

# LIGHT Impressions

2026 | 2027



Lamps from Essen



## LIGHT Impressions 2026 | 2027


Lamps from Essen

### Professional lighting solutions. Tailor-made. Available quickly.

For more than 30 years, KS Licht, a lighting wholesaler based in Essen, has been a partner to electricians, designers and businesses. With LIGHT Impressions 2026 | 2027, we present a carefully selected range of luminaires for professional applications, commercial projects and sophisticated residential projects.

### B2B ONLINE SHOP & DIGITAL PROCUREMENT

In the KS Multi Brand Business online shop ([ks-licht.nl](http://ks-licht.nl)) you will find the latest products, new arrivals, special offers and all the key information you need for your day-to-day work. Check availability online, find and order suitable spare parts, and use catalogues, flip-through catalogues and pro-duct links for quick support with customer advice, quotations and project management.

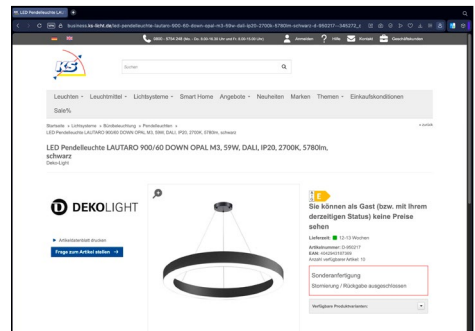


### LIGHTING DESIGN & PROJECT SUPPORT

Whether for offices, retail, catering, hotels, medical practices or commercial premises: we can help you select the right luminaires and develop practical lighting solutions for your project. Our lighting designers will advise you personally and, on request, provide you with technical data, tender documents, light distribution curves and LDT files for planning and implementation.



### SHOWROOM & CONSULTATION BY APPOINTMENT

In our showroom in Essen, we display a selection of lighting fixtures from various manufacturers across more than 300 m². By prior appointment, we'd be happy to advise you in person, compare products and demonstrate lighting effects and quality right there on site.

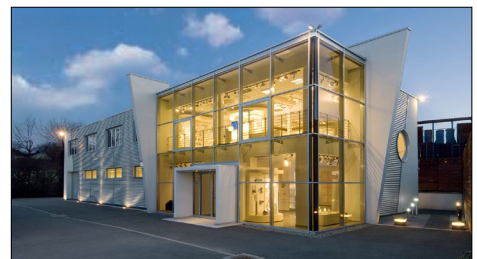

### COLLECTION CENTRE IN ESSEN-FRILLENDORF

Items ordered for collection in Essen will be ready for you once we have notified you:  
Manderscheidtstraße 12, 45141 Essen.  
Mon–Thu 8.30 am–4.00 pm, Fri 8.30 am–3.00 pm

Discover our range now, book an appointment or request a lighting design: [ks-licht.nl](http://ks-licht.nl)

**KS Licht- und Elektrotechnik GmbH**  
**Manderscheidtstraße 8 C**  
**45141 Essen**  
**Germany**

Tel.: +49 (0)201-89924-0  
[verkauf@ks-germany.com](mailto:verkauf@ks-germany.com)  
[www.ks-germany.com](http://www.ks-germany.com)



## LIGHTING DESIGN, VISUALISATION AND PROJECT SUPPORT

Professional lighting design provides confidence when implementing lighting projects. Realistic 3D visualisations, lighting calculations and lighting designs allow lighting effects, illuminance levels and potential energy savings to be evaluated before installation.

Comprehensive planning resources are available for the products featured in this catalogue. These include LDT data, DIALux data, technical product information and specification texts. This enables projects to be planned quickly, accurately and in compliance with applicable standards.

From the initial concept through to implementation, professional planning services support efficient, cost-effective and goal-oriented project execution.



In our main catalogue, you will find our complete product range as well as practical system solutions that combine luminaires, accessories and technology to form comprehensive concepts for a wide variety of applications.

DISCOVER

- 01 service
- 03 table of contents
- 04 areas of application
- 06 refurbishment solutions
- 08 product highlights

INTERIOR LIGHTS

- 20 pendant lights
- 40 surface mounted ceiling lights
- 86 built in ceiling lights
- 129 downlights
- 144 insert panels
- 162 surface mounted wall lights
- 172 built in wall lights
- 180 reading lights
- 190 table and floor lights
- 200 office lights
- 219 hall floodlight
- 229 damp-proof luminaires

TRUNKING SYSTEMS

- 240 trunking systems



**SANOTRUNK UNIVERSAL**  
tool-free universal trunking refurbishment

POWER RAILS

- 266 D ONE 1-phase power rail system
- 287 1-phase power rail luminaires
- 302 D LINE 3-phase power rail system
- 334 D LINE DALI 3-phase power rail system
- 364 power rail luminaires



**D LINE DALI**  
flexible multifunctional track system

BATTERY LIGHTS

- 414 battery lights

OUTDOOR LIGHTS

- 422 bollard lights
- 442 surface mounted wall lights
- 484 ceiling and wall lights
- 488 built in wall lights
- 494 spherical lamps
- 498 energy distributor
- 508 surface mounted / ground spike lights
- 520 wall washer
- 524 ground recessed lights
- 540 floodlight
- 544 display lights



## SYSTEM LAUTARO


- 550 pendant lights
- 558 surface mounted ceiling lights



**LAUTARO**  
circular lighting solution with system

## SYSTEM PLANO

- 564 luminaire system
- 582 profile system

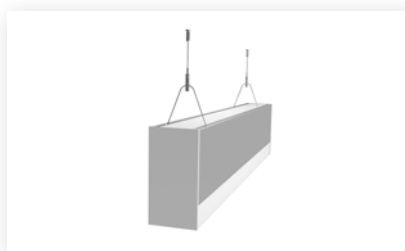

**PLANO**  
individually configurable lighting system

## SYSTEM COMBO

- 590 concrete profile
- 596 built-in profile
- 600 facade profile
- 604 insulation profile
- 606 click profile



**COMBO**  
innovative profile-in-profile solution

## ALUMINIUM PROFILES

- 614 linear light in 5 steps
- 618 assembly
- 620 homogeneous light image
- 622 U-profiles - flat + high - built-in / built-on
- 644 T-profiles - flat + high - built in
- 658 H- and groove-profiles
- 662 step/plinth/angle/corner-profiles - built-in/-on
- 684 dry construction profiles
- 704 tile profiles
- 712 profiles for outdoor usw - walk-/trafficable

## LED STRIPES

- 724 quick finder
- 728 COB
- 744 12V
- 746 24V
- 770 48V
- 784 230V
- 786 mounting material for LED strips

## POWER SUPPLIES

- 792 DC - CV
- 808 DC - CC
- 818 AC - CV

## CONTROLLER

- 824 RF-smart
- 850 Casambi Bluetooth
- 852 DALI / DMX dimmer

## ILLUMINANTS

- 860 MR16 / GU53
- 861 G9 - GU10
- 864 E27
- 867 GX53

## ACCESSORIES

- 872 indoor
- 875 outdoor
- 883 chemical products

## LOOK UP

- 884 legend
- 886 lighting solutions
- 890 index

## THE RIGHT LIGHTING FOR EVERY APPLICATION

Our versatile range for professional building lighting offers you the right solution - whether for refurbishment, modernisation or new build. With well thought-out lighting concepts and innovative products, we create optimum conditions for every application situation.



### industrie

High-performance, efficient lighting creates optimal working conditions in industry, logistics, and manufacturing. DEKO-LIGHT offers durable lighting solutions that sustainably reduce energy consumption, maintenance requirements, and operating costs.



### hotel and restaurant industry

Lighting creates atmosphere and shapes the character of hotels, restaurants, and cafés. Decorative fixtures and flexible lighting solutions help create inviting spaces with a special ambience.



### residential

The right lighting lends every living space personality and comfort. Our versatile product range offers customized lighting solutions for stylish home designs.



### retail

Professional lighting draws attention to products and creates a pleasant shopping experience. From track lighting to accent lighting, DEKO-LIGHT offers the right solution for modern retail spaces.



#### outdoor areas

Outdoor lighting combines safety, wayfinding, and architectural highlighting. Our extensive portfolio enables customized lighting concepts for facades, pathways, and outdoor areas.



#### office

Modern office lighting combines functionality, comfort, and design. High-quality lighting solutions create work environments that promote concentration, communication, and well-being.



#### educational institutions

Optimal lighting supports concentration, wayfinding, and a pleasant learning atmosphere. DEKO-LIGHT offers efficient lighting solutions for schools, universities, and educational institutions.



#### healthcare facilities

Professional lighting creates optimal conditions for treatment, orientation, and well-being. Our lighting solutions combine functionality with a pleasant and reassuring atmosphere.






## SYSTEMATIC RETROFITTING


Rising energy costs, new efficiency requirements and outdated lighting systems make the modernisation of existing lighting systems more important than ever. With the SANOTRUNK UNIVERSAL and PRO OFFICE SANO refurbishment solutions, DEKO-LIGHT offers two cost-effective systems for quick and straightforward conversion to modern LED technology.

SANOTRUNK UNIVERSAL enables the refurbishment of existing T5 and T8 continuous lighting systems and is compatible with almost all standard track systems. PRO OFFICE SANO has been specially developed for replacing conventional grid-mounted luminaires and, thanks to its optimised dimensions, reliably covers existing installation channels.

Both systems offer the benefits of simple installation, high energy efficiency and modern light quality, whilst meeting the requirements for BEG funding. This allows existing lighting systems to be modernised quickly, cost-effectively and with minimal disruption to the existing infrastructure.



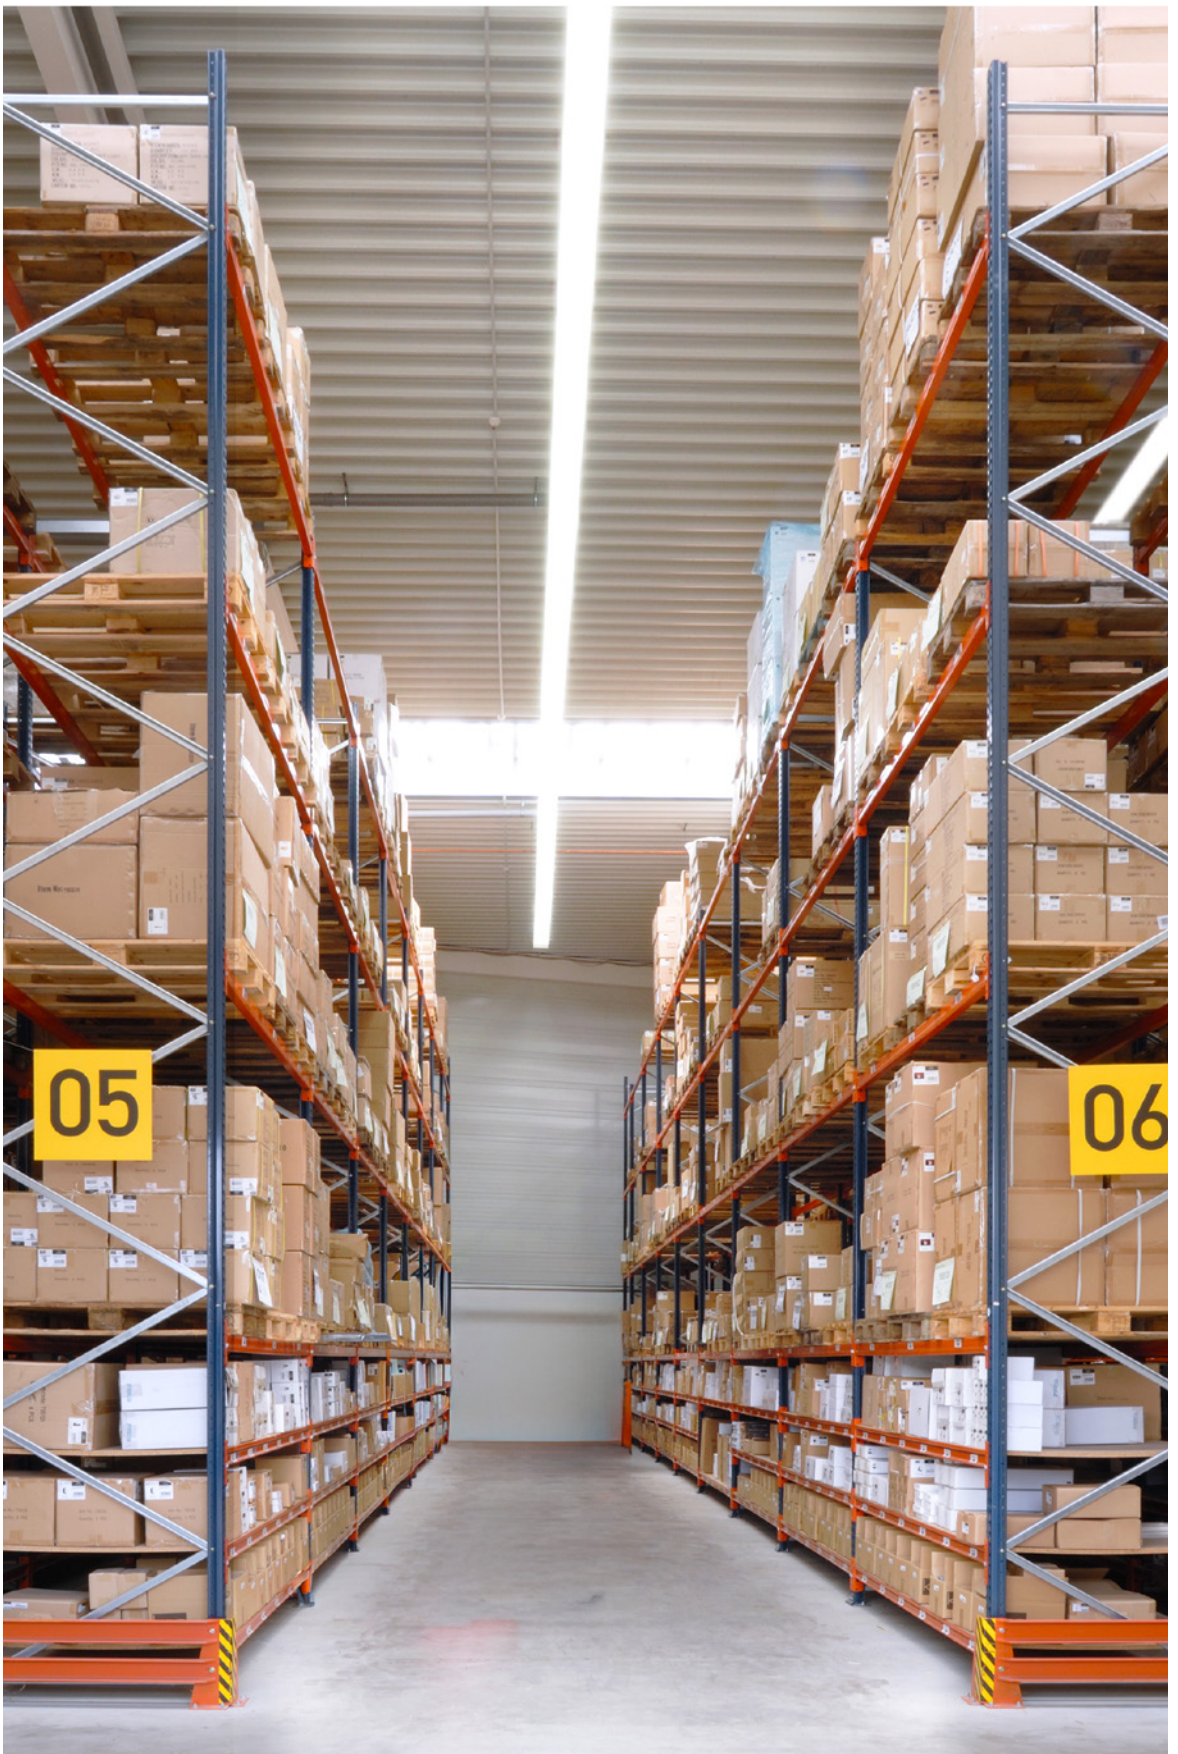

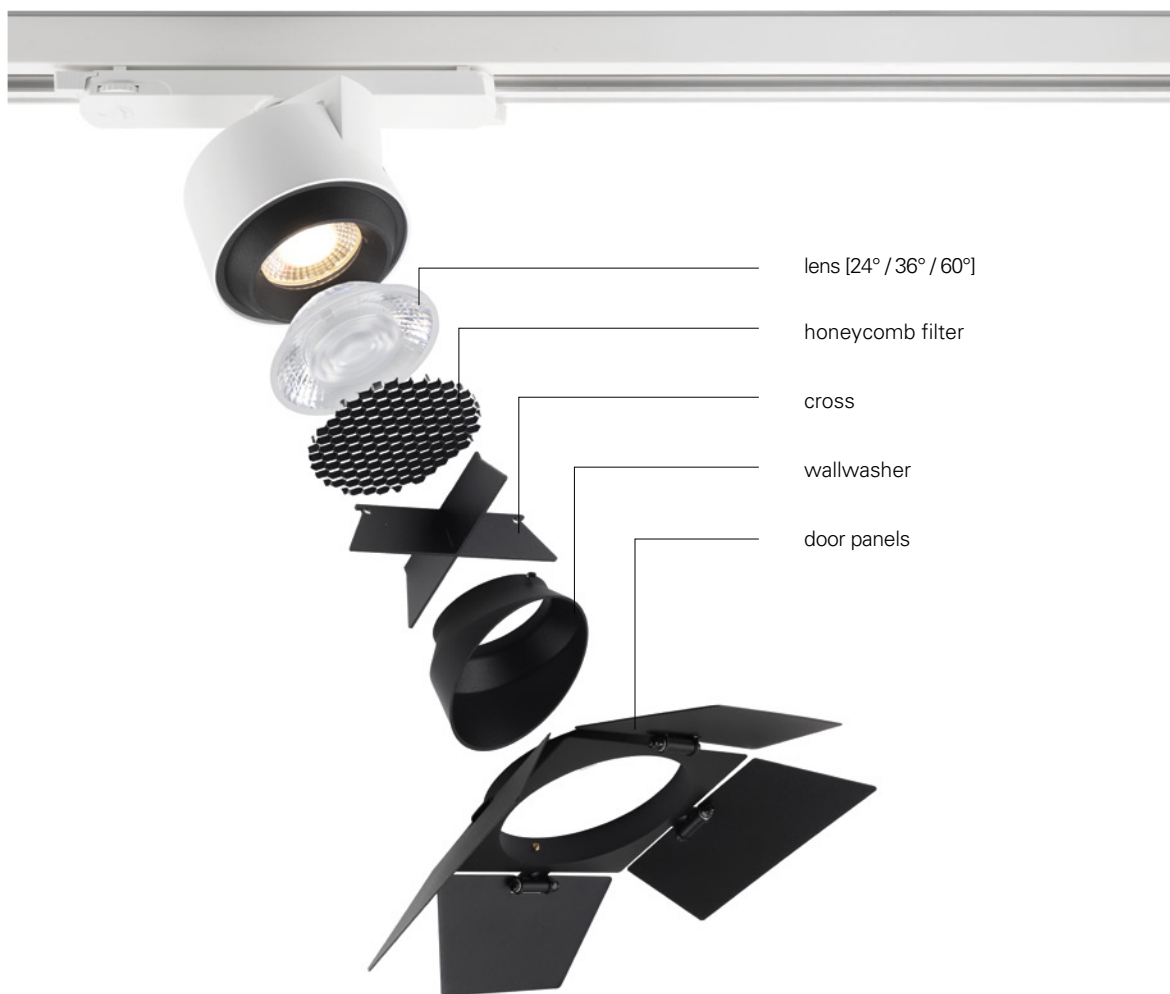

## CERES – MAXIMUM FLEXIBILITY, SUPERIOR LIGHT QUALITY

Flexible 3-phase track spotlight with high energy efficiency and excellent light quality. Thanks to its extensive range of accessories, various power levels and colour temperatures of 3000 K and 4000 K, the luminaire can be perfectly adapted to individual lighting requirements. Available in ON/OFF and DALI versions and eligible for BEG funding.







## FOCARIS – MAXIMUM PRECISION, COMPLETE FLEXIBILITY

The FOCARIS track spotlight combines maximum flexibility with precision lighting technology. Thanks to its continuously adjustable beam angle from 15° to 50° or 60°, the light can be precisely adapted to any application – without the need to change reflectors. The homogeneous light distribution ensures high-quality illumination of retail areas, exhibitions and display objects. Optional honeycomb louvres provide additional glare control. FOCARIS is available in TRI-AC and DALI versions, making it the ideal solution for demanding lighting applications.






## CURVED D LINE – NEW FREEDOM FOR CREATIVE LIGHTING CONCEPTS

The CURVED D LINE track opens up entirely new design possibilities for modern lighting concepts. With its 90° bend [radius 1 m], it allows for the creation of semicircles, circles or waves. The 1.57 m-long segments can be used as both D LINE DALI and D LINE standard tracks. A wide range of mounting options ensures maximum flexibility during installation. Never before have there been so many possibilities for designing track lighting systems.



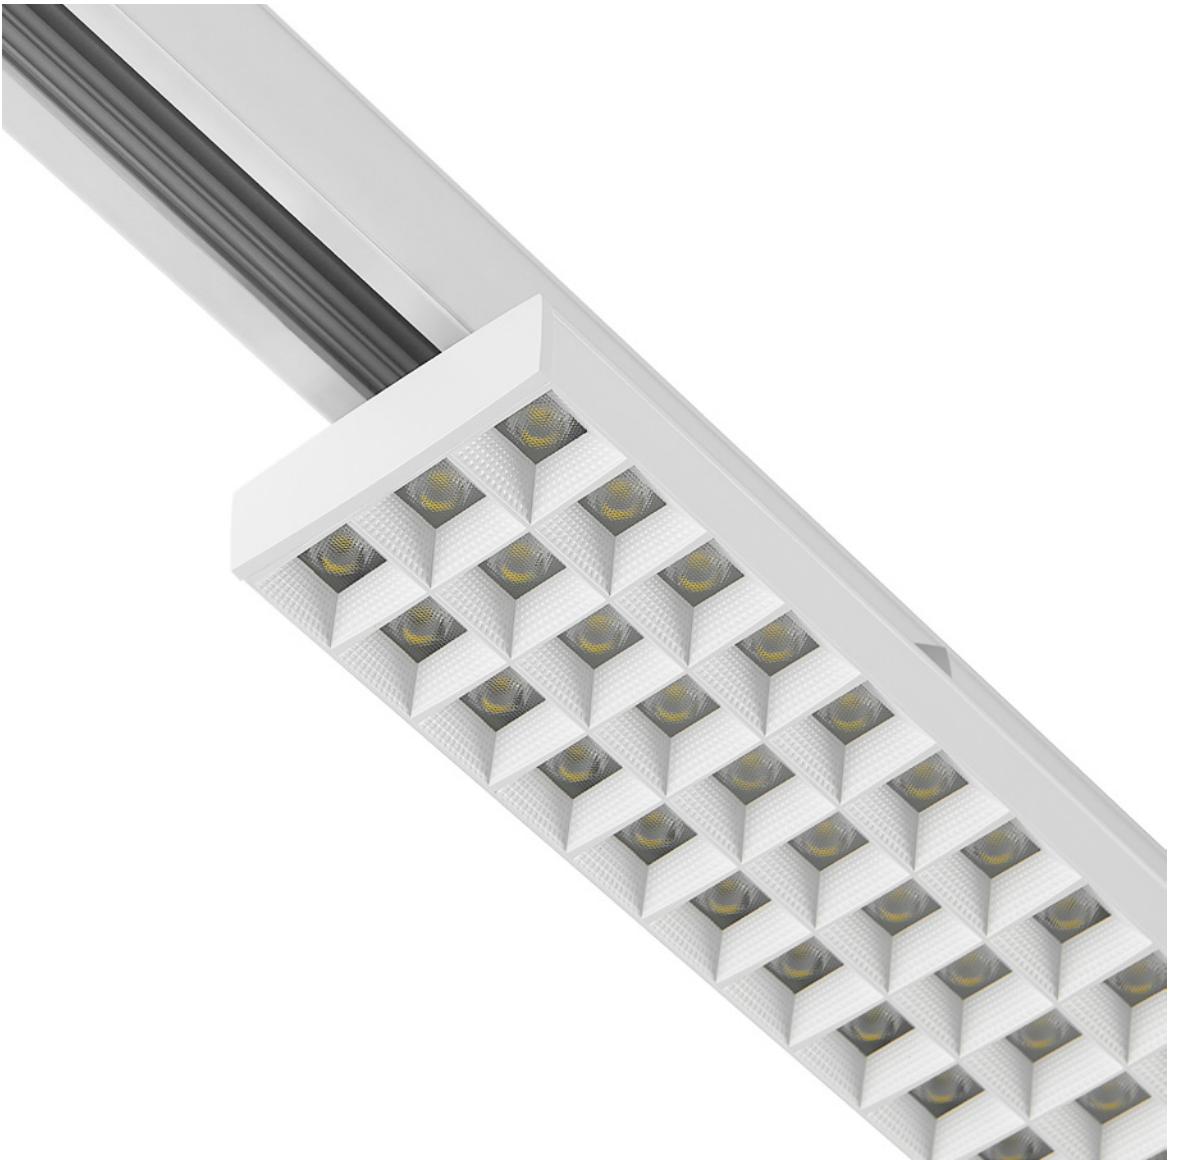

## OFFICE SERIES – PROVEN LIGHTING QUALITY, NEW POSSIBILITIES

For years, the OFFICE THREE series has been synonymous with high-quality workplace lighting, offering excellent light quality and a high level of visual comfort. With the new pendant luminaire, the successful product family is expanding to include yet another solution for modern office and working environments. It is complemented by the LINEAR PRO OFFICE – the office version of the tried-and-tested LINEAR PRO track lighting series. Together, both product families offer comprehensive lighting solutions for modern working environments.

Whether for individual workstations, open-plan offices or meeting areas – thanks to their suitability for computer workstations, high colour rendering and eligibility for BEG funding, both the OFFICE THREE series and the LINEAR PRO OFFICE meet the requirements of modern office concepts. From table, floor and pendant luminaires to track lighting, DEKO-LIGHT offers the right solution for every lighting task.







## **FARO – PREMIUM BOLLARD LIGHTING FOR DEMANDING OUTDOOR AREAS**

The FARO bollard luminaire series stands for high-quality outdoor lighting with exceptionally uniform light distribution and excellent glare control. With the new FARO ON/OFF, DEKO-LIGHT complements the existing FARO DALI with a more compact version for a wide range of lighting applications.

Robust materials, seawater-resistant properties and premium workmanship make FARO the ideal solution for pathways, public spaces and demanding outdoor environments.



## RF-SMART SPOT – SMARTLY CONTROLLED, PERFECTLY STAGED

The RF-smart ground spike spotlights offer dimmable brightness and colour saturation, as well as 16 million colours and a continuously adjustable colour temperature. 18 pre-installed automatic programmes, together with the ability to synchronise multiple RF-smart components, ensure maximum flexibility. Control is conveniently carried out via RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included] or via any Zigbee 3.0-compatible control systems and apps such as Amazon Alexa, Google Assistant or Tuya [corresponding gateway required]. The RF-smart WIDE-SPOT provides even, wide-area illumination, whilst the RF-smart SPOT, with its narrow beam angle, is ideal for precise accent lighting.






## COB STRIPS – GREATER EFFICIENCY, PERFECT LINES OF LIGHT

With the new COB Standard and Professional series, DEKO-LIGHT introduces a completely redesigned portfolio for modern linear lighting and architectural illumination. The new series impress with improved efficiency, expanded colour temperature options and attractive variants for a wide range of project requirements.

While the Standard series stands out with high light quality, RGBW technology and an excellent price-performance ratio, the Professional series sets new benchmarks in luminous efficacy, efficiency and light uniformity. Thanks to the dot-free COB technology, both series are ideally suited for demanding lighting concepts and premium lighting applications.

The portfolio is complemented by the proven specialist solutions for sauna and façade applications, which remain available.







INTERIOR LIGTHS

- 24 pendant lights
- 44 surface mounted ceiling lights
- 90 built in ceiling lights
- 132 downlights
- 148 insert panels
- 166 surface mounted wall lights
- 176 built in wall lights
- 184 reading lights
- 194 table and floor lights
- 204 office lights
- 222 hall floodlight
- 232 damp-proof luminaires



# pendant lights



□ ■ ■ ■  
page 20



□ ■ ■ ■  
page 22



■ □  
page 24



□ ■  
page 26



□ ■  
page 28



□ ■  
page 29



□ ■  
page 30



■  
page 32



■ ■  
page 33



■ ■  
page 34



■ ■  
page 35



□ ■  
page 36





## MENKAR

The pendant lights in the MENKAR series impress with clever lighting functions and high-quality aluminium accents. The separate rear light (approx. 15 - 20 % indirect light component) enables permanent indirect lighting. The light colour can be adjusted in 2 stages [3000/4000K] via a CCT switch.








## MENKAR

- Indirect and direct lighting
- High light intensity
- Light colour adjustable in two stages
- Can be suspended by up to 1,800/3,000 mm [depending on model]
- Optional diffuser lens for UGR<19

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|                     |              |                         |                                           |
|---------------------|--------------|-------------------------|-------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                       |
| Colour Temperature  | 3000/4000 K  | Control                 | Leading-edge dimmer, Trailing-edge dimmer |
| Rated Input Voltage | 220-240 V/AC | CRI (Ra)                | 80                                        |
| Height              | 90 mm        | IK Protection Class     | IK04                                      |
| Base Height         | 30 mm        |                         |                                           |



342201

| Article       | Housing Color |       | Luminous Flux | Power  | Ø      | Pendulum Length | Base Ø | Price           |
|---------------|---------------|-------|---------------|--------|--------|-----------------|--------|-----------------|
| <b>342201</b> | White         | WW NW | 3300/3500 lm  | 45.0 W | 400 mm | 1800 mm         | 100 mm | <b>€ 191.95</b> |
| <b>342202</b> | Black         | WW NW | 3300/3500 lm  | 45.0 W | 400 mm | 1800 mm         | 100 mm | <b>€ 191.95</b> |
| <b>342203</b> | Light grey    | WW NW | 3300/3500 lm  | 45.0 W | 400 mm | 1800 mm         | 100 mm | <b>€ 191.95</b> |
| <b>342204</b> | Dark brown    | WW NW | 3300/3500 lm  | 45.0 W | 400 mm | 1800 mm         | 100 mm | <b>€ 191.95</b> |
| <b>342205</b> | White         | WW NW | 5600/6000 lm  | 65.0 W | 600 mm | 1800 mm         | 120 mm | <b>€ 319.95</b> |
| <b>342206</b> | Black         | WW NW | 5600/6000 lm  | 65.0 W | 600 mm | 1800 mm         | 120 mm | <b>€ 319.95</b> |
| <b>342207</b> | Light grey    | WW NW | 5600/6000 lm  | 65.0 W | 600 mm | 1800 mm         | 120 mm | <b>€ 319.95</b> |
| <b>342208</b> | Dark brown    | WW NW | 5600/6000 lm  | 65.0 W | 600 mm | 1800 mm         | 120 mm | <b>€ 319.95</b> |
| <b>342209</b> | White         | WW NW | 8400/8700 lm  | 90.0 W | 800 mm | 3000 mm         | 150 mm | <b>€ 447.95</b> |
| <b>342210</b> | Black         | WW NW | 8400/8700 lm  | 90.0 W | 800 mm | 3000 mm         | 150 mm | <b>€ 447.95</b> |
| <b>342211</b> | Light grey    | WW NW | 8400/8700 lm  | 90.0 W | 800 mm | 3000 mm         | 150 mm | <b>€ 447.95</b> |
| <b>342212</b> | Dark brown    | WW NW | 8400/8700 lm  | 90.0 W | 800 mm | 3000 mm         | 150 mm | <b>€ 447.95</b> |



Accessories for **342201, 342202, 342203, 342204**

**930709** Diffusing lenses UGR 19 for Menkar 400 lamp

€ 11.95

Accessories for **342205, 342206, 342207, 342208**

**930710** Diffusing lenses UGR 19 for Menkar 600 lamp

€ 19.95

Accessories for **342205, 342206, 342207, 342208, 342209, 342210, 342211, 342212**

**843340** DALI, Triac dimmer, 100-240 V, 400 W, IP20

€ 59.95

Accessories for **342209, 342210, 342211, 342212**

**930711** Diffusing lenses UGR 19 for Menkar 800 lamp

€ 31.95

Accessories for **342210, 342211, 342212**

**843503** RF-smart, Triac dimmer, 230 V, 300 W, IP20

€ 55.95



## MEROPE

The pendant lamps of the MEROPE series combine timeless elegance and subdued modernity. Available in the diameters 380, 580 and 780 mm, the light colour [3,000/4,000 K] can be selected before installation using a CCT switch. The exterior finish is brushed aluminium in the colours coffee and silver or matt powder-coated in black and white.






## MEROPE

- Light colour adjustable in two stages
- Can be suspended by up to 1,800/3,000 mm [depending on model]

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Colour Temperature  | 3000/4000 K  | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Rated Input Voltage | 220-240 V/AC | CRI (Ra)                | 80                                           |
| Height              | 35 mm        | IK Protection Class     | IK04                                         |
| Base Height         | 65 mm        |                         |                                              |



342189

| Article       | Housing Color |       | Luminous Flux | Power  | Ø      | Pendulum Length | Base Ø | Price           |
|---------------|---------------|-------|---------------|--------|--------|-----------------|--------|-----------------|
| <b>342189</b> | White         | WW NW | 2100/2200 lm  | 30.0 W | 380 mm | 1800 mm         | 220 mm | <b>€ 167.95</b> |
| <b>342190</b> | Black         | WW NW | 2100/2200 lm  | 30.0 W | 380 mm | 1800 mm         | 220 mm | <b>€ 167.95</b> |
| <b>342191</b> | Light grey    | WW NW | 2100/2200 lm  | 30.0 W | 380 mm | 1800 mm         | 220 mm | <b>€ 167.95</b> |
| <b>342192</b> | Dark brown    | WW NW | 2100/2200 lm  | 30.0 W | 380 mm | 1800 mm         | 220 mm | <b>€ 167.95</b> |
| <b>342193</b> | White         | WW NW | 3100/3200 lm  | 42.0 W | 580 mm | 1800 mm         | 220 mm | <b>€ 223.95</b> |
| <b>342194</b> | Black         | WW NW | 3100/3200 lm  | 42.0 W | 580 mm | 1800 mm         | 220 mm | <b>€ 223.95</b> |
| <b>342195</b> | Light grey    | WW NW | 3100/3200 lm  | 42.0 W | 580 mm | 1800 mm         | 220 mm | <b>€ 223.95</b> |
| <b>342196</b> | Dark brown    | WW NW | 3100/3200 lm  | 42.0 W | 580 mm | 1800 mm         | 220 mm | <b>€ 223.95</b> |
| <b>342197</b> | White         | WW NW | 4800/4900 lm  | 60.0 W | 780 mm | 3000 mm         | 275 mm | <b>€ 375.95</b> |
| <b>342198</b> | Black         | WW NW | 4800/4900 lm  | 60.0 W | 780 mm | 3000 mm         | 275 mm | <b>€ 375.95</b> |
| <b>342199</b> | Light grey    | WW NW | 4800/4900 lm  | 60.0 W | 780 mm | 3000 mm         | 275 mm | <b>€ 375.95</b> |
| <b>342200</b> | Dark brown    | WW NW | 4800/4900 lm  | 60.0 W | 780 mm | 3000 mm         | 275 mm | <b>€ 375.95</b> |



### Accessories

|               |                                            |
|---------------|--------------------------------------------|
| <b>843503</b> | RF-smart, Triac dimmer, 230 V, 300 W, IP20 |
| <b>843340</b> | DALI, Triac dimmer, 100-240 V, 400 W, IP20 |

|  |                |
|--|----------------|
|  | <b>€ 55.95</b> |
|  | <b>€ 59.95</b> |



## SLIM ROUND

SLIM series lights include single-luminaire and triple-luminaire pendant lamps, recessed ceiling lights and matching pendant lamps for the DEKO-LIGHT current track system. The die-cast aluminium light body is the same size for all variants [300 × 39 mm]. Several SLIM models therefore can also be combined with each other in larger spaces. The pendant lamps for ceiling installation with max. 180 cm suspended mounting are available in a one or three-luminaire variant; three-luminaire variant both with long or round base depending on the arrangement of the lights.

While the fixed SLIM models create a pleasant warm white light in dining rooms, reading nooks and more, the single-luminaire SLIM current track light is ideal for gastronomy and retail projects with changing room layouts. The premium SLIM series is rounded off with the opportunity for customisation using interchangeable reflector rings and lenses.








## SLIM ROUND

- Extra-soft fabric cable
- Glare-free, due to low UGR value [ $<19$ ]
- Slim design at just 39 mm in diameter
- Incl. silver-coloured reflector ring

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Base Height             | 25 mm                                        |
| Colour Temperature  | 2700 K       | Power Supply Unit incl. | Yes                                          |
| Rated Input Voltage | 220-240 V/AC | Light Beam Angle        | 24 Degree                                    |
| Height              | 300 mm       | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                   | 39 mm        | CRI (Ra)                | 90                                           |
| Pendulum Length     | 1800 mm      |                         |                                              |



342237

| Article       | Housing Color | Luminous Flux | Power  | Base Ø | Price    |
|---------------|---------------|---------------|--------|--------|----------|
| <b>342237</b> | Black         | 500 lm        | 5.0 W  | 100 mm | € 67.95  |
| <b>342238</b> | White         | 500 lm        | 5.0 W  | 100 mm | € 67.95  |
| <b>342241</b> | Black         | 1500 lm       | 15.0 W | 240 mm | € 167.95 |
| <b>342242</b> | White         | 1500 lm       | 15.0 W | 240 mm | € 167.95 |



### Accessories

|               |                                              |  |        |
|---------------|----------------------------------------------|--|--------|
| <b>930744</b> | Reflector ring white for Slim series         |  | € 3.95 |
| <b>930745</b> | Reflector ring black for Slim series         |  | € 3.95 |
| <b>930746</b> | Reflector ring gold-coloured for Slim series |  | € 4.75 |
| <b>930747</b> | 24° lens for Slim series                     |  | € 3.95 |
| <b>930748</b> | 36° lens for Slim series                     |  | € 3.95 |
| <b>930749</b> | 60° lens for Slim series                     |  | € 3.95 |

### Accessories for 342237

|               |                                                              |  |         |
|---------------|--------------------------------------------------------------|--|---------|
| <b>930914</b> | 68 mm Recessed Ceiling Adapter for Pendant Luminaires, black |  | € 23.95 |
|---------------|--------------------------------------------------------------|--|---------|

### Accessories for 342238

|               |                                                              |  |         |
|---------------|--------------------------------------------------------------|--|---------|
| <b>930913</b> | 68 mm Recessed Ceiling Adapter for Pendant Luminaires, white |  | € 23.95 |
|---------------|--------------------------------------------------------------|--|---------|

### Accessories for 342241, 342242

|               |                                            |  |         |
|---------------|--------------------------------------------|--|---------|
| <b>843340</b> | DALI, Triac dimmer, 100-240 V, 400 W, IP20 |  | € 59.95 |
| <b>843503</b> | RF-smart, Triac dimmer, 230 V, 300 W, IP20 |  | € 55.95 |



LUCEA CCT

LUCEA series pendant lights with CCT are available in 10, 15 and 20 W versions and offer up to 2,000 lumens of light output. The maximum suspended mounting is 1,800 mm. Optional lenses can be used to narrow or expand the light emission angle of the individual models. LUCEA lights feature a die-cast aluminium housing.



page 60



page 62



page 400



page 404






## LUCEA CCT

- Light colour adjustable in two stages
- Incl. black reflector ring

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Colour Temperature  | 3000/4000 K  | Light Beam Angle        | 36 Degree                                    |
| Rated Input Voltage | 220-240 V/AC | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Pendulum Length     | 1800 mm      | CRI (Ra)                | 90                                           |
| Base Height         | 29 mm        | IK Protection Class     | IK03                                         |
| Base Ø              | 104,5 mm     |                         |                                              |



342177

| Article       | Housing Color |       | Luminous Flux | Power  | Height | Ø     | Price           |
|---------------|---------------|-------|---------------|--------|--------|-------|-----------------|
| <b>342177</b> | White         | WW NW | 930/1000 lm   | 10.0 W | 157 mm | 65 mm | <b>€ 111.95</b> |
| <b>342178</b> | Black         | WW NW | 930/1000 lm   | 10.0 W | 157 mm | 65 mm | <b>€ 111.95</b> |
| <b>342181</b> | White         | WW NW | 1930/2000 lm  | 20.0 W | 178 mm | 85 mm | <b>€ 143.95</b> |
| <b>342182</b> | Black         | WW NW | 1930/2000 lm  | 20.0 W | 178 mm | 85 mm | <b>€ 143.95</b> |



### Accessories for 342177, 342178

|               |                                     |  |               |
|---------------|-------------------------------------|--|---------------|
| <b>930679</b> | Lens 24° for Lucea 6/10             |  | <b>€ 7.95</b> |
| <b>930756</b> | Reflector ring for Lucea 6/10 white |  | <b>€ 3.95</b> |
| <b>930757</b> | Reflector ring for Lucea 6/10 black |  | <b>€ 3.95</b> |
| <b>930758</b> | Reflector ring for Lucea 6/10 gold  |  | <b>€ 3.95</b> |

### Accessories for 342177, 342181

|               |                                                              |  |                |
|---------------|--------------------------------------------------------------|--|----------------|
| <b>930913</b> | 68 mm Recessed Ceiling Adapter for Pendant Luminaires, white |  | <b>€ 23.95</b> |
|---------------|--------------------------------------------------------------|--|----------------|

### Accessories for 342178, 342182

|               |                                                              |  |                |
|---------------|--------------------------------------------------------------|--|----------------|
| <b>930914</b> | 68 mm Recessed Ceiling Adapter for Pendant Luminaires, black |  | <b>€ 23.95</b> |
|---------------|--------------------------------------------------------------|--|----------------|

### Accessories for 342181, 342182

|               |                                      |  |               |
|---------------|--------------------------------------|--|---------------|
| <b>930680</b> | Lens 24° for Lucea 15/20             |  | <b>€ 9.95</b> |
| <b>930681</b> | Lens 60° for Lucea 15/20             |  | <b>€ 9.95</b> |
| <b>930759</b> | Reflector ring for Lucea 15/20 white |  | <b>€ 4.75</b> |
| <b>930760</b> | Reflector ring for Lucea 15/20 black |  | <b>€ 4.75</b> |
| <b>930761</b> | Reflector ring for Lucea 15/20 gold  |  | <b>€ 4.75</b> |



LUCEA

- Extra-soft fabric cable
- Incl. black reflector ring

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Base Ø                  | 104.5 mm                                     |
| Colour Temperature  | 2700 K       | Power Supply Unit incl. | Yes                                          |
| Rated Input Voltage | 200-240 V/AC | Light Beam Angle        | 36 Degree                                    |
| Height              | 157 mm       | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                   | 65 mm        | CRI (Ra)                | 90                                           |
| Pendulum Length     | 1800 mm      | IK Protection Class     | IK03                                         |
| Base Height         | 29 mm        |                         |                                              |

| Article | Housing Color |       | Luminous Flux | Power  | Price    |
|---------|---------------|-------|---------------|--------|----------|
| 342243  |               | White | 800 lm        | 6.0 W  | € 103.95 |
| 342244  |               | Black | 800 lm        | 6.0 W  | € 103.95 |
| 342245  |               | White | 1300 lm       | 10.0 W | € 111.95 |
| 342246  |               | Black | 1300 lm       | 10.0 W | € 111.95 |



Accessories

|        |                                     |  |        |
|--------|-------------------------------------|--|--------|
| 930679 | Lens 24° for Lucea 6/10             |  | € 7.95 |
| 930756 | Reflector ring for Lucea 6/10 white |  | € 3.95 |
| 930757 | Reflector ring for Lucea 6/10 black |  | € 3.95 |
| 930758 | Reflector ring for Lucea 6/10 gold  |  | € 3.95 |

Accessories for 342243, 342245


|        |                                                              |  |         |
|--------|--------------------------------------------------------------|--|---------|
| 930913 | 68 mm Recessed Ceiling Adapter for Pendant Luminaires, white |  | € 23.95 |
|--------|--------------------------------------------------------------|--|---------|

Accessories for 342244, 342246

|        |                                                              |  |         |
|--------|--------------------------------------------------------------|--|---------|
| 930914 | 68 mm Recessed Ceiling Adapter for Pendant Luminaires, black |  | € 23.95 |
|--------|--------------------------------------------------------------|--|---------|







## LUCEA DTW

- Extra-soft fabric cable
- Dim-to-warm 1,800 K-2,700 K
- Incl. black reflector ring

### Application Area

Home / Living, Reception / Communication, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Pendulum Length         | 1800 mm                                      |
| Colour Temperature  | 1800-2700 K  | Power Supply Unit incl. | Yes                                          |
| Luminous Flux       | 750 lm       | Light Beam Angle        | 36 Degree                                    |
| Power               | 10 W         | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Rated Input Voltage | 200-240 V/AC | CRI (Ra)                | 90                                           |
| Height              | 157 mm       | IK Protection Class     | IK03                                         |
| Ø                   | 65 mm        |                         |                                              |

| Article       | Housing Color |  | Price    |
|---------------|---------------|--|----------|
| <b>342247</b> | White         |  | € 119.95 |
| <b>342248</b> | Black         |  | € 119.95 |



### Accessories

|               |                                     |  |        |
|---------------|-------------------------------------|--|--------|
| <b>930756</b> | Reflector ring for Lucea 6/10 white |  | € 3.95 |
| <b>930757</b> | Reflector ring for Lucea 6/10 black |  | € 3.95 |
| <b>930758</b> | Reflector ring for Lucea 6/10 gold  |  | € 3.95 |

### Accessories for 342247

|               |                                                              |  |         |
|---------------|--------------------------------------------------------------|--|---------|
| <b>930913</b> | 68 mm Recessed Ceiling Adapter for Pendant Luminaires, white |  | € 23.95 |
|---------------|--------------------------------------------------------------|--|---------|

### Accessories for 342248

|               |                                                              |  |         |
|---------------|--------------------------------------------------------------|--|---------|
| <b>930914</b> | 68 mm Recessed Ceiling Adapter for Pendant Luminaires, black |  | € 23.95 |
|---------------|--------------------------------------------------------------|--|---------|



page 60



page 62



page 400



page 404



## CAN

The CAN pendant light in lengths 150 mm and 350 mm combines modern design with practical functionality. The GU10 base enables quick and simple replacement of the lamp. The screw-on cylinder enables tool-free maintenance and optional decorative rings allow colourful accents to be created. The pendant light is part of the CAN series, which also contains ceiling, wall, reading and outdoor lights and therefore provides versatile application options for private and commercial spaces.



page 68




page 70



page 167



page 168



## CAN

- Flat and discreet lamp base
- Can be customised with a wide range of accessories
- Replaceable lamp to offer an individual lighting solution
- Can be combined with the comprehensive CAN series product family

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|                 |           |                     |                                    |
|-----------------|-----------|---------------------|------------------------------------|
| Housing         | Aluminium | Max. Power          | 1x max. 7.5 W                      |
| Ø               | 60 mm     | Rated Input Voltage | 220-240 V/AC                       |
| Pendulum Length | 1700 mm   | Control             | Dimmable via optional light source |
| Base Height     | 27 mm     |                     |                                    |
| Base Ø          | 60 mm     |                     |                                    |

| Article       | Housing Color | Height | Price          |
|---------------|---------------|--------|----------------|
| <b>342254</b> | White         | 150 mm | <b>€ 51.95</b> |
| <b>342255</b> | Black         | 150 mm | <b>€ 51.95</b> |
| <b>342256</b> | White         | 350 mm | <b>€ 59.95</b> |
| <b>342257</b> | Black         | 350 mm | <b>€ 59.95</b> |



### Accessories

|               |                                                                  |  |               |
|---------------|------------------------------------------------------------------|--|---------------|
| <b>930301</b> | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930302</b> | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930303</b> | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | <b>€ 3.95</b> |
| <b>930307</b> | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | <b>€ 6.95</b> |
| <b>930308</b> | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | <b>€ 6.95</b> |
| <b>930309</b> | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | <b>€ 6.95</b> |
| <b>930310</b> | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | <b>€ 6.95</b> |
| <b>930366</b> | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | <b>€ 3.95</b> |
| <b>931065</b> | Acrylic attachment for Can                                       |  | <b>€ 3.95</b> |

### Accessories for **342254, 342256**

|               |                                                              |  |                |
|---------------|--------------------------------------------------------------|--|----------------|
| <b>930913</b> | 68 mm Recessed Ceiling Adapter for Pendant Luminaires, white |  | <b>€ 23.95</b> |
|---------------|--------------------------------------------------------------|--|----------------|

### Accessories for **342255, 342257**

|               |                                                              |  |                |
|---------------|--------------------------------------------------------------|--|----------------|
| <b>930914</b> | 68 mm Recessed Ceiling Adapter for Pendant Luminaires, black |  | <b>€ 23.95</b> |
|---------------|--------------------------------------------------------------|--|----------------|




## LAMP SOCKET SEGULA DESIGN BULBS

The pendant lights are fitted with textile cables. This generous cable length enables flexible installation even in high rooms and allows individual height adjustment depending on the installation situation. The housing is characterised by a reduced, clear design language and is therefore ideal for modern architectural and lighting concepts in interiors. The E27 sockets used are deliberately oversized. The enlarged sleeve creates a visually harmonious unit between the socket and light source - without visible transitions or technical breaks. Compatible with our DESIGN-BULB light sources, this pendant luminaire is particularly suitable for project-oriented applications in the interior design, shop fitting or catering sectors. It provides an ideal basis for decorative lighting solutions with design requirements.





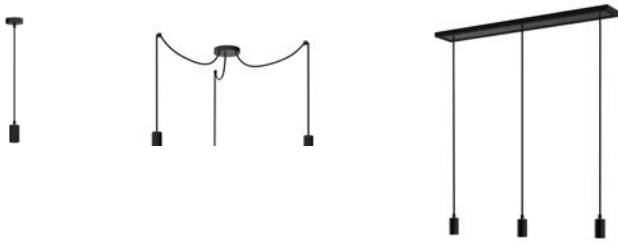

## LAMP SOCKET SEGULA DESIGN BULBS

- Sliding E27 socket sleeve(s) for adapting to lamps with special dimensions
- Ideal for use in conjunction with our designer bulb series
- Soft textile cable
- High-quality surface finish

|         |                |                     |                    |
|---------|----------------|---------------------|--------------------|
| Housing | Metal, Plastic | Rated Input Voltage | 220-240 V/AC       |
| Height  | 80 mm          | Connection Type     | Connectionbox IP20 |
| Ø       | 50 mm          |                     |                    |

| Article       | Housing Color | Max. Power     | Base Length | Base Width | Base Height | Base Ø | Price           |
|---------------|---------------|----------------|-------------|------------|-------------|--------|-----------------|
| <b>930908</b> | Black         | 1x max. 60.0 W |             |            | 20 mm       | 100 mm | <b>€ 47.95</b>  |
| <b>930909</b> | Black         | 1x max. 60.0 W |             |            | 20 mm       | 100 mm | <b>€ 55.95</b>  |
| <b>930965</b> | Black         | 3x max. 57.0 W |             |            | 25 mm       | 125 mm | <b>€ 155.95</b> |
| <b>930966</b> | Black         | 3x max. 57.0 W | 990 mm      | 150 mm     | 25 mm       |        | <b>€ 263.95</b> |



## DEKO-LIGHT LED DESIGN-BULB ORBIT E27 DIMMABLE

- Glass body is manufactured by hand
- Filigree lamp
- Reflections create the impression of floating light
- Patented soft filament technology
- Suitable for decorative and creative lights with and without lampshade
- Ideal for use in combination with our sockets with sliding socket sleeve

|                  |            |                     |                      |
|------------------|------------|---------------------|----------------------|
| Housing          | Glass      | Rated Input Voltage | 220-240 V/AC         |
| Light Beam Angle | 330 Degree | Life Time           | 20000 h              |
| Height           | 120 mm     | Control             | Trailing-edge dimmer |
| Ø                | 220 mm     | Channels            | 1                    |

| Article       | Housing Color | Colour Temperature | Luminous Flux | Power | Power Consumption | CRI (Ra) | EEI | Price           |
|---------------|---------------|--------------------|---------------|-------|-------------------|----------|-----|-----------------|
| <b>180731</b> | Smoky         | 1900 K             | 185 lm        | 4.5 W | 5 kWh/1000h       | 85       |     | <b>€ 109.95</b> |
| <b>180730</b> | Gold          | 2200 K             | 240 lm        | 4.0 W | 4 kWh/1000h       | 90       |     | <b>€ 109.95</b> |





## DEKO-LIGHT LED DESIGN BULB SHINE E27 DIMMABLE

Let our new designer light series ORBIT, SHINE and MOON take you into the world of style. The sophisticated luminous elements and the reflections generated in the glass create the impression of floating light. Whether light and airy in your living room at home or opulent and spacious in the hotel lobby - the dimmable LED lamps from the designer bulb series are perfect for open lights without shades or lampholders with E27 sockets and are a real eye-catcher wherever they are used.






## DEKO-LIGHT LED DESIGN BULB SHINE E27 DIMMABLE

- Glass body is manufactured by hand
- Filigree lamp
- Reflections create the impression of floating light
- Patented soft filament technology
- Suitable for decorative and creative lights with and without lampshade
- Ideal for use in combination with our sockets with sliding socket sleeve

|                   |             |                     |                      |
|-------------------|-------------|---------------------|----------------------|
| Housing           | Glass       | Rated Input Voltage | 220-240 V/AC         |
| Light Beam Angle  | 330 Degree  | Life Time           | 20000 h              |
| Height            | 190 mm      | Control             | Trailing-edge dimmer |
| Ø                 | 200 mm      | Channels            | 1                    |
| Power Consumption | 5 kWh/1000h |                     |                      |


| Article       | Housing Color | Colour Temperature | Luminous Flux | Power | CRI (Ra) | EEI | Price          |
|---------------|---------------|--------------------|---------------|-------|----------|-----|----------------|
| <b>180733</b> | Smoky         | 1900 K             | 210 lm        | 5.0 W | 85       |     | <b>€ 93.95</b> |
| <b>180732</b> | Gold          | 2200 K             | 300 lm        | 4.5 W | 90       |     | <b>€ 93.95</b> |



## DEKO-LIGHT LED DESIGN BULB MOON E27 DIMMABLE

|                     |              |          |                      |
|---------------------|--------------|----------|----------------------|
| Housing             | Glass        | Control  | Trailing-edge dimmer |
| Light Beam Angle    | 330 Degree   | Channels | 1                    |
| Rated Input Voltage | 220-240 V/AC |          |                      |

| Article       | Housing Color | Colour Temperature | Luminous Flux | Power | Height | Ø      | EEI | Price           |
|---------------|---------------|--------------------|---------------|-------|--------|--------|-----|-----------------|
| <b>180734</b> | Smoky         | 1900 K             | 220 lm        | 6.0 W | 165 mm | 125 mm |     | <b>€ 56.95</b>  |
| <b>180735</b> | Smoky         | 1900 K             | 260 lm        | 6.0 W | 185 mm | 150 mm |     | <b>€ 64.95</b>  |
| <b>180736</b> | Smoky         | 1900 K             | 300 lm        | 6.0 W | 230 mm | 200 mm |     | <b>€ 89.95</b>  |
| <b>180737</b> | Smoky         | 1900 K             | 350 lm        | 8.0 W | 320 mm | 300 mm |     | <b>€ 199.95</b> |
| <b>180741</b> | Black         | 2200 K             | 240 lm        | 4.0 W | 165 mm | 125 mm |     | <b>€ 71.95</b>  |
| <b>180742</b> | Black         | 2200 K             | 240 lm        | 4.0 W | 200 mm | 150 mm |     | <b>€ 91.95</b>  |
| <b>180743</b> | Black         | 2200 K             | 240 lm        | 4.0 W | 230 mm | 200 mm |     | <b>€ 119.95</b> |





## 68 MM CEILING MOUNT ADAPTER FOR PENDANT LAMPS

The recessed ceiling adapter is the ideal solution for discreetly and securely installing pendant lights weighing up to 2.5 kg. Thanks to the integrated three-pin connection box with strain relief and feed-through wiring, the adapter can be connected to the power supply quickly and reliably. Suitable for cable diameters of 5-7 mm and ceiling thicknesses of 2-15 mm, the adapter ensures that the light is seamlessly integrated into the ceiling. The result: A simple, high-quality look that discreetly conceals all electrical components and meets the highest aesthetic demands.







## 68 MM CEILING MOUNT ADAPTER FOR PENDANT LAMPS

- Secure installation of pendant lamps in 68 mm ceiling recesses
- Includes three-pin connection box with strain relief and feed-through wiring
- Suitable for cable diameters of 5-7 mm
- Suitable for ceiling thicknesses of 2-15 mm

|         |                      |                    |          |
|---------|----------------------|--------------------|----------|
| Housing | Polycarbonate, Steel | Installation Depth | 27 mm    |
| Height  | 32 mm                | Cut Out Ø          | 65-75 mm |
| Ø       | 90 mm                |                    |          |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 930913  |  White | € 23.95 |
| 930914  |  Black | € 23.95 |



### Lighting design

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.

# surface mounted ceiling lights



page 40



page 42



page 44



page 46



page 48



page 50



page 51



page 54



page 55



page 56



page 57



page 58



☐ ☒  
page 59



☐ ☒  
page 60



☐ ☒  
page 62



☐ ☒  
page 64



☐ ☒  
page 64



☐ ☒  
page 66



☐ ☒  
page 67



☐ ☒  
page 68



☐ ☒  
page 69



☐ ☒  
page 70



☐ ☒  
page 72



☐ ☒  
page 76



☐ ☒  
page 76



☐ ☒ ☐  
page 78



☐ ☒ ☐  
page 79



☐  
page 80



☐  
page 83



## MENKAR

MENKAR series ceiling and wall lights feature clever lighting functions and high-quality aluminium accents. The rear light (approx. 15-20 % indirect light) also allows additional indirect lighting.







## MENKAR


- Direct and indirect lighting (light proportion approx. 15-20 %)
- Light colour adjustable in two steps
- Optional diffuser lens for UGR<19
- Can be used as a wall or ceiling light (depending on model)



### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                     |                                 |                                 |                                                     |
|---------------------|---------------------------------|---------------------------------|-----------------------------------------------------|
| Housing             | Aluminium, Polycarbonate, Steel | Power Supply Unit incl. Control | Yes<br>Leading-edge dimmer,<br>Trailing-edge dimmer |
| Colour Temperature  | 3000/4000 K                     | CRI (Ra)                        | 80                                                  |
| Height              | 90 mm                           | IK Protection Class             | IK04                                                |
| Rated Input Voltage | 220-240 V/AC                    |                                 |                                                     |



348198

| Article       | Housing Color | Luminous Flux | Surface | Ø      | Power  | Price           |
|---------------|---------------|---------------|---------|--------|--------|-----------------|
| <b>348200</b> | Light grey    | 3300/3500 lm  | Brushed | 400 mm | 45.0 W | <b>€ 175.95</b> |
| <b>348201</b> | Dark brown    | 3300/3500 lm  | Brushed | 400 mm | 45.0 W | <b>€ 175.95</b> |
| <b>348198</b> | White         | 3300/3500 lm  | Matt    | 400 mm | 45.0 W | <b>€ 175.95</b> |
| <b>348199</b> | Black         | 3300/3500 lm  | Matt    | 400 mm | 45.0 W | <b>€ 175.95</b> |
| <b>348204</b> | Light grey    | 5600/6000 lm  | Brushed | 600 mm | 65.0 W | <b>€ 303.95</b> |
| <b>348205</b> | Dark brown    | 5600/6000 lm  | Brushed | 600 mm | 65.0 W | <b>€ 303.95</b> |
| <b>348202</b> | White         | 5600/6000 lm  | Matt    | 600 mm | 65.0 W | <b>€ 303.95</b> |
| <b>348203</b> | Black         | 5600/6000 lm  | Matt    | 600 mm | 65.0 W | <b>€ 303.95</b> |
| <b>348208</b> | Light grey    | 8400/8700 lm  | Brushed | 800 mm | 90.0 W | <b>€ 431.95</b> |
| <b>348209</b> | Dark brown    | 8400/8700 lm  | Brushed | 800 mm | 90.0 W | <b>€ 431.95</b> |
| <b>348206</b> | White         | 8400/8700 lm  | Matt    | 800 mm | 90.0 W | <b>€ 431.95</b> |
| <b>348207</b> | Black         | 8400/8700 lm  | Matt    | 800 mm | 90.0 W | <b>€ 431.95</b> |



Accessories for **348198, 348199, 348200, 348201**

**930709** Diffusing lenses UGR 19 for Menkar 400 lamp

€ 11.95

Accessories for **348202, 348203, 348204, 348205**

**930710** Diffusing lenses UGR 19 for Menkar 600 lamp

€ 19.95

Accessories for **348206, 348207, 348208, 348209**

**930711** Diffusing lenses UGR 19 for Menkar 800 lamp

€ 31.95

Accessories

**843503** RF-smart, Triac dimmer, 230 V, 300 W, IP20

€ 55.95

**843340** DALI, Triac dimmer, 100-240 V, 400 W, IP20

€ 59.95



## MEROPE

The timeless MEROPE demonstrates not only impressively high luminous flux and a low assembly height, it is also highly visually appealing thanks to its elegant outer aluminium ring – available in sand-blasted white or black, brushed in silver or on-trend coffee. Available in the diameters 380 mm, 580 mm and 780 mm, the MEROPE can be integrated into very different environments even more flexibly.

In addition, the light colour can be adjusted in 2 stages, 3,000 K or 4,000 K.





## MEROPE


- High luminous flux
- Light colour adjustable in 2 stages
- Low assembly height

### Application Area

Home / Living

|                         |              |
|-------------------------|--------------|
| Housing                 | Aluminium    |
| Colour Temperature      | 3000/4000 K  |
| Height                  | 60 mm        |
| Rated Input Voltage     | 220-240 V/AC |
| Power Supply Unit incl. | Yes          |

|                     |                                              |
|---------------------|----------------------------------------------|
| Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| CRI (Ra)            | 80                                           |
| IK Protection Class | IK04                                         |



348186

| Article       | Housing Color |  | Luminous Flux | Surface | Ø      | Power  | Price           |
|---------------|---------------|--|---------------|---------|--------|--------|-----------------|
| <b>348188</b> | Light grey    |  | 2100/2200 lm  | Brushed | 380 mm | 30.0 W | <b>€ 151.95</b> |
| <b>348189</b> | Dark brown    |  | 2100/2200 lm  | Brushed | 380 mm | 30.0 W | <b>€ 151.95</b> |
| <b>348186</b> | White         |  | 2100/2200 lm  | Matt    | 380 mm | 30.0 W | <b>€ 151.95</b> |
| <b>348187</b> | Black         |  | 2100/2200 lm  | Matt    | 380 mm | 30.0 W | <b>€ 151.95</b> |
| <b>348192</b> | Light grey    |  | 3100/3200 lm  | Brushed | 580 mm | 42.0 W | <b>€ 219.95</b> |
| <b>348193</b> | Dark brown    |  | 3100/3200 lm  | Brushed | 580 mm | 42.0 W | <b>€ 219.95</b> |
| <b>348190</b> | White         |  | 3100/3200 lm  | Matt    | 580 mm | 42.0 W | <b>€ 219.95</b> |
| <b>348191</b> | Black         |  | 3100/3200 lm  | Matt    | 580 mm | 42.0 W | <b>€ 219.95</b> |
| <b>348196</b> | Light grey    |  | 4800/4900 lm  | Brushed | 780 mm | 60.0 W | <b>€ 359.95</b> |
| <b>348197</b> | Dark brown    |  | 4800/4900 lm  | Brushed | 780 mm | 60.0 W | <b>€ 359.95</b> |
| <b>348194</b> | White         |  | 4800/4900 lm  | Matt    | 780 mm | 60.0 W | <b>€ 359.95</b> |
| <b>348195</b> | Black         |  | 4800/4900 lm  | Matt    | 780 mm | 60.0 W | <b>€ 359.95</b> |




### Accessories

|               |                                            |
|---------------|--------------------------------------------|
| <b>843503</b> | RF-smart, Triac dimmer, 230 V, 300 W, IP20 |
| <b>843340</b> | DALI, Triac dimmer, 100-240 V, 400 W, IP20 |

|  |                |
|--|----------------|
|  | <b>€ 55.95</b> |
|  | <b>€ 59.95</b> |



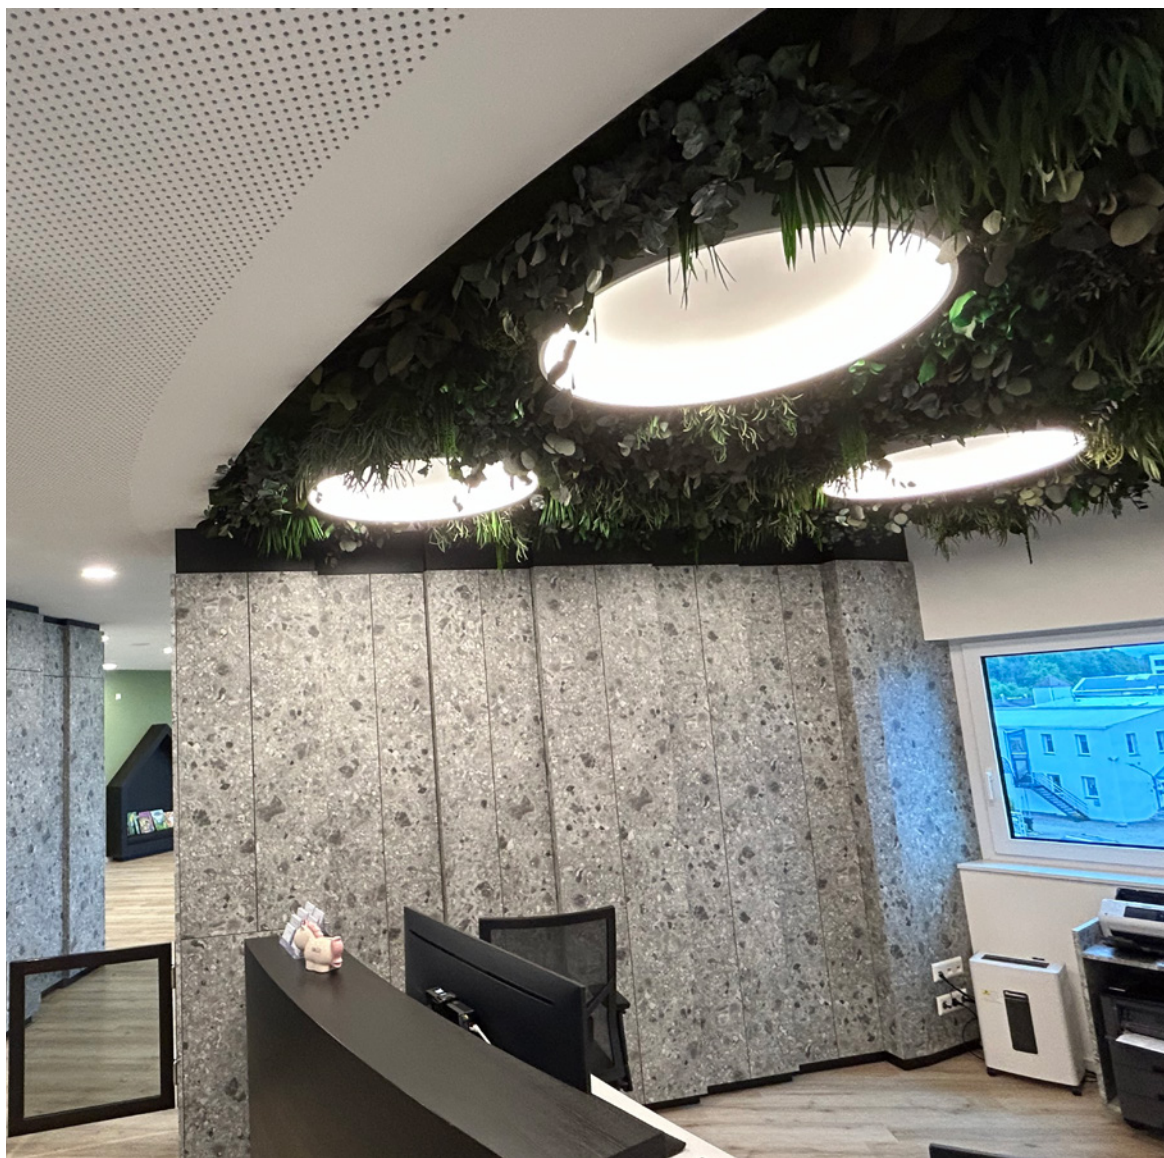

## SCULPTORIS

Modern elegance for ceilings; the ceiling lights from the SCULPTORIS series can be used in a number of ways indoors thanks to different outputs, sizes and colour temperatures. The surface-mounted ceiling lights provide extensive illumination for rooms and also look great as wall lights.

The light is softly and extensively diffused through the large, circumferential diffuser with matt aluminium design and illuminates rooms pleasantly and evenly.

The light colours warm white (3,000 K) or neutral white (4,000 K) can be set for each variant.








SCULPTORIS

- Light colour adjustable in 2 stages
- Uniform illumination
- Circumferential diffuser

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                         |              |                     |                                              |
|-------------------------|--------------|---------------------|----------------------------------------------|
| Housing                 | Aluminium    | Light Beam Angle    | 150 Degree                                   |
| Colour Temperature      | 3000/4000 K  | Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Surface                 | Matt         | CRI (Ra)            | 80                                           |
| Rated Input Voltage     | 220-240 V/AC | IK Protection Class | IK04                                         |
| Power Supply Unit incl. | Yes          |                     |                                              |



| Article | Housing Color |  | Luminous Flux | Height | Ø      | Power  | Price    |
|---------|---------------|--|---------------|--------|--------|--------|----------|
| 348180  | White         |  | 2000/2100 lm  | 100 mm | 400 mm | 30.0 W | € 215.95 |
| 348181  | Black         |  | 2000/2100 lm  | 100 mm | 400 mm | 30.0 W | € 215.95 |
| 348182  | White         |  | 3000/3100 lm  | 130 mm | 600 mm | 42.0 W | € 279.95 |
| 348183  | Black         |  | 3000/3100 lm  | 130 mm | 600 mm | 42.0 W | € 279.95 |



Accessories

|        |                                            |  |         |
|--------|--------------------------------------------|--|---------|
| 843503 | RF-smart, Triac dimmer, 230 V, 300 W, IP20 |  | € 55.95 |
| 843340 | DALI, Triac dimmer, 100-240 V, 400 W, IP20 |  | € 59.95 |




Technical data sheet

New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.



## ZANIAH

Whilst flat surfaces and covers are the go-to for most surface-mounted ceiling lights, the ZANIAH places special emphasis on its 360° lamp [either a 12 W, 18 W or 24 W variant]. Replaceable covers allow the visual appearance of ZANIAH to be changed even after installation. The covers are available in eight colour variants, allowing plenty of scope for customisation.





## ZANIAH


- Can be customised using coloured covers
- 360° light emission angle
- Can be used as a wall or ceiling light

### Application Area

Reception / Communication, Corridor / stairwell, Home / Living, Hotel / catering

|                         |              |                     |                                              |
|-------------------------|--------------|---------------------|----------------------------------------------|
| Housing                 | Aluminium    | Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Colour Temperature      | 3000 K       | CRI (Ra)            | 80                                           |
| Rated Input Voltage     | 220-240 V/AC | IK Protection Class | IK05                                         |
| Power Supply Unit incl. | Yes          |                     |                                              |
| Light Beam Angle        | 120 Degree   |                     |                                              |

| Article | Housing Color |  | Luminous Flux | Height | Ø      | Power  | EEI | Price   |
|---------|---------------|--|---------------|--------|--------|--------|-----|---------|
| 620033  | Light grey    |  | 1510 lm       | 42 mm  | 290 mm | 12.0 W |     | € 79.95 |
| 620034  | Blue          |  | 1510 lm       | 42 mm  | 290 mm | 12.0 W |     | € 79.95 |
| 620035  | Green         |  | 1510 lm       | 42 mm  | 290 mm | 12.0 W |     | € 79.95 |
| 620036  | Red           |  | 1510 lm       | 42 mm  | 290 mm | 12.0 W |     | € 79.95 |
| 620037  | Yellow        |  | 1510 lm       | 42 mm  | 290 mm | 12.0 W |     | € 79.95 |
| 620038  | Dark grey     |  | 1510 lm       | 42 mm  | 290 mm | 12.0 W |     | € 79.95 |
| 620039  | Black         |  | 1510 lm       | 42 mm  | 290 mm | 12.0 W |     | € 79.95 |
| 620040  | White         |  | 1510 lm       | 42 mm  | 290 mm | 12.0 W |     | € 79.95 |
| 620041  | Light grey    |  | 2020 lm       | 46 mm  | 370 mm | 18.0 W |     | € 87.95 |
| 620042  | Blue          |  | 2020 lm       | 46 mm  | 370 mm | 18.0 W |     | € 87.95 |
| 620043  | Green         |  | 2020 lm       | 46 mm  | 370 mm | 18.0 W |     | € 87.95 |
| 620044  | Red           |  | 2020 lm       | 46 mm  | 370 mm | 18.0 W |     | € 87.95 |
| 620045  | Yellow        |  | 2020 lm       | 46 mm  | 370 mm | 18.0 W |     | € 87.95 |
| 620046  | Dark grey     |  | 2020 lm       | 46 mm  | 370 mm | 18.0 W |     | € 87.95 |
| 620047  | Black         |  | 2020 lm       | 46 mm  | 370 mm | 18.0 W |     | € 87.95 |
| 620048  | White         |  | 2020 lm       | 46 mm  | 370 mm | 18.0 W |     | € 87.95 |
| 620049  | Light grey    |  | 2565 lm       | 46 mm  | 420 mm | 24.0 W |     | € 95.95 |
| 620050  | Blue          |  | 2565 lm       | 46 mm  | 420 mm | 24.0 W |     | € 95.95 |
| 620051  | Green         |  | 2565 lm       | 46 mm  | 420 mm | 24.0 W |     | € 95.95 |
| 620052  | Red           |  | 2565 lm       | 46 mm  | 420 mm | 24.0 W |     | € 95.95 |
| 620053  | Yellow        |  | 2565 lm       | 46 mm  | 420 mm | 24.0 W |     | € 95.95 |
| 620054  | Dark grey     |  | 2565 lm       | 46 mm  | 420 mm | 24.0 W |     | € 95.95 |
| 620055  | Black         |  | 2565 lm       | 46 mm  | 420 mm | 24.0 W |     | € 95.95 |
| 620056  | White         |  | 2565 lm       | 46 mm  | 420 mm | 24.0 W |     | € 95.95 |





The ALTAIS 2 Round is a modern ceiling and wall luminaire that is ideal for lighting solutions in commercial, public and private areas. Its clear, round design blends into a wide variety of architectural settings - from technical rooms, corridors and stairwells to modern residential and commercial areas. Thanks to the integrated CCT switch, the light colour can be adjusted in three stages (2700K / 3000K / 4000K). The output can also be adjusted in two stages to optimise energy efficiency and luminous efficacy depending on the room requirements. With through-wiring and surface-mounted cable entries, the installation options are very flexible. Installation is convenient thanks to a practical and time-saving click system.

As an eligible product in accordance with the requirements of the Federal Subsidy for Efficient Buildings (BEG), the ALTAIS 2 Round also contributes to energy-efficient refurbishment - a plus point for sustainable projects.








## ALTAIS 2 ROUND

- Light colour adjustable in 3 stages
- Power adjustable in 2 steps
- through-wiring possible
- Easy installation thanks to click system
- Optional surface-mounted cable entry
- BEG eligible

### Application Area

Bathroom / WC, Corridor / stairwell, Wellness / Spa / Gym, Workshop / Craft / Warehouse, Home / Living, Retrofit / Refurbishment

|                    |                  |                     |              |
|--------------------|------------------|---------------------|--------------|
| Housing            | Polycarbonate    | Rated Input Voltage | 100-240 V/AC |
| Colour Temperature | 2700/3000/4000 K | Light Beam Angle    | 120 Degree   |
| Height             | 52 mm            | CRI (Ra)            | 85           |
| Base Height        | 20.5 mm          | IK Protection Class | IK10         |



348276

| Article       | Housing Color                  |                                                                                                                                                                         | Luminous Flux     | Ø      | Base Ø | Power Selectable | Price          |
|---------------|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|--------|--------|------------------|----------------|
| <b>348276</b> | <input type="checkbox"/> White |   | 1725/1800/1800 lm | 220 mm | 180 mm | 10.0 W / 15.0 W  | <b>€ 55.95</b> |
| <b>348277</b> | <input type="checkbox"/> White |   | 2070/2160/2160 lm | 280 mm | 240 mm | 13.0 W / 18.0 W  | <b>€ 67.95</b> |
| <b>348278</b> | <input type="checkbox"/> White |   | 2875/3000/3000 lm | 330 mm | 280 mm | 18.0 W / 25.0 W  | <b>€ 79.95</b> |



### Onlineshop

You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.



ALTAIS 2 ROUND MOTION


- Light colour adjustable in 3 stages
- Power adjustable in 2 levels
- Adjustable motion detector with corridor function
- through-wiring possible
- Easy installation thanks to click system
- Optional surface-mounted cable entry
- BEG eligible



Application Area

Bathroom / WC, Corridor / stairwell, Wellness / Spa / Gym, Workshop / Craft / Warehouse, Home / Living, Retrofit / Refurbishment

|                     |                  |                     |            |
|---------------------|------------------|---------------------|------------|
| Housing             | Polycarbonate    | Light Beam Angle    | 120 Degree |
| Colour Temperature  | 2700/3000/4000 K | CRI (Ra)            | 85         |
| Height              | 52 mm            | Motion Detector     | Yes        |
| Base Height         | 20.5 mm          | IK Protection Class | IK10       |
| Rated Input Voltage | 100-240 V/AC     |                     |            |



348279

| Article | Housing Color                  |  | Luminous Flux     | Ø      | Base Ø | Power Selectable | Price    |
|---------|--------------------------------|--|-------------------|--------|--------|------------------|----------|
| 348279  | <input type="checkbox"/> White |  | 1725/1800/1800 lm | 220 mm | 180 mm | 10.0 W / 15.0 W  | € 79.95  |
| 348280  | <input type="checkbox"/> White |  | 2070/2160/2160 lm | 280 mm | 240 mm | 13.0 W / 18.0 W  | € 91.95  |
| 348281  | <input type="checkbox"/> White |  | 2875/3000/3000 lm | 330 mm | 280 mm | 18.0 W / 25.0 W  | € 103.95 |



Lighting design

Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.




ALTAIS 2 ROUND MOTION MS

- Light colour adjustable in 3 stages
- Power adjustable in 2 levels
- Adjustable motion detector with corridor function
- Multi-master-slave configuration with up to 8 groups
- through-wiring possible
- Easy installation thanks to click system
- Optional surface-mounted cable entry
- BEG eligible


Application Area

Bathroom / WC, Corridor / stairwell, Wellness / Spa / Gym, Workshop / Craft / Warehouse, Home / Living, Retrofit / Refurbishment

|                     |                  |                     |            |
|---------------------|------------------|---------------------|------------|
| Housing             | Polycarbonate    | Light Beam Angle    | 120 Degree |
| Colour Temperature  | 2700/3000/4000 K | CRI (Ra)            | 85         |
| Height              | 52 mm            | Motion Detector     | Yes        |
| Base Height         | 20.5 mm          | IK Protection Class | IK10       |
| Rated Input Voltage | 100-240 V/AC     |                     |            |



| Article | Housing Color                  |                                                                                                                                                                         | Luminous Flux     | Ø      | Base Ø | Power Selectable | Price    |
|---------|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|--------|--------|------------------|----------|
| 348285  | <input type="checkbox"/> White |   | 2070/2160/2160 lm | 280 mm | 240 mm | 13.0 W / 18.0 W  | € 107.95 |
| 348286  | <input type="checkbox"/> White |   | 2875/3000/3000 lm | 330 mm | 280 mm | 18.0 W / 25.0 W  | € 119.95 |



Accessories

931075 Remote control for Altais 2 Motion MS



€ 19.95



**5-year guarantee**  
Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

## UNI II

The UNI II series comprises high-quality surface-mounted luminaires and track-mounted spotlights for use on walls and ceilings in commercial and private premises.

The rotating and swivelling luminaire heads of the UNI II series – available in white and black aluminium housing versions – are equipped with warm white COB LEDs and can be folded flush onto the base if required to shine vertically downwards like a ceiling spotlight. In addition to the single, double and triple versions, both a MINI version [with smaller luminaire head and base] and a MAX version are available.

### THE SERIES AT A GLANCE



#### UNI II

The standard version [TILT] with 3,000 K is also available with two [DOUBLE] and three [TRIPLE] luminaire heads on a base and as a wall-mounted version.



#### UNI II MINI

The MINI version [optionally 2,700 K or 3,000 K] is available with one [MINI II TILT] or two [MINI II DOUBLE] luminaire heads and is suitable for particularly discreet use in small rooms.



#### UNI II MAX

THE MAX version [3,000 K] with its 2,410 lumens also makes a big impression on its own.



#### UNI II TRACK SPOT

Whether private [1-phase] or commercial [3-phase]: As a track spotlight, the UNI II can be aligned even more flexibly in the room. Available as a standard version [UNI II TILT] and as a MINI version [MINI II TILT].



#### UNI II RECESSED LIGHT

The rotatable and swivelling luminaire head of the UNI II recessed luminaire [also available as a MINI and MAX version] can be folded flush onto the base if required in order to shine vertically downwards like a ceiling spotlight.



## VERSATILE ACCESSORIES

THE UNI II series offers numerous options to further individualise the light and appearance of the luminaires:






UNI 2

- „Glow“ effect on reflector ring
- Can be rotated and swivelled
- Can be customised with a comprehensive range of accessories

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Colour Temperature  | 3000 K       | Light Beam Angle        | 36 Degree                                    |
| Height              | 103 mm       | Rotation Angle          | 350 Degree                                   |
| Ø                   | 100 mm       | Swivelling Angle        | 90 Degree                                    |
| Power               | 12 W         | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Base Height         | 14.5 mm      | CRI (Ra)                | 90                                           |
| Base Ø              | 96 mm        |                         |                                              |
| Rated Input Voltage | 220-240 V/AC |                         |                                              |



| Article | Housing Color | Luminous Flux | Price    |
|---------|---------------|---------------|----------|
| 348179  | Black         | 780 lm        | € 115.95 |
| 348124  | White         | 835 lm        | € 115.95 |



Accessories

|        |                                                       |                                                                                     |        |
|--------|-------------------------------------------------------|-------------------------------------------------------------------------------------|--------|
| 930305 | 36° reflector for Klara/Nihal Mini/Uni II series      |  | € 2.95 |
| 930306 | 48° reflector for Klara/Nihal Mini/Uni II series      |  | € 6.95 |
| 930307 | Honeycomb filter for Klara/Nihal Mini/Uni II series   |  | € 6.95 |
| 930308 | Spread lens for Klara/Nihal Mini/Uni II series        |  | € 6.95 |
| 930309 | Softening lens for Klara/Nihal Mini/Uni II series     |  | € 6.95 |
| 930310 | Linear spread lens for Klara/Nihal Mini/Uni II series |  | € 6.95 |
| 930334 | Rear white cover for Uni II series                    |  | € 2.95 |
| 930335 | Rear black cover for Uni II series                    |  | € 2.45 |
| 930336 | White heat sink cover for Uni II series               |  | € 2.95 |
| 930337 | Black heat sink cover for Uni II series               |  | € 6.45 |
| 930338 | Reflector ring white for Uni II series                |  | € 9.95 |
| 930339 | Reflector ring black for Uni II series                |  | € 8.95 |
| 930340 | Reflector ring gold for Uni II series                 |  | € 8.95 |
| 930341 | Reflector ring chrome for Uni II series               |  | € 8.95 |






UNI 2 DOUBLE

- „Glow“ effect on reflector ring
- Can be rotated and swivelled
- Can be customised with a comprehensive range of accessories

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|                    |           |                         |                                              |
|--------------------|-----------|-------------------------|----------------------------------------------|
| Housing            | Aluminium | Rated Input Voltage     | 220-240 V/AC                                 |
| Colour Temperature | 3000 K    | Power Supply Unit incl. | Yes                                          |
| Length             | 212 mm    | Light Beam Angle        | 36 Degree                                    |
| Width              | 100 mm    | Rotation Angle          | 350 Degree                                   |
| Height             | 103 mm    | Swivelling Angle        | 90 Degree                                    |
| Power              | 20 W      | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Base Length        | 212 mm    | CRI (Ra)                | 90                                           |
| Base Width         | 20 mm     |                         |                                              |
| Base Height        | 14 mm     |                         |                                              |



348125

| Article | Housing Color | Luminous Flux | Price    |
|---------|---------------|---------------|----------|
| 348175  | Black         | 1440 lm       | € 207.95 |
| 348125  | White         | 1730 lm       | € 207.95 |



Accessories

|        |                                                       |        |
|--------|-------------------------------------------------------|--------|
| 930305 | 36° reflector for Klara/Nihal Mini/Uni II series      | € 2.95 |
| 930306 | 48° reflector for Klara/Nihal Mini/Uni II series      | € 6.95 |
| 930307 | Honeycomb filter for Klara/Nihal Mini/Uni II series   | € 6.95 |
| 930308 | Spread lens for Klara/Nihal Mini/Uni II series        | € 6.95 |
| 930309 | Softening lens for Klara/Nihal Mini/Uni II series     | € 6.95 |
| 930310 | Linear spread lens for Klara/Nihal Mini/Uni II series | € 6.95 |
| 930334 | Rear white cover for Uni II series                    | € 2.95 |
| 930335 | Rear black cover for Uni II series                    | € 2.45 |
| 930336 | White heat sink cover for Uni II series               | € 2.95 |
| 930337 | Black heat sink cover for Uni II series               | € 6.45 |
| 930338 | Reflector ring white for Uni II series                | € 9.95 |
| 930339 | Reflector ring black for Uni II series                | € 8.95 |
| 930340 | Reflector ring gold for Uni II series                 | € 8.95 |
| 930341 | Reflector ring chrome for Uni II series               | € 8.95 |






UNI 2 TRIPLE

- „Glow“ effect on reflector ring
- Can be rotated and swivelled
- Can be customised with a comprehensive range of accessories

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|                    |           |                         |                                              |
|--------------------|-----------|-------------------------|----------------------------------------------|
| Housing            | Aluminium | Base Height             | 14.5 mm                                      |
| Colour Temperature | 3000 K    | Rated Input Voltage     | 220-240 V/AC                                 |
| Length             | 324 mm    | Power Supply Unit incl. | Yes                                          |
| Width              | 100 mm    | Light Beam Angle        | 36 Degree                                    |
| Height             | 103 mm    | Rotation Angle          | 350 Degree                                   |
| Ø                  | 100 mm    | Swivelling Angle        | 90 Degree                                    |
| Power              | 30 W      | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Base Length        | 315 mm    | CRI (Ra)                | 90                                           |
| Base Width         | 25 mm     |                         |                                              |



348107

| Article | Housing Color | Luminous Flux | Price    |
|---------|---------------|---------------|----------|
| 348210  | Black         | 2150 lm       | € 295.95 |
| 348107  | White         | 2420 lm       | € 295.95 |



Accessories

|        |                                                       |  |        |
|--------|-------------------------------------------------------|--|--------|
| 930305 | 36° reflector for Klara/Nihal Mini/Uni II series      |  | € 2.95 |
| 930306 | 48° reflector for Klara/Nihal Mini/Uni II series      |  | € 6.95 |
| 930307 | Honeycomb filter for Klara/Nihal Mini/Uni II series   |  | € 6.95 |
| 930308 | Spread lens for Klara/Nihal Mini/Uni II series        |  | € 6.95 |
| 930309 | Softening lens for Klara/Nihal Mini/Uni II series     |  | € 6.95 |
| 930310 | Linear spread lens for Klara/Nihal Mini/Uni II series |  | € 6.95 |
| 930334 | Rear white cover for Uni II series                    |  | € 2.95 |
| 930335 | Rear black cover for Uni II series                    |  | € 2.45 |
| 930336 | White heat sink cover for Uni II series               |  | € 2.95 |
| 930337 | Black heat sink cover for Uni II series               |  | € 6.45 |
| 930338 | Reflector ring white for Uni II series                |  | € 9.95 |
| 930339 | Reflector ring black for Uni II series                |  | € 8.95 |
| 930340 | Reflector ring gold for Uni II series                 |  | € 8.95 |
| 930341 | Reflector ring chrome for Uni II series               |  | € 8.95 |








## UNI 2 MINI

- „Glow“ effect on reflector ring
- Can be rotated and swivelled
- Can be customised with a comprehensive range of accessories

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|                         |              |                  |                                              |
|-------------------------|--------------|------------------|----------------------------------------------|
| Housing                 | Aluminium    | Light Beam Angle | 36 Degree                                    |
| Height                  | 75 mm        | Rotation Angle   | 350 Degree                                   |
| Ø                       | 91 mm        | Swivelling Angle | 90 Degree                                    |
| Base Height             | 44 mm        | Control          | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Base Ø                  | 75 mm        | CRI (Ra)         | 90                                           |
| Rated Input Voltage     | 220-240 V/AC |                  |                                              |
| Power Supply Unit incl. | Yes          |                  |                                              |



348122

| Article       | Housing Color | Colour Temperature | Luminous Flux | Power  | EEL | Price           |
|---------------|---------------|--------------------|---------------|--------|-----|-----------------|
| <b>348234</b> | Black         | 2700 K             | 700 lm        | 11.3 W |     | <b>€ 103.95</b> |
| <b>348233</b> | White         | 2700 K             | 730 lm        | 11.3 W |     | <b>€ 103.95</b> |
| <b>348178</b> | Black         | 3000 K             | 540 lm        | 8.0 W  | G   | <b>€ 95.95</b>  |
| <b>348122</b> | White         | 3000 K             | 630 lm        | 8.0 W  | G   | <b>€ 95.95</b>  |



### Accessories

|               |                                              |  |               |
|---------------|----------------------------------------------|--|---------------|
| <b>930327</b> | Rear black cover for Uni II Mini series      |  | <b>€ 2.95</b> |
| <b>930328</b> | White heat sink cover for Uni II Mini series |  | <b>€ 2.95</b> |
| <b>930329</b> | Black heat sink cover for Uni II Mini series |  | <b>€ 2.45</b> |
| <b>930330</b> | Reflector ring white for Uni II Mini series  |  | <b>€ 8.95</b> |
| <b>930331</b> | Reflector ring black for Uni II Mini series  |  | <b>€ 8.95</b> |
| <b>930332</b> | Reflector ring gold for Uni II Mini series   |  | <b>€ 8.95</b> |
| <b>930333</b> | Reflector ring chrome for Uni II Mini series |  | <b>€ 8.95</b> |
| <b>930770</b> | Reflector 24° for Uni II Mini series         |  | <b>€ 8.95</b> |
| <b>930771</b> | Reflector 48° for Uni II Mini series         |  | <b>€ 8.95</b> |



### Technical data sheet

New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.




## UNI 2 MINI DOUBLE

- „Glow“ effect on reflector ring
- Can be rotated and swivelled
- Can be customised with a comprehensive range of accessories

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Length              | 160 mm       | Light Beam Angle        | 36 Degree                                    |
| Width               | 75 mm        | Rotation Angle          | 350 Degree                                   |
| Height              | 91 mm        | Swivelling Angle        | 90 Degree                                    |
| Base Length         | 160 mm       | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Base Width          | 75 mm        | CRI (Ra)                | 90                                           |
| Base Height         | 44 mm        |                         |                                              |
| Rated Input Voltage | 220-240 V/AC |                         |                                              |



348123

| Article | Housing Color | Colour Temperature | Luminous Flux | Power  | EEL | Price    |
|---------|---------------|--------------------|---------------|--------|-----|----------|
| 348236  | Black         | 2700 K             | 1300 lm       | 21.0 W |     | € 167.95 |
| 348235  | White         | 2700 K             | 1400 lm       | 21.0 W |     | € 167.95 |
| 348177  | Black         | 3000 K             | 1020 lm       | 15.0 W |     | € 159.95 |
| 348123  | White         | 3000 K             | 1210 lm       | 15.0 W |     | € 159.95 |



### Accessories

|        |                                              |  |        |
|--------|----------------------------------------------|--|--------|
| 930327 | Rear black cover for Uni II Mini series      |  | € 2.95 |
| 930328 | White heat sink cover for Uni II Mini series |  | € 2.95 |
| 930329 | Black heat sink cover for Uni II Mini series |  | € 2.45 |
| 930330 | Reflector ring white for Uni II Mini series  |  | € 8.95 |
| 930331 | Reflector ring black for Uni II Mini series  |  | € 8.95 |
| 930332 | Reflector ring gold for Uni II Mini series   |  | € 8.95 |
| 930333 | Reflector ring chrome for Uni II Mini series |  | € 8.95 |
| 930770 | Reflector 24° for Uni II Mini series         |  | € 8.95 |
| 930771 | Reflector 48° for Uni II Mini series         |  | € 8.95 |




## UNI 2 MAX

- „Glow“ effect on reflector ring
- Can be rotated and swivelled
- Can be customised with a comprehensive range of accessories

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Colour Temperature  | 3000 K       | Light Beam Angle        | 36 Degree                                    |
| Height              | 128 mm       | Rotation Angle          | 350 Degree                                   |
| Ø                   | 125 mm       | Swivelling Angle        | 90 Degree                                    |
| Power               | 32 W         | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Base Height         | 62 mm        | CRI (Ra)                | 90                                           |
| Base Ø              | 125 mm       |                         |                                              |
| Rated Input Voltage | 220-240 V/AC |                         |                                              |



348127

| Article       | Housing Color | Luminous Flux | Price           |
|---------------|---------------|---------------|-----------------|
| <b>348176</b> | Black         | 2730 lm       | <b>€ 199.95</b> |
| <b>348127</b> | White         | 2830 lm       | <b>€ 199.95</b> |



### Accessories

|               |                                             |  |                |
|---------------|---------------------------------------------|--|----------------|
| <b>930390</b> | 24° reflector for Uni II Max                |  | <b>€ 8.95</b>  |
| <b>930391</b> | 36° reflector for Uni II Max                |  | <b>€ 9.95</b>  |
| <b>930392</b> | 48° reflector for Uni II Max                |  | <b>€ 8.95</b>  |
| <b>930393</b> | Rear white cover for Uni II Max series      |  | <b>€ 8.95</b>  |
| <b>930394</b> | Rear black cover for Uni II Max series      |  | <b>€ 8.95</b>  |
| <b>930395</b> | White heat sink cover for Uni II Max series |  | <b>€ 8.95</b>  |
| <b>930396</b> | Black heat sink cover for Uni II Max series |  | <b>€ 8.95</b>  |
| <b>930397</b> | Reflector ring white for Uni II Max series  |  | <b>€ 9.95</b>  |
| <b>930398</b> | Reflector ring black for Uni II Max series  |  | <b>€ 8.95</b>  |
| <b>930399</b> | Reflector ring gold for Uni II Max series   |  | <b>€ 11.95</b> |






LUCEA CCT

- Incl. black reflector ring
- Comprehensive range of accessories for customisation
- Light colour adjustable in two steps



**Application Area**  
 Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

|                         |              |                     |                                              |
|-------------------------|--------------|---------------------|----------------------------------------------|
| Housing                 | Aluminium    | Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Colour Temperature      | 3000/4000 K  | CRI (Ra)            | 90                                           |
| Rated Input Voltage     | 220-240 V/AC | IK Protection Class | IK03                                         |
| Power Supply Unit incl. | Yes          |                     |                                              |
| Light Beam Angle        | 36 Degree    |                     |                                              |



348153

| Article | Housing Color |  | Luminous Flux | Height | Ø      | Power  | Price    |
|---------|---------------|--|---------------|--------|--------|--------|----------|
| 348153  | White         |  | 930/1000 lm   | 157 mm | 65 mm  | 10.0 W | € 95.95  |
| 348154  | Black         |  | 930/1000 lm   | 157 mm | 65 mm  | 10.0 W | € 95.95  |
| 348155  | White         |  | 1460/1500 lm  | 178 mm | 85 mm  | 15.0 W | € 111.95 |
| 348156  | Black         |  | 1460/1500 lm  | 178 mm | 85 mm  | 15.0 W | € 111.95 |
| 348157  | White         |  | 1930/2000 lm  | 178 mm | 85 mm  | 20.0 W | € 127.95 |
| 348158  | Black         |  | 1930/2000 lm  | 178 mm | 85 mm  | 20.0 W | € 127.95 |
| 348159  | White         |  | 2700/2900 lm  | 211 mm | 100 mm | 30.0 W | € 143.95 |
| 348160  | Black         |  | 2700/2900 lm  | 211 mm | 100 mm | 30.0 W | € 143.95 |



Accessories for 348153, 348154

|        |                                     |  |        |
|--------|-------------------------------------|--|--------|
| 930679 | Lens 24° for Lucea 6/10             |  | € 7.95 |
| 930756 | Reflector ring for Lucea 6/10 white |  | € 3.95 |
| 930757 | Reflector ring for Lucea 6/10 black |  | € 3.95 |
| 930758 | Reflector ring for Lucea 6/10 gold  |  | € 3.95 |

Accessories for 348155, 348156, 348157, 348158

|        |                                      |  |        |
|--------|--------------------------------------|--|--------|
| 930680 | Lens 24° for Lucea 15/20             |  | € 9.95 |
| 930681 | Lens 60° for Lucea 15/20             |  | € 9.95 |
| 930759 | Reflector ring for Lucea 15/20 white |  | € 4.75 |
| 930760 | Reflector ring for Lucea 15/20 black |  | € 4.75 |
| 930761 | Reflector ring for Lucea 15/20 gold  |  | € 4.75 |

Accessories for 348159, 348160

|        |                                      |  |         |
|--------|--------------------------------------|--|---------|
| 930682 | Lens 24° for Lucea 30                |  | € 12.95 |
| 930684 | Lens 60° for Lucea 30                |  | € 12.95 |
| 930762 | Reflector ring for Lucea 30/40 white |  | € 5.45  |
| 930763 | Reflector ring for Lucea 30/40 black |  | € 5.45  |
| 930764 | Reflector ring for Lucea 30/40 gold  |  | € 5.45  |








LUCEA TILT CCT

- Incl. black reflector ring
- Comprehensive range of accessories for customisation
- Light colour adjustable in two steps

**Application Area**  
 Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|                         |              |                     |                                           |
|-------------------------|--------------|---------------------|-------------------------------------------|
| Housing                 | Aluminium    | Swivelling Angle    | 90 Degree                                 |
| Colour Temperature      | 3000/4000 K  | Control             | Leading-edge dimmer, Trailing-edge dimmer |
| Rated Input Voltage     | 220-240 V/AC | CRI (Ra)            | 90                                        |
| Power Supply Unit incl. | Yes          | IK Protection Class | IK03                                      |
| Light Beam Angle        | 36 Degree    |                     |                                           |
| Rotation Angle          | 350 Degree   |                     |                                           |



348161

| Article | Housing Color |  | Luminous Flux | Height | Ø      | Power  | Price    |
|---------|---------------|--|---------------|--------|--------|--------|----------|
| 348161  |               |  | 930/1000 lm   | 218 mm | 65 mm  | 10.0 W | € 103.95 |
| 348162  |               |  | 930/1000 lm   | 218 mm | 65 mm  | 10.0 W | € 103.95 |
| 348163  |               |  | 1460/1500 lm  | 241 mm | 85 mm  | 15.0 W | € 119.95 |
| 348164  |               |  | 1460/1500 lm  | 241 mm | 85 mm  | 15.0 W | € 119.95 |
| 348165  |               |  | 1930/2000 lm  | 241 mm | 85 mm  | 20.0 W | € 135.95 |
| 348166  |               |  | 1930/2000 lm  | 241 mm | 85 mm  | 20.0 W | € 135.95 |
| 348167  |               |  | 2700/2900 lm  | 274 mm | 100 mm | 30.0 W | € 151.95 |
| 348168  |               |  | 2700/2900 lm  | 274 mm | 100 mm | 30.0 W | € 151.95 |



Accessories for 348161, 348162

|        |                                     |  |         |
|--------|-------------------------------------|--|---------|
| 930679 | Lens 24° for Lucea 6/10             |  | € 7.95  |
| 930752 | Door panel for Lucea 6/10 white     |  | € 17.95 |
| 930753 | Door panel for Lucea 6/10 black     |  | € 17.95 |
| 930756 | Reflector ring for Lucea 6/10 white |  | € 3.95  |
| 930757 | Reflector ring for Lucea 6/10 black |  | € 3.95  |
| 930758 | Reflector ring for Lucea 6/10 gold  |  | € 3.95  |

Accessories for 348163, 348164, 348165, 348166

|        |                                      |  |         |
|--------|--------------------------------------|--|---------|
| 930680 | Lens 24° for Lucea 15/20             |  | € 9.95  |
| 930681 | Lens 60° for Lucea 15/20             |  | € 9.95  |
| 930754 | Door panel for Lucea 15/20 white     |  | € 18.95 |
| 930755 | Door panel for Lucea 15/20 black     |  | € 18.95 |
| 930759 | Reflector ring for Lucea 15/20 white |  | € 4.75  |
| 930760 | Reflector ring for Lucea 15/20 black |  | € 4.75  |
| 930761 | Reflector ring for Lucea 15/20 gold  |  | € 4.75  |

Accessories for **348167, 348168**

- 930677** Door panel for Lucea 30/40 white
- 930678** Door panel for Lucea 30/40 black
- 930682** Lens 24° for Lucea 30
- 930684** Lens 60° for Lucea 30
- 930762** Reflector ring for Lucea 30/40 white
- 930763** Reflector ring for Lucea 30/40 black
- 930764** Reflector ring for Lucea 30/40 gold

|                                                                                   |         |
|-----------------------------------------------------------------------------------|---------|
|  | € 19.95 |
|  | € 19.95 |
|  | € 12.95 |
|  | € 12.95 |
|  | € 5.45  |
|  | € 5.45  |
|  | € 5.45  |



page 26



page 400



page 404



**Lighting design**

Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.



LUCEA

- Incl. black reflector ring
- Can be customised with a comprehensive range of accessories

**Application Area**  
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|                         |              |                     |                                              |
|-------------------------|--------------|---------------------|----------------------------------------------|
| Housing                 | Aluminium    | Light Beam Angle    | 36 Degree                                    |
| Colour Temperature      | 2700 K       | Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Height                  | 157 mm       | CRI (Ra)            | 90                                           |
| Ø                       | 65 mm        | IK Protection Class | IK03                                         |
| Rated Input Voltage     | 200-240 V/AC |                     |                                              |
| Power Supply Unit incl. | Yes          |                     |                                              |

| Article | Housing Color |  | Luminous Flux | Power  | Price    |
|---------|---------------|--|---------------|--------|----------|
| 348213  | White         |  | 800 lm        | 6.0 W  | € 95.95  |
| 348214  | Black         |  | 800 lm        | 6.0 W  | € 95.95  |
| 348215  | White         |  | 1300 lm       | 10.0 W | € 103.95 |
| 348216  | Black         |  | 1300 lm       | 10.0 W | € 103.95 |



Accessories

|        |                                     |  |        |
|--------|-------------------------------------|--|--------|
| 930679 | Lens 24° for Lucea 6/10             |  | € 7.95 |
| 930756 | Reflector ring for Lucea 6/10 white |  | € 3.95 |
| 930757 | Reflector ring for Lucea 6/10 black |  | € 3.95 |
| 930758 | Reflector ring for Lucea 6/10 gold  |  | € 3.95 |





LUCEA TILT

- Incl. black reflector ring
- Can be customised with a comprehensive range of accessories

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|                         |              |                     |                                              |
|-------------------------|--------------|---------------------|----------------------------------------------|
| Housing                 | Aluminium    | Light Beam Angle    | 36 Degree                                    |
| Colour Temperature      | 2700 K       | Rotation Angle      | 350 Degree                                   |
| Height                  | 157 mm       | Swivelling Angle    | 90 Degree                                    |
| Ø                       | 65 mm        | Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Base Height             | 29 mm        | CRI (Ra)            | 90                                           |
| Base Ø                  | 103.5 mm     | IK Protection Class | IK03                                         |
| Rated Input Voltage     | 200-240 V/AC |                     |                                              |
| Power Supply Unit incl. | Yes          |                     |                                              |

| Article | Housing Color                                                                             |                                                                                     | Luminous Flux | Power  | Price    |
|---------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|--------|----------|
| 348223  |  White |  | 800 lm        | 6.0 W  | € 95.95  |
| 348224  |  Black |  | 800 lm        | 6.0 W  | € 95.95  |
| 348225  |  White |  | 1300 lm       | 10.0 W | € 103.95 |
| 348226  |  Black |  | 1300 lm       | 10.0 W | € 103.95 |



Accessories

|        |                                     |                                                                                     |         |
|--------|-------------------------------------|-------------------------------------------------------------------------------------|---------|
| 930679 | Lens 24° for Lucea 6/10             |  | € 7.95  |
| 930752 | Door panel for Lucea 6/10 white     |  | € 17.95 |
| 930753 | Door panel for Lucea 6/10 black     |  | € 17.95 |
| 930756 | Reflector ring for Lucea 6/10 white |  | € 3.95  |
| 930757 | Reflector ring for Lucea 6/10 black |  | € 3.95  |
| 930758 | Reflector ring for Lucea 6/10 gold  |  | € 3.95  |



page 28



page 296



page 297



LUCEA DTW

- Dim-to-warm 1,800 K-2,700 K
- Incl. black reflector ring
- Can be customised with a comprehensive range of accessories

Application Area

Home / Living, Reception / Communication, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Colour Temperature  | 1800-2700 K  | Light Beam Angle        | 36 Degree                                    |
| Luminous Flux       | 750 lm       | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Height              | 157 mm       | CRI (Ra)                | 90                                           |
| Ø                   | 65 mm        | IK Protection Class     | IK03                                         |
| Power               | 10 W         |                         |                                              |
| Rated Input Voltage | 200-240 V/AC |                         |                                              |

| Article | Housing Color                                                                             |                                                                                     | Price    |
|---------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|
| 348237  |  White |  | € 103.95 |
| 348238  |  Black |  | € 103.95 |




Accessories

|        |                                     |                                                                                     |         |
|--------|-------------------------------------|-------------------------------------------------------------------------------------|---------|
| 930752 | Door panel for Lucea 6/10 white     |  | € 17.95 |
| 930753 | Door panel for Lucea 6/10 black     |  | € 17.95 |
| 930756 | Reflector ring for Lucea 6/10 white |  | € 3.95  |
| 930757 | Reflector ring for Lucea 6/10 black |  | € 3.95  |
| 930758 | Reflector ring for Lucea 6/10 gold  |  | € 3.95  |







LUCEA TILT DTW

- Dim-to-warm 1,800 K-2,700 K
- Incl. black reflector ring
- Can be customised with a comprehensive range of accessories

Application Area

Home / Living, Reception / Communication, Hotel / catering

|                         |              |                     |                                              |
|-------------------------|--------------|---------------------|----------------------------------------------|
| Housing                 | Aluminium    | Light Beam Angle    | 36 Degree                                    |
| Colour Temperature      | 1800-2700 K  | Rotation Angle      | 350 Degree                                   |
| Luminous Flux           | 750 lm       | Swivelling Angle    | 90 Degree                                    |
| Height                  | 218 mm       | Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                       | 65 mm        | CRI (Ra)            | 90                                           |
| Power                   | 10 W         | IK Protection Class | IK03                                         |
| Rated Input Voltage     | 200-240 V/AC |                     |                                              |
| Power Supply Unit incl. | Yes          |                     |                                              |

| Article | Housing Color |  | Price    |
|---------|---------------|--|----------|
| 348239  | White         |  | € 103.95 |
| 348240  | Black         |  | € 103.95 |



Accessories

|        |                                     |  |         |
|--------|-------------------------------------|--|---------|
| 930752 | Door panel for Lucea 6/10 white     |  | € 17.95 |
| 930753 | Door panel for Lucea 6/10 black     |  | € 17.95 |
| 930756 | Reflector ring for Lucea 6/10 white |  | € 3.95  |
| 930757 | Reflector ring for Lucea 6/10 black |  | € 3.95  |
| 930758 | Reflector ring for Lucea 6/10 gold  |  | € 3.95  |



page 26



page 400



page 404



CAN IP20

- Can be customised with a wide range of accessories
- Replaceable light source to offer an individual lighting solution
- Can be combined with the comprehensive CAN series product family

**Application Area**  
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

|            |               |                     |                                    |
|------------|---------------|---------------------|------------------------------------|
| Housing    | Aluminium     | Rated Input Voltage | 220-240 V/AC                       |
| Height     | 105 mm        | Control             | Dimmable via optional light source |
| Ø          | 60 mm         |                     |                                    |
| Max. Power | 1x max. 7.5 W |                     |                                    |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 348241  |  White | € 23.95 |
| 348242  |  Black | € 23.95 |



Accessories

|        |                                                       |                                                                                     |        |
|--------|-------------------------------------------------------|-------------------------------------------------------------------------------------|--------|
| 930301 | Reflector ring white for Klara/Nihal Mini/Can series  |  | € 3.95 |
| 930302 | Reflector ring black for Klara/Nihal Mini/Can series  |  | € 3.95 |
| 930303 | Reflector ring gold for Klara/Nihal Mini/Can series   |  | € 3.95 |
| 930307 | Honeycomb filter for Klara/Nihal Mini/Uni II series   |  | € 6.95 |
| 930308 | Spread lens for Klara/Nihal Mini/Uni II series        |  | € 6.95 |
| 930309 | Softening lens for Klara/Nihal Mini/Uni II series     |  | € 6.95 |
| 930310 | Linear spread lens for Klara/Nihal Mini/Uni II series |  | € 6.95 |
| 930366 | Reflector ring silver for Klara/Nihal Mini/Can series |  | € 3.95 |
| 931065 | Acrylic attachment for Can                            |  | € 3.95 |





CAN IP44

- customised lighting solution thanks to replaceable light source
- can be combined with the extensive product family of the CAN series
- suitable for damp rooms

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC, Hotel bathrooms / commercial wet areas

|            |               |                     |                                    |
|------------|---------------|---------------------|------------------------------------|
| Housing    | Aluminium     | Rated Input Voltage | 220-240 V/AC                       |
| Height     | 105 mm        | Control             | Dimmable via optional light source |
| Ø          | 60 mm         |                     |                                    |
| Max. Power | 1x max. 7.5 W |                     |                                    |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 348243  | White         | € 27.95 |
| 348244  | Black         | € 27.95 |



Accessories

|        |                                                       |  |        |
|--------|-------------------------------------------------------|--|--------|
| 930301 | Reflector ring white for Klara/Nihal Mini/Can series  |  | € 3.95 |
| 930302 | Reflector ring black for Klara/Nihal Mini/Can series  |  | € 3.95 |
| 930366 | Reflector ring silver for Klara/Nihal Mini/Can series |  | € 3.95 |
| 930303 | Reflector ring gold for Klara/Nihal Mini/Can series   |  | € 3.95 |



page 30



page 167



page 182



page 184



page 383




page 467





## CANTILT SQUARE

The square CAN surface-mounted ceiling light provides a flexible lighting solution for commercial and private spaces. Available as a one-, two- and three-luminaire variant in the colours black and white, it enables precise alignment of the light using rotating and swivelling luminous elements. The widely used GU10 base enables quick and simple replacement of the lamp, while the screw-on cylinder housing enables tool-free access. Installation for rigid and flexible conductors is easy and efficient due to the integrated push terminals. The CAN surface-mounted ceiling light is part of a versatile series, which also contains pendant, wall, reading and outdoor lights.





## CAN TILT SQUARE

- Flat and discreet lamp base
- Can be customised with a wide range of accessories
- Replaceable lamp to offer an individual lighting solution
- Can be combined with the comprehensive CAN series product family

### Application Area

Home / Living, Hotel / catering

|             |           |                     |                                    |
|-------------|-----------|---------------------|------------------------------------|
| Housing     | Aluminium | Rated Input Voltage | 220-240 V/AC                       |
| Height      | 125 mm    | Control             | Dimmable via optional light source |
| Ø           | 60 mm     | Rotation Angle      | 350 Degree                         |
| Base Width  | 90 mm     | Swivelling Angle    | 90 Degree                          |
| Base Height | 15 mm     |                     |                                    |

| Article       | Housing Color | Base Length | Max. Power    | Price          |
|---------------|---------------|-------------|---------------|----------------|
| <b>348245</b> | White         | 110 mm      | 1x max. 7.5 W | <b>€ 35.95</b> |
| <b>348246</b> | Black         | 110 mm      | 1x max. 7.5 W | <b>€ 35.95</b> |
| <b>348247</b> | White         | 305 mm      | 2x max. 7.5 W | <b>€ 67.95</b> |
| <b>348248</b> | Black         | 305 mm      | 2x max. 7.5 W | <b>€ 67.95</b> |
| <b>348249</b> | White         | 480 mm      | 3x max. 7.5 W | <b>€ 99.95</b> |
| <b>348250</b> | Black         | 480 mm      | 3x max. 7.5 W | <b>€ 99.95</b> |



### Accessories

|               |                                                                  |                                                                                     |               |
|---------------|------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|
| <b>930301</b> | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930302</b> | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930303</b> | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | <b>€ 3.95</b> |
| <b>930307</b> | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | <b>€ 6.95</b> |
| <b>930308</b> | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | <b>€ 6.95</b> |
| <b>930309</b> | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | <b>€ 6.95</b> |
| <b>930310</b> | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | <b>€ 6.95</b> |
| <b>930366</b> | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | <b>€ 3.95</b> |
| <b>931065</b> | Acrylic attachment for Can                                       |  | <b>€ 3.95</b> |





## CAN TILT ROUND

The round CAN surface-mounted ceiling light provides a flexible lighting solution for commercial and private spaces. Available as a one-, two- and three-luminaire variant in the colours black and white, it enables precise alignment of the light using rotating and swivelling luminous elements. The widely used GU10 base enables quick and simple replacement of the lamp, while the screw-on cylinder housing enables tool-free access. Installation for rigid and flexible conductors is easy and efficient due to the integrated push terminals. The CAN surface-mounted ceiling light is part of a versatile series, which also contains pendant, wall, reading and outdoor lights.



page 30

page 167

page 182

page 184



## CAN TILT ROUND

- Flat and discreet lamp base
- Replaceable lamp to offer an individual lighting solution
- Can be customised with a wide range of accessories
- Can be combined with the comprehensive CAN series product family

### Application Area

Home / Living, Hotel / catering

|                     |              |                  |                                    |
|---------------------|--------------|------------------|------------------------------------|
| Housing             | Aluminium    | Control          | Dimmable via optional light source |
| Height              | 125 mm       |                  |                                    |
| Ø                   | 60 mm        | Rotation Angle   | 350 Degree                         |
| Base Height         | 15 mm        | Swivelling Angle | 90 Degree                          |
| Rated Input Voltage | 220-240 V/AC |                  |                                    |

| Article       | Housing Color | Base Ø | Max. Power    | Price          |
|---------------|---------------|--------|---------------|----------------|
| <b>348251</b> | White         | 80 mm  | 1x max. 7.5 W | <b>€ 35.95</b> |
| <b>348252</b> | Black         | 80 mm  | 1x max. 7.5 W | <b>€ 35.95</b> |
| <b>348253</b> | White         | 200 mm | 2x max. 7.5 W | <b>€ 67.95</b> |
| <b>348254</b> | Black         | 200 mm | 2x max. 7.5 W | <b>€ 67.95</b> |
| <b>348255</b> | White         | 250 mm | 3x max. 7.5 W | <b>€ 95.95</b> |
| <b>348256</b> | Black         | 250 mm | 3x max. 7.5 W | <b>€ 95.95</b> |



### Accessories

|               |                                                                  |  |               |
|---------------|------------------------------------------------------------------|--|---------------|
| <b>930301</b> | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930302</b> | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930303</b> | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | <b>€ 3.95</b> |
| <b>930307</b> | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | <b>€ 6.95</b> |
| <b>930308</b> | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | <b>€ 6.95</b> |
| <b>930309</b> | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | <b>€ 6.95</b> |
| <b>930310</b> | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | <b>€ 6.95</b> |
| <b>930366</b> | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | <b>€ 3.95</b> |
| <b>931065</b> | Acrylic attachment for Can                                       |  | <b>€ 3.95</b> |



## CAN MIX'N MATCH

The new CAN series is the all-round solution for both private and commercial use – more extensive than ever before! Whether pendant light, ceiling light, wall light, reading light, track light, table and floor lamp, or outdoor luminaire – CAN is available in numerous variants and feels at home almost anywhere: living rooms, hotel rooms, restaurants, or garden areas.

With the new Mix'n Match variant – available for almost every type of luminaire – CAN can now be designed even more individually and adapted to different environments. The modular principle includes base, cylinder housing, and reflector ring as well as individual accessories, which, however, do not affect the look of the luminaire itself.

### 1 **choose BASE**

Define the CAN luminaire type:  
ceiling light, wall light, floor lamp, etc.

### 2 **select CYLINDER HOUSING**


The cylinder housing is available in six different colours:  
black, white, dark grey, brass, bronze, rose gold.

### 3 **add REFLECTOR RING**

Combine the reflector ring colour-matched to the cylinder housing  
or create a deliberate contrast.

### 4 **ACCESSORIES [optional]**

If desired, the CAN can be complemented with a honeycomb filter  
or a special lens.

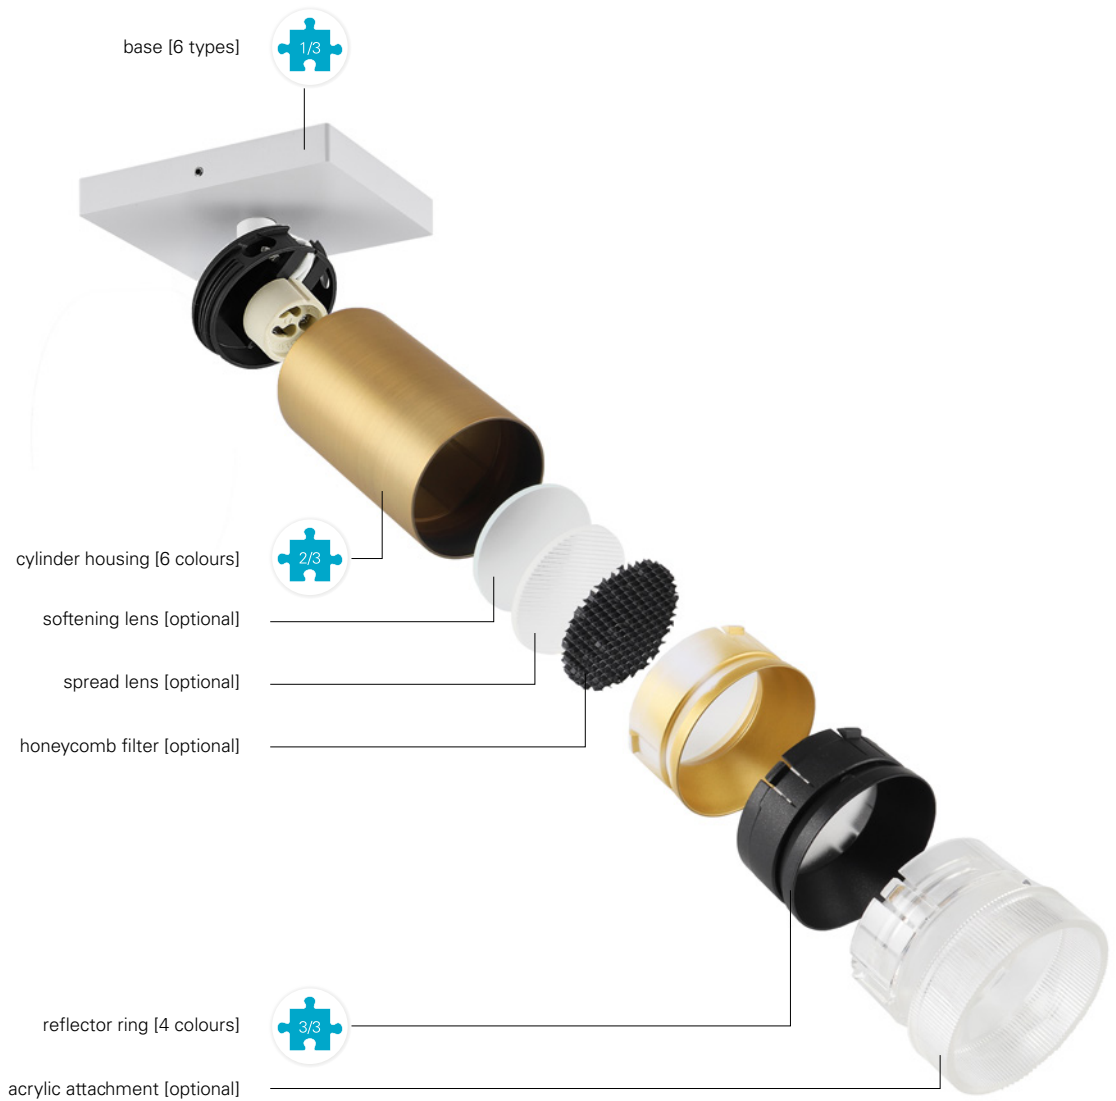

### Onlineshop

You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.



CAN TILT SQUARE BASE MIX'N MATCH 1/3

- flat and discreet luminaire base
- can be customised with cylinder housing in 6 different colours

|             |           |                     |                                    |
|-------------|-----------|---------------------|------------------------------------|
| Housing     | Aluminium | Rated Input Voltage | 220-240 V/AC                       |
| Width       | 90 mm     | Control             | Dimmable via optional light source |
| Height      | 58 mm     |                     |                                    |
| Base Width  | 90 mm     | Rotation Angle      | 350 Degree                         |
| Base Height | 15 mm     | Swivelling Angle    | 90 Degree                          |

| Article | Housing Color | Length | Base Length | Max. Power    | Price   |
|---------|---------------|--------|-------------|---------------|---------|
| 348264  | White         | 110 mm | 110 mm      | 1x max. 7.5 W | € 29.95 |
| 348265  | Black         | 110 mm | 110 mm      | 1x max. 7.5 W | € 29.95 |
| 348266  | White         | 305 mm | 305 mm      | 2x max. 7.5 W | € 55.95 |
| 348267  | Black         | 305 mm | 305 mm      | 2x max. 7.5 W | € 55.95 |
| 348268  | White         | 480 mm | 480 mm      | 3x max. 7.5 W | € 79.95 |
| 348269  | Black         | 480 mm | 480 mm      | 3x max. 7.5 W | € 79.95 |



CAN TILT ROUND BASE MIX'N MATCH 1/3

|                     |              |                  |                                    |
|---------------------|--------------|------------------|------------------------------------|
| Housing             | Aluminium    | Control          | Dimmable via optional light source |
| Height              | 58 mm        |                  |                                    |
| Base Height         | 15 mm        | Rotation Angle   | 350 Degree                         |
| Rated Input Voltage | 220-240 V/AC | Swivelling Angle | 90 Degree                          |

| Article | Housing Color | Ø      | Base Ø | Max. Power    | Price   |
|---------|---------------|--------|--------|---------------|---------|
| 348270  | White         | 80 mm  | 80 mm  | 1x max. 7.5 W | € 29.95 |
| 348271  | Black         | 80 mm  | 80 mm  | 1x max. 7.5 W | € 29.95 |
| 348272  | White         | 200 mm | 200 mm | 2x max. 7.5 W | € 54.95 |
| 348273  | Black         | 200 mm | 200 mm | 2x max. 7.5 W | € 54.95 |
| 348274  | White         | 250 mm | 250 mm | 3x max. 7.5 W | € 79.95 |
| 348275  | Black         | 250 mm | 250 mm | 3x max. 7.5 W | € 79.95 |







CYLINDER HOOUSING FOR CAN MIX'N MATCH 2/3

Housing                      Aluminium                      Ø                      60 mm  
Height                      98 mm

| Article | Housing Color                                                                                | Price   |
|---------|----------------------------------------------------------------------------------------------|---------|
| 931053  |  White      | € 6.45  |
| 931054  |  Black      | € 6.45  |
| 931055  |  Bronze     | € 14.95 |
| 931056  |  Brass      | € 14.95 |
| 931057  |  Black grey | € 14.95 |
| 931058  |  Rosé       | € 14.95 |

IP20



REFLECTOR RING FOR CAN MIX'N MATCH 3/3

Housing                      Plastic                      Ø                      57 mm  
Height                      28 mm

| Article | Housing Color                                                                              | Price  |
|---------|--------------------------------------------------------------------------------------------|--------|
| 930301  |  White  | € 3.95 |
| 930302  |  Black  | € 3.95 |
| 930303  |  Gold   | € 3.95 |
| 930366  |  Silver | € 3.95 |

IP20



BENGALA ROUND

- Exchangeable lamp
- Can be rotated and swivelled

**Application Area**  
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

|            |              |                     |                                    |
|------------|--------------|---------------------|------------------------------------|
| Housing    | Aluminium    | Rated Input Voltage | 220-240 V/AC                       |
| Height     | 120 mm       | Control             | Dimmable via optional light source |
| Ø          | 96 mm        | Swivelling Angle    | 30 Degree                          |
| Base Ø     | 96 mm        |                     |                                    |
| Max. Power | 1x max. 50 W |                     |                                    |

| Article | Housing Color                                                                              | Price   |
|---------|--------------------------------------------------------------------------------------------|---------|
| 122416  |  Silver | € 35.95 |
| 348022  |  Black  | € 35.95 |
| 348023  |  White  | € 35.95 |





BENGALA SQUARE

- Exchangeable lamp
- Can be rotated and swivelled

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

|             |           |                     |                                    |
|-------------|-----------|---------------------|------------------------------------|
| Housing     | Aluminium | Max. Power          | 1x max. 50 W                       |
| Length      | 96 mm     | Rated Input Voltage | 220-240 V/AC                       |
| Width       | 96 mm     | Control             | Dimmable via optional light source |
| Height      | 120 mm    | Swivelling Angle    | 30 Degree                          |
| Base Length | 96 mm     |                     |                                    |
| Base Width  | 96 mm     |                     |                                    |

| Article | Housing Color                                                                              | Price   |
|---------|--------------------------------------------------------------------------------------------|---------|
| 122417  |  Silver | € 35.95 |
| 348024  |  Black  | € 35.95 |
| 348025  |  White  | € 35.95 |

GU10















## PRO OFFICE SANO

PRO OFFICE SANO series ceiling lights are an efficient solution for renovating and modernising old T5/T8 louver lights. Due to slightly larger dimensions, the lights cover the old installations and so do not require the ceiling to be repainted.

Arrestor cables, plug connectors and mounting brackets make installation so easy that it can be performed by one person. In addition to ease of installation, the series offers impressive technical highlights: It provides flexible light control via CCT switch (3,000 K / 3,500 K / 4,000 K), dimmable variants (leading-edge/trailing-edge or DALI) and output adjustment in four stages (TRIAC variants only). They are also eligible for BEG German federal funding for energy-efficient buildings and emergency power capable.






## PRO OFFICE SANO

- Renovation solution for T5/T8 louver lights
- Uniform illumination
- Covers the old installation, therefore no repainting necessary
- Easy to install due to plug connector, arrestor cables and mounting bracket
- Light colour adjustable in three levels
- Output adjustable in four levels [TRIAC variants only]
- Microprismatic surface structure
- Eligible for BEG German federal funding for energy-efficient buildings
- Emergency power capable [176-280 V/DC EOFI: 95 %]
- Suitable for workplaces with screens in accordance with EN 12464-1 BAP65 [L65 ≤ 3,000 cd/m²]

### Application Area

Office / conference, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

|                         |                            |                     |                                           |
|-------------------------|----------------------------|---------------------|-------------------------------------------|
| Housing                 | Aluminium, Stainless steel | Light Beam Angle    | 90 Degree                                 |
| Colour Temperature      | 3000/3500/4000 K           | Control             | Trailing-edge dimmer, Leading-edge dimmer |
| Height                  | 48 mm                      | CRI (Ra)            | 90                                        |
| Rated Input Voltage     | 198-264 V/AC               | IK Protection Class | IK03                                      |
| Power Supply Unit incl. | Yes                        |                     |                                           |



348258

| Article       | Housing Color                  |       | Luminous Flux     | Length  | Width  | Power Selectable            | EEL | Price           |
|---------------|--------------------------------|-------|-------------------|---------|--------|-----------------------------|-----|-----------------|
| <b>348258</b> | <input type="checkbox"/> White | WW NW | 4200/4500/4400 lm | 625 mm  | 625 mm | 27.0 / 30.0 / 33.0 / 35.0 W |     | <b>€ 151.95</b> |
| <b>348259</b> | <input type="checkbox"/> White | WW NW | 4350/4600/4500 lm | 1225 mm | 325 mm | 27.0 / 30.0 / 32.0 / 35.0 W |     | <b>€ 167.95</b> |
| <b>348260</b> | <input type="checkbox"/> White | WW NW | 5200/5500/5400 lm | 1525 mm | 325 mm | 32.0 / 35.5 / 38.0 / 42.0 W |     | <b>€ 183.95</b> |




### Lighting design

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.








## PRO OFFICE SANO DALI

- Renovation solution for T5/T8 louver lights
- uniform illumination
- Covers the old installation, therefore no repainting necessary
- Easy to install due to plug connector, arrestor cables and mounting bracket
- Light colour adjustable in three levels
- Output adjustable in four levels [TRIAC variants only]
- Microprismatic surface structure
- Eligible for BEG German federal funding for energy-efficient buildings
- Emergency power capable [176-280 V/DC EOFI: 95 %]
- Suitable for workplaces with screens in accordance with EN 12464-1 BAP65 [L65 ≤ 3,000 cd/m²]

### Application Area

Office / conference, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

|                         |                            |                     |                                |
|-------------------------|----------------------------|---------------------|--------------------------------|
| Housing                 | Aluminium, Stainless steel | Light Beam Angle    | 90 Degree                      |
| Colour Temperature      | 3000/3500/4000 K           | Control             | DALI 2 / DT6, Intelli Push-Dim |
| Height                  | 48 mm                      | CRI (Ra)            | 90                             |
| Rated Input Voltage     | 198-264 V/AC               | IK Protection Class | IK03                           |
| Power Supply Unit incl. | Yes                        |                     |                                |



348261

| Article       | Housing Color                  |       | Luminous Flux     | Length  | Width  | Power  | Price           |
|---------------|--------------------------------|-------|-------------------|---------|--------|--------|-----------------|
| <b>348261</b> | <input type="checkbox"/> White | WW NW | 4400/4700/4600 lm | 625 mm  | 625 mm | 35.0 W | <b>€ 191.95</b> |
| <b>348262</b> | <input type="checkbox"/> White | WW NW | 4200/4500/4400 lm | 1225 mm | 325 mm | 34.0 W | <b>€ 175.95</b> |
| <b>348263</b> | <input type="checkbox"/> White | WW NW | 5300/5600/5500 lm | 1525 mm | 325 mm | 42.0 W | <b>€ 207.95</b> |



### Onlineshop

You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

# built in ceiling lights



page 86



page 87



page 88



page 89



page 92



page 98



page 104



page 105



page 106



page 108



page 113



page 120



□ ■  
page 122



SAMSOLA ROUND

- Suitable for GU10/GU5.3 sockets [sold separately]
- Lamps are easy to install due to click lock

**Application Area**  
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                    |           |                  |                                    |
|--------------------|-----------|------------------|------------------------------------|
| Housing            | Aluminium | Cut Out Ø        | 68 mm                              |
| Height             | 23 mm     | Control          | Dimmable via optional light source |
| Ø                  | 82 mm     | Swivelling Angle | 30 Degree                          |
| Installation Depth | 100 mm    |                  |                                    |

| Article | Housing Color                                                                                 | Surface | Price  |
|---------|-----------------------------------------------------------------------------------------------|---------|--------|
| 110039  |  White     | Matt    | € 7.95 |
| 110042  |  Aluminium | Matt    | € 7.95 |
| 110041  |  Silver    | Shiny   | € 7.95 |
| 110040  |  Silver    | Brushed | € 7.95 |
| 110038  |  Copper    | Brushed | € 7.95 |
| 110043  |  Black     | Matt    | € 7.95 |




Accessories

|        |                                              |                                                                                     |        |
|--------|----------------------------------------------|-------------------------------------------------------------------------------------|--------|
| 100204 | Socket GU10 with spacer                      |  | € 3.25 |
| 100200 | Socket GU5.3 with 15 cm cable                |  | € 0.75 |
| 829063 | Safety spacer                                |  | € 3.45 |
| 930967 | Reducing ring round 130/70 mm, Traffic white |  | € 7.95 |
| 931043 | Reducing ring round 130/70 mm, Signal white  |  | € 7.95 |



**Light sources**  
For all lights and bases:  
You can find the right light sources in the »Light sources« section.



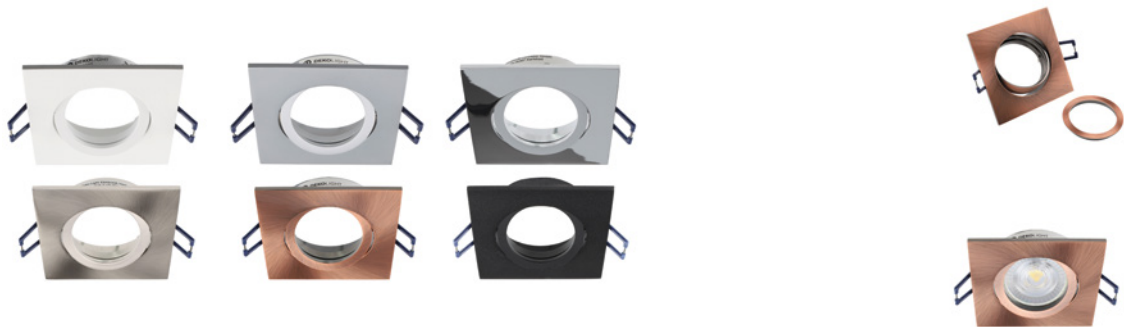

SAMSOLA SQUARE

- Suitable for GU10/GU5.3 sockets [sold separately]
- Lamps are easy to install due to click lock

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                    |           |                  |                                    |
|--------------------|-----------|------------------|------------------------------------|
| Housing            | Aluminium | Cut Out Ø        | 68 mm                              |
| Length             | 85 mm     | Control          | Dimmable via optional light source |
| Width              | 85 mm     | Swivelling Angle | 30 Degree                          |
| Height             | 23 mm     |                  |                                    |
| Installation Depth | 100 mm    |                  |                                    |

| Article | Housing Color | Surface | Price  |
|---------|---------------|---------|--------|
| 110045  | White         | Matt    | € 7.95 |
| 110048  | Aluminium     | Matt    | € 7.95 |
| 110047  | Silver        | Shiny   | € 7.95 |
| 110046  | Silver        | Brushed | € 7.95 |
| 110044  | Copper        | Brushed | € 7.95 |
| 110049  | Black         | Matt    | € 7.95 |



Accessories

|        |                                               |  |        |
|--------|-----------------------------------------------|--|--------|
| 100204 | Socket GU10 with spacer                       |  | € 3.25 |
| 100200 | Socket GU5.3 with 15 cm cable                 |  | € 0.75 |
| 829063 | Safety spacer                                 |  | € 3.45 |
| 930972 | Reducing ring square 130/70 mm, Traffic white |  | € 7.95 |
| 931048 | Reducing ring square 130/70 mm, Signal white  |  | € 7.95 |



**Onlineshop**  
You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.



SAMSOLA MAX ROUND

- Suitable for GU10 / GU5.3 sockets [sold separately]
- Easy installation of the light sources thanks to click lock

**Application Area**  
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                    |           |                  |                                    |
|--------------------|-----------|------------------|------------------------------------|
| Housing            | Aluminium | Cut Out Ø        | 68-80 mm                           |
| Height             | 23 mm     | Control          | Dimmable via optional light source |
| Ø                  | 95 mm     | Swivelling Angle | 30 Degree                          |
| Installation Depth | 100 mm    |                  |                                    |

| Article | Housing Color                                                                                 | Surface | Price  |
|---------|-----------------------------------------------------------------------------------------------|---------|--------|
| 110051  |  White     | Brushed | € 9.95 |
| 110054  |  Aluminium | Matt    | € 9.95 |
| 110053  |  Silver    | Shiny   | € 9.95 |
| 110052  |  Silver    | Brushed | € 9.95 |
| 110050  |  Copper    | Brushed | € 9.95 |
| 110055  |  Black     | Matt    | € 9.95 |




Accessories

|        |                                              |                                                                                     |        |
|--------|----------------------------------------------|-------------------------------------------------------------------------------------|--------|
| 100204 | Socket GU10 with spacer                      |  | € 3.25 |
| 100200 | Socket GU5.3 with 15 cm cable                |  | € 0.75 |
| 829063 | Safety spacer                                |  | € 3.45 |
| 930967 | Reducing ring round 130/70 mm, Traffic white |  | € 7.95 |
| 931043 | Reducing ring round 130/70 mm, Signal white  |  | € 7.95 |



**Light sources**  
For all lights and bases:  
You can find the right light sources in the »Light sources« section.

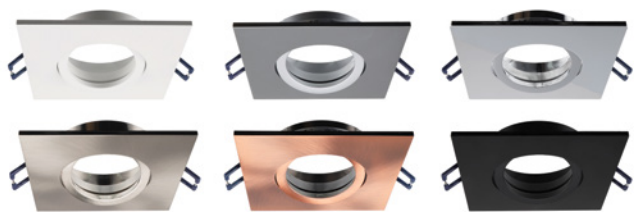

SAMSOLA MAX SQUARE

- Suitable for GU10 / GU5.3 sockets [sold separately]
- Easy installation of the light sources thanks to click lock

**Application Area**  
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                    |           |                  |                                    |
|--------------------|-----------|------------------|------------------------------------|
| Housing            | Aluminium | Cut Out Ø        | 68-80 mm                           |
| Length             | 95 mm     | Control          | Dimmable via optional light source |
| Width              | 95 mm     | Swivelling Angle | 30 Degree                          |
| Height             | 23 mm     |                  |                                    |
| Installation Depth | 100 mm    |                  |                                    |

| Article | Housing Color | Surface | Price  |
|---------|---------------|---------|--------|
| 110057  | White         | Matt    | € 9.95 |
| 110060  | Aluminium     | Matt    | € 9.95 |
| 110059  | Silver        | Shiny   | € 9.95 |
| 110058  | Silver        | Brushed | € 9.95 |
| 110056  | Copper        | Brushed | € 9.95 |
| 110061  | Black         | Matt    | € 9.95 |



Accessories

|        |                                               |  |        |
|--------|-----------------------------------------------|--|--------|
| 100204 | Socket GU10 with spacer                       |  | € 3.25 |
| 100200 | Socket GU5.3 with 15 cm cable                 |  | € 0.75 |
| 829063 | Safety spacer                                 |  | € 3.45 |
| 930972 | Reducing ring square 130/70 mm, Traffic white |  | € 7.95 |
| 931048 | Reducing ring square 130/70 mm, Signal white  |  | € 7.95 |



**5-year guarantee**  
Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



ARKTUR

- Replaceable lamp [GU5.3/MR16]
- Swivel-mounted
- Dimmable

**Application Area**  
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                     |              |                  |                                    |
|---------------------|--------------|------------------|------------------------------------|
| Housing             | Aluminium    | Cut Out Ø        | 85 mm                              |
| Height              | 43 mm        | Control          | Dimmable via optional light source |
| Ø                   | 93 mm        | Swivelling Angle | 30 Degree                          |
| Max. Power          | 1x max. 35 W |                  |                                    |
| Rated Input Voltage | 12 V/AC/DC   |                  |                                    |

| Article | Housing Color                  | Price   |
|---------|--------------------------------|---------|
| 110019  | <input type="checkbox"/> White | € 12.95 |





ALTAIR

- Replaceable lamp [GU5.3/MR16]
- Dimmable

**Application Area**  
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC


|                    |              |                     |                                    |
|--------------------|--------------|---------------------|------------------------------------|
| Housing            | Aluminium    | Rated Input Voltage | 12 V/AC/DC                         |
| Height             | 35 mm        | Cut Out Ø           | 68 mm                              |
| Ø                  | 85 mm        | Control             | Dimmable via optional light source |
| Installation Depth | 33 mm        |                     |                                    |
| Max. Power         | 1x max. 35 W |                     |                                    |

| Article | Housing Color                  | Price  |
|---------|--------------------------------|--------|
| 110017  | <input type="checkbox"/> White | € 9.95 |
|         |                                |        |

|             |                                              |        |
|-------------|----------------------------------------------|--------|
| Accessories |                                              |        |
| 930967      | Reducing ring round 130/70 mm, Traffic white | € 7.95 |
| 931043      | Reducing ring round 130/70 mm, Signal white  | € 7.95 |






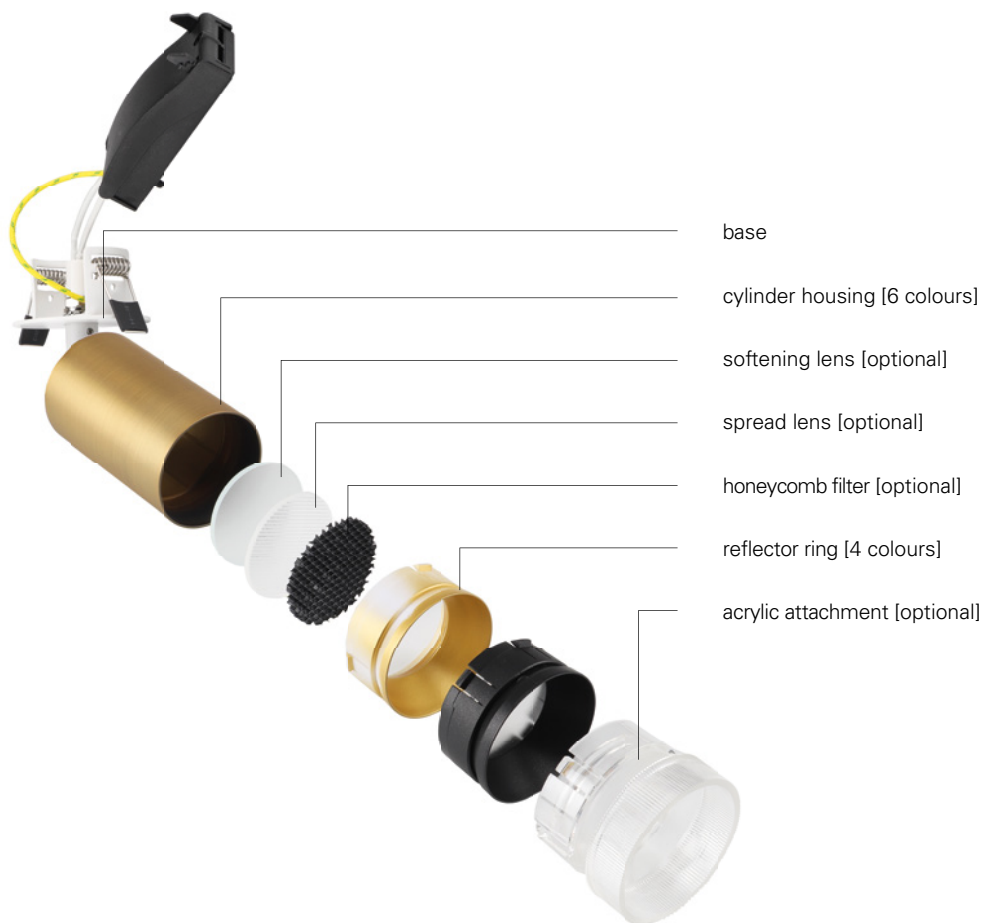

## CAN ROUND

The CAN recessed spotlight round offers a flexible lighting solution for commercial and private spaces. Available as a single and double-lamp version in black and white, it enables precise alignment of the light thanks to the rotatable and swiveling light body. The widely used GU10 base makes it easy to replace the light source quickly and the screw-on cylinder housing enables tool-free access. Thanks to the integrated plug-in terminals, installation for rigid and flexible cables is simple and efficient. The CAN surface-mounted ceiling luminaire is part of a versatile series that also includes pendant, wall, reading and outdoor luminaires.



CAN ROUND

- Customised lighting solution thanks to replaceable light source
- can be customised with cylinder housing in 5 different colours
- can be combined with the extensive product family of the CAN series

Application Area

Home / Living, Hotel / catering

|                     |              |                  |                                    |
|---------------------|--------------|------------------|------------------------------------|
| Housing             | Aluminium    | Cut Out Ø        | 51 mm                              |
| Height              | 98 mm        | Control          | Dimmable via optional light source |
| Ø                   | 60 mm        | Rotation Angle   | 350 Degree                         |
| Installation Depth  | 40 mm        | Swivelling Angle | 90 Degree                          |
| Rated Input Voltage | 220-240 V/AC |                  |                                    |

| Article | Housing Color | Length | Max. Power    | Cut Out Length | Price   |
|---------|---------------|--------|---------------|----------------|---------|
| 565755  | White         |        | 1x max. 7.5 W |                | € 26.95 |
| 565756  | Black         |        | 1x max. 7.5 W |                | € 26.95 |
| 565757  | White         | 160 mm | 2x max. 7.5 W | 100 mm         | € 55.95 |
| 565758  | Black         | 160 mm | 2x max. 7.5 W | 100 mm         | € 55.95 |



Accessories

|        |                                                                  |  |        |
|--------|------------------------------------------------------------------|--|--------|
| 930301 | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | € 3.95 |
| 930302 | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | € 3.95 |
| 930303 | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | € 3.95 |
| 930307 | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | € 6.95 |
| 930308 | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | € 6.95 |
| 930309 | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | € 6.95 |
| 930310 | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | € 6.95 |
| 930366 | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | € 3.95 |
| 931065 | Acrylic attachment for Can                                       |  | € 3.95 |



## REDUCING RINGS

The renovation rings for recessed luminaires provide a practical solution for covering oversized ceiling cut-outs. Available in different sizes, they offer flexible adaptation to various cut-out dimensions and enable a clean retrofit of existing installations. The rings are suitable for suspended ceilings with a thickness of 3 to 30 mm and are ideal for recessed luminaires with mounting springs. Installation is quick and can often be carried out without tools.



REDUCING RINGS FOR RECESSED LIGHTS

- Renovation solution for excessively large ceiling cut-outs
- Flexible adaptation to ceiling cut-outs
- suitable for 3-30 mm thick hollow ceilings
- toolless installation possible

| Housing |                                        | Metal  | Installation Depth |        | 41 mm     |                |         |
|---------|----------------------------------------|--------|--------------------|--------|-----------|----------------|---------|
| Height  |                                        | 1.7 mm |                    |        |           |                |         |
| Article | Housing Color                          | Length | Width              | Ø      | Cut Out Ø | Inner diameter | Price   |
| 930967  | <input type="checkbox"/> Traffic white |        |                    | 130 mm | 95 mm     | 70 mm          | € 7.95  |
| 931043  | <input type="checkbox"/> Signal white  |        |                    | 130 mm | 95 mm     | 70 mm          | € 7.95  |
| 930968  | <input type="checkbox"/> Traffic white |        |                    | 155 mm | 120 mm    | 95 mm          | € 9.95  |
| 931044  | <input type="checkbox"/> Signal white  |        |                    | 155 mm | 120 mm    | 95 mm          | € 9.95  |
| 930969  | <input type="checkbox"/> Traffic white |        |                    | 210 mm | 175 mm    | 135 mm         | € 10.95 |
| 931045  | <input type="checkbox"/> Signal white  |        |                    | 210 mm | 175 mm    | 135 mm         | € 10.95 |
| 930970  | <input type="checkbox"/> Traffic white |        |                    | 240 mm | 205 mm    | 180 mm         | € 13.95 |
| 931046  | <input type="checkbox"/> Signal white  |        |                    | 240 mm | 205 mm    | 180 mm         | € 13.95 |
| 930971  | <input type="checkbox"/> Traffic white |        |                    | 280 mm | 245 mm    | 210 mm         | € 18.95 |
| 931047  | <input type="checkbox"/> Signal white  |        |                    | 280 mm | 245 mm    | 210 mm         | € 18.95 |
| 930972  | <input type="checkbox"/> Traffic white | 130 mm | 130 mm             |        | 95 mm     | 70 mm          | € 7.95  |
| 931048  | <input type="checkbox"/> Signal white  | 130 mm | 130 mm             |        | 95 mm     | 70 mm          | € 7.95  |
| 930973  | <input type="checkbox"/> Traffic white | 155 mm | 155 mm             |        | 120 mm    | 95 mm          | € 9.95  |
| 931049  | <input type="checkbox"/> Signal white  | 155 mm | 155 mm             |        | 120 mm    | 95 mm          | € 9.45  |
| 930974  | <input type="checkbox"/> Traffic white | 210 mm | 210 mm             |        | 175 mm    | 135 mm         | € 10.95 |
| 931050  | <input type="checkbox"/> Signal white  | 210 mm | 210 mm             |        | 175 mm    | 135 mm         | € 10.95 |
| 930975  | <input type="checkbox"/> Traffic white | 240 mm | 240 mm             |        | 205 mm    | 180 mm         | € 13.95 |
| 931051  | <input type="checkbox"/> Signal white  | 240 mm | 240 mm             |        | 205 mm    | 180 mm         | € 13.95 |
| 930976  | <input type="checkbox"/> Traffic white | 280 mm | 280 mm             |        | 245 mm    | 210 mm         | € 18.95 |
| 931052  | <input type="checkbox"/> Signal white  | 280 mm | 280 mm             |        | 245 mm    | 210 mm         | € 18.95 |

## DIONE

**The DIONE series comprises elegant recessed spotlights in aluminium housing with particularly shallow mounting depth - a real problem solver in the refurbishment sector.**

The popular DIONE recessed ceiling luminaires with high-quality COB LED including reflector are housed in an aluminium casing and have a cut-out dimension of 68 mm. While the available colours white, silver, black, chrome and nickel harmonise with almost any type of ceiling, the actual special feature of the DIONE is not visible when installed: The recessed spotlights are extremely space-saving when installed and require only 25 or 27 mm of ceiling cavity. This is where the power supply unit and the Quick connection box are located, which allows 3-pole through-wiring of several DIONE models as well as retrofitting as part of renovations.

The plug-in connector between the spotlight and the power supply unit allows installers to conveniently install the lighting equipment and connect the spotlight once the ceiling work has been completed.

The DIONE recessed spotlights are available in the light colours 2,700K, 3,000 K, 4,000 K, as a dim-to-warm version [1,800- 3,000K] and RGBW. In addition to the IP20 version, an IP44 version is also available, making the DIONE suitable for bathrooms and other damp areas indoors.

With this variety, the DIONE series offers recessed spotlights for a wide range of applications - from private homes and exhibition areas to guest areas in hotels and restaurants. Thanks to the wide selection of light colours and IP classes, the DIONE can be flexibly integrated into any environment and covers all design requirements, from a feel-good character to functional lighting.





## THAT'S HOW EASY IT IS



1 - Quick wiring / through-wiring on the Quick connection box due to screwless plug-in terminals



2 - quick connection box is placed over the 68 mm cut-out in the cavity



4 - connect the power supply unit to the spot using the connector



6 - The result: a compact installation with a swivelling spot, a dimmable power supply unit and the option of through-wiring in the ceiling cavity - ideal in refurbishment areas.










### DIONE IP20

- Low installation depth
- Incl. dimmable power supply unit and connection box
- Feed-through wiring possible
- Ideal renovation solution
- Light and power supply unit with intermediate connector

**Application Area**  
 Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                         |              |                             |                                              |
|-------------------------|--------------|-----------------------------|----------------------------------------------|
| Housing                 | Aluminium    | Required Installation Depth | 25 mm                                        |
| Height                  | 41 mm        | Light Beam Angle            | 36 Degree                                    |
| Ø                       | 82 mm        | Swivelling Angle            | 30 Degree                                    |
| Power                   | 8.5 W        | Cut Out Ø                   | 68 mm                                        |
| Rated Input Voltage     | 220-240 V/AC | Control                     | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Power Supply Unit incl. | Yes          |                             |                                              |
| Installation Depth      | 38 mm        |                             |                                              |



| Article | Housing Color | Colour Temperature | Luminous Flux | CRI (Ra) | Price   |
|---------|---------------|--------------------|---------------|----------|---------|
| 565375  | White         | 2700 K             | 750 lm        | 81       | € 47.95 |
| 565376  | Silver        | 2700 K             | 750 lm        | 81       | € 47.95 |
| 565377  | Black         | 2700 K             | 750 lm        | 81       | € 47.95 |
| 565378  | Nickel        | 2700 K             | 750 lm        | 81       | € 47.95 |
| 565379  | Chrome        | 2700 K             | 750 lm        | 81       | € 47.95 |
| 565355  | White         | 3000 K             | 800 lm        | 81       | € 47.95 |
| 565356  | Silver        | 3000 K             | 800 lm        | 81       | € 47.95 |
| 565357  | Black         | 3000 K             | 800 lm        | 81       | € 47.95 |
| 565371  | Nickel        | 3000 K             | 800 lm        | 81       | € 47.95 |
| 565372  | Chrome        | 3000 K             | 800 lm        | 81       | € 47.95 |
| 565358  | White         | 4000 K             | 800 lm        | 84       | € 47.95 |
| 565359  | Silver        | 4000 K             | 800 lm        | 84       | € 47.95 |
| 565360  | Black         | 4000 K             | 800 lm        | 84       | € 47.95 |
| 565373  | Nickel        | 4000 K             | 800 lm        | 84       | € 47.95 |
| 565374  | Chrome        | 4000 K             | 800 lm        | 84       | € 47.95 |










Accessories

|        |                                              |                                                                                     |        |
|--------|----------------------------------------------|-------------------------------------------------------------------------------------|--------|
| 930863 | 60° reflector for Dione                      |  | € 4.95 |
| 930864 | Frosted diffusing lens for Dione             |  | € 2.25 |
| 829063 | Safety spacer                                |  | € 3.45 |
| 930967 | Reducing ring round 130/70 mm, Traffic white |  | € 7.95 |
| 931043 | Reducing ring round 130/70 mm, Signal white  |  | € 7.95 |




DIONE IP20 DTW

- Low installation depth
- Incl. dimmable power supply unit and connection box
- Feed-through wiring possible
- Ideal renovation solution
- Light and power supply unit with intermediate connector

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                         |              |                             |                                              |
|-------------------------|--------------|-----------------------------|----------------------------------------------|
| Housing                 | Aluminium    | Installation Depth          | 38 mm                                        |
| Colour Temperature      | 1800-3000 K  | Required Installation Depth | 25 mm                                        |
| Luminous Flux           | 480 lm       | Light Beam Angle            | 36 Degree                                    |
| Height                  | 41 mm        | Swivelling Angle            | 30 Degree                                    |
| Ø                       | 82 mm        | Cut Out Ø                   | 68 mm                                        |
| Power                   | 8.5 W        | Control                     | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Rated Input Voltage     | 220-240 V/AC |                             |                                              |
| Power Supply Unit incl. | Yes          | CRI (Ra)                    | 95                                           |




| Article | Housing Color |    | Price   |
|---------|---------------|----|---------|
| 565380  | White         | WW | € 55.95 |
| 565381  | Silver        | WW | € 55.95 |
| 565382  | Black         | WW | € 55.95 |
| 565383  | Chrome        | WW | € 55.95 |
| 565384  | Nickel        | WW | € 55.95 |



Accessories

|        |                                              |        |
|--------|----------------------------------------------|--------|
| 930863 | 60° reflector for Dione                      | € 4.95 |
| 930864 | Frosted diffusing lens for Dione             | € 2.25 |
| 829063 | Safety spacer                                | € 3.45 |
| 930967 | Reducing ring round 130/70 mm, Traffic white | € 7.95 |
| 931043 | Reducing ring round 130/70 mm, Signal white  | € 7.95 |

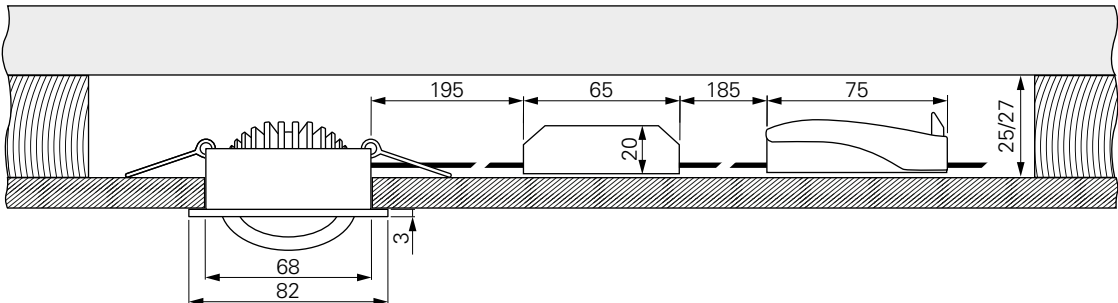




DIONE IP44

- Low installation depth
- Splash-proof [downwards after installation]
- Incl. dimmable power supply unit and connection box
- Feed-through wiring possible
- Ideal renovation solution
- Light and power supply unit with intermediate connector

Application Area


Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

|                         |              |                             |                                              |
|-------------------------|--------------|-----------------------------|----------------------------------------------|
| Housing                 | Aluminium    | Required Installation Depth | 27 mm                                        |
| Height                  | 44 m         | Light Beam Angle            | 36 Degree                                    |
| Ø                       | 82 mm        | Swivelling Angle            | 30 Degree                                    |
| Power                   | 8.5 W        | Cut Out Ø                   | 68 mm                                        |
| Rated Input Voltage     | 220-240 V/AC | Control                     | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Power Supply Unit incl. | Yes          |                             |                                              |
| Installation Depth      | 41 mm        |                             |                                              |



565388


| Article | Housing Color | Colour Temperature | Luminous Flux | CRI (Ra) | Price   |
|---------|---------------|--------------------|---------------|----------|---------|
| 565388  | White         | WW 2700 K          | 750 lm        | 81       | € 51.95 |
| 565389  | Silver        | WW 2700 K          | 750 lm        | 81       | € 51.95 |
| 565390  | Black         | WW 2700 K          | 750 lm        | 81       | € 51.95 |
| 565391  | Chrome        | WW 2700 K          | 750 lm        | 81       | € 51.95 |
| 565392  | Nickel        | WW 2700 K          | 750 lm        | 81       | € 51.95 |
| 565393  | White         | WW 3000 K          | 800 lm        | 81       | € 51.95 |
| 565394  | Silver        | WW 3000 K          | 800 lm        | 81       | € 51.95 |
| 565395  | Black         | WW 3000 K          | 800 lm        | 81       | € 51.95 |
| 565396  | Chrome        | WW 3000 K          | 800 lm        | 81       | € 51.95 |
| 565397  | Nickel        | WW 3000 K          | 800 lm        | 81       | € 51.95 |
| 565398  | White         | NW 4000 K          | 800 lm        | 84       | € 51.95 |
| 565399  | Silver        | NW 4000 K          | 800 lm        | 84       | € 51.95 |
| 565400  | Black         | NW 4000 K          | 800 lm        | 84       | € 51.95 |
| 565401  | Chrome        | NW 4000 K          | 800 lm        | 84       | € 51.95 |
| 565402  | Nickel        | NW 4000 K          | 800 lm        | 84       | € 51.95 |



Accessories

- 930863 60° reflector for Dione
- 930864 Frosted diffusing lens for Dione
- 829063 Safety spacer
- 930967 Reducing ring round 130/70 mm, Traffic white
- 931043 Reducing ring round 130/70 mm, Signal white

- € 4.95
- € 2.25
- € 3.45
- € 7.95
- € 7.95

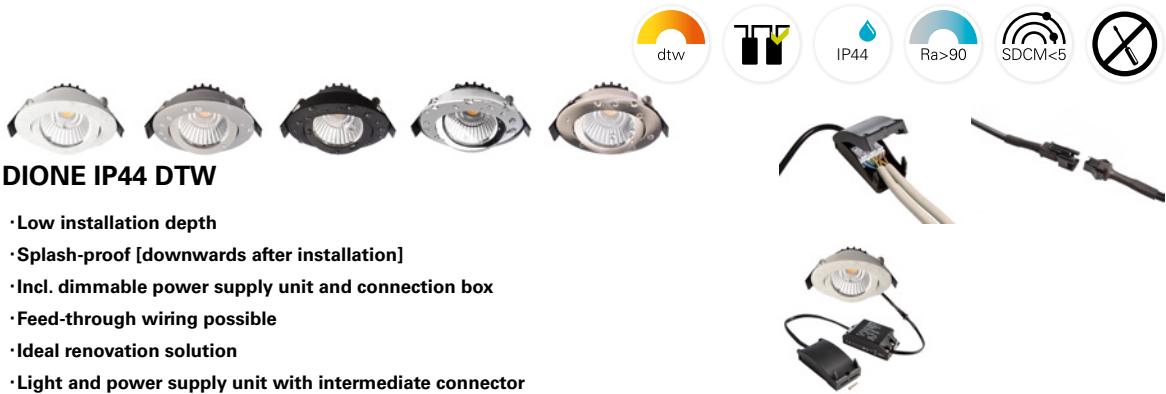


DIONE IP44 DTW


- Low installation depth
- Splash-proof [downwards after installation]
- Incl. dimmable power supply unit and connection box
- Feed-through wiring possible
- Ideal renovation solution
- Light and power supply unit with intermediate connector

**Application Area**  
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

|                         |              |                             |                                              |
|-------------------------|--------------|-----------------------------|----------------------------------------------|
| Housing                 | Aluminium    | Installation Depth          | 41 mm                                        |
| Colour Temperature      | 1800-3000 K  | Required Installation Depth | 27 mm                                        |
| Luminous Flux           | 480 lm       | Light Beam Angle            | 36 Degree                                    |
| Height                  | 44 mm        | Swivelling Angle            | 30 Degree                                    |
| Ø                       | 82 mm        | Cut Out Ø                   | 68 mm                                        |
| Power                   | 8.5 W        | Control                     | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Rated Input Voltage     | 220-240 V/AC | CRI (Ra)                    | 95                                           |
| Power Supply Unit incl. | Yes          |                             |                                              |




| Article | Housing Color | Price   |
|---------|---------------|---------|
| 565403  | White         | € 59.95 |
| 565404  | Silver        | € 59.95 |
| 565405  | Black         | € 59.95 |
| 565406  | Chrome        | € 59.95 |
| 565407  | Nickel        | € 59.95 |



Accessories

|        |                                              |        |
|--------|----------------------------------------------|--------|
| 930863 | 60° reflector for Dione                      | € 4.95 |
| 930864 | Frosted diffusing lens for Dione             | € 2.25 |
| 829063 | Safety spacer                                | € 3.45 |
| 930967 | Reducing ring round 130/70 mm, Traffic white | € 7.95 |
| 931043 | Reducing ring round 130/70 mm, Signal white  | € 7.95 |

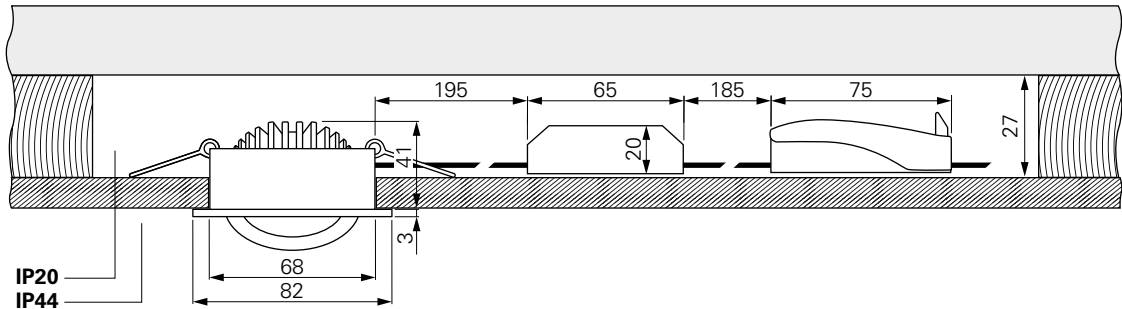







## DIONE, IP44, RGBW

- Low installation depth
- splash-proof [downwards when installed]
- suitable for 24V colour controls
- can be combined with all Dione recessed spotlights
- high-quality RGBW COB technology
- RGB 3x 3W, WW 1x 6W, max. possible total output 9W
- homogeneous colour mixing

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

|                         |           |                             |                                  |
|-------------------------|-----------|-----------------------------|----------------------------------|
| Housing                 | Aluminium | Installation Depth          | 41 mm                            |
| Colour Temperature      | 3000 K    | Required Installation Depth | 27 mm                            |
| Luminous Flux           | 540 lm    | Light Beam Angle            | 36 Degree                        |
| Height                  | 41 mm     | Swivelling Angle            | 30 Degree                        |
| Ø                       | 82 mm     | Cut Out Ø                   | 68 mm                            |
| Power                   | 9 W       | Control                     | Dimmable via optional controller |
| Rated Input Voltage     | 24 V/DC   | CRI (Ra)                    | 90                               |
| Power Supply Unit incl. | No        |                             |                                  |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 565450  | White         | € 59.95 |
| 565451  | Light grey    | € 59.95 |
| 565452  | Black         | € 59.95 |
| 565453  | Chrome        | € 59.95 |
| 565454  | Nickel        | € 59.95 |




### Accessories

|        |                                                                             |
|--------|-----------------------------------------------------------------------------|
| 843542 | RF-smart, Starter-Set RGB/W/CCT, 12-48V, 20A incl. Remote, IP20             |
| 843037 | Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)                              |
| 843502 | RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20           |
| 843343 | DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6                                 |
| 843344 | DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8                                 |
| 843279 | MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free |
| 862234 | FLAT, CV, UT 24 V/20 W                                                      |
| 862122 | FLAT, CV, UT 24 V/50 W                                                      |
| 862126 | LONG-FLAT, CV, LT-100-24                                                    |
| 930967 | Reducing ring round 130/70 mm, Traffic white                                |
| 931043 | Reducing ring round 130/70 mm, Signal white                                 |



|          |
|----------|
| € 91.95  |
| € 143.95 |
| € 79.95  |
| € 75.95  |
| € 75.95  |
| € 91.95  |
| € 20.95  |
| € 41.95  |
| € 77.95  |
| € 7.95   |
| € 7.95   |

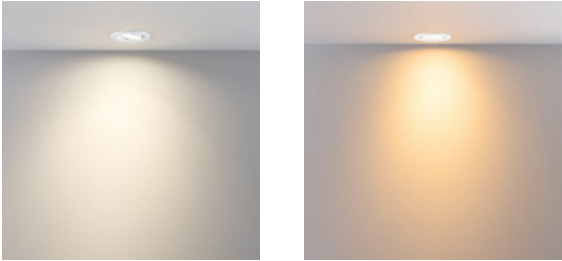


SURTUR

- Integrated power supply unit
- through-wiring possible
- Light colour adjustable in 3 steps
- Very high colour rendering



**Application Area**  
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                         |                  |                                 |                                              |
|-------------------------|------------------|---------------------------------|----------------------------------------------|
| Colour Temperature      | 2700/3000/4000 K | Control                         | Trailing-edge dimmer,<br>Leading-edge dimmer |
| Rated Input Voltage     | 220-240 V/AC     | CRI (Ra)                        | 90                                           |
| Power Supply Unit incl. | Yes              | Accumulator/Battery<br>Operated | No                                           |
| Light Beam Angle        | 40 Degree        | IK Protection Class             | IK06                                         |
| Swivelling Angle        | 30 Degree        |                                 |                                              |



565455

| Article | Housing Color | Luminous Flux    | Housing                        | Ø cut out | Height | Ø      | Power | Price   |
|---------|---------------|------------------|--------------------------------|-----------|--------|--------|-------|---------|
| 565455  | White         | 520/600/510 lm   | Polycarbonate                  | 68-75 mm  | 44 mm  | 85 mm  | 6.0 W | € 19.95 |
| 565456  | Black         | 520/600/510 lm   | Polycarbonate                  | 68-75 mm  | 44 mm  | 85 mm  | 6.0 W | € 19.95 |
| 565457  | White         | 900/1000/1000 lm | Polycarbonate / PA - Polyamide | 83-95 mm  | 72 mm  | 105 mm | 9.0 W | € 25.95 |
| 565458  | Black         | 900/1000/1000 lm | Polycarbonate / PA - Polyamide | 83-95 mm  | 72 mm  | 105 mm | 9.0 W | € 25.95 |



Accessories for 565455, 565456

|        |                                              |   |        |
|--------|----------------------------------------------|---|--------|
| 930967 | Reducing ring round 130/70 mm, Traffic white | 2 | € 7.95 |
| 931043 | Reducing ring round 130/70 mm, Signal white  | 2 | € 7.95 |

Accessories for 565457, 565458

|        |                                              |   |        |
|--------|----------------------------------------------|---|--------|
| 930968 | Reducing ring round 155/95 mm, Traffic white | 2 | € 9.95 |
| 931044 | Reducing ring round 155/95 mm, Signal white  | 2 | € 9.95 |



**Onlineshop**  
You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.



SURTUR DTW


- Integrated power supply unit
- Feed-through wiring possible
- Adjustable light colour - dim to warm
- Very high colour rendering



Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                         |              |                     |                                              |
|-------------------------|--------------|---------------------|----------------------------------------------|
| Colour Temperature      | 1800-2700 K  | Control             | Trailing-edge dimmer,<br>Leading-edge dimmer |
| Rated Input Voltage     | 220-240 V/AC | CRI (Ra)            | 90                                           |
| Power Supply Unit incl. | Yes          | Accumulator/Battery | No                                           |
| Light Beam Angle        | 40 Degree    | Operated            |                                              |
| Swivelling Angle        | 30 Degree    | IK Protection Class | IK06                                         |



565459

| Article | Housing Color | Luminous Flux | Housing                        | Ø cut out | Height | Ø      | Power | Price   |
|---------|---------------|---------------|--------------------------------|-----------|--------|--------|-------|---------|
| 565459  | White         | 230/430 lm    | Polycarbonate                  | 68-75 mm  | 44 mm  | 85 mm  | 6.0 W | € 22.95 |
| 565460  | Black         | 230/430 lm    | Polycarbonate                  | 68-75 mm  | 44 mm  | 85 mm  | 6.0 W | € 22.95 |
| 565461  | White         | 360/720 lm    | Polycarbonate / PA - Polyamide | 83-95 mm  | 72 mm  | 105 mm | 9.0 W | € 29.95 |
| 565462  | Black         | 360/720 lm    | Polycarbonate / PA - Polyamide | 83-95 mm  | 72 mm  | 105 mm | 9.0 W | € 29.95 |



Accessories for 565459, 565460

|        |                                              |        |
|--------|----------------------------------------------|--------|
| 930967 | Reducing ring round 130/70 mm, Traffic white | € 7.95 |
| 931043 | Reducing ring round 130/70 mm, Signal white  | € 7.95 |

Accessories for 565461, 565462

|        |                                              |        |
|--------|----------------------------------------------|--------|
| 930968 | Reducing ring round 155/95 mm, Traffic white | € 9.95 |
| 931044 | Reducing ring round 155/95 mm, Signal white  | € 9.95 |



Technical data sheet

New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.





### SMD-68-230V-ROUND

Plenty of power for less! SMD-68 series recessed lights deliver up to 550 lm and also have an integrated, dimmable power supply (230 V direct connection), which makes the use of GU10 holders and retrofitted equipment redundant.








SMD-68-230V-ROUND

- Integrated power supply unit
- Swivel-mounted
- Low installation depth

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                         |              |                  |                                              |
|-------------------------|--------------|------------------|----------------------------------------------|
| Housing                 | Plastic      | Light Beam Angle | 45 Degree                                    |
| Height                  | 43.8 mm      | Swivelling Angle | 36 Degree                                    |
| Ø                       | 85 mm        | Cut Out Ø        | 68 mm                                        |
| Power                   | 6.5 W        | Control          | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Rated Input Voltage     | 220-240 V/AC | CRI (Ra)         | 80                                           |
| Power Supply Unit incl. | Yes          |                  |                                              |
| Installation Depth      | 41.3 mm      |                  |                                              |




565337

| Article | Housing Color | Colour Temperature | Luminous Flux | EEI | Price   |
|---------|---------------|--------------------|---------------|-----|---------|
| 565337  | White         | 2700 K             | 510 lm        | G   | € 15.95 |
| 565385  | Black         | 2700 K             | 510 lm        | G   | € 15.95 |
| 565338  | White         | 3000 K             | 540 lm        | F   | € 15.95 |
| 565386  | Black         | 3000 K             | 540 lm        | F   | € 15.95 |
| 565339  | White         | 4000 K             | 550 lm        | G   | € 15.95 |
| 565387  | Black         | 4000 K             | 550 lm        | G   | € 15.95 |



Accessories

|        |                                              |  |        |
|--------|----------------------------------------------|--|--------|
| 930967 | Reducing ring round 130/70 mm, Traffic white |  | € 7.95 |
| 931043 | Reducing ring round 130/70 mm, Signal white  |  | € 7.95 |




COB 68 HCL

- Suitable for 24 V HCL controllers
- Swivel-mounted




**Application Area**  
 Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                         |             |                    |                                  |
|-------------------------|-------------|--------------------|----------------------------------|
| Housing                 | Aluminium   | Installation Depth | 60 mm                            |
| Colour Temperature      | 2500-6500 K | Light Beam Angle   | 65 Degree                        |
| Luminous Flux           | 534 lm      | Swivelling Angle   | 25 Degree                        |
| Height                  | 46 mm       | Cut Out Ø          | 68 mm                            |
| Ø                       | 78 mm       | Control            | Dimmable via optional controller |
| Power                   | 8 W         | CRI (Ra)           | 80                               |
| Rated Input Voltage     | 24 V/DC     |                    |                                  |
| Power Supply Unit incl. | No          |                    |                                  |



565193

| Article | Housing Color                  | Colour Temperature                                                                        | Price   |
|---------|--------------------------------|-------------------------------------------------------------------------------------------|---------|
| 565193  | <input type="checkbox"/> White | <input checked="" type="checkbox"/> WW <input checked="" type="checkbox"/> CW 2500-6500 K | € 52.95 |



Accessories

|        |                                                                          |  |
|--------|--------------------------------------------------------------------------|--|
| 829063 | Safety spacer                                                            |  |
| 862234 | FLAT, CV, UT 24 V/20 W                                                   |  |
| 862168 | BASIC, CV, Q8H-24-150 W                                                  |  |
| 843501 | RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control |  |
| 930967 | Reducing ring round 130/70 mm, Traffic white                             |  |
| 931043 | Reducing ring round 130/70 mm, Signal white                              |  |

|  |          |
|--|----------|
|  | € 3.45   |
|  | € 20.95  |
|  | € 103.95 |
|  | € 79.95  |
|  | € 7.95   |
|  | € 7.95   |






COB 95 HCL

- suitable for 24V HCL control
- swivelling

Application Area


Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                         |             |                    |                                  |
|-------------------------|-------------|--------------------|----------------------------------|
| Housing                 | Aluminium   | Installation Depth | 70 mm                            |
| Colour Temperature      | 2500-6500 K | Light Beam Angle   | 65 Degree                        |
| Luminous Flux           | 1118 lm     | Swivelling Angle   | 25 Degree                        |
| Height                  | 65 mm       | Cut Out Ø          | 95 mm                            |
| Ø                       | 108 mm      | Control            | Dimmable via optional controller |
| Power                   | 16 W        | CRI (Ra)           | 80                               |
| Rated Input Voltage     | 24 V/DC     |                    |                                  |
| Power Supply Unit incl. | No          |                    |                                  |



| Article | Housing Color | Colour Temperature | Price |
|---------|---------------|--------------------|-------|
|---------|---------------|--------------------|-------|

|        |                                |                                                                                           |         |
|--------|--------------------------------|-------------------------------------------------------------------------------------------|---------|
| 565194 | <input type="checkbox"/> White | <input checked="" type="checkbox"/> WW <input checked="" type="checkbox"/> CW 2500-6500 K | € 87.95 |
|--------|--------------------------------|-------------------------------------------------------------------------------------------|---------|



Accessories

|        |                                                                          |
|--------|--------------------------------------------------------------------------|
| 829063 | Safety spacer                                                            |
| 862233 | FLAT, CV, UT 24 V/12 W                                                   |
| 862166 | BASIC, CV, Q8H-24-100 W                                                  |
| 843501 | RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control |
| 930968 | Reducing ring round 155/95 mm, Traffic white                             |
| 931044 | Reducing ring round 155/95 mm, Signal white                              |

|  |         |
|--|---------|
|  | € 3.45  |
|  | € 17.95 |
|  | € 77.95 |
|  | € 79.95 |
|  | € 9.95  |
|  | € 9.95  |



## TARVOS

The TARVOS series offers a well-designed LED downlight portfolio for professional indoor lighting solutions. The name of each luminaire directly refers to the cut-out diameter in millimeters – TARVOS 68, 100, 150, or 240. This allows the models to be planned quickly and precisely into existing or new ceiling cut-outs. All TARVOS recessed spotlights are suitable for emergency power operation, feature a round housing, and are available in several variants that differ in housing colour, light colour, beam angle, and control [see list]. This enables precise and individual adaptation of the lighting effect to the respective application – from pinpoint accentuation to wide, diffuse general lighting.



### Overview of variants

- housing colour: black, light grey, white
- colour temperature: 2700K, 3000K, 4000K
- beam angle: 15°, 30°, 45°
- control: DALI 2.0, DT6, push dim


The TARVOS series meets the requirements for BEG funding (Federal Funding for Efficient Buildings). Combined with its high energy efficiency and long-lasting LED technology, the recessed spotlights thus present a future-proof solution from both economic and ecological perspectives – especially for refurbishment projects in existing buildings. The range covers offices, corridors and stairwells, retail and gastronomy areas, as well as public facilities.









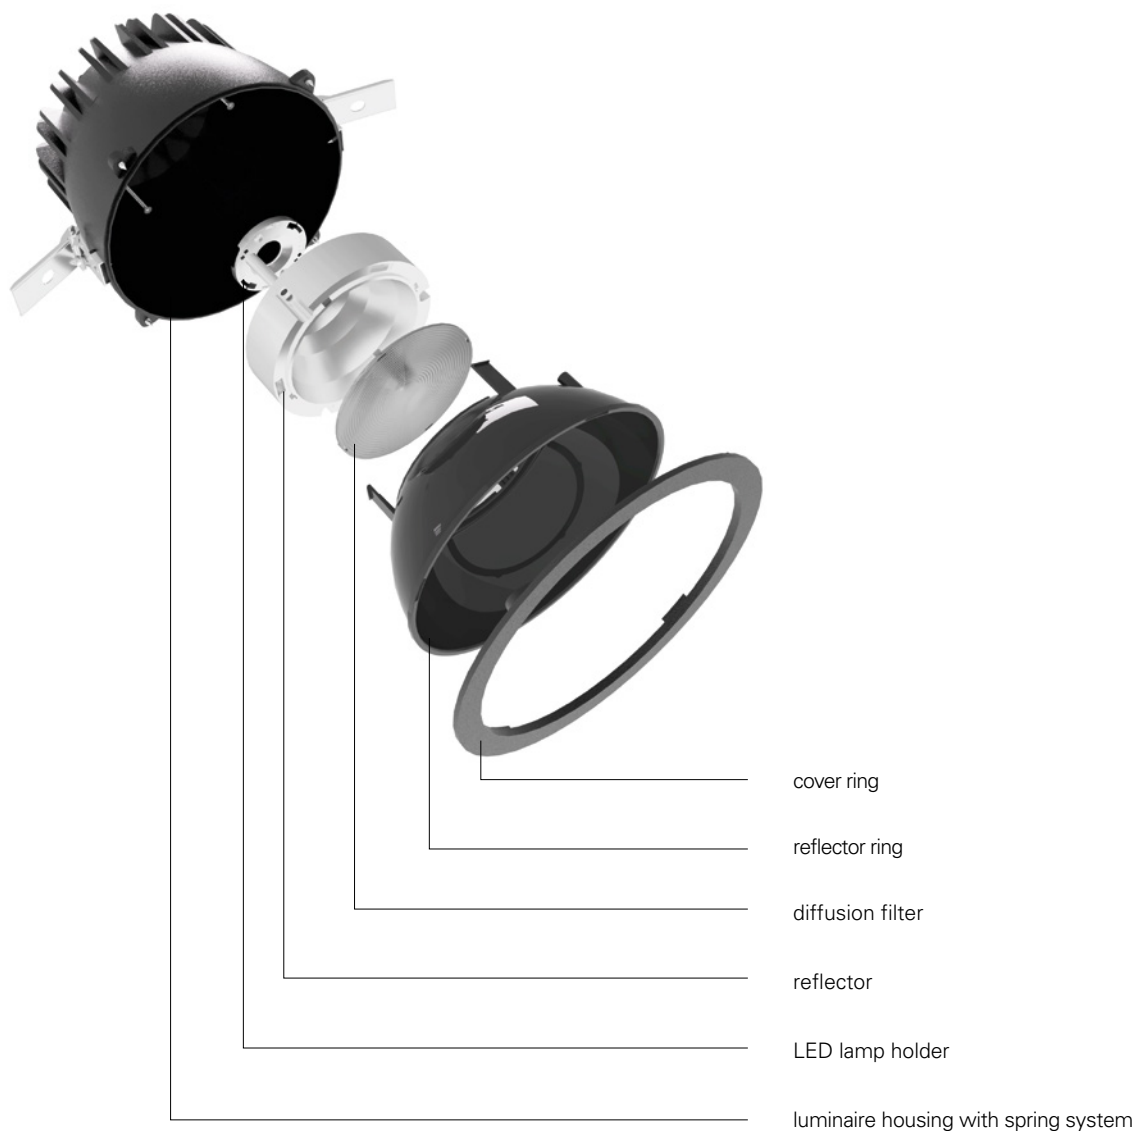


## TARVOS

The TARVOS series offers a well-designed LED downlight portfolio for professional indoor lighting solutions. The name of each luminaire directly refers to the cut-out diameter in millimeters – TARVOS 68, 100, 150, or 240. This allows the models to be planned quickly and precisely into existing or new ceiling cut-outs. All TARVOS recessed spotlights are suitable for emergency power operation, feature a round housing, and are available in several variants that differ in housing colour, light colour, beam angle, and control (see list). This enables precise and individual adaptation of the lighting effect to the respective application – from pinpoint accentuation to wide, diffuse general lighting.



**Note: Please note that the TARVOS series are project items that are not available from stock. The delivery time is approx. 6 weeks.**



### TARVOS

- Through-wiring possible
- very high color rendering
- BEG eligible
- capable of emergency power supply
- incl. power supply unit and 230V direct connection

#### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                     |              |                     |      |
|---------------------|--------------|---------------------|------|
| Housing             | Aluminium    | CRI (Ra)            | 90   |
| Rated Input Voltage | 220-240 V/AC | IK Protection Class | IK05 |



#### Lighting design

Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.

TARVOS 68

| Ø x H      |             |              |              |              | Cut Out Ø |        |        |        |        | Power rating | Colour temperature |        |        | Luminous flux | Dimmable                        | Housing Color |            |       | Light Beam Angle |     |     | Article | Price    |
|------------|-------------|--------------|--------------|--------------|-----------|--------|--------|--------|--------|--------------|--------------------|--------|--------|---------------|---------------------------------|---------------|------------|-------|------------------|-----|-----|---------|----------|
| 85 x 86 mm | 115 x 75 mm | 165 x 113 mm | 205 x 144 mm | 255 x 160 mm | 68 mm     | 100 mm | 150 mm | 190 mm | 240 mm |              | 2700 K             | 3000 K | 4000 K |               | DALI 2.0 /<br>D16 /<br>Push-Dim | white         | light grey | black | 15°              | 30° | 45° |         |          |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        |                                 |               |            | x     | x                |     |     | 565463  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        |                                 |               |            | x     |                  | x   |     | 565464  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        |                                 |               |            | x     |                  |     | x   | 565465  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        |                                 |               | x          |       | x                |     |     | 565466  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        |                                 |               | x          |       |                  | x   |     | 565467  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        |                                 |               | x          |       |                  |     | x   | 565468  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        |                                 | x             |            |       | x                |     |     | 565469  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        |                                 | x             |            |       |                  | x   |     | 565470  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        |                                 | x             |            |       |                  |     | x   | 565471  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        | x                               |               |            | x     | x                |     |     | 565472  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        | x                               |               |            | x     |                  | x   |     | 565473  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        | x                               |               |            | x     |                  |     | x   | 565474  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        | x                               |               | x          |       | x                |     |     | 565475  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        | x                               |               | x          |       |                  | x   |     | 565476  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        | x                               |               | x          |       |                  |     | x   | 565477  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        | x                               | x             |            |       | x                |     |     | 565478  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        | x                               | x             |            |       |                  | x   |     | 565479  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        | x                  |        |        | 860 lm        | x                               | x             |            |       |                  |     | x   | 565480  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        |                                 |               |            | x     | x                |     |     | 565481  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        |                                 |               |            | x     |                  | x   |     | 565482  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        |                                 |               |            | x     |                  |     | x   | 565483  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        |                                 |               | x          |       | x                |     |     | 565484  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        |                                 |               | x          |       |                  | x   |     | 565485  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        |                                 |               | x          |       |                  |     | x   | 565486  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        |                                 | x             |            |       | x                |     |     | 565487  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        |                                 | x             |            |       |                  | x   |     | 565488  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        |                                 | x             |            |       |                  |     | x   | 565489  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        | x                               |               |            | x     | x                |     |     | 565490  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        | x                               |               |            | x     |                  | x   |     | 565491  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        | x                               |               |            | x     |                  |     | x   | 565492  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        | x                               |               | x          |       | x                |     |     | 565493  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        | x                               |               | x          |       |                  | x   |     | 565494  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        | x                               |               | x          |       |                  |     | x   | 565495  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        | x                               | x             |            |       | x                |     |     | 565496  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        | x                               | x             |            |       |                  | x   |     | 565497  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    | x      |        | 870 lm        | x                               | x             |            |       |                  |     | x   | 565498  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        |                                 |               |            | x     | x                |     |     | 565499  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        |                                 |               |            | x     |                  | x   |     | 565500  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        |                                 |               |            | x     |                  |     | x   | 565501  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        |                                 |               | x          |       | x                |     |     | 565502  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        |                                 |               | x          |       |                  | x   |     | 565503  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        |                                 |               | x          |       |                  |     | x   | 565504  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        |                                 | x             |            |       | x                |     |     | 565505  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        |                                 | x             |            |       |                  | x   |     | 565506  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        |                                 | x             |            |       |                  |     | x   | 565507  | € 136.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        | x                               |               |            | x     | x                |     |     | 565508  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        | x                               |               |            | x     |                  | x   |     | 565509  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        | x                               |               |            |       |                  |     | x   | 565510  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        | x                               |               |            | x     |                  |     |     | 565511  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        | x                               |               |            | x     |                  | x   |     | 565512  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        | x                               |               |            | x     |                  |     | x   | 565513  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        | x                               | x             |            |       | x                |     |     | 565514  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        | x                               | x             |            |       |                  | x   |     | 565515  | € 186.95 |
| x          |             |              |              |              | x         |        |        |        |        | 7.2 W        |                    |        | x      | 905 lm        | x                               | x             |            |       |                  |     | x   | 565516  | € 186.95 |

## TARVOS 100

| Ø x H      |             |              |              |              | Cut Out Ø |        |        |        |        | Power rating | Colour temperature |        |        | Luminous flux | Dimmable | Housing Color             |       |            | Light Beam Angle |     |        | Article  | Price |
|------------|-------------|--------------|--------------|--------------|-----------|--------|--------|--------|--------|--------------|--------------------|--------|--------|---------------|----------|---------------------------|-------|------------|------------------|-----|--------|----------|-------|
| 85 x 86 mm | 115 x 75 mm | 165 x 113 mm | 205 x 144 mm | 255 x 160 mm | 68 mm     | 100 mm | 150 mm | 190 mm | 240 mm |              | 2700 K             | 3000 K | 4000 K |               |          | DALI 2.0 / DT6 / Push-Dim | white | light grey | black            | 15° | 30°    |          |       |
| x          | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       |          |                           | x     | x          |                  |     | 565517 | € 152.95 |       |
|            | x           |              |              |              | x         |        |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       |          |                           | x     |            | x                |     | 565518 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       |          |                           | x     |            |                  | x   | 565519 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       |          | x                         |       |            |                  |     | 565520 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       |          | x                         |       |            | x                |     | 565521 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       |          | x                         |       |            |                  | x   | 565522 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       |          | x                         |       | x          |                  |     | 565523 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       |          | x                         |       |            | x                |     | 565524 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       |          | x                         |       |            |                  | x   | 565525 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       | x        |                           | x     | x          |                  |     | 565526 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       | x        |                           | x     |            | x                |     | 565527 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       | x        |                           | x     |            |                  | x   | 565528 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       | x        | x                         |       | x          |                  |     | 565529 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       | x        | x                         |       |            | x                |     | 565530 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       | x        | x                         |       |            |                  | x   | 565531 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       | x        | x                         |       | x          |                  |     | 565532 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       | x        | x                         |       |            | x                |     | 565533 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       | x                  |        |        | 1290 lm       | x        | x                         |       |            |                  | x   | 565534 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       |          |                           | x     | x          |                  |     | 565535 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       |          |                           | x     |            | x                |     | 565536 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       |          |                           | x     |            |                  | x   | 565537 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       |          | x                         |       | x          |                  |     | 565538 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       |          | x                         |       |            | x                |     | 565539 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       |          | x                         |       |            |                  | x   | 565540 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       |          | x                         |       | x          |                  |     | 565541 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       |          | x                         |       |            | x                |     | 565542 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       |          | x                         |       |            |                  | x   | 565543 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       | x        |                           | x     | x          |                  |     | 565544 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       | x        |                           | x     |            | x                |     | 565545 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       | x        |                           | x     |            |                  | x   | 565546 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       | x        |                           | x     |            |                  |     | 565547 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       | x        | x                         |       |            | x                |     | 565548 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       | x        | x                         |       |            |                  | x   | 565549 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       | x        | x                         |       | x          |                  |     | 565550 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       | x        | x                         |       |            | x                |     | 565551 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    | x      |        | 1310 lm       | x        | x                         |       |            |                  | x   | 565552 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       |          |                           | x     | x          |                  |     | 565553 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       |          |                           | x     |            | x                |     | 565554 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       |          |                           | x     |            |                  | x   | 565555 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       |          | x                         |       | x          |                  |     | 565556 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       |          | x                         |       |            | x                |     | 565557 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       |          | x                         |       |            |                  | x   | 565558 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       |          | x                         |       |            | x                |     | 565559 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       |          | x                         |       |            | x                |     | 565560 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       |          | x                         |       |            |                  | x   | 565561 | € 152.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       | x        |                           | x     | x          |                  |     | 565562 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       | x        |                           | x     |            | x                |     | 565563 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       | x        |                           | x     |            |                  | x   | 565564 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       | x        |                           | x     |            |                  |     | 565565 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       | x        |                           | x     |            |                  | x   | 565566 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       | x        |                           | x     |            |                  | x   | 565567 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       | x        | x                         |       |            | x                |     | 565568 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       | x        | x                         |       |            | x                |     | 565569 | € 201.95 |       |
|            | x           |              |              |              | x         | x      |        |        |        | 10.8 W       |                    |        | x      | 1360 lm       | x        | x                         |       |            |                  | x   | 565570 | € 201.95 |       |

TARVOS 150

| Ø x H      |             |              |              |              | Cut Out Ø |        |        |        |        | Power rating | Colour temperature |        |        | Luminous flux | Dimmable                        | Housing Color |            |       | Light Beam Angle |     |     | Article | Price    |
|------------|-------------|--------------|--------------|--------------|-----------|--------|--------|--------|--------|--------------|--------------------|--------|--------|---------------|---------------------------------|---------------|------------|-------|------------------|-----|-----|---------|----------|
| 85 x 86 mm | 115 x 75 mm | 165 x 113 mm | 205 x 144 mm | 255 x 160 mm | 68 mm     | 100 mm | 150 mm | 190 mm | 240 mm |              | 2700 K             | 3000 K | 4000 K |               | DALI 2.0 /<br>D16 /<br>Push-Dim | white         | light grey | black | 15°              | 30° | 45° |         |          |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       |                                 |               |            | x     | x                |     |     | 565571  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       |                                 |               |            | x     |                  | x   |     | 565572  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       |                                 |               |            | x     |                  |     | x   | 565573  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       |                                 |               | x          |       | x                |     |     | 565574  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       |                                 |               | x          |       |                  | x   |     | 565575  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       |                                 |               | x          |       |                  |     | x   | 565576  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       |                                 | x             |            |       | x                |     |     | 565577  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       |                                 | x             |            |       |                  | x   |     | 565578  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       |                                 | x             |            |       |                  |     | x   | 565579  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       | x                               |               |            | x     | x                |     |     | 565580  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       | x                               |               |            | x     |                  | x   |     | 565581  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       | x                               |               |            | x     |                  |     | x   | 565582  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       | x                               |               | x          |       | x                |     |     | 565583  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       | x                               |               | x          |       |                  | x   |     | 565584  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       | x                               |               | x          |       |                  |     | x   | 565585  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       | x                               | x             |            |       | x                |     |     | 565586  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       | x                               | x             |            |       |                  | x   |     | 565587  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       | x                  |        |        | 1720 lm       | x                               | x             |            |       |                  |     | x   | 565588  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       |                                 |               |            | x     | x                |     |     | 565589  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       |                                 |               |            | x     |                  | x   |     | 565590  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       |                                 |               |            | x     |                  |     | x   | 565591  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       |                                 |               | x          |       | x                |     |     | 565592  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       |                                 |               | x          |       |                  | x   |     | 565593  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       |                                 |               | x          |       |                  |     | x   | 565594  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       |                                 | x             |            |       | x                |     |     | 565595  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       |                                 | x             |            |       |                  | x   |     | 565596  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       |                                 | x             |            |       |                  |     | x   | 565597  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       | x                               |               |            | x     | x                |     |     | 565598  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       | x                               |               |            | x     |                  | x   |     | 565599  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       | x                               |               |            | x     |                  |     | x   | 565600  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       | x                               |               | x          |       | x                |     |     | 565601  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       | x                               |               | x          |       |                  | x   |     | 565602  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       | x                               |               | x          |       |                  |     | x   | 565603  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       | x                               | x             |            |       | x                |     |     | 565604  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       | x                               | x             |            |       |                  | x   |     | 565605  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    | x      |        | 1750 lm       | x                               | x             |            |       |                  |     | x   | 565606  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       |                                 |               |            | x     | x                |     |     | 565607  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       |                                 |               |            | x     |                  | x   |     | 565608  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       |                                 |               |            | x     |                  |     | x   | 565609  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       |                                 |               | x          |       | x                |     |     | 565610  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       |                                 |               | x          |       |                  | x   |     | 565611  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       |                                 |               | x          |       |                  |     | x   | 565612  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       |                                 | x             |            |       | x                |     |     | 565613  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       |                                 | x             |            |       |                  | x   |     | 565614  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       |                                 | x             |            |       |                  |     | x   | 565615  | € 177.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       | x                               |               |            | x     | x                |     |     | 565616  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       | x                               |               |            | x     |                  | x   |     | 565617  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       | x                               |               |            | x     |                  |     | x   | 565618  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       | x                               |               | x          |       | x                |     |     | 565619  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       | x                               |               | x          |       |                  | x   |     | 565620  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       | x                               |               | x          |       |                  |     | x   | 565621  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       | x                               | x             |            |       | x                |     |     | 565622  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       | x                               | x             |            |       |                  | x   |     | 565623  | € 226.95 |
|            |             | x            |              |              |           |        | x      |        |        | 14.4 W       |                    |        | x      | 1810 lm       | x                               | x             |            |       |                  |     | x   | 565624  | € 226.95 |



## TARVOS 190

| Ø x H      |             |              |              |              | Cut Out Ø |        |        |        |        | Power rating | Colour temperature |        |        | Luminous flux | Dimmable<br>DALI 2.0 /<br>DT6 /<br>Push-Dim | Housing Color |            |       | Light Beam Angle |     |     | Article | Price    |
|------------|-------------|--------------|--------------|--------------|-----------|--------|--------|--------|--------|--------------|--------------------|--------|--------|---------------|---------------------------------------------|---------------|------------|-------|------------------|-----|-----|---------|----------|
| 85 x 86 mm | 115 x 75 mm | 165 x 113 mm | 205 x 144 mm | 255 x 160 mm | 68 mm     | 100 mm | 150 mm | 190 mm | 240 mm |              | 2700 K             | 3000 K | 4000 K |               |                                             | white         | light grey | black | 15°              | 30° | 45° |         |          |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       |                                             |               |            | x     | x                |     |     | 565625  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       |                                             |               |            | x     |                  | x   |     | 565626  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       |                                             |               |            | x     |                  |     | x   | 565627  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       |                                             |               | x          |       | x                |     |     | 565628  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       |                                             |               | x          |       |                  | x   |     | 565629  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       |                                             |               | x          |       |                  |     | x   | 565630  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       |                                             | x             |            |       | x                |     |     | 565631  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       |                                             | x             |            |       |                  | x   |     | 565632  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       |                                             | x             |            |       |                  |     | x   | 565633  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       | x                                           |               |            | x     | x                |     |     | 565634  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       | x                                           |               |            | x     |                  | x   |     | 565635  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       | x                                           |               |            | x     |                  |     | x   | 565636  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       | x                                           |               | x          |       | x                |     |     | 565637  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       | x                                           |               | x          |       |                  | x   |     | 565638  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       | x                                           |               | x          |       |                  |     | x   | 565639  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       | x                                           | x             |            |       | x                |     |     | 565640  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       | x                                           | x             |            |       |                  | x   |     | 565641  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       | x                  |        |        | 1590 lm       | x                                           | x             |            |       |                  |     | x   | 565642  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       |                                             |               |            | x     | x                |     |     | 565643  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       |                                             |               |            | x     |                  | x   |     | 565644  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       |                                             |               |            | x     |                  |     | x   | 565645  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       |                                             |               | x          |       | x                |     |     | 565646  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       |                                             |               | x          |       |                  | x   |     | 565647  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       |                                             |               | x          |       |                  |     | x   | 565648  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       |                                             | x             |            |       | x                |     |     | 565649  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       |                                             | x             |            |       |                  | x   |     | 565650  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       |                                             | x             |            |       |                  |     | x   | 565651  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       | x                                           |               |            | x     | x                |     |     | 565652  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       | x                                           |               |            | x     |                  | x   |     | 565653  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       | x                                           |               |            | x     |                  |     | x   | 565654  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       | x                                           |               | x          |       | x                |     |     | 565655  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       | x                                           |               | x          |       |                  | x   |     | 565656  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       | x                                           |               | x          |       |                  |     | x   | 565657  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       | x                                           | x             |            |       | x                |     |     | 565658  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       | x                                           | x             |            |       |                  | x   |     | 565659  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    | x      |        | 2630 lm       | x                                           | x             |            |       |                  |     | x   | 565660  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       |                                             |               |            | x     | x                |     |     | 565661  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       |                                             |               |            | x     |                  | x   |     | 565662  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       |                                             |               |            | x     |                  |     | x   | 565663  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       |                                             |               | x          |       | x                |     |     | 565664  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       |                                             |               | x          |       |                  | x   |     | 565665  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       |                                             |               | x          |       |                  |     | x   | 565666  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       |                                             | x             |            |       | x                |     |     | 565667  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       |                                             | x             |            |       |                  | x   |     | 565668  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       |                                             | x             |            |       |                  |     | x   | 565669  | € 191.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       | x                                           |               |            | x     | x                |     |     | 565670  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       | x                                           |               |            | x     |                  | x   |     | 565671  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       | x                                           |               |            | x     |                  |     | x   | 565672  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       | x                                           |               | x          |       | x                |     |     | 565673  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       | x                                           |               | x          |       |                  | x   |     | 565674  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       | x                                           |               | x          |       |                  |     | x   | 565675  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       | x                                           | x             |            |       | x                |     |     | 565676  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       | x                                           | x             |            |       |                  | x   |     | 565677  | € 242.95 |
|            |             |              | x            |              |           |        |        | x      |        | 21.6 W       |                    |        | x      | 2720 lm       | x                                           | x             |            |       |                  |     | x   | 565678  | € 242.95 |

TARVOS 240

| Ø x H      |             |              |              |              | Cut Out Ø |        |        |        |        | Power rating | Colour temperature |        |        | Luminous flux | Dimmable                        | Housing Color |            |       | Light Beam Angle |     |     | Article | Price    |
|------------|-------------|--------------|--------------|--------------|-----------|--------|--------|--------|--------|--------------|--------------------|--------|--------|---------------|---------------------------------|---------------|------------|-------|------------------|-----|-----|---------|----------|
| 85 x 86 mm | 115 x 75 mm | 165 x 113 mm | 205 x 144 mm | 255 x 160 mm | 68 mm     | 100 mm | 150 mm | 190 mm | 240 mm |              | 2700 K             | 3000 K | 4000 K |               | DALI 2.0 /<br>D16 /<br>Push-Dim | white         | light grey | black | 15°              | 30° | 45° |         |          |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       |                                 |               |            | x     | x                |     |     | 565679  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       |                                 |               |            | x     |                  | x   |     | 565680  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       |                                 |               |            | x     |                  |     | x   | 565681  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       |                                 |               | x          |       | x                |     |     | 565682  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       |                                 |               | x          |       |                  | x   |     | 565683  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       |                                 |               | x          |       |                  |     | x   | 565684  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       |                                 | x             |            |       | x                |     |     | 565685  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       |                                 | x             |            |       |                  | x   |     | 565686  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       |                                 | x             |            |       |                  |     | x   | 565687  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       | x                               |               |            | x     | x                |     |     | 565688  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       | x                               |               |            | x     |                  | x   |     | 565689  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       | x                               |               |            | x     |                  |     | x   | 565690  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       | x                               |               | x          |       | x                |     |     | 565691  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       | x                               |               | x          |       |                  | x   |     | 565692  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       | x                               |               | x          |       |                  |     | x   | 565693  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       | x                               | x             |            |       | x                |     |     | 565694  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       | x                               | x             |            |       |                  | x   |     | 565695  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       | x                  |        |        | 3020 lm       | x                               | x             |            |       |                  |     | x   | 565696  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       |                                 |               |            | x     | x                |     |     | 565697  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       |                                 |               |            | x     |                  | x   |     | 565698  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       |                                 |               |            | x     |                  |     | x   | 565699  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       |                                 |               | x          |       | x                |     |     | 565700  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       |                                 |               | x          |       |                  | x   |     | 565701  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       |                                 |               | x          |       |                  |     | x   | 565702  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       |                                 | x             |            |       | x                |     |     | 565703  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       |                                 | x             |            |       |                  | x   |     | 565704  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       |                                 | x             |            |       |                  |     | x   | 565705  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       | x                               |               |            | x     | x                |     |     | 565706  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       | x                               |               |            | x     |                  | x   |     | 565707  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       | x                               |               |            | x     |                  |     | x   | 565708  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       | x                               |               | x          |       | x                |     |     | 565709  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       | x                               |               | x          |       |                  | x   |     | 565710  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       | x                               |               | x          |       |                  |     | x   | 565711  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       | x                               | x             |            |       | x                |     |     | 565712  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       | x                               | x             |            |       |                  | x   |     | 565713  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    | x      |        | 3070 lm       | x                               | x             |            |       |                  |     | x   | 565714  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       |                                 |               |            | x     | x                |     |     | 565715  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       |                                 |               |            | x     |                  | x   |     | 565716  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       |                                 |               |            | x     |                  |     | x   | 565717  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       |                                 |               | x          |       | x                |     |     | 565718  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       |                                 |               | x          |       |                  | x   |     | 565719  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       |                                 |               | x          |       |                  |     | x   | 565720  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       |                                 | x             |            |       | x                |     |     | 565721  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       |                                 | x             |            |       |                  | x   |     | 565722  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       |                                 | x             |            |       |                  |     | x   | 565723  | € 226.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       | x                               |               |            | x     | x                |     |     | 565724  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       | x                               |               |            | x     |                  | x   |     | 565725  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       | x                               |               |            | x     |                  |     | x   | 565726  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       | x                               |               | x          |       | x                |     |     | 565727  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       | x                               |               | x          |       |                  | x   |     | 565728  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       | x                               |               | x          |       |                  |     | x   | 565729  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       | x                               | x             |            |       | x                |     |     | 565730  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       | x                               | x             |            |       |                  | x   |     | 565731  | € 290.95 |
|            |             |              |              | x            |           |        |        |        | x      | 25.2 W       |                    |        | x      | 3170 lm       | x                               | x             |            |       |                  |     | x   | 565732  | € 290.95 |





## SLIM

Matching recessed spotlights are available for our SLIM luminaire series. The die-cast aluminium luminaire body is always the same size [300 x 39 mm]. The SLIM recessed spotlights have the standard installation dimension of 68 mm. This makes the single-flame recessed spotlights particularly suitable for sales areas, reception areas or even hotels and restaurants.





SLIM

- Glare-free, due to low UGR value (<19)
- Slim design with only 39 mm diameter
- Incl. silver-coloured reflector ring
- Installation diameter 68 mm

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                         |              |                    |                                              |
|-------------------------|--------------|--------------------|----------------------------------------------|
| Housing                 | Aluminium    | Installation Depth | 25 mm                                        |
| Colour Temperature      | 2700 K       | Light Beam Angle   | 36 Degree                                    |
| Luminous Flux           | 500 lm       | Rotation Angle     | 300 Degree                                   |
| Height                  | 194 mm       | Swivelling Angle   | 60 Degree                                    |
| Ø                       | 80 mm        | Cut Out Ø          | 68 mm                                        |
| Power                   | 5 W          | Control            | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Rated Input Voltage     | 220-240 V/AC | CRI (Ra)           | 90                                           |
| Power Supply Unit incl. | Yes          |                    |                                              |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 565408  | White         | € 47.95 |
| 565409  | Black         | € 47.95 |

Accessories

|        |                                              |  |        |
|--------|----------------------------------------------|--|--------|
| 930744 | Reflector ring white for Slim series         |  | € 3.95 |
| 930745 | Reflector ring black for Slim series         |  | € 3.95 |
| 930746 | Reflector ring gold-coloured for Slim series |  | € 4.75 |
| 930747 | 24° lens for Slim series                     |  | € 3.95 |
| 930748 | 36° lens for Slim series                     |  | € 3.95 |
| 930749 | 60° lens for Slim series                     |  | € 3.95 |



**5-year guarantee**  
Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.






UNI 2

- „Glow“ effect on reflector ring
- Can be rotated and swivelled
- Can be combined with a power supply unit as desired [excl.]

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                         |            |                  |                                         |
|-------------------------|------------|------------------|-----------------------------------------|
| Housing                 | Aluminium  | Light Beam Angle | 36 Degree                               |
| Colour Temperature      | 3000 K     | Swivelling Angle | 85 Degree                               |
| Height                  | 84 mm      | Cut Out Ø        | 125 mm                                  |
| Ø                       | 139 mm     | Control          | Dimmable via optional power supply unit |
| Power                   | 12 W       | CRI (Ra)         | 90                                      |
| Rated Input Voltage     | 33-34 V/DC | Rated Current    | 350 mA                                  |
| Power Supply Unit incl. | No         |                  |                                         |
| Installation Depth      | 90 mm      |                  |                                         |



565343

| Article | Housing Color | Colour Temperature | Luminous Flux | EEL | Price   |
|---------|---------------|--------------------|---------------|-----|---------|
| 565343  | White         | 3000 K             | 760 lm        | F   | € 95.95 |
| 565361  | Black         | 3000 K             | 1010 lm       | F   | € 95.95 |



Accessories

|        |                                                                  |  |         |
|--------|------------------------------------------------------------------|--|---------|
| 930305 | 36° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series      |  | € 2.95  |
| 930306 | 48° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series      |  | € 6.95  |
| 930307 | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | € 6.95  |
| 930308 | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | € 6.95  |
| 930309 | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | € 6.95  |
| 930310 | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | € 6.95  |
| 930334 | Rear white cover for Uni II series                               |  | € 2.95  |
| 930335 | Rear black cover for Uni II series                               |  | € 2.45  |
| 930336 | White heat sink cover for Uni II series                          |  | € 2.95  |
| 930337 | Black heat sink cover for Uni II series                          |  | € 6.45  |
| 930338 | Reflector ring white for Uni II series                           |  | € 9.95  |
| 930339 | Reflector ring black for Uni II series                           |  | € 8.95  |
| 930340 | Reflector ring gold for Uni II series                            |  | € 8.95  |
| 930341 | Reflector ring chrome for Uni II series                          |  | € 8.95  |
| 180512 | BASIC, CC, CC35018/18 W                                          |  | € 18.95 |
| 862191 | BASIC, DIM, Multi CC, IE-25D                                     |  | € 51.95 |
| 862204 | BASIC, DIM, CC, D35020UF/20 W                                    |  | € 31.95 |
| 930969 | Reducing ring round 210/135 mm, Traffic white                    |  | € 10.95 |
| 931045 | Reducing ring round 210/135 mm, Signal white                     |  | € 10.95 |



page 54



page 389






UNI 2 MINI

- „Glow“ effect on reflector ring
- Can be rotated and swivelled
- Can be combined with a power supply unit as desired [excl.]



**Application Area**  
 Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                         |            |                  |                                         |
|-------------------------|------------|------------------|-----------------------------------------|
| Housing                 | Aluminium  | Light Beam Angle | 36 Degree                               |
| Colour Temperature      | 3000 K     | Swivelling Angle | 75 Degree                               |
| Height                  | 80 mm      | Cut Out Ø        | 95 mm                                   |
| Ø                       | 103 mm     | Control          | Dimmable via optional power supply unit |
| Power                   | 9 W        | CRI (Ra)         | 90                                      |
| Rated Input Voltage     | 18-19 V/DC | Rated Current    | 500 mA                                  |
| Power Supply Unit incl. | No         |                  |                                         |
| Installation Depth      | 85 mm      |                  |                                         |



565342

| Article | Housing Color | Colour Temperature | Luminous Flux | Price   |
|---------|---------------|--------------------|---------------|---------|
| 565342  | White         | 3000 K             | 765 lm        | € 79.95 |
| 565354  | Black         | 3000 K             | 825 lm        | € 79.95 |



Accessories

|        |                                              |
|--------|----------------------------------------------|
| 930328 | White heat sink cover for Uni II Mini series |
| 930329 | Black heat sink cover for Uni II Mini series |
| 930330 | Reflector ring white for Uni II Mini series  |
| 930331 | Reflector ring black for Uni II Mini series  |
| 930332 | Reflector ring gold for Uni II Mini series   |
| 930333 | Reflector ring chrome for Uni II Mini series |
| 930770 | Reflector 24° for Uni II Mini series         |
| 930771 | Reflector 48° for Uni II Mini series         |
| 180513 | BASIC, CC, CC50018/18 W                      |
| 862190 | BASIC, DIM, Multi CC, IE-12D                 |
| 862236 | OCTO, DIM, CC, RSM-12-500T/12 W              |
| 930968 | Reducing ring round 155/95 mm, Traffic white |
| 931044 | Reducing ring round 155/95 mm, Signal white  |

|  |         |
|--|---------|
|  | € 2.95  |
|  | € 2.45  |
|  | € 8.95  |
|  | € 8.95  |
|  | € 8.95  |
|  | € 8.95  |
|  | € 8.95  |
|  | € 8.95  |
|  | € 18.95 |
|  | € 47.95 |
|  | € 23.95 |
|  | € 9.95  |
|  | € 9.95  |



**Onlineshop**  
 You can find more information about the products in the onlineshop:  
 Detailed images, videos, project reports, LDT files, EPREL data sheets and more.




## UNI 2 MAX

- „Glow“ effect on reflector ring
- Can be rotated and swivelled
- Can be combined with a power supply unit as desired [excl.]

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                         |            |                  |                                         |
|-------------------------|------------|------------------|-----------------------------------------|
| Housing                 | Aluminium  | Light Beam Angle | 36 Degree                               |
| Colour Temperature      | 3000 K     | Swivelling Angle | 85 Degree                               |
| Height                  | 97 mm      | Cut Out Ø        | 155 mm                                  |
| Ø                       | 165 mm     | Control          | Dimmable via optional power supply unit |
| Power                   | 24 W       | CRI (Ra)         | 90                                      |
| Rated Input Voltage     | 34-35 V/DC | Rated Current    | 700 mA                                  |
| Power Supply Unit incl. | No         |                  |                                         |
| Installation Depth      | 100 mm     |                  |                                         |



565344

| Article | Housing Color |    | Luminous Flux | Price    |
|---------|---------------|----|---------------|----------|
| 565351  | Black         | ww | 2260 lm       | € 119.95 |
| 565344  | White         | ww | 2380 lm       | € 119.95 |



### Accessories

|        |                                             |  |         |
|--------|---------------------------------------------|--|---------|
| 930390 | 24° reflector for Uni II Max                |  | € 8.95  |
| 930391 | 36° reflector for Uni II Max                |  | € 9.95  |
| 930392 | 48° reflector for Uni II Max                |  | € 8.95  |
| 930395 | White heat sink cover for Uni II Max series |  | € 8.95  |
| 930396 | Black heat sink cover for Uni II Max series |  | € 8.95  |
| 930397 | Reflector ring white for Uni II Max series  |  | € 9.95  |
| 930398 | Reflector ring black for Uni II Max series  |  | € 8.95  |
| 930399 | Reflector ring gold for Uni II Max series   |  | € 11.95 |
| 862192 | BASIC, DIM, Multi CC, IE-45D                |  | € 55.95 |
| 862198 | BASIC, CC, V8-30-700 mA/30 W                |  | € 21.95 |
| 862208 | BASIC, DIM, CC, D70040NTF/40 W              |  | € 37.95 |



### Technical data sheet

New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.

# downlights



page 129



page 130



page 132



page 133



page 134



page 135



page 136



page 138



page 140









## ACRUX PRO CCT


- through-wiring possible
- Integrated power supply unit for 230V direct connection
- splash-proof [downwards when installed]
- light colour adjustable in three stages
- power adjustable in 3 stages (only Ø 120 / 145 / 190)
- BEG eligible

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                     |                           |                              |                                           |
|---------------------|---------------------------|------------------------------|-------------------------------------------|
| Housing             | Aluminium, PA - Polyamide | Control                      | Trailing-edge dimmer, Leading-edge dimmer |
| Surface             | Shiny                     | CRI (Ra)                     | 90                                        |
| Colour Temperature  | 2700/3000/4000 K          | Accumulator/Battery Operated | No                                        |
| Rated Input Voltage | 220-240 V/AC              | IK Protection Class          | IK05                                      |
| Light Beam Angle    | 100 Degree                |                              |                                           |

| Article       | Housing Color |  | Luminous Flux     | Height | Ø      | Power      | Ø cut out  | Price          |
|---------------|---------------|--|-------------------|--------|--------|------------|------------|----------------|
| <b>565745</b> | White         |  | 800/840/840 lm    | 50 mm  | 90 mm  | 7,0 W      | 68-75 mm   | <b>€ 19.95</b> |
| <b>565746</b> | Black         |  | 800/840/840 lm    | 50 mm  | 90 mm  | 7,0 W      | 68-75 mm   | <b>€ 19.95</b> |
| <b>565747</b> | White         |  | 1080/1130/1180 lm | 55 mm  | 110 mm | 9,0 W      | 82-95 mm   | <b>€ 23.95</b> |
| <b>565748</b> | Black         |  | 1080/1130/1180 lm | 55 mm  | 110 mm | 9,0 W      | 82-95 mm   | <b>€ 23.95</b> |
| <b>565749</b> | White         |  | 1800/1950/1875 lm | 60 mm  | 145 mm | 9/12/15 W  | 120-130 mm | <b>€ 27.95</b> |
| <b>565750</b> | Black         |  | 1800/1950/1875 lm | 60 mm  | 145 mm | 9/12/15 W  | 120-130 mm | <b>€ 27.95</b> |
| <b>565751</b> | White         |  | 2400/2600/2500 lm | 72 mm  | 180 mm | 12/16/20 W | 145-155 mm | <b>€ 31.95</b> |
| <b>565752</b> | Black         |  | 2400/2600/2500 lm | 72 mm  | 180 mm | 12/16/20 W | 145-155 mm | <b>€ 31.95</b> |
| <b>565753</b> | White         |  | 3600/3900/3750 lm | 85 mm  | 230 mm | 18/24/30 W | 190-205 mm | <b>€ 43.95</b> |
| <b>565754</b> | Black         |  | 3600/3900/3750 lm | 85 mm  | 230 mm | 18/24/30 W | 190-205 mm | <b>€ 43.95</b> |



### Accessories for **565745, 565746**

|               |                                              |  |               |
|---------------|----------------------------------------------|--|---------------|
| <b>930967</b> | Reducing ring round 130/70 mm, Traffic white |  | <b>€ 7.95</b> |
| <b>931043</b> | Reducing ring round 130/70 mm, Signal white  |  | <b>€ 7.95</b> |

### Accessories for **565747, 565748**

|               |                                              |  |               |
|---------------|----------------------------------------------|--|---------------|
| <b>930968</b> | Reducing ring round 155/95 mm, Traffic white |  | <b>€ 9.95</b> |
| <b>931044</b> | Reducing ring round 155/95 mm, Signal white  |  | <b>€ 9.95</b> |

### Accessories for **565749, 565750**

|               |                                               |  |                |
|---------------|-----------------------------------------------|--|----------------|
| <b>930969</b> | Reducing ring round 210/135 mm, Traffic white |  | <b>€ 10.95</b> |
| <b>931045</b> | Reducing ring round 210/135 mm, Signal white  |  | <b>€ 10.95</b> |


### Accessories for **565753, 565754**

|               |                                               |  |                |
|---------------|-----------------------------------------------|--|----------------|
| <b>930971</b> | Reducing ring round 280/210 mm, Traffic white |  | <b>€ 18.95</b> |
| <b>931047</b> | Reducing ring round 280/210 mm, Signal white  |  | <b>€ 18.95</b> |



## ANIK ROUND

The ANIK ROUND LED downlight is a high-quality lighting solution for a wide range of applications - for example in reception areas, offices, conference rooms, shops, sales areas, hotels, the catering trade and in bathrooms and WCs. It impresses with its uniform, wide light distribution with a beam angle of 120° and very high colour rendering ( $R_a \geq 90$ ). Thanks to its IP44 downward protection rating when installed, it is also suitable for damp environments. The luminaire can be combined with external power supply units and is therefore dimmable. The ANIK ROUND series covers a wide power spectrum from 9 W to 30 W and is available in the colour temperatures 2700 K, 3000 K and 4000 K. With its flat design (19-22 mm high) and various diameters (144-398 mm), it is suitable for both new buildings and refurbishment projects.





## ANIK ROUND


- splash-proof [downwards when installed]
- very low installation depth [max. 36mm]
- uniform and wide light distribution
- very high colour rendering



### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

|                         |                                                  |                              |                                         |
|-------------------------|--------------------------------------------------|------------------------------|-----------------------------------------|
| Housing                 | Aluminium, Steel, PMMA - Polymethyl methacrylate | Light Beam Angle             | 120 Degree                              |
| Surface                 | Powder-coated, Fine structure, Matt              | Control                      | Dimmable via optional power supply unit |
| Rated Input Voltage     | 32-37 V/DC                                       | CRI (Ra)                     | 90                                      |
| Power Supply Unit incl. | No                                               | Accumulator/Battery Operated | No                                      |
|                         |                                                  | IK Protection Class          | IK05                                    |



565410

| Article       | Housing Color                  | Colour Temp. | Luminous Flux | Rated Current | Height | Ø      | Ø cut out | Power  | Price          |
|---------------|--------------------------------|--------------|---------------|---------------|--------|--------|-----------|--------|----------------|
| <b>565410</b> | <input type="checkbox"/> White | 2700 K       | 1070 lm       | 260 mA        | 19 mm  | 144 mm | 130 mm    | 9.0 W  | <b>€ 26.95</b> |
| <b>565413</b> | <input type="checkbox"/> White | 2700 K       | 1540 lm       | 350 mA        | 22 mm  | 173 mm | 165 mm    | 12.0 W | <b>€ 38.95</b> |
| <b>565416</b> | <input type="checkbox"/> White | 2700 K       | 2050 lm       | 500 mA        | 20 mm  | 234 mm | 220 mm    | 17.0 W | <b>€ 55.95</b> |
| <b>565419</b> | <input type="checkbox"/> White | 2700 K       | 4130 lm       | 900 mA        | 20 mm  | 398 mm | 380 mm    | 30.0 W | <b>€ 78.95</b> |
| <b>565411</b> | <input type="checkbox"/> White | 3000 K       | 1100 lm       | 260 mA        | 19 mm  | 144 mm | 130 mm    | 9.0 W  | <b>€ 26.95</b> |
| <b>565414</b> | <input type="checkbox"/> White | 3000 K       | 1580 lm       | 350 mA        | 22 mm  | 173 mm | 165 mm    | 12.0 W | <b>€ 38.95</b> |
| <b>565417</b> | <input type="checkbox"/> White | 3000 K       | 2080 lm       | 500 mA        | 20 mm  | 234 mm | 220 mm    | 17.0 W | <b>€ 55.95</b> |
| <b>565420</b> | <input type="checkbox"/> White | 3000 K       | 4180 lm       | 900 mA        | 20 mm  | 398 mm | 380 mm    | 30.0 W | <b>€ 78.95</b> |
| <b>565412</b> | <input type="checkbox"/> White | 4000 K       | 1150 lm       | 260 mA        | 19 mm  | 144 mm | 130 mm    | 9.0 W  | <b>€ 26.95</b> |
| <b>565415</b> | <input type="checkbox"/> White | 4000 K       | 1620 lm       | 350 mA        | 22 mm  | 173 mm | 165 mm    | 12.0 W | <b>€ 38.95</b> |
| <b>565418</b> | <input type="checkbox"/> White | 4000 K       | 2130 lm       | 500 mA        | 20 mm  | 234 mm | 220 mm    | 17.0 W | <b>€ 55.95</b> |
| <b>565421</b> | <input type="checkbox"/> White | 4000 K       | 4230 lm       | 900 mA        | 20 mm  | 398 mm | 380 mm    | 30.0 W | <b>€ 78.95</b> |



### Accessories for 565410, 565411, 565412

**862285** BASIC, DIM, CC, D26012UF/12W

**€ 25.95**

### Accessories for 565410, 565411, 565412, 565413, 565414, 565415

**862190** BASIC, DIM, Multi CC, IE-12D

**€ 47.95**

### Accessories for 565413, 565414, 565415

**180512** BASIC, CC, CC35018/18 W

**€ 18.95**

**862203** BASIC, DIM, CC, D350012UF/12 W

**€ 29.95**

### Accessories for 565416, 565417, 565418

**862191** BASIC, DIM, Multi CC, IE-25D

**€ 51.95**

**862205** BASIC, DIM, CC, D50020UF/20 W

**€ 31.95**

### Accessories for 565419, 565420, 565421


**862157** BASIC, CC, V8-40-900/40 W

**€ 23.95**

**862192** BASIC, DIM, Multi CC, IE-45D

**€ 55.95**






**ANIK ROUND HCL**

- splash-proof [downwards when installed]
- very low installation depth [max. 36mm]
- suitable for 24V HCL control
- uniform and wide light distribution
- very high colour rendering
- individually combinable and dimmable with power supply

**Application Area**

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

|                         |                                                  |                              |                                  |
|-------------------------|--------------------------------------------------|------------------------------|----------------------------------|
| Housing                 | Aluminium, Steel, PMMA - Polymethyl methacrylate | Light Beam Angle             | 120 Degree                       |
| Surface                 | Powder-coated, Fine structure, Matt              | Control                      | Dimmable via optional controller |
| Colour Temperature      | 2700-6500 K                                      | CRI (Ra)                     | 90                               |
| Rated Input Voltage     | 24 V/DC                                          | Accumulator/Battery Operated | No                               |
| Power Supply Unit incl. | No                                               | IK Protection Class          | IK05                             |



565422

| Article | Housing Color                  |  | Luminous Flux | Height | Ø      | Ø cut out | Power  | Installation Depth | Price   |
|---------|--------------------------------|--|---------------|--------|--------|-----------|--------|--------------------|---------|
| 565422  | <input type="checkbox"/> White |  | 850 lm        | 19 mm  | 144 mm | 130 mm    | 9.0 W  | 16.5 mm            | € 36.95 |
| 565423  | <input type="checkbox"/> White |  | 1310 lm       | 22 mm  | 173 mm | 165 mm    | 12.0 W | 19.5 mm            | € 46.95 |
| 565424  | <input type="checkbox"/> White |  | 1850 lm       | 20 mm  | 234 mm | 220 mm    | 17.0 W | 17.5 mm            | € 63.95 |
| 565425  | <input type="checkbox"/> White |  | 3220 lm       | 20 mm  | 398 mm | 380 mm    | 30.0 W | 17 mm              | € 87.95 |



**Accessories**

|        |                                                                          |  |          |
|--------|--------------------------------------------------------------------------|--|----------|
| 843501 | RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control |  | € 79.95  |
| 862166 | BASIC, CV, Q8H-24-100 W                                                  |  | € 77.95  |
| 843341 | DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT6                              |  | € 67.95  |
| 843342 | DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT8                              |  | € 67.95  |
| 843037 | Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)                           |  | € 143.95 |
| 843279 | MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A            |  | € 91.95  |

**Accessories for 565422**

|        |                                              |  |        |
|--------|----------------------------------------------|--|--------|
| 930967 | Reducing ring round 130/70 mm, Traffic white |  | € 7.95 |
| 931043 | Reducing ring round 130/70 mm, Signal white  |  | € 7.95 |

**Accessories for 565422, 565423**



|        |                        |  |         |
|--------|------------------------|--|---------|
| 862234 | FLAT, CV, UT 24 V/20 W |  | € 20.95 |
|--------|------------------------|--|---------|

**Accessories for 565424**

|        |                        |  |         |
|--------|------------------------|--|---------|
| 862163 | BASIC, CV, Q8H-24-40 W |  | € 37.95 |
|--------|------------------------|--|---------|

**Accessories for 565425**

|        |                        |  |         |
|--------|------------------------|--|---------|
| 862122 | FLAT, CV, UT 24 V/50 W |  | € 41.95 |
|--------|------------------------|--|---------|

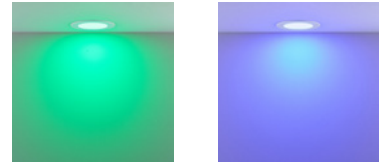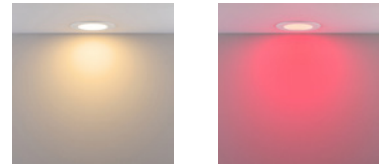


## ANIK ROUND RGBW

- splash-proof [downwards when installed]
- very low installation depth [max. 36mm]
- suitable for 24V colour control
- uniform and wide light distribution
- very high colour rendering
- individually combinable and dimmable with power supply unit

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

|                         |                                                  |                              |                                  |
|-------------------------|--------------------------------------------------|------------------------------|----------------------------------|
| Housing                 | Aluminium, Steel, PMMA - Polymethyl methacrylate | Light Beam Angle             | 120 Degree                       |
| Surface                 | Powder-coated, Fine structure, Matt              | Control                      | Dimmable via optional controller |
| Colour Temperature      | 3000 K                                           | CRI (Ra)                     | 90                               |
| Rated Input Voltage     | 24 V/DC                                          | Accumulator/Battery Operated | No                               |
| Power Supply Unit incl. | No                                               | IK Protection Class          | IK05                             |



565426

| Article       | Housing Color                  |  | Luminous Flux | Height | Ø      | Ø cut out | Power  | Installation Depth | Price          |
|---------------|--------------------------------|--|---------------|--------|--------|-----------|--------|--------------------|----------------|
| <b>565426</b> | <input type="checkbox"/> White |  | 780 lm        | 19 mm  | 144 mm | 130 mm    | 12.0 W | 16.5 mm            | <b>€ 43.95</b> |
| <b>565427</b> | <input type="checkbox"/> White |  | 1180 lm       | 22 mm  | 173 mm | 165 mm    | 16.0 W | 19.5 mm            | <b>€ 54.95</b> |
| <b>565428</b> | <input type="checkbox"/> White |  | 1580 lm       | 20 mm  | 234 mm | 220 mm    | 22.0 W | 17.5 mm            | <b>€ 71.95</b> |
| <b>565429</b> | <input type="checkbox"/> White |  | 2360 lm       | 20 mm  | 398 mm | 380 mm    | 36.0 W | 17 mm              | <b>€ 95.95</b> |



### Accessories

|               |                                                                   |  |                 |
|---------------|-------------------------------------------------------------------|--|-----------------|
| <b>843502</b> | RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20 |  | <b>€ 79.95</b>  |
| <b>862166</b> | BASIC, CV, Q8H-24-100 W                                           |  | <b>€ 77.95</b>  |
| <b>843343</b> | DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6                       |  | <b>€ 75.95</b>  |
| <b>843344</b> | DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8                       |  | <b>€ 75.95</b>  |
| <b>843037</b> | Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)                    |  | <b>€ 143.95</b> |
| <b>843279</b> | MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A     |  | <b>€ 91.95</b>  |

### Accessories for 565426

|               |                                              |  |               |
|---------------|----------------------------------------------|--|---------------|
| <b>930967</b> | Reducing ring round 130/70 mm, Traffic white |  | <b>€ 7.95</b> |
| <b>931043</b> | Reducing ring round 130/70 mm, Signal white  |  | <b>€ 7.95</b> |

### Accessories for 565426, 565427

|               |                        |  |                |
|---------------|------------------------|--|----------------|
| <b>862234</b> | FLAT, CV, UT 24 V/20 W |  | <b>€ 20.95</b> |
|---------------|------------------------|--|----------------|

### Accessories for 565428

|               |                        |  |                |
|---------------|------------------------|--|----------------|
| <b>862163</b> | BASIC, CV, Q8H-24-40 W |  | <b>€ 37.95</b> |
|---------------|------------------------|--|----------------|

### Accessories for 565429

|               |                        |  |                |
|---------------|------------------------|--|----------------|
| <b>862122</b> | FLAT, CV, UT 24 V/50 W |  | <b>€ 41.95</b> |
|---------------|------------------------|--|----------------|




ANIK SQUARE

- splash-proof [downwards when installed]
- very low installation depth [max. 36mm]
- uniform and wide light distribution
- very high colour rendering

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

|                         |                                                  |                              |                                         |
|-------------------------|--------------------------------------------------|------------------------------|-----------------------------------------|
| Housing                 | Aluminium, Steel, PMMA - Polymethyl methacrylate | Light Beam Angle             | 120 Degree                              |
| Surface                 | Powder-coated, Fine structure, Matt              | Control                      | Dimmable via optional power supply unit |
| Rated Input Voltage     | 32-37 V/DC                                       | CRI (Ra)                     | 90                                      |
| Power Supply Unit incl. | No                                               | Accumulator/Battery Operated | No                                      |
|                         |                                                  | IK Protection Class          | IK05                                    |



| Article | Housing Color                  | Colour Temperature | Luminous Flux | Length | Width  | Height  | cut out    | Price   |
|---------|--------------------------------|--------------------|---------------|--------|--------|---------|------------|---------|
| 565430  | <input type="checkbox"/> White | 2700 K             | 1020 lm       | 110 mm | 110 mm | 20.5 mm | 90x90 mm   | € 26.95 |
| 565433  | <input type="checkbox"/> White | 2700 K             | 2060 lm       | 180 mm | 180 mm | 21 mm   | 155x155 mm | € 38.95 |
| 565436  | <input type="checkbox"/> White | 2700 K             | 2860 lm       | 237 mm | 237 mm | 21 mm   | 215x215 mm | € 55.95 |
| 565439  | <input type="checkbox"/> White | 2700 K             | 3850 lm       | 398 mm | 398 mm | 20 mm   | 380x380 mm | € 78.95 |
| 565431  | <input type="checkbox"/> White | 3000 K             | 1050 lm       | 110 mm | 110 mm | 20.5 mm | 90x90 mm   | € 26.95 |
| 565434  | <input type="checkbox"/> White | 3000 K             | 2100 lm       | 180 mm | 180 mm | 21 mm   | 155x155 mm | € 38.95 |
| 565437  | <input type="checkbox"/> White | 3000 K             | 2910 lm       | 237 mm | 237 mm | 21 mm   | 215x215 mm | € 55.95 |
| 565440  | <input type="checkbox"/> White | 3000 K             | 3900 lm       | 398 mm | 398 mm | 20 mm   | 380x380 mm | € 78.95 |
| 565432  | <input type="checkbox"/> White | 4000 K             | 1100 lm       | 110 mm | 110 mm | 20.5 mm | 90x90 mm   | € 26.95 |
| 565435  | <input type="checkbox"/> White | 4000 K             | 2150 lm       | 180 mm | 180 mm | 21 mm   | 155x155 mm | € 38.95 |
| 565438  | <input type="checkbox"/> White | 4000 K             | 2950 lm       | 237 mm | 237 mm | 21 mm   | 215x215 mm | € 55.95 |
| 565441  | <input type="checkbox"/> White | 4000 K             | 4170 lm       | 398 mm | 398 mm | 20 mm   | 380x380 mm | € 78.95 |



Accessories for 565430, 565431, 565432

|        |                              |  |         |
|--------|------------------------------|--|---------|
| 862190 | BASIC, DIM, Multi CC, IE-12D |  | € 47.95 |
| 862285 | BASIC, DIM, CC, D26012UF/12W |  | € 25.95 |

Accessories for 565433, 565434, 565435

|        |                               |  |         |
|--------|-------------------------------|--|---------|
| 862205 | BASIC, DIM, CC, D50020UF/20 W |  | € 31.95 |
| 862226 | FLAT, CC, UT500 mA/20 W       |  | € 22.95 |

Accessories for 565433, 565434, 565435, 565436, 565437, 565438



|        |                              |  |         |
|--------|------------------------------|--|---------|
| 862191 | BASIC, DIM, Multi CC, IE-25D |  | € 51.95 |
|--------|------------------------------|--|---------|

Accessories for 565436, 565437, 565438

|        |                                |  |         |
|--------|--------------------------------|--|---------|
| 862198 | BASIC, CC, V8-30-700 mA/30 W   |  | € 21.95 |
| 862208 | BASIC, DIM, CC, D70040NTF/40 W |  | € 37.95 |

Accessories for 565439, 565440, 565441

|        |                              |  |         |
|--------|------------------------------|--|---------|
| 862157 | BASIC, CC, V8-40-900/40 W    |  | € 23.95 |
| 862192 | BASIC, DIM, Multi CC, IE-45D |  | € 55.95 |

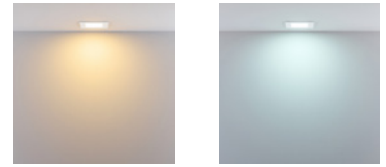


## ANIK SQUARE HCL

- splash-proof [downwards when installed]
- very low installation depth [max. 36mm]
- suitable for 24V HCL control
- uniform and wide light distribution
- very high colour rendering
- individually combinable and dimmable with power supply

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

|                         |                                                  |                              |                                  |
|-------------------------|--------------------------------------------------|------------------------------|----------------------------------|
| Housing                 | Aluminium, Steel, PMMA - Polymethyl methacrylate | Light Beam Angle             | 120 Degree                       |
| Surface                 | Powder-coated, Fine structure, Matt              | Control                      | Dimmable via optional controller |
| Colour Temperature      | 2700-6500 K                                      | CRI (Ra)                     | 90                               |
| Rated Input Voltage     | 24 V/DC                                          | Accumulator/Battery Operated | No                               |
| Power Supply Unit incl. | No                                               | IK Protection Class          | IK05                             |



565443

| Article | Housing Color                  | Luminous Flux | Length | Width  | Height  | cut out    | Power  | Price   |
|---------|--------------------------------|---------------|--------|--------|---------|------------|--------|---------|
| 565442  | <input type="checkbox"/> White | 860 lm        | 110 mm | 110 mm | 20.5 mm | 90x90 mm   | 9.0 W  | € 36.95 |
| 565443  | <input type="checkbox"/> White | 1860 lm       | 180 mm | 180 mm | 21 mm   | 155x155 mm | 17.0 W | € 46.95 |
| 565444  | <input type="checkbox"/> White | 2620 lm       | 237 mm | 237 mm | 21 mm   | 215x215 mm | 24.0 W | € 63.95 |
| 565445  | <input type="checkbox"/> White | 3290 lm       | 398 mm | 398 mm | 20 mm   | 380x380 mm | 30.0 W | € 87.95 |



### Accessories

|        |                                                                          |  |          |
|--------|--------------------------------------------------------------------------|--|----------|
| 843501 | RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control |  | € 79.95  |
| 862166 | BASIC, CV, Q8H-24-100 W                                                  |  | € 77.95  |
| 843341 | DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT6                              |  | € 67.95  |
| 843342 | DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT8                              |  | € 67.95  |
| 843037 | Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)                           |  | € 143.95 |
| 843279 | MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A            |  | € 91.95  |

### Accessories for 565442


|        |                                              |  |         |
|--------|----------------------------------------------|--|---------|
| 862234 | FLAT, CV, UT 24 V/20 W                       |  | € 20.95 |
| 930967 | Reducing ring round 130/70 mm, Traffic white |  | € 7.95  |
| 931043 | Reducing ring round 130/70 mm, Signal white  |  | € 7.95  |

### Accessories for 565443, 565444

|        |                        |  |         |
|--------|------------------------|--|---------|
| 862163 | BASIC, CV, Q8H-24-40 W |  | € 37.95 |
|--------|------------------------|--|---------|

### Accessories for 565445

|        |                        |  |         |
|--------|------------------------|--|---------|
| 862122 | FLAT, CV, UT 24 V/50 W |  | € 41.95 |
|--------|------------------------|--|---------|

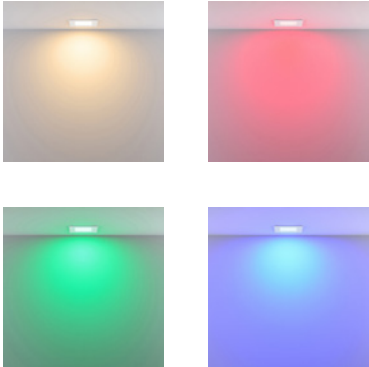

ANIK SQUARE RGBW

- splash-proof [downwards when installed]
- suitable for 24V colour control
- uniform and wide light distribution
- very high colour rendering
- can be individually combined and dimmed with power supply unit

**Application Area**  
 Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

|                         |                                                  |                              |                                  |
|-------------------------|--------------------------------------------------|------------------------------|----------------------------------|
| Housing                 | Aluminium, Steel, PMMA - Polymethyl methacrylate | Light Beam Angle             | 120 Degree                       |
| Surface                 | Powder-coated, Fine structure, Matt              | Control                      | Dimmable via optional controller |
| Colour Temperature      | 3000 K                                           | CRI (Ra)                     | 90                               |
| Rated Input Voltage     | 24 V/DC                                          | Accumulator/Battery Operated | No                               |
| Power Supply Unit incl. | No                                               | IK Protection Class          | IK05                             |

| Article | Housing Color                  |  | Luminous Flux | Length | Width  | Height  | cut out    | Power  | Price   |
|---------|--------------------------------|--|---------------|--------|--------|---------|------------|--------|---------|
| 565446  | <input type="checkbox"/> White |  | 960 lm        | 110 mm | 110 mm | 20.5 mm | 90x90 mm   | 14.0 W | € 43.95 |
| 565447  | <input type="checkbox"/> White |  | 1510 lm       | 180 mm | 180 mm | 21 mm   | 155x155 mm | 23.0 W | € 54.95 |
| 565448  | <input type="checkbox"/> White |  | 2010 lm       | 237 mm | 237 mm | 21 mm   | 215x215 mm | 30.0 W | € 71.95 |
| 565449  | <input type="checkbox"/> White |  | 2410 lm       | 398 mm | 398 mm | 20 mm   | 380x380 mm | 37.0 W | € 95.95 |



Accessories

|        |                                                                  |  |          |
|--------|------------------------------------------------------------------|--|----------|
| 843502 | RF-smart, starter set RGBW/CCT, 12-48 V, 20 A incl. remote, IP20 |  | € 79.95  |
| 862166 | BASIC, CV, Q8H-24-100 W                                          |  | € 77.95  |
| 843343 | DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6                      |  | € 75.95  |
| 843344 | DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8                      |  | € 75.95  |
| 843037 | Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)                   |  | € 143.95 |
| 843279 | MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A    |  | € 91.95  |

Accessories for 565446

|        |                                              |  |         |
|--------|----------------------------------------------|--|---------|
| 862234 | FLAT, CV, UT 24 V/20 W                       |  | € 20.95 |
| 930967 | Reducing ring round 130/70 mm, Traffic white |  | € 7.95  |
| 931043 | Reducing ring round 130/70 mm, Signal white  |  | € 7.95  |

Accessories for 565447, 565448

|        |                        |  |         |
|--------|------------------------|--|---------|
| 862163 | BASIC, CV, Q8H-24-40 W |  | € 37.95 |
|--------|------------------------|--|---------|

Accessories for 565449

|        |                        |  |         |
|--------|------------------------|--|---------|
| 862122 | FLAT, CV, UT 24 V/50 W |  | € 41.95 |
|--------|------------------------|--|---------|





## REDUCING RINGS FOR RECESSED LIGHTS

- Renovation solution for excessively large ceiling cut-outs
- Flexible adaptation to ceiling cut-outs
- suitable for 3-30 mm thick hollow ceilings
- toolless installation possible

|                |                                        |        |                    |        |           |                |         |
|----------------|----------------------------------------|--------|--------------------|--------|-----------|----------------|---------|
| Housing Height | Metal 1.7 mm                           |        | Installation Depth |        | 41 mm     |                |         |
| Article        | Housing Color                          | Length | Width              | Ø      | Cut Out Ø | Inner diameter | Price   |
| 930967         | <input type="checkbox"/> Traffic white |        |                    | 130 mm | 95 mm     | 70 mm          | € 7.95  |
| 931043         | <input type="checkbox"/> Signal white  |        |                    | 130 mm | 95 mm     | 70 mm          | € 7.95  |
| 930968         | <input type="checkbox"/> Traffic white |        |                    | 155 mm | 120 mm    | 95 mm          | € 9.95  |
| 931044         | <input type="checkbox"/> Signal white  |        |                    | 155 mm | 120 mm    | 95 mm          | € 9.95  |
| 930969         | <input type="checkbox"/> Traffic white |        |                    | 210 mm | 175 mm    | 135 mm         | € 10.95 |
| 931045         | <input type="checkbox"/> Signal white  |        |                    | 210 mm | 175 mm    | 135 mm         | € 10.95 |
| 930970         | <input type="checkbox"/> Traffic white |        |                    | 240 mm | 205 mm    | 180 mm         | € 13.95 |
| 931046         | <input type="checkbox"/> Signal white  |        |                    | 240 mm | 205 mm    | 180 mm         | € 13.95 |
| 930971         | <input type="checkbox"/> Traffic white |        |                    | 280 mm | 245 mm    | 210 mm         | € 18.95 |
| 931047         | <input type="checkbox"/> Signal white  |        |                    | 280 mm | 245 mm    | 210 mm         | € 18.95 |
| 930972         | <input type="checkbox"/> Traffic white | 130 mm | 130 mm             |        | 95 mm     | 70 mm          | € 7.95  |
| 931048         | <input type="checkbox"/> Signal white  | 130 mm | 130 mm             |        | 95 mm     | 70 mm          | € 7.95  |
| 930973         | <input type="checkbox"/> Traffic white | 155 mm | 155 mm             |        | 120 mm    | 95 mm          | € 9.95  |
| 931049         | <input type="checkbox"/> Signal white  | 155 mm | 155 mm             |        | 120 mm    | 95 mm          | € 9.45  |
| 930974         | <input type="checkbox"/> Traffic white | 210 mm | 210 mm             |        | 175 mm    | 135 mm         | € 10.95 |
| 931050         | <input type="checkbox"/> Signal white  | 210 mm | 210 mm             |        | 175 mm    | 135 mm         | € 10.95 |
| 930975         | <input type="checkbox"/> Traffic white | 240 mm | 240 mm             |        | 205 mm    | 180 mm         | € 13.95 |
| 931051         | <input type="checkbox"/> Signal white  | 240 mm | 240 mm             |        | 205 mm    | 180 mm         | € 13.95 |
| 930976         | <input type="checkbox"/> Traffic white | 280 mm | 280 mm             |        | 245 mm    | 210 mm         | € 18.95 |
| 931052         | <input type="checkbox"/> Signal white  | 280 mm | 280 mm             |        | 245 mm    | 210 mm         | € 18.95 |



### MODULAR SYSTEM COB 31 W

The MODULAR recessed ceiling light range offers a wide range of possible applications. Whether virtually invisible or with a prominent frame - these modules are as flexible as you want them to be. By replacing the reflectors, different light beams can be created and by using filters / diffusers, you can individually select or retrofit your lighting mood. We offer the LED modules in warm and neutral white. This gives you the option of adapting the individual elements to local requirements in order to create your perfect lighting situation.






## MODULAR SYSTEM COB 31 W

· Lamp can be customised with comprehensive accessories

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|                     |            |                         |           |
|---------------------|------------|-------------------------|-----------|
| Housing             | Aluminium  | Power Supply Unit incl. | No        |
| Height              | 103 mm     | Light Beam Angle        | 60 Degree |
| Ø                   | 85 mm      | CRI (Ra)                | 90        |
| Power               | 31 W       | Rated Current           | 900 mA    |
| Rated Input Voltage | 35-36 V/DC |                         |           |



565352

| Article       | Housing Color | Colour Temperature | Luminous Flux | Price   |
|---------------|---------------|--------------------|---------------|---------|
| <b>565352</b> | Grey          | 3000 K             | 3660 lm       | € 99.95 |
| <b>565353</b> | Grey          | 4000 K             | 3850 lm       | € 99.95 |



### Accessories

|               |                                                        |  |         |
|---------------|--------------------------------------------------------|--|---------|
| <b>930084</b> | 17° reflector for modular system COB                   |  | € 15.95 |
| <b>930085</b> | 40° reflector for modular system COB                   |  | € 15.95 |
| <b>930087</b> | Frosted glass diffuser for modular system COB          |  | € 0.95  |
| <b>930088</b> | Honeycomb filter for modular system COB                |  | € 4.95  |
| <b>930089</b> | 170 mm mounting ring for modular system COB, 150 mm    |  | € 17.95 |
| <b>930090</b> | 230 mm mounting ring for modular system COB, 220 mm    |  | € 23.95 |
| <b>930091</b> | Swivel mounting ring for modular system COB, 115 mm    |  | € 25.95 |
| <b>930092</b> | Cardan frame 1-fold for modular system COB, 130x130 mm |  | € 29.95 |
| <b>930093</b> | Cardan frame 2-fold for modular system COB, 130x240 mm |  | € 53.95 |
| <b>930094</b> | Cardan insert without frame for modular system COB     |  | € 71.95 |
| <b>930095</b> | Cardan insert without frame for modular system COB     |  | € 71.95 |
| <b>930096</b> | Cardan insert without frame for modular system COB     |  | € 92.95 |
| <b>930097</b> | Cardan insert without frame for modular system COB     |  | € 92.95 |
| <b>862157</b> | BASIC, CC, V8-40-900/40 W                              |  | € 23.95 |
| <b>862264</b> | BASIC, DIM, CC, D090040NTF/40 W                        |  | € 37.95 |
| <b>862192</b> | BASIC, DIM, Multi CC, IE-45D                           |  | € 55.95 |



### Lighting design

Interested in our lighting design service?


Your contact person will be happy to answer any questions you may have.



## ZAURAK

Recessed ceiling lights can be subtly integrated into private and commercial spaces, yet when it comes to replacing, the existing ceiling cut-out can present a problem. The ZAURAK series comes with an adjustable mounting clip, which can be used with larger and smaller ceiling cut-outs. In addition, the ZAURAK has a low installation depth for universal use. Two exchangeable cover rings in silver and black are included in the scope of delivery.






## ZAURAK

- Light colour adjustable in three stages
- Output adjustable in two stages
- Adjustable recess dimension 65-270 mm [model-dependent]
- Ideal renovation solution for ceiling recesses
- Incl. two colour rings [black/silver]

### Application Area

Bathroom / WC, Corridor / stairwell, Home / Living, Refurbishment

|                         |                  |                     |            |
|-------------------------|------------------|---------------------|------------|
| Housing                 | Plastic          | Light Beam Angle    | 110 Degree |
| Colour Temperature      | 3000/4000/5700 K | CRI (Ra)            | 80         |
| Rated Input Voltage     | 220-240 V/AC     | IK Protection Class | IK03       |
| Power Supply Unit incl. | Yes              |                     |            |



565327

| Article | Housing Color                  |          | Luminous Flux     | Height  | Ø      | Power Selectable | Cut Out Ø  | Price   |
|---------|--------------------------------|----------|-------------------|---------|--------|------------------|------------|---------|
| 565327  | <input type="checkbox"/> White | WW NW CW | 900/960/840 lm    | 20.5 mm | 180 mm | 8.0 W / 12.0 W   | 65-160 mm  | € 37.95 |
| 565328  | <input type="checkbox"/> White | WW NW CW | 1440/1710/1530 lm | 21.5 mm | 220 mm | 12.0 W / 18.0 W  | 120-200 mm | € 45.95 |
| 565329  | <input type="checkbox"/> White | WW NW CW | 2125/2375/2250 lm | 25 mm   | 300 mm | 18.0 W / 25.0 W  | 150-270 mm | € 63.95 |




### Onlineshop


You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.




# insert panels



☐ page 146




☐ page 147




☐ page 148



☐ page 149



☐ page 152




☐ page 153




☐ page 154




☐ page 156



☐ page 157



☐ page 158



☐ page 159



## BACKLIGHT PANELS [SERIES: BASIC AND PRO] – TECHNOLOGY AND ADVANTAGES

Not every LED panel is built the same! There are technologies exist to produce homogeneous, flat and glare-free light. Each method has its own advantages and disadvantages and depends on the individual user requirements and budget needs. For example, the LED panels from our BASIC and PRO series rely on backlight technology.

In LED panels with backlight technology, the LEDs - behind the diffuser - are evenly spread over the entire panel surface and shine directly downwards. This design has a decisive advantage: no other components are required to direct the light in the desired direction [downwards], because the LEDs are already in the »right« position. The simpler design results above all in better efficiency and a lower price as well as a longer lifetime. At the same time you do not have to worry about possible yellowing of the light guide plate, which is often used in some cheaper sidelight panels.

The disadvantages: Due to their design, the LED elements require more space, which is why backlight panels are curved towards the backside and therefore have a higher thickness with it. For this [optical] reason, backlight panels are only suitable to a limited extent for suspension from the ceiling. Their smaller beam angle [approx. 90°] results in a smaller illuminated area.

### advantages

- better efficiency
- longer lifetime
- lower costs
- much more attractive price/performance ratio
- no light guide plates that are prone to yellowing

### disadvantages

- higher thickness
- lower beam angle [approx. 90°]
- less suitable for suspension
- thicker packaging

In the following picture you can see the typical structure of a backlight LED panel.






BASIC

- BEG-eligible
- cost-effective, ready-to-connect solution
- for insertion into grid ceilings
- Mounting in surface-mounted and recessed frames possible
- Refurbishment solution for T5/T8 louvre luminaires
- Incl. power supply unit CC, 900mA, 33-38V, 36W

Application Area


Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

|                         |              |                     |            |
|-------------------------|--------------|---------------------|------------|
| Housing                 | Aluminium    | Light Beam Angle    | 120 Degree |
| Height                  | 32 mm        | CRI (Ra)            | 80         |
| Rated Input Voltage     | 220-240 V/AC | IK Protection Class | IK03       |
| Power Supply Unit incl. | Yes          | UGR                 | 22         |



100140

| Article | Housing Color                  | Colour Temperature | Luminous Flux | Length  | Width  | Power  | Price   |
|---------|--------------------------------|--------------------|---------------|---------|--------|--------|---------|
| 100143  | <input type="checkbox"/> White | 3000 K             | 3900 lm       | 1195 mm | 295 mm | 30.5 W | € 39.95 |
| 100149  | <input type="checkbox"/> White | 3000 K             | 3900 lm       | 595 mm  | 595 mm | 30.5 W | € 34.95 |
| 100140  | <input type="checkbox"/> White | 3000 K             | 3900 lm       | 620 mm  | 620 mm | 30.5 W | € 35.95 |
| 100144  | <input type="checkbox"/> White | 4000 K             | 4320 lm       | 1195 mm | 295 mm | 30.5 W | € 39.95 |
| 100150  | <input type="checkbox"/> White | 4000 K             | 4320 lm       | 595 mm  | 595 mm | 30.5 W | € 34.95 |
| 100141  | <input type="checkbox"/> White | 4000 K             | 4320 lm       | 620 mm  | 620 mm | 33.0 W | € 35.95 |



Accessories

|        |                                                          |  |         |
|--------|----------------------------------------------------------|--|---------|
| 930674 | Safety cable                                             |  | € 3.95  |
| 930676 | Mounting brackets for 600x600/300x1,200 mm backlit panel |  | € 3.95  |
| 862192 | BASIC, DIM, Multi CC, IE-45D                             |  | € 55.95 |

Accessories for 100140, 100141

|        |                                            |  |         |
|--------|--------------------------------------------|--|---------|
| 930665 | Surface-mounted frame for 620x620 mm panel |  | € 47.95 |
| 930668 | Recessed frame for 620x620 mm panel        |  | € 45.95 |

Accessories for 100143, 100144

|        |                                              |  |         |
|--------|----------------------------------------------|--|---------|
| 930666 | Surface-mounted frame for 300x1,200 mm panel |  | € 55.95 |
| 930669 | Recessed frame for 300x1,200 mm panel        |  | € 53.95 |

Accessories for 100149, 100150

|        |                                            |  |         |
|--------|--------------------------------------------|--|---------|
| 930664 | Surface-mounted frame for 595x595 mm panel |  | € 43.95 |
| 930667 | Recessed frame for 595x595 mm panel        |  | € 41.95 |






BASIC FLEX


- Eligible for BEG German federal funding for energy-efficient buildings
- Light colour adjustable in three stages
- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Renovation solution for T5/T8 louver lights
- Incl. CC power supply, 900mA, 33-38 V, 36 W

**Application Area**  
Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

|                     |                   |                         |            |
|---------------------|-------------------|-------------------------|------------|
| Housing             | Aluminium         | Power Supply Unit incl. | Yes        |
| Colour Temperature  | 3000/4000/6000 K  | Light Beam Angle        | 120 Degree |
| Luminous Flux       | 3900/4320/4140 lm | CRI (Ra)                | 80         |
| Power               | 30.5 W            | IK Protection Class     | IK03       |
| Rated Input Voltage | 220-240 V/AC      | UGR                     | 22         |



| Article | Housing Color                  |                                                                                                | Length | Width   | Height | Power  | Power Selectable | Price   |
|---------|--------------------------------|------------------------------------------------------------------------------------------------|--------|---------|--------|--------|------------------|---------|
| 100145  | <input type="checkbox"/> White | <input checked="" type="checkbox"/> WW <input type="checkbox"/> NW <input type="checkbox"/> CW | 295 mm | 1195 mm | 32 mm  | 30.5 W |                  | € 43.95 |
| 100142  | <input type="checkbox"/> White | <input checked="" type="checkbox"/> WW <input type="checkbox"/> NW <input type="checkbox"/> CW | 620 mm | 620 mm  | 25 mm  |        | 30.5 W           | € 38.95 |



Accessories


|        |                                                          |                                                                                     |         |
|--------|----------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 930674 | Safety cable                                             |  | € 3.95  |
| 930676 | Mounting brackets for 600x600/300x1,200 mm backlit panel |  | € 3.95  |
| 862264 | BASIC, DIM, CC, D090040NTF/40 W                          |  | € 37.95 |
| 862192 | BASIC, DIM, Multi CC, IE-45D                             |  | € 55.95 |

Accessories for 100142

|        |                                            |                                                                                     |         |
|--------|--------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 930665 | Surface-mounted frame for 620x620 mm panel |  | € 47.95 |
| 930668 | Recessed frame for 620x620 mm panel        |  | € 45.95 |

Accessories for 100145

|        |                                              |                                                                                     |         |
|--------|----------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 930666 | Surface-mounted frame for 300x1,200 mm panel |  | € 55.95 |
| 930669 | Recessed frame for 300x1,200 mm panel        |  | € 53.95 |




BASIC OFFICE

- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Suitable for workplaces with screens in accordance with EN 12464-1 BAP65
- Microprismatic surface structure
- Suitable for office spaces, reception rooms and hallways
- Good value, ready-to-install solution
- Incl. CC power supply, 900mA, 33-38 V, 36 W

Application Area


Office / conference, Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

|                     |              |                         |           |
|---------------------|--------------|-------------------------|-----------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes       |
| Colour Temperature  | 4000 K       | Light Beam Angle        | 90 Degree |
| Luminous Flux       | 4000 lm      | CRI (Ra)                | 80        |
| Height              | 32 mm        | IK Protection Class     | IK03      |
| Power               | 30.5 W       | UGR                     | 19        |
| Rated Input Voltage | 220-240 V/AC |                         |           |



100146

| Article | Housing Color |    | Length | Width   | Height | Power  | Power Selectable | Price   |
|---------|---------------|----|--------|---------|--------|--------|------------------|---------|
| 100147  | White         | NW | 295 mm | 1195 mm | 32 mm  | 30.5 W |                  | € 42.95 |
| 100151  | White         | NW | 595 mm | 595 mm  | 25 mm  |        | 30.5 W           | € 37.95 |
| 100146  | White         | NW | 620 mm | 620 mm  | 25 mm  |        | 30.5 W           | € 39.95 |



Accessories

|        |                                                          |  |         |
|--------|----------------------------------------------------------|--|---------|
| 930674 | Safety cable                                             |  | € 3.95  |
| 930676 | Mounting brackets for 600x600/300x1,200 mm backlit panel |  | € 3.95  |
| 862264 | BASIC, DIM, CC, D090040NTF/40 W                          |  | € 37.95 |
| 862192 | BASIC, DIM, Multi CC, IE-45D                             |  | € 55.95 |

Accessories for 100146

|        |                                            |  |         |
|--------|--------------------------------------------|--|---------|
| 930665 | Surface-mounted frame for 620x620 mm panel |  | € 47.95 |
| 930668 | Recessed frame for 620x620 mm panel        |  | € 45.95 |

Accessories for 100147

|        |                                              |  |         |
|--------|----------------------------------------------|--|---------|
| 930666 | Surface-mounted frame for 300x1,200 mm panel |  | € 55.95 |
| 930669 | Recessed frame for 300x1,200 mm panel        |  | € 53.95 |

Accessories for 100151

|        |                                            |  |         |
|--------|--------------------------------------------|--|---------|
| 930664 | Surface-mounted frame for 595x595 mm panel |  | € 43.95 |
| 930667 | Recessed frame for 595x595 mm panel        |  | € 41.95 |




## PRO OFFICE

- Eligible for BEG German federal funding for energy-efficient buildings
- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Highly efficient solution
- Renovation solution for T5/T8 louver lights
- Suitable for office spaces/reception rooms/hallways
- Suitable for workplaces with screens in accordance with EN 12464-1 BAP65
- Microprismatic surface structure
- Can be combined with a power supply unit as desired [excl.]

### Application Area

Office / conference, Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

|                         |            |                     |                                         |
|-------------------------|------------|---------------------|-----------------------------------------|
| Housing                 | Aluminium  | Control             | Dimmable via optional power supply unit |
| Height                  | 32 mm      | CRI (Ra)            | 80                                      |
| Power                   | 17 W       | Rated Current       | 450 mA                                  |
| Rated Input Voltage     | 35-40 V/DC | IK Protection Class | IK03                                    |
| Power Supply Unit incl. | No         | UGR                 | 19                                      |
| Light Beam Angle        | 90 Degree  |                     |                                         |



100084

| Article       | Housing Color                  | Colour Temperature | Luminous Flux | Length  | Width   | EEI | Price   |
|---------------|--------------------------------|--------------------|---------------|---------|---------|-----|---------|
| <b>100084</b> | <input type="checkbox"/> White | 3000 K             | 2880 lm       | 620 mm  | 620 mm  | D   | € 54.95 |
| <b>100089</b> | <input type="checkbox"/> White | 3000 K             | 2880 lm       | 1195 mm | 295 mm  | E   | € 56.95 |
| <b>100122</b> | <input type="checkbox"/> White | 4000 K             | 3200 lm       | 295 mm  | 1195 mm | D   | € 55.95 |
| <b>100148</b> | <input type="checkbox"/> White | 4000 K             | 3200 lm       | 595 mm  | 595 mm  | C   | € 49.95 |
| <b>100088</b> | <input type="checkbox"/> White | 4000 K             | 3200 lm       | 620 mm  | 620 mm  | D   | € 54.95 |



### Accessories

|               |                                                          |  |         |
|---------------|----------------------------------------------------------|--|---------|
| <b>930674</b> | Safety cable                                             |  | € 3.95  |
| <b>930676</b> | Mounting brackets for 600x600/300x1,200 mm backlit panel |  | € 3.95  |
| <b>862257</b> | QUICK, CC, 450 mA, 30-40 V, 20 W                         |  | € 29.95 |
| <b>862191</b> | BASIC, DIM, Multi CC, IE-25D                             |  | € 51.95 |

### Accessories for 100084, 100088

|               |                                            |  |         |
|---------------|--------------------------------------------|--|---------|
| <b>930665</b> | Surface-mounted frame for 620x620 mm panel |  | € 47.95 |
| <b>930668</b> | Recessed frame for 620x620 mm panel        |  | € 45.95 |

### Accessories for 100089, 100122

|               |                                              |  |         |
|---------------|----------------------------------------------|--|---------|
| <b>930666</b> | Surface-mounted frame for 300x1,200 mm panel |  | € 55.95 |
| <b>930669</b> | Recessed frame for 300x1,200 mm panel        |  | € 53.95 |

### Accessories for 100148

|               |                                            |  |         |
|---------------|--------------------------------------------|--|---------|
| <b>930664</b> | Surface-mounted frame for 595x595 mm panel |  | € 43.95 |
| <b>930667</b> | Recessed frame for 595x595 mm panel        |  | € 41.95 |

## SIDELIGHT-PANELS [SERIES: STANDARD] – TECHNOLOGY AND ADVANTAGES

Not every LED panel is built the same! There are technologies exist to produce homogeneous, flat light. Each method has its own advantages and disadvantages and depends on the individual user requirements and budget needs. For example LED panels from our standard series use sidelight technology.

Unlike backlight panels, the LEDs are not spread over the entire panel surface, but are located on the side of the aluminum frame of the luminaire. Depending on the model and version, only one, two or all four sides are equipped with LED stripes. What all edgelit or sidelight panels have in common is that the LEDs shine into the center of the panel. The light must therefore still be redirected in order to radiate downwards.

The most important element here is the light guide plate. This is usually made of acrylic glass [also PMMA (polymethyl methacrylate), a transparent thermoplastic material], which distributes the light evenly over the entire surface and deflects it downwards. In addition, acrylic glass does not yellow with age. In addition to the light guide plate, which deflects the light by means of small laser-engraved dots, the additional reflector, similar to the one the backlight panel, and the diffuser also contribute to the significantly more complex structure of a sidelight panel [see picture to the right].

The great advantage is the lower construction thickness, which is why edgelit panels can be integrated more discreetly in rooms and are better suited as pendant variants. At the same time, the panels allow a higher beam angle [approx. 120°] what results in a larger illuminated area. The disadvantages: Edgelit panels are more expensive and offer less efficiency and lifetime compared to backlight panels.

### advantages

- lower thickness
- higher beam angle [approx. 120°]
- more suitable for suspension
- thinner packing

### disadvantages

- higher costs
- worse price/performance ratio
- average lifetime
- lower efficiency

In the following picture you can see the typical structure of a sidelight LED panel.



aluminium frame mithit LEDs

microprismatic diffusing lens

diffuser disc

light guide panel

reflector insert

EVA [ethylene vinyl acetate copolymer] foam

back panel




STANDARD FLEX

- Light colour adjustable in three stages
- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Suitable for pendant mounting
- Suitable for reception rooms and hallways
- Can be combined with a power supply unit as desired [excl.]

Application Area

Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

|                         |                  |                     |                                         |
|-------------------------|------------------|---------------------|-----------------------------------------|
| Housing                 | Aluminium        | Control             | Dimmable via optional power supply unit |
| Colour Temperature      | 3000/4000/6000 K | CRI (Ra)            | 90                                      |
| Height                  | 10 mm            | IK Protection Class | IK03                                    |
| Rated Input Voltage     | 33-38 V/DC       | UGR                 | 22                                      |
| Power Supply Unit incl. | No               |                     |                                         |
| Light Beam Angle        | 120 Degree       |                     |                                         |



100123

| Article | Housing Color |  | Luminous Flux     | Length  | Width  | Power  | Rated Current | Price    |
|---------|---------------|--|-------------------|---------|--------|--------|---------------|----------|
| 100125  | White         |  | 3570/3990/3780 lm | 1195 mm | 295 mm | 36.0 W | 1050 mA       | € 66.95  |
| 100123  | White         |  | 3780/4200/4000 lm | 620 mm  | 620 mm | 36.0 W | 1050 mA       | € 63.95  |
| 100139  | White         |  | 5300/6000/5700 lm | 1195 mm | 595 mm | 51.5 W | 1500 mA       | € 131.95 |
| 100154  | White         |  | 5300/6000/5700 lm | 1240 mm | 620 mm | 51.5 W | 1500 mA       | € 135.95 |



Accessories

|        |              |  |        |
|--------|--------------|--|--------|
| 930674 | Safety cable |  | € 3.95 |
|--------|--------------|--|--------|

Accessories for 100123

|        |                                             |  |         |
|--------|---------------------------------------------|--|---------|
| 930665 | Surface-mounted frame for 620x620 mm panel  |  | € 47.95 |
| 930670 | Recessed frame for 620x620 mm backlit panel |  | € 47.95 |

Accessories for 100123, 100125

|        |                                                 |  |         |
|--------|-------------------------------------------------|--|---------|
| 930672 | Cable suspension for 620x620/300x1,200 mm panel |  | € 17.95 |
| 862193 | BASIC, DIM, Multi CC, IE-45HD                   |  | € 55.95 |
| 862258 | QUICK, CC, 1,050 mA, 25-40 V, 42 W              |  | € 37.95 |

Accessories for 100125

|        |                                               |  |         |
|--------|-----------------------------------------------|--|---------|
| 930666 | Surface-mounted frame for 300x1,200 mm panel  |  | € 55.95 |
| 930671 | Recessed frame for 300x1,200 mm backlit panel |  | € 55.95 |

Accessories for 100139

|        |                                               |  |         |
|--------|-----------------------------------------------|--|---------|
| 930675 | Surface-mounted frame for 600x1,200 mm panel  |  | € 55.95 |
| 930688 | Recessed frame for 600x1,200 mm backlit panel |  | € 67.95 |

Accessories for 100139, 100154

|        |                                         |  |         |
|--------|-----------------------------------------|--|---------|
| 930673 | Cable suspension for 600x1,200 mm panel |  | € 25.95 |
| 862194 | BASIC, DIM, Multi CC, IE-75D            |  | € 67.95 |
| 862259 | QUICK, CC, 1,500 mA, 27-42 V, 60 W      |  | € 45.95 |






STANDARD OFFICE

- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Suitable for pendant mounting
- Suitable for office spaces, reception rooms, hallways
- Suitable for workplaces with screens in accordance with EN 12464-1 BAP65
- Microprismatic surface structure

**Application Area**  
Office / conference, Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

|                         |            |                     |                                         |
|-------------------------|------------|---------------------|-----------------------------------------|
| Housing                 | Aluminium  | Light Beam Angle    | 90 Degree                               |
| Colour Temperature      | 4000 K     | Control             | Dimmable via optional power supply unit |
| Luminous Flux           | 4200 lm    | CRI (Ra)            | 90                                      |
| Height                  | 9 mm       | Rated Current       | 1050 mA                                 |
| Power                   | 36 W       | IK Protection Class | IK03                                    |
| Rated Input Voltage     | 33-38 V/DC | UGR                 | 19                                      |
| Power Supply Unit incl. | No         |                     |                                         |



100124

| Article | Housing Color                                                                                                      | Length  | Width  | EEI                                                                                   | Price   |
|---------|--------------------------------------------------------------------------------------------------------------------|---------|--------|---------------------------------------------------------------------------------------|---------|
| 100138  | <input type="checkbox"/> White  | 1195 mm | 295 mm |  | € 66.95 |
| 100124  | <input type="checkbox"/> White  | 620 mm  | 620 mm |  | € 63.95 |



Accessories

|        |                                                 |                                                                                     |         |
|--------|-------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 930672 | Cable suspension for 620x620/300x1,200 mm panel |  | € 17.95 |
| 930674 | Safety cable                                    |  | € 3.95  |
| 862258 | QUICK, CC, 1,050 mA, 25-40 V, 42 W              |  | € 37.95 |
| 862193 | BASIC, DIM, Multi CC, IE-45HD                   |  | € 55.95 |

Accessories for 100124

|        |                                             |                                                                                     |         |
|--------|---------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 930665 | Surface-mounted frame for 620x620 mm panel  |  | € 47.95 |
| 930670 | Recessed frame for 620x620 mm backlit panel |  | € 47.95 |

Accessories for 100138

|        |                                               |                                                                                     |         |
|--------|-----------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 930666 | Surface-mounted frame for 300x1,200 mm panel  |  | € 55.95 |
| 930671 | Recessed frame for 300x1,200 mm backlit panel |  | € 55.95 |



## STANDARD SANO

The SANO LED panel is a simple and cost-effective solution for renovating old T5/T8 louver lights. Its slim design enables seamless integration into existing installations without the need for additional adjustments.

Due to its eligibility for BEG German federal funding for energy-efficient buildings, the SANO insert panel is a sustainable and economically attractive solution. The panel provides uniform illumination with high colour reproduction values and minimises glare, which is particularly important in commercial environments.





**STANDARD SANO**

- Eligible for BEG German federal funding for energy-efficient buildings
- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Suitable for pendant mounting
- Renovation solution for T5/T8 louver lights
- Can be combined with a power supply unit as desired [excl.]

**Application Area**

Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

|                    |                          |                         |                                         |
|--------------------|--------------------------|-------------------------|-----------------------------------------|
| Housing            | Aluminium, Polycarbonate | Rated Input Voltage     | 35-40 V/DC                              |
| Colour Temperature | 4000 K                   | Power Supply Unit incl. | No                                      |
| Luminous Flux      | 4900 lm                  | Light Beam Angle        | 120 Degree                              |
| Length             | 1495 mm                  | Control                 | Dimmable via optional power supply unit |
| Width              | 295 mm                   | CRI (Ra)                | 90                                      |
| Height             | 10 mm                    | Rated Current           | 1050 mA                                 |
| Power              | 33 W                     | UGR                     | 22                                      |

| Article       | Housing Color                                                                                                      | Price           |
|---------------|--------------------------------------------------------------------------------------------------------------------|-----------------|
| <b>100158</b> | <input type="checkbox"/> White  | <b>€ 107.95</b> |




**Accessories**

|               |                                              |
|---------------|----------------------------------------------|
| <b>930795</b> | Surface-mounted frame for 1,500x300 mm panel |
| <b>930796</b> | Recessed frame for 1,500x300 mm panel        |
| <b>930673</b> | Cable suspension for 600x1,200 mm panel      |
| <b>930674</b> | Safety cable                                 |
| <b>862258</b> | QUICK, CC, 1,050 mA, 25-40 V, 42 W           |

|                                                                                     |                |
|-------------------------------------------------------------------------------------|----------------|
|  | <b>€ 63.95</b> |
|  | <b>€ 55.95</b> |
|  | <b>€ 25.95</b> |
|  | <b>€ 3.95</b>  |
|  | <b>€ 37.95</b> |



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.



## OFFICE FLEX


- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Suitable for pendant mounting
- Suitable for office spaces, reception rooms, hallways
- Light colour adjustable in three stages
- Suitable for workplaces with screens in accordance with EN 12464-1 BAP65
- Microprismatic surface structure



### Application Area


Office / conference, Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

|                         |                  |                     |                                              |
|-------------------------|------------------|---------------------|----------------------------------------------|
| Housing                 | Aluminium        | Light Beam Angle    | 100 Degree                                   |
| Colour Temperature      | 3000/4000/5700 K | Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Height                  | 10 mm            | CRI (Ra)            | 90                                           |
| Power                   | 40 W             | IK Protection Class | IK08                                         |
| Rated Input Voltage     | 220-240 V/AC     | UGR                 | 19                                           |
| Power Supply Unit incl. | Yes              |                     |                                              |



100078

| Article | Housing Color                                        | Luminous Flux | Length  | Width  | Price    |
|---------|------------------------------------------------------|---------------|---------|--------|----------|
| 100078  | <input type="checkbox"/> White <span>WW NW CW</span> | 3300 lm       | 620 mm  | 620 mm | € 143.95 |
| 100079  | <input type="checkbox"/> White <span>WW NW CW</span> | 3500 lm       | 1195 mm | 295 mm | € 175.95 |



### Accessories

862193 BASIC, DIM, Multi CC, IE-45HD



€ 55.95

### Accessories for 100078

930665 Surface-mounted frame for 620x620 mm panel



€ 47.95

930670 Recessed frame for 620x620 mm backlit panel



€ 47.95

### Accessories for 100079

930666 Surface-mounted frame for 300x1,200 mm panel



€ 55.95

930671 Recessed frame for 300x1,200 mm backlit panel




€ 55.95



### Technical data sheet

New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.

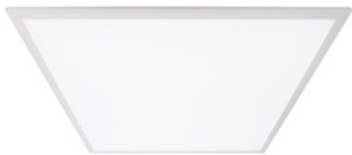


HCL

- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Suitable for 24 V HCL controllers
- Suitable for event spaces/reception rooms, hallways
- Low housing depth

Application Area

Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

|                    |             |                         |                                  |
|--------------------|-------------|-------------------------|----------------------------------|
| Housing            | Aluminium   | Rated Input Voltage     | 24 V/DC                          |
| Colour Temperature | 3000-5500 K | Power Supply Unit incl. | No                               |
| Luminous Flux      | 3551 lm     | Light Beam Angle        | 120 Degree                       |
| Length             | 620 mm      | Control                 | Dimmable via optional controller |
| Width              | 620 mm      | CRI (Ra)                | 80                               |
| Height             | 10 mm       |                         |                                  |
| Power              | 49.5 W      |                         |                                  |



100032

| Article | Housing Color                  | Colour Temperature                                                                        | Price    |
|---------|--------------------------------|-------------------------------------------------------------------------------------------|----------|
| 100032  | <input type="checkbox"/> White | <input checked="" type="checkbox"/> WW <input checked="" type="checkbox"/> CW 3000-5500 K | € 135.95 |





Accessories

|        |                                                                          |
|--------|--------------------------------------------------------------------------|
| 930665 | Surface-mounted frame for 620x620 mm panel                               |
| 930670 | Recessed frame for 620x620 mm backlit panel                              |
| 862122 | FLAT, CV, UT 24 V/50 W                                                   |
| 862166 | BASIC, CV, Q8H-24-100 W                                                  |
| 843501 | RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control |

|  |         |
|--|---------|
|  | € 47.95 |
|  | € 47.95 |
|  | € 41.95 |
|  | € 77.95 |
|  | € 79.95 |



**5-year guarantee**  
Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

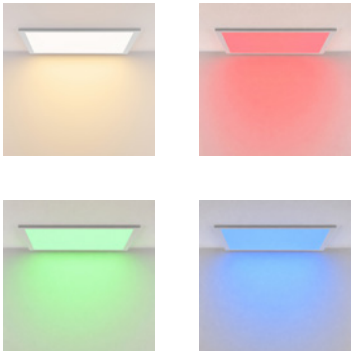


## STANDARD RGB CCT

- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Suitable for event spaces, reception rooms, hallways
- Suitable for 24 V colour and HCL controllers

### Application Area

Reception / Communication, Object lighting / architecture, Wellness / Spa / Gym, Advertising lighting, Hotel / catering, Theatre / event, Refurbishment

|                         |             |                     |                                  |
|-------------------------|-------------|---------------------|----------------------------------|
| Housing                 | Aluminium   | Light Beam Angle    | 110 Degree                       |
| Colour Temperature      | 2700-6500 K | Control             | Dimmable via optional controller |
| Luminous Flux           | 5000 lm     | CRI (Ra)            | 90                               |
| Height                  | 12.5 mm     | IK Protection Class | IK05                             |
| Power                   | 88 W        | UGR                 | 19                               |
| Rated Input Voltage     | 24 V/DC     |                     |                                  |
| Power Supply Unit incl. | No          |                     |                                  |



100160

| Article | Housing Color                                                                                                       | Length | Width  | Price    |
|---------|---------------------------------------------------------------------------------------------------------------------|--------|--------|----------|
| 100160  | <input type="checkbox"/> White <input type="checkbox"/> RGB <input type="checkbox"/> WW <input type="checkbox"/> CW | 595 mm | 595 mm | € 164.95 |
| 100159  | <input type="checkbox"/> White <input type="checkbox"/> RGB <input type="checkbox"/> WW <input type="checkbox"/> CW | 620 mm | 620 mm | € 167.95 |



### Accessories for 100159

- 930665** Surface-mounted frame for 620x620 mm panel
- 930668** Recessed frame for 620x620 mm panel





### Accessories for 100160

- 930664** Surface-mounted frame for 595x595 mm panel
- 930667** Recessed frame for 595x595 mm panel
- 930907** Recessed frame 600x600 for standard panels





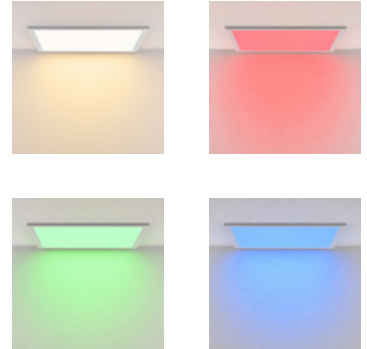


## STANDARD RGBW

- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Powerful and intense colours, incl. pastel tones
- Suitable for 24 V colour controllers
- Suitable for event spaces, reception rooms, hallways

### Application Area


Reception / Communication, Object lighting / architecture, Wellness / Spa / Gym, Advertising lighting, Hotel / catering, Theatre / event, Refurbishment

|                         |           |                  |                                  |
|-------------------------|-----------|------------------|----------------------------------|
| Housing                 | Aluminium | Light Beam Angle | 110 Degree                       |
| Height                  | 11 mm     | Control          | Dimmable via optional controller |
| Power                   | 94 W      | CRI (Ra)         | 90                               |
| Rated Input Voltage     | 24 V/DC   |                  |                                  |
| Power Supply Unit incl. | No        |                  |                                  |



100152

| Article       | Housing Color | Colour Temperature | Luminous Flux | Length | Width  | Price           |
|---------------|---------------|--------------------|---------------|--------|--------|-----------------|
| <b>100156</b> | White         | 3000 K             | 4000 lm       | 595 mm | 595 mm | <b>€ 147.95</b> |
| <b>100152</b> | White         | 3000 K             | 4000 lm       | 620 mm | 620 mm | <b>€ 151.95</b> |
| <b>100157</b> | White         | 4000 K             | 4200 lm       | 595 mm | 595 mm | <b>€ 147.95</b> |
| <b>100153</b> | White         | 4000 K             | 4200 lm       | 620 mm | 620 mm | <b>€ 151.95</b> |



### Accessories

|               |                                                                             |  |                 |
|---------------|-----------------------------------------------------------------------------|--|-----------------|
| <b>862166</b> | BASIC, CV, Q8H-24-100 W                                                     |  | <b>€ 77.95</b>  |
| <b>872091</b> | IP, CV, V6-320-24                                                           |  | <b>€ 175.95</b> |
| <b>843502</b> | RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20           |  | <b>€ 79.95</b>  |
| <b>843037</b> | Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)                              |  | <b>€ 143.95</b> |
| <b>843279</b> | MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free |  | <b>€ 91.95</b>  |

### Accessories for 100152, 100153

|               |                                            |  |                |
|---------------|--------------------------------------------|--|----------------|
| <b>930665</b> | Surface-mounted frame for 620x620 mm panel |  | <b>€ 47.95</b> |
| <b>930668</b> | Recessed frame for 620x620 mm panel        |  | <b>€ 45.95</b> |

### Accessories for 100156, 100157

|               |                                            |  |                |
|---------------|--------------------------------------------|--|----------------|
| <b>930664</b> | Surface-mounted frame for 595x595 mm panel |  | <b>€ 43.95</b> |
| <b>930667</b> | Recessed frame for 595x595 mm panel        |  | <b>€ 41.95</b> |

### Accessories for 100157

|               |                                            |  |                |
|---------------|--------------------------------------------|--|----------------|
| <b>930907</b> | Recessed frame 600x600 for standard panels |  | <b>€ 43.95</b> |
|---------------|--------------------------------------------|--|----------------|

# surface mounted wall lights



page 162



page 163



page 164



page 167



page 168






ACAMAR

**Application Area**  
Reception / Communication, Object lighting / architecture, Home / Living, Hotel / catering

|                    |           |                         |                      |
|--------------------|-----------|-------------------------|----------------------|
| Housing            | Aluminium | Base Height             | 33 mm                |
| Colour Temperature | 3000 K    | Power                   | 6.5 W                |
| Length             | 170 mm    | Rated Input Voltage     | 220-240 V/AC         |
| Width              | 100 mm    | Power Supply Unit incl. | Yes                  |
| Height             | 80 mm     | Light Beam Angle        | 105 Degree           |
| Base Length        | 120 mm    | Control                 | Trailing-edge dimmer |
| Base Width         | 60 mm     | CRI (Ra)                | 92                   |



341194

| Article | Housing Color | Luminous Flux | Price    |
|---------|---------------|---------------|----------|
| 341196  | Black, Gold   | 300 lm        | € 123.95 |
| 341194  | White         | 390 lm        | € 123.95 |
| 341195  | Silver, White | 500 lm        | € 123.95 |






APODIS

**Application Area**  
Home / Living, Reception / Communication, Home office / study, Hotel / catering

|                    |           |                         |                                              |
|--------------------|-----------|-------------------------|----------------------------------------------|
| Housing            | Aluminium | Base Height             | 100 mm                                       |
| Colour Temperature | 3000 K    | Rated Input Voltage     | 220-240 V/AC                                 |
| Length             | 76 mm     | Power Supply Unit incl. | Yes                                          |
| Width              | 61 mm     | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Base Length        | 60 mm     | CRI (Ra)                | 80                                           |
| Base Width         | 18 mm     |                         |                                              |



341200

| Article | Housing Color |    | Luminous Flux | Height | Power  | Light Beam Angle | Price    |
|---------|---------------|----|---------------|--------|--------|------------------|----------|
| 341200  | ■ Gold, Black | ww | 350 lm        | 500 mm | 10.8 W | 40 Degree        | € 184.95 |
| 341202  | ■ Gold, Black | ww | 450 lm        | 800 mm | 14.7 W | 30 Degree        | € 224.95 |






## CUBE

Little cube, big effect: The cube emits its light up and down in equal measure, drawing the eye to spacial elements and bringing structure. The compact cube made from concrete or plaster [available in the colour tones beige, grey, dark grey, white and black] with its subdued design has the essentials in focus, assuming a back seat presence.



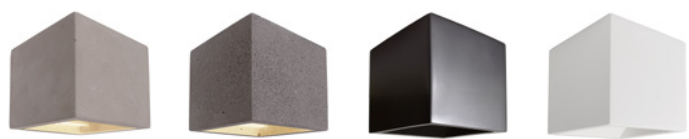

CUBE

- Exchangeable lamp
- A variety of concrete/plaster colour variants
- Can be painted over [white variant only]

Application Area

Home / Living, Hotel / catering

|             |        |                        |                                    |
|-------------|--------|------------------------|------------------------------------|
| Length      | 115 mm | Max. Power             | 1x max. 25 W                       |
| Width       | 115 mm | Rated Input Voltage    | 220-240 V/AC                       |
| Height      | 115 mm | Control                | Dimmable via optional light source |
| Base Length | 57 mm  | Colour of Light Output | White                              |
| Base Width  | 57 mm  |                        |                                    |
| Base Height | 63 mm  |                        |                                    |

| Article | Housing Color                                                                                 | Housing  | Paintable | Price   |
|---------|-----------------------------------------------------------------------------------------------|----------|-----------|---------|
| 341183  |  Grey      | Concrete |           | € 55.95 |
| 341184  |  Dark grey | Concrete |           | € 55.95 |
| 341250  |  Black     | Plaster  |           | € 57.95 |
| 341249  |  White     | Plaster  | Yes       | € 57.95 |



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.





## CAN IP20

- Customised lighting solution thanks to replaceable light source
- combinable with the extensive product family of the CAN series

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|             |           |                     |                                    |
|-------------|-----------|---------------------|------------------------------------|
| Housing     | Aluminium | Base Height         | 77 mm                              |
| Length      | 72 mm     | Max. Power          | 1x max. 7.5 W                      |
| Height      | 125 mm    | Rated Input Voltage | 220-240 V/AC                       |
| Ø           | 60 mm     | Control             | Dimmable via optional light source |
| Base Length | 12.6 mm   |                     |                                    |
| Base Width  | 40 mm     |                     |                                    |

| Article       | Housing Color | Price          |
|---------------|---------------|----------------|
| <b>341341</b> | White         | <b>€ 35.95</b> |
| <b>341342</b> | Black         | <b>€ 35.95</b> |



### Accessories

|               |                                                                  |  |               |
|---------------|------------------------------------------------------------------|--|---------------|
| <b>930307</b> | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | <b>€ 6.95</b> |
| <b>930308</b> | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | <b>€ 6.95</b> |
| <b>930309</b> | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | <b>€ 6.95</b> |
| <b>930310</b> | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | <b>€ 6.95</b> |
| <b>930301</b> | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930302</b> | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930366</b> | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | <b>€ 3.95</b> |
| <b>930303</b> | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | <b>€ 3.95</b> |
| <b>931065</b> | Acrylic attachment for Can                                       |  | <b>€ 3.95</b> |



page 30

page 68

page 70

page 72

page 383



### Light sources

For all lights and bases:

You can find the right light sources in the »Light sources« section.



CAN UP & DOWN IP20

The CAN wall light provides versatile lighting options for various commercial and private projects. The up/down variant with light emission on both sides can be adapted perfectly to individual room concepts. The GU10 base enables simple replacement of the lamp, while the screw-on cylinder allows tool-free access. Installation for rigid and flexible conductors is particularly easy due to the integrated push terminals. Individual accents can be created with the optional, interchangeable decorative rings. The CAN wall light is part of a comprehensive series and is also available as a pendant, ceiling, reading and outdoor light.





## CAN UP & DOWN IP20

- Customised lighting solution thanks to replaceable light source
- combinable with the extensive product family of the CAN series

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|             |           |                     |                                    |
|-------------|-----------|---------------------|------------------------------------|
| Housing     | Aluminium | Base Height         | 77 mm                              |
| Length      | 72 mm     | Max. Power          | 2x max. 7.5 W                      |
| Height      | 230 mm    | Rated Input Voltage | 220-240 V/AC                       |
| Ø           | 60 mm     | Control             | Dimmable via optional light source |
| Base Length | 12.6 mm   |                     |                                    |
| Base Width  | 40 mm     |                     |                                    |

| Article       | Housing Color                             | Price          |
|---------------|-------------------------------------------|----------------|
| <b>341343</b> | <input type="checkbox"/> White            | <b>€ 43.95</b> |
| <b>341344</b> | <input checked="" type="checkbox"/> Black | <b>€ 43.95</b> |



### Accessories

|               |                                                                  |                                                                                     |               |
|---------------|------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|
| <b>930307</b> | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | <b>€ 6.95</b> |
| <b>930308</b> | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | <b>€ 6.95</b> |
| <b>930309</b> | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | <b>€ 6.95</b> |
| <b>930310</b> | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | <b>€ 6.95</b> |
| <b>930301</b> | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930302</b> | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930366</b> | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | <b>€ 3.95</b> |
| <b>930303</b> | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | <b>€ 3.95</b> |
| <b>931065</b> | Acrylic attachment for Can                                       |  | <b>€ 3.95</b> |



### Light sources

For all lights and bases:

You can find the right light sources in the »Light sources« section.

# built in wall lights






page 174



page 176





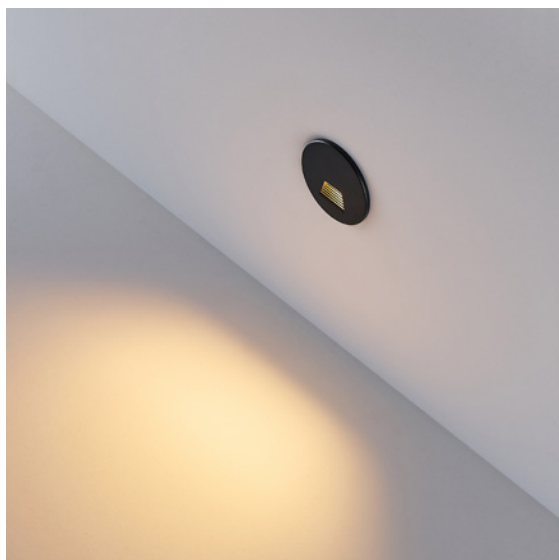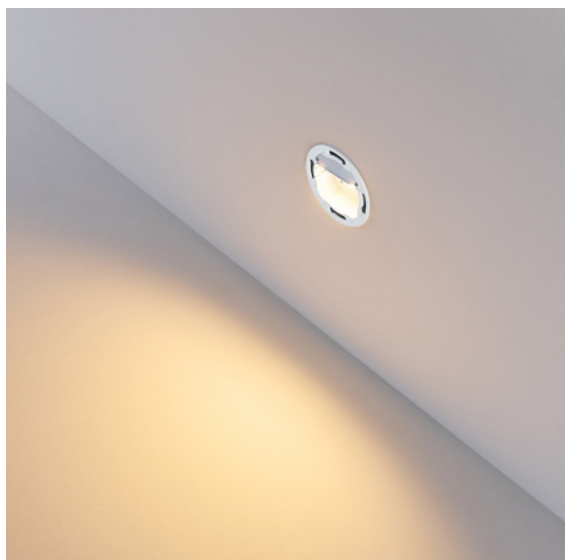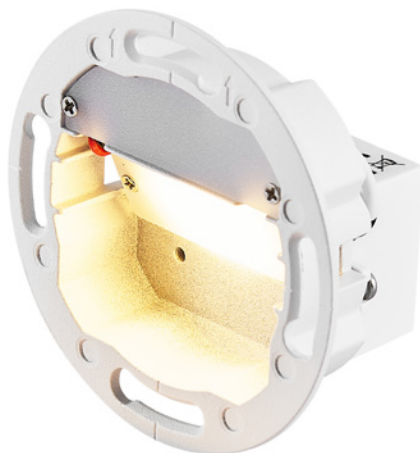


## ALWAID PRO

The new ALWAID PRO series combines functional wall-mounted recessed luminaires with a compact design, elegant appearance, and practical features. With a mounting depth of only 39 mm, the luminaires fit into all common 68 mm switch boxes – whether standard or deep versions. This makes the ALWAID PRO ideal for renovations and new constructions with limited space.

The ALWAID PRO series offers maximum design freedom: all luminaires are available with both round and square covers. Two colour options are available for the housing – white and black – as well as two high-quality material finishes: aluminium and glass/polycarbonate. Additionally, a selection of geometric light exit openings provides individual lighting moods depending on the application and architectural requirements. Furthermore, the recessed spots [2,700 K or 3,000 K] are available as dimmable versions or as ALWAID PRO MOTION with integrated motion sensor. The latter additionally offers a two-stage power switch [2 W / 4 W] for individual adjustment of light output.

All variants are equipped with an integrated power supply for 230V direct connection and can be easily through-wired – ideal for series installations in corridors or staircases.



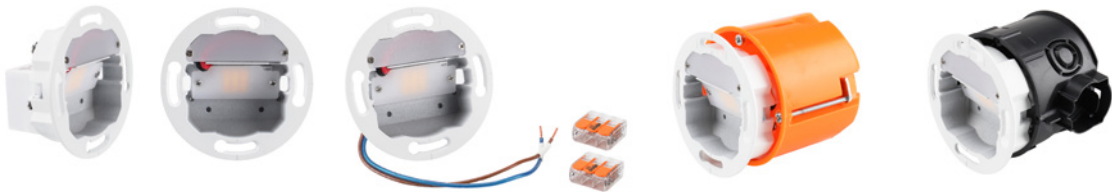

ALWAID PRO

- integrated power supply unit for 230V direct connection
- through-wiring possible
- dimmable via leading edge/trailing edge phase
- suitable for 68 mm switch boxes of normal and deep design




|                         |                          |                     |                                              |
|-------------------------|--------------------------|---------------------|----------------------------------------------|
| Housing                 | Aluminium, Polycarbonate | Installation Depth  | 39 mm                                        |
| Height                  | 41 mm                    | Cut Out Ø           | 68 mm                                        |
| Ø                       | 71.5 mm                  | Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Power                   | 4 W                      | CRI (Ra)            | 80                                           |
| Rated Input Voltage     | 220-240 V/AC             | IK Protection Class | IK05                                         |
| Power Supply Unit incl. | Yes                      | Light Direction     | Front                                        |

| Article | Housing Color                  | Colour Temperature | Luminous Flux | Price   |
|---------|--------------------------------|--------------------|---------------|---------|
| 565733  | <input type="checkbox"/> White | 2700 K             | 610 lm        | € 47.95 |
| 565734  | <input type="checkbox"/> White | 3000 K             | 630 lm        | € 47.95 |



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.

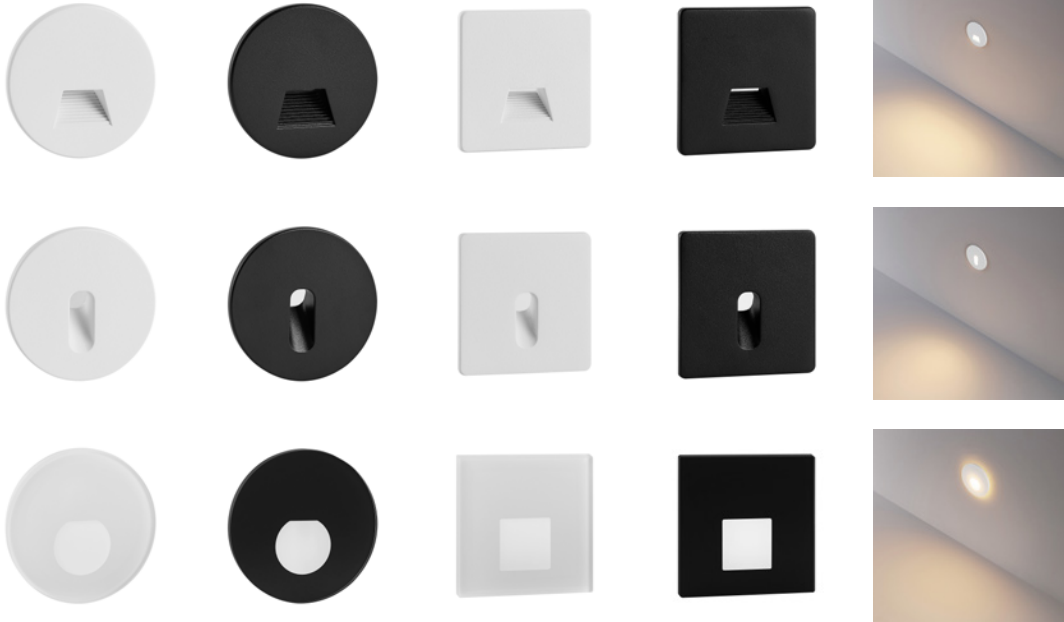

## ALWAID PRO

| Article       | Housing Color | Housing               | housing shape | light cone | L x W x H       | Ø x H      | Price          |
|---------------|---------------|-----------------------|---------------|------------|-----------------|------------|----------------|
| <b>931013</b> | White         | Aluminium             | round         | wide       |                 | 75 x 18 mm | <b>€ 9.95</b>  |
| <b>931015</b> | Black         | Aluminium             | round         | wide       |                 | 75 x 18 mm | <b>€ 9.95</b>  |
| <b>931025</b> | White         | Aluminium             | angular       | wide       | 75 x 75 x 18 mm |            | <b>€ 9.95</b>  |
| <b>931027</b> | Black         | Aluminium             | angular       | wide       | 75 x 75 x 18 mm |            | <b>€ 9.95</b>  |
| <b>931007</b> | White         | Aluminium             | round         | narrow     |                 | 75 x 18 mm | <b>€ 9.95</b>  |
| <b>931009</b> | Black         | Aluminium             | round         | narrow     |                 | 75 x 18 mm | <b>€ 9.95</b>  |
| <b>931019</b> | White         | Aluminium             | angular       | narrow     | 75 x 75 x 18 mm |            | <b>€ 9.95</b>  |
| <b>931021</b> | Black         | Aluminium             | angular       | narrow     | 75 x 75 x 18 mm |            | <b>€ 9.95</b>  |
| <b>931037</b> | White         | Glass / Polycarbonate | round         | soft       |                 | 78 x 23 mm | <b>€ 14.95</b> |
| <b>931039</b> | Black         | Glass / Polycarbonate | round         | soft       |                 | 78 x 23 mm | <b>€ 14.95</b> |
| <b>931031</b> | White         | Glass / Polycarbonate | angular       | soft       | 78 mm           |            | <b>€ 14.95</b> |
| <b>931033</b> | Black         | Glass / Polycarbonate | angular       | soft       | 78 mm           |            | <b>€ 14.95</b> |

IP20




ALWAID PRO MOTION

- integrated power supply unit for 230V direct connection
- with motion detector
- through-wiring possible
- power adjustable in 2 stages
- suitable for 68 mm switch boxes of normal and deep design




|                     |                          |                         |       |
|---------------------|--------------------------|-------------------------|-------|
| Housing             | Aluminium, Polycarbonate | Power Supply Unit incl. | Yes   |
| Height              | 41 mm                    | Installation Depth      | 39 mm |
| Ø                   | 71.5 mm                  | Cut Out Ø               | 68 mm |
| Power Selectable    | 2 W, 4 W                 | CRI (Ra)                | 80    |
| Rated Input Voltage | 220-240 V/AC             | IK Protection Class     | IK05  |
|                     |                          | Light Direction         | Front |

| Article | Housing Color                  | Colour Temperature | Luminous Flux | Price   |
|---------|--------------------------------|--------------------|---------------|---------|
| 565736  | <input type="checkbox"/> White | 2700 K             | 610 lm        | € 51.95 |
| 565737  | <input type="checkbox"/> White | 3000 K             | 630 lm        | € 51.95 |



**5-year guarantee**  
Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



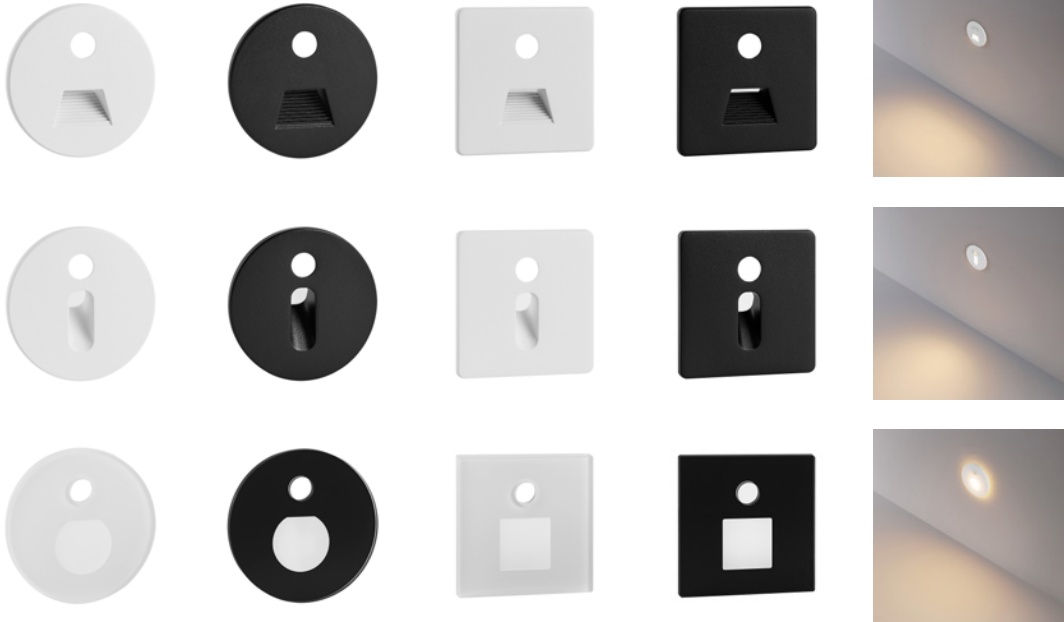

## ALWAID PRO MOTION

| Article       | Housing Color                             | Housing               | housing shape | light cone | L x W x H       | Ø x H      | Price   |
|---------------|-------------------------------------------|-----------------------|---------------|------------|-----------------|------------|---------|
| <b>931016</b> | <input type="checkbox"/> White            | Aluminium             | round         | wide       |                 | 75 x 18 mm | € 12.95 |
| <b>931018</b> | <input checked="" type="checkbox"/> Black | Aluminium             | round         | wide       |                 | 75 x 18 mm | € 12.95 |
| <b>931028</b> | <input type="checkbox"/> White            | Aluminium             | angular       | wide       | 75 x 75 x 18 mm |            | € 12.95 |
| <b>931030</b> | <input checked="" type="checkbox"/> Black | Aluminium             | angular       | wide       | 75 x 75 x 18 mm |            | € 12.95 |
| <b>931010</b> | <input type="checkbox"/> White            | Aluminium             | round         | narrow     |                 | 75 x 18 mm | € 12.95 |
| <b>931012</b> | <input checked="" type="checkbox"/> Black | Aluminium             | round         | narrow     |                 | 75 x 18 mm | € 12.95 |
| <b>931022</b> | <input type="checkbox"/> White            | Aluminium             | angular       | narrow     | 75 x 75 x 18 mm |            | € 12.95 |
| <b>931024</b> | <input checked="" type="checkbox"/> Black | Aluminium             | angular       | narrow     | 75 x 75 x 18 mm |            | € 12.95 |
| <b>931040</b> | <input type="checkbox"/> White            | Glass / Polycarbonate | round         | soft       |                 | 75 x 18 mm | € 17.95 |
| <b>931042</b> | <input checked="" type="checkbox"/> Black | Glass / Polycarbonate | round         | soft       |                 | 75 x 18 mm | € 17.95 |
| <b>931034</b> | <input type="checkbox"/> White            | Glass / Polycarbonate | angular       | soft       | 75 x 75 x 18 mm |            | € 17.95 |
| <b>931036</b> | <input checked="" type="checkbox"/> Black | Glass / Polycarbonate | angular       | soft       | 75 x 75 x 18 mm |            | € 17.95 |

IP20

# reading lights



page 180



page 181



page 182



page 184





## BRAHE ROUND

The BRAHE wall light with indirect lighting and narrow light emission angle of 25° means anyone else in the bed can sleep peacefully while the person on the other side is still reading. The simple design of the BRAHE also impresses in other areas, such as reading nooks.



page 194



page 195




## BRAHE ROUND

· Direct and indirect lighting can be switched on separately

### Application Area


Home / Living, Hotel / catering

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Rated Input Voltage     | 220-240 V/AC |
| Colour Temperature | 3000 K    | Power Supply Unit incl. | Yes          |
| Height             | 110 mm    | Light Beam Angle        | 25 Degree    |
| Ø                  | 150 mm    | Swivelling Angle        | 360 Degree   |
| Power              | 8.5 W     | CRI (Ra)                | 80           |



341242

| Article       | Housing Color                                                                                                                                                             | Luminous Flux | Price   |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------|
| <b>341243</b> | Black   | 395 lm        | € 83.95 |
| <b>341242</b> | White   | 490 lm        | € 83.95 |




## BRAHE SQUARE

- High-quality, flexible gooseneck
- Gooseneck with silicone sleeve for easy cleaning
- Individually adjustable via flexible gooseneck

### Application Area


Home / Living, Hotel / catering

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Base Height             | 25 mm        |
| Colour Temperature | 3000 K    | Power                   | 3.3 W        |
| Length             | 310 mm    | Rated Input Voltage     | 100-240 V/AC |
| Height             | 80 mm     | Power Supply Unit incl. | Yes          |
| Ø                  | 25 mm     | Light Beam Angle        | 25 Degree    |
| Base Length        | 80 mm     | Swivelling Angle        | 360 Degree   |
| Base Width         | 80 mm     | CRI (Ra)                | 80           |



341236

| Article       | Housing Color                                                                                                                                                                 | Luminous Flux | Price   |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------|
| <b>341237</b> | Black   | 165 lm        | € 53.95 |
| <b>341236</b> | White   | 175 lm        | € 53.95 |





CANTILT SQUARE

The square CAN reading light is the ideal choice for modern hotel rooms and sophisticated living spaces. It offers a convenient charging option for smartphones and other devices via USB-C and USB-A (article no. 341339 and 341340 only). The widely used GU10 base enables the quick replacement of the lamp, while the screw-on cylinder housing allows tool-free access. Individual accents can be set with the optional, replaceable decorative rings. The CAN reading light is part of a versatile lighting family, which is also available as a pendant, ceiling, wall and outdoor light.



page 30



page 68



page 70



page 72







## CAN TILT SQUARE

- Flat and discreet lamp base
- Replaceable lamp to offer an individual lighting solution
- Can be customised with a wide range of accessories
- Can be combined with the comprehensive product family of the CAN series
- Can be charged via USB-C/USB-A [art. nos. 341339 and 341340 only]

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|             |           |                     |                                    |
|-------------|-----------|---------------------|------------------------------------|
| Housing     | Aluminium | Max. Power          | 1x max. 7.5 W                      |
| Length      | 102 mm    | Rated Input Voltage | 220-240 V/AC                       |
| Height      | 105 mm    | Control             | Dimmable via optional light source |
| Ø           | 60 mm     | Rotation Angle      | 355 Degree                         |
| Base Width  | 100 mm    | Swivelling Angle    | 90 Degree                          |
| Base Height | 100 mm    |                     |                                    |

| Article       | Housing Color | Charging connection             | Price          |
|---------------|---------------|---------------------------------|----------------|
| <b>341337</b> | White         |                                 | <b>€ 39.95</b> |
| <b>341338</b> | Black         |                                 | <b>€ 39.95</b> |
| <b>341339</b> | White         | 1 x USB type A / 1 x USB type C | <b>€ 55.95</b> |
| <b>341340</b> | Black         | 1 x USB type A / 1 x USB type C | <b>€ 55.95</b> |



### Accessories

|               |                                                                  |  |               |
|---------------|------------------------------------------------------------------|--|---------------|
| <b>930307</b> | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | <b>€ 6.95</b> |
| <b>930308</b> | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | <b>€ 6.95</b> |
| <b>930309</b> | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | <b>€ 6.95</b> |
| <b>930310</b> | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | <b>€ 6.95</b> |
| <b>930301</b> | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930302</b> | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930366</b> | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | <b>€ 3.95</b> |
| <b>930303</b> | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | <b>€ 3.95</b> |
| <b>931065</b> | Acrylic attachment for Can                                       |  | <b>€ 3.95</b> |



### Light sources

For all lights and bases:

You can find the right light sources in the »Light sources« section.



CANTILT ROUND

The round CAN reading light is the ideal choice for modern hotel rooms and sophisticated living spaces. It offers a convenient charging option for smartphones and other devices via USB-C and USB-A (article no. 341335 and 341336 only). The widely used GU10 base enables the quick replacement of the lamp, while the screw-on cylinder housing allows tool-free access. Individual accents can be set with the optional, replaceable decorative rings. The CAN reading light is part of a versatile lighting family, which is also available as a pendant, ceiling, wall and outdoor light.



page 30



page 69



page 70



page 72





## CAN TILT ROUND

- Flat and discreet lamp base
- Can be customised with a wide range of accessories
- Replaceable lamp to offer an individual lighting solution
- Can be combined with the comprehensive product family of the CAN series
- Can be charged via USB-C/USB-A [art. nos. 341335 and 341336 only]

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|            |               |                     |                                    |
|------------|---------------|---------------------|------------------------------------|
| Housing    | Aluminium     | Rated Input Voltage | 220-240 V/AC                       |
| Length     | 102 mm        | Control             | Dimmable via optional light source |
| Height     | 105 mm        | Rotation Angle      | 355 Degree                         |
| Ø          | 60 mm         | Swivelling Angle    | 90 Degree                          |
| Base Ø     | 100 mm        |                     |                                    |
| Max. Power | 1x max. 7.5 W |                     |                                    |

| Article       | Housing Color | Charging connection             | Price          |
|---------------|---------------|---------------------------------|----------------|
| <b>341333</b> | White         |                                 | <b>€ 39.95</b> |
| <b>341334</b> | Black         |                                 | <b>€ 39.95</b> |
| <b>341335</b> | White         | 1 x USB type A / 1 x USB type C | <b>€ 55.95</b> |
| <b>341336</b> | Black         | 1 x USB type A / 1 x USB type C | <b>€ 55.95</b> |



### Accessories

|               |                                                                  |  |               |
|---------------|------------------------------------------------------------------|--|---------------|
| <b>930307</b> | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | <b>€ 6.95</b> |
| <b>930308</b> | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | <b>€ 6.95</b> |
| <b>930309</b> | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | <b>€ 6.95</b> |
| <b>930310</b> | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | <b>€ 6.95</b> |
| <b>930301</b> | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930302</b> | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930366</b> | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | <b>€ 3.95</b> |
| <b>930303</b> | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | <b>€ 3.95</b> |
| <b>931065</b> | Acrylic attachment for Can                                       |  | <b>€ 3.95</b> |



### Light sources

For all lights and bases:

You can find the right light sources in the »Light sources« section.



CAN TILT SQUARE BASE MIX'N MATCH 1/3

- flat and discreet luminaire base
- charging option via USB-C / USB-A [only item no. 341347 and 341348]

**Application Area**  
 Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

|             |               |                     |                                    |
|-------------|---------------|---------------------|------------------------------------|
| Housing     | Aluminium     | Rated Input Voltage | 220-240 V/AC                       |
| Height      | 105 mm        | Control             | Dimmable via optional light source |
| Ø           | 60 mm         | Rotation Angle      | 340 Degree                         |
| Base Length | 100 mm        | Swivelling Angle    | 90 Degree                          |
| Base Width  | 100 mm        |                     |                                    |
| Max. Power  | 1x max. 7.5 W |                     |                                    |

| Article | Housing Color | Charging connection             | Price   |
|---------|---------------|---------------------------------|---------|
| 341345  | White         |                                 | € 33.95 |
| 341346  | Black         |                                 | € 33.95 |
| 341347  | White         | 1 x USB type A / 1 x USB type C | € 49.95 |
| 341348  | Black         | 1 x USB type A / 1 x USB type C | € 49.95 |



CAN TILT ROUND BASE MIX'N MATCH 1/3

|            |               |                     |                                    |
|------------|---------------|---------------------|------------------------------------|
| Housing    | Aluminium     | Rated Input Voltage | 220-240 V/AC                       |
| Height     | 105 mm        | Control             | Dimmable via optional light source |
| Ø          | 60 mm         | Rotation Angle      | 340 Degree                         |
| Base Ø     | 100 mm        | Swivelling Angle    | 90 Degree                          |
| Max. Power | 1x max. 7.5 W |                     |                                    |

| Article | Housing Color | Charging connection             | Price   |
|---------|---------------|---------------------------------|---------|
| 341349  | White         |                                 | € 33.95 |
| 341350  | Black         |                                 | € 33.95 |
| 341351  | White         | 1 x USB type A / 1 x USB type C | € 49.95 |
| 341352  | Black         | 1 x USB type A / 1 x USB type C | € 49.95 |





CYLINDER HOUSING FUR CAN MIX'N MATCH 2/3

Housing                                      Aluminium                                      Ø                                      60 mm  
Height                                      95 mm

| Article | Housing Color                                                                                | Price   |
|---------|----------------------------------------------------------------------------------------------|---------|
| 931059  |  White      | € 6.45  |
| 931060  |  Black      | € 6.45  |
| 931061  |  Bronze     | € 14.95 |
| 931062  |  Brass      | € 14.95 |
| 931063  |  Black grey | € 14.95 |
| 931064  |  Rosé       | € 14.95 |

IP20



REFLECTOR RING FOR CAN MIX'N MATCH 3/3

Housing                                      Plastic                                      Ø                                      57 mm  
Height                                      28 mm

| Article | Housing Color                                                                              | Price  |
|---------|--------------------------------------------------------------------------------------------|--------|
| 930301  |  White  | € 3.95 |
| 930302  |  Black  | € 3.95 |
| 930303  |  Gold   | € 3.95 |
| 930366  |  Silver | € 3.95 |

IP20

# table and floor lights



page 190



page 191



page 192



page 192



page 194



page 195



page 196







CAN

- customisable with extensive accessories
- customised lighting solution thanks to replaceable light source
- combinable with the extensive product family of the CAN series

Application Area  
Home / Living, Hotel / catering

|                     |               |                        |                                    |
|---------------------|---------------|------------------------|------------------------------------|
| Housing             | Aluminium     | Primary Cable Length   | 2 m                                |
| Height              | 1115 mm       | Primary Connection End | Safety plug                        |
| Ø                   | 60 mm         | Control                | Dimmable via optional light source |
| Base Ø              | 252 mm        | Rotation Angle         | 340 Degree                         |
| Max. Power          | 1x max. 7.5 W | Swivelling Angle       | 90 Degree                          |
| Rated Input Voltage | 220-240 V/AC  |                        |                                    |

| Article | Housing Color                                                                             | Price    |
|---------|-------------------------------------------------------------------------------------------|----------|
| 343037  |  White | € 103.95 |
| 343038  |  Black | € 103.95 |



Accessories

|        |                                                                  |                                                                                     |        |
|--------|------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|
| 930301 | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | € 3.95 |
| 930302 | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | € 3.95 |
| 930303 | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | € 3.95 |
| 930307 | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | € 6.95 |
| 930308 | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | € 6.95 |
| 930309 | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | € 6.95 |
| 930310 | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | € 6.95 |
| 930366 | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | € 3.95 |
| 931065 | Acrylic attachment for Can                                       |  | € 3.95 |



**Light sources**  
For all lights and bases:  
You can find the right light sources in the »Light sources« section.



## CAN

- customisable with extensive accessories
- customised lighting solution thanks to replaceable light source
- combinable with the extensive product family of the CAN series

### Application Area

Home / Living, Hotel / catering

|                     |               |                        |                                    |
|---------------------|---------------|------------------------|------------------------------------|
| Housing             | Aluminium     | Primary Cable Length   | 2 m                                |
| Height              | 400 mm        | Primary Connection End | Safety plug                        |
| Ø                   | 60 mm         | Control                | Dimmable via optional light source |
| Base Ø              | 182 mm        | Rotation Angle         | 340 Degree                         |
| Max. Power          | 1x max. 7.5 W | Swivelling Angle       | 90 Degree                          |
| Rated Input Voltage | 220-240 V/AC  |                        |                                    |

| Article       | Housing Color                             | Price          |
|---------------|-------------------------------------------|----------------|
| <b>346086</b> | <input type="checkbox"/> White            | <b>€ 76.95</b> |
| <b>346087</b> | <input checked="" type="checkbox"/> Black | <b>€ 76.95</b> |



### Accessories

|               |                                                                  |                                                                                     |               |
|---------------|------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|
| <b>930301</b> | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930302</b> | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930303</b> | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | <b>€ 3.95</b> |
| <b>930307</b> | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | <b>€ 6.95</b> |
| <b>930308</b> | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | <b>€ 6.95</b> |
| <b>930309</b> | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | <b>€ 6.95</b> |
| <b>930310</b> | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | <b>€ 6.95</b> |
| <b>930366</b> | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | <b>€ 3.95</b> |
| <b>931065</b> | Acrylic attachment for Can                                       |  | <b>€ 3.95</b> |



### 5-year guarantee

Benefit from the maximum quality promise:

All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



CAN BASE MIX'N MATCH 1/3

- customisable with extensive accessories
- individual lighting solution thanks to interchangeable light source
- can be customised with cylinder housing in 6 different colours
- can be combined with the extensive product family of the CAN series

Application Area  
Home / Living, Hotel / catering

|                     |               |                        |                                    |
|---------------------|---------------|------------------------|------------------------------------|
| Housing             | Aluminium     | Primary Cable Length   | 2 m                                |
| Length              | 252 mm        | Primary Connection End | Safety plug                        |
| Width               | 240 mm        | Control                | Dimmable via optional light source |
| Height              | 1115 mm       | Rotation Angle         | 340 Degree                         |
| Base Ø              | 240 mm        | Swivelling Angle       | 90 Degree                          |
| Max. Power          | 1x max. 7.5 W |                        |                                    |
| Rated Input Voltage | 220-240 V/AC  |                        |                                    |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 343039  |  White | € 97.95 |
| 343040  |  Black | € 97.95 |



CAN BASE MIX'N MATCH 1/3

|                     |               |                        |                                    |
|---------------------|---------------|------------------------|------------------------------------|
| Housing             | Aluminium     | Primary Cable Length   | 2 m                                |
| Length              | 182 mm        | Primary Connection End | Safety plug                        |
| Width               | 170 mm        | Control                | Dimmable via optional light source |
| Height              | 400 mm        | Rotation Angle         | 340 Degree                         |
| Base Ø              | 170 mm        | Swivelling Angle       | 90 Degree                          |
| Max. Power          | 1x max. 7.5 W |                        |                                    |
| Rated Input Voltage | 220-240 V/AC  |                        |                                    |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 346088  |  White | € 69.95 |
| 346089  |  Black | € 69.95 |





CYLINDER HOOUSING FOR CAN MIX'N MATCH 2/3

Housing                      Aluminium                      Ø                      60 mm  
Height                      95 mm

| Article | Housing Color                                                                                | Price   |
|---------|----------------------------------------------------------------------------------------------|---------|
| 931059  |  White      | € 6.45  |
| 931060  |  Black      | € 6.45  |
| 931061  |  Bronze     | € 14.95 |
| 931062  |  Brass      | € 14.95 |
| 931063  |  Black grey | € 14.95 |
| 931064  |  Rosé       | € 14.95 |

IP20



REFLECTOR RING FOR CAN MIX'N MATCH 3/3

Housing                      Plastic                      Ø                      57 mm  
Height                      28 mm

| Article | Housing Color                                                                              | Price  |
|---------|--------------------------------------------------------------------------------------------|--------|
| 930301  |  White  | € 3.95 |
| 930302  |  Black  | € 3.95 |
| 930303  |  Gold   | € 3.95 |
| 930366  |  Silver | € 3.95 |

IP20




BRAHE

- Can be rotated and swivelled
- Direct and indirect lighting can be switched on separately


Application Area  
Home / Living, Hotel / catering

|                     |              |                         |                 |
|---------------------|--------------|-------------------------|-----------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes             |
| Colour Temperature  | 3000 K       | Light Beam Angle        | 25 Degree       |
| Height              | 455 mm       | Swivelling Angle        | 90 Degree       |
| Ø                   | 150 mm       | Primary Connection End  | Power plug IP20 |
| Power               | 8.5 W        | CRI (Ra)                | 80              |
| Rated Input Voltage | 220-240 V/AC |                         |                 |

| Article | Housing Color                                                                       |                                                                                           | Luminous Flux | Price    |
|---------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------------|----------|
| 346016  |  | Black  | 370 lm        | € 124.95 |
| 346015  |  | White  | 470 lm        | € 124.95 |





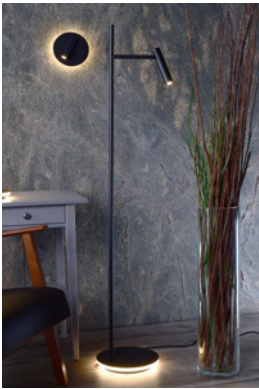

BRAHE


- Can be rotated and swivelled
- Direct and indirect lighting can be switched on separately

Application Area

Home / Living, Hotel / catering

|                     |              |                         |                 |
|---------------------|--------------|-------------------------|-----------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes             |
| Colour Temperature  | 3000 K       | Light Beam Angle        | 25 Degree       |
| Height              | 1387 mm      | Swivelling Angle        | 90 Degree       |
| Ø                   | 305 mm       | Primary Connection End  | Power plug IP20 |
| Power Selectable    | 3 W, 8 W     | CRI (Ra)                | 80              |
| Rated Input Voltage | 220-240 V/AC |                         |                 |

| Article | Housing Color |    | Luminous Flux | Price    |
|---------|---------------|----|---------------|----------|
| 343026  | Black         | WW | 555 lm        | € 207.95 |
| 343025  | White         | WW | 735 lm        | € 207.95 |





## ADHARA

Classic design interpreted in a modern way - the ADHARA made from aluminium captivates with its classic lines, ultra-modern materials and high degree of flexibility. The ADHARA can be optimally adjusted to any situation via its two or three joints. Its powerful LED module delivers 950 lumens and can also be dimmed thanks to a touch sensor. Whether for the boss's office or for a child's desk, the ADHARA looks great anywhere.



ADHARA

- Can be rotated and swivelled via joints
- Dimmable in three stages using touch sensor

Application Area

Home / Living, Reception / Communication, Home office / study

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Power                   | 12 W         |
| Colour Temperature | 3000 K    | Rated Input Voltage     | 100-240 V/AC |
| Luminous Flux      | 950 lm    | Power Supply Unit incl. | Yes          |
| Length             | 498 mm    | Light Beam Angle        | 120 Degree   |
| Height             | 480 mm    | Swivelling Angle        | 180 Degree   |
| Ø                  | 150 mm    | Primary Cable Length    | 1.6 m        |
| Base Height        | 21.5 mm   | Primary Connection End  | Power plug   |
| Base Ø             | 180 mm    | CRI (Ra)                | 80           |

| Article | Housing Color                                                                              |                                                                                     | Price    |
|---------|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|
| 346026  |  Black  |  | € 159.95 |
| 346027  |  White  |  | € 159.95 |
| 346028  |  Silver |  | € 159.95 |



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.

# office lights



□ ■ □  
page 200



■ □ □  
page 202



□ □ ■  
page 204



□ □ ■  
page 205



■  
page 206



□ □ ■  
page 212



□ □ ■  
page 213



□ □ ■  
page 214



□ □ ■  
page 215





## ROUND TRANSPARENT LED PANEL

The LED pendant light is equipped with a transparent acrylic glass pane for soft direct and indirect light distribution, which is almost transparent when switched off. When switched on, the pane distributes the light almost entirely without glare.

With a glare rating [UGR] of under 22, this pendant light is suitable for various communal or even conference rooms. Bright, efficient and with a sophisticated design, this light not only stands out from all other office equipment, but can also be integrated into any other modern interior.








## ROUND TRANSPARENT LED PANEL

- Eligible for BEG German federal funding for energy-efficient buildings
- Light colour adjustable in three stages
- Particularly delicate frame
- Low glare value
- Transparent luminous element

### Application Area

Reception / Communication, Office / conference, Home / Living, Home office / study, Hotel / catering

|                     |                  |                         |                                              |
|---------------------|------------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium        | Base Ø                  | 215 mm                                       |
| Colour Temperature  | 3000/3500/4000 K | Power Supply Unit incl. | Yes                                          |
| Power               | 50 W             | Light Beam Angle        | 140 Degree                                   |
| Rated Input Voltage | 200-240 V/AC     | Light Beam Angle 2      | 150 Degree                                   |
| Height              | 12 mm            | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                   | 633 mm           | CRI (Ra)                | 90                                           |
| Pendulum Length     | 1800 mm          | IK Protection Class     | IK04                                         |
| Base Height         | 43 mm            |                         |                                              |



342251

| Article       | Housing Color |       | Luminous Flux     | Price    |
|---------------|---------------|-------|-------------------|----------|
| <b>342252</b> | Black         | WW NW | 6000/6100/6100 lm | € 339.95 |
| <b>342253</b> | Light grey    | WW NW | 6100/6200/6200 lm | € 339.95 |
| <b>342251</b> | White         | WW NW | 6200/6400/6400 lm | € 339.95 |



### Accessories

|               |                                            |                                                                                     |         |
|---------------|--------------------------------------------|-------------------------------------------------------------------------------------|---------|
| <b>843340</b> | DALI, Triac dimmer, 100-240 V, 400 W, IP20 |  | € 59.95 |
| <b>843503</b> | RF-smart, Triac dimmer, 230 V, 300 W, IP20 |  | € 55.95 |



### Lighting design

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.



## LED PANEL TRANSPARENT ANGULAR

The LED pendant lamp has transparent glass for direct and indirect light distribution that is almost see-through when switched off. When the light is switched on, the pane distributes the light almost entirely without glare.

This pendant lamp is fully office-compatible with a glare value [UGR] of under 19. Bright, efficient and with a sophisticated design, this light not only stands out in any type of office environment.






## LED PANEL TRANSPARENT ANGULAR

- Very low glare value
- Light colour adjustable in 2 stages
- Transparent luminous element
- Max. suspended mounting 1,800 mm

### Application Area

Reception / Communication, Office / conference, Home / Living, Home office / study, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Base Length             | 570 mm                                       |
| Colour Temperature  | 3000/4000 K  | Base Width              | 80 mm                                        |
| Luminous Flux       | 5600/6100 lm | Base Height             | 50 mm                                        |
| Power               | 53 W         | Power Supply Unit incl. | Yes                                          |
| Rated Input Voltage | 220-240 V/AC | Light Beam Angle        | 360 Degree                                   |
| Length              | 295 mm       | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Width               | 1195 mm      | CRI (Ra)                | 90                                           |
| Height              | 12 mm        |                         |                                              |
| Pendulum Length     | 1800 mm      |                         |                                              |



342221

| Article       | Housing Color | Price           |
|---------------|---------------|-----------------|
| <b>342219</b> | Black         | <b>€ 239.95</b> |
| <b>342220</b> | Light grey    | <b>€ 239.95</b> |
| <b>342221</b> | White         | <b>€ 239.95</b> |



### Technical data sheet

New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.




OFFICE THREE STANDARD

- Suitable for VDU workstations (according to EN 12464-1 BAP65 [L65 = 3000cd/m²])
- BEG-eligible
- CRI>95 for direct light component
- Indirect light component 85%

Application Area

Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

|                     |              |                         |                                |
|---------------------|--------------|-------------------------|--------------------------------|
| Housing             | Aluminium    | Base Width              | 52 mm                          |
| Colour Temperature  | 4000 K       | Base Height             | 35 mm                          |
| Luminous Flux       | 8300 lm      | Power Supply Unit incl. | Yes                            |
| Power               | 56 W         | Light Beam Angle        | 115 Degree                     |
| Rated Input Voltage | 180-264 V/AC | Light Beam Angle 2      | 50 Degree                      |
| Length              | 1179 mm      | Control                 | DALI 2 / DT6, Intelli Push-Dim |
| Width               | 64 mm        | CRI (Ra)                | 95                             |
| Height              | 35 mm        | IK Protection Class     | IK03                           |
| Pendulum Length     | 2500 mm      |                         |                                |
| Base Length         | 603 mm       |                         |                                |



342258

| Article | Housing Color |    | Price    |
|---------|---------------|----|----------|
| 342258  | White         | NW | € 439.95 |
| 342259  | Light grey    | NW | € 439.95 |
| 342260  | Black         | NW | € 439.95 |






OFFICE THREE PRO

- Suitable for VDU workstations (according to EN 12464-1 BAP65 [L65 = 3000cd/m²])
- BEG-eligible
- CRI>95 for direct light component
- Indirect light component 85%
- D4i power supply unit for direct coupling with DALI sensor

Application Area

Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

|                     |              |                         |                                    |
|---------------------|--------------|-------------------------|------------------------------------|
| Housing             | Aluminium    | Base Width              | 52 mm                              |
| Colour Temperature  | 4000 K       | Base Height             | 35 mm                              |
| Luminous Flux       | 10900 lm     | Power Supply Unit incl. | Yes                                |
| Power               | 77 W         | Light Beam Angle        | 115 Degree                         |
| Rated Input Voltage | 220-240 V/AC | Light Beam Angle 2      | 50 Degree                          |
| Length              | 1391 mm      | Control                 | DALI 2 / DT6 D4i, Intelli Push-Dim |
| Width               | 64 mm        | CRI (Ra)                | 95                                 |
| Height              | 35 mm        | IK Protection Class     | IK03                               |
| Pendulum Length     | 2500 mm      |                         |                                    |
| Base Length         | 603 mm       |                         |                                    |



342261

| Article | Housing Color |    | Price    |
|---------|---------------|----|----------|
| 342261  | White         | NW | € 559.95 |
| 342262  | Light grey    | NW | € 559.95 |
| 342263  | Black         | NW | € 559.95 |






OFFICE ONE

- Very low glare value
- Service life 50,000 h L80B10
- Dimmable using touch sensor
- Ready to use

Application Area

Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Power                   | 80 W         |
| Colour Temperature | 4000 K    | Rated Input Voltage     | 220-240 V/AC |
| Luminous Flux      | 7400 lm   | Power Supply Unit incl. | Yes          |
| Length             | 610 mm    | Light Beam Angle        | 110 Degree   |
| Width              | 310 mm    | Light Beam Angle 2      | 90 Degree    |
| Height             | 1950 mm   | Primary Cable Length    | 1.5 m        |
| Base Length        | 460 mm    | Primary Connection End  | Power plug   |
| Base Width         | 300 mm    | CRI (Ra)                | 80           |
| Base Height        | 8 mm      |                         |              |



343030

| Article | Housing Color | Price    |
|---------|---------------|----------|
| 343030  | Silver        | € 655.95 |







OFFICE ONE MOTION

- Very low glare value
- Service life 50,000 h L80B10
- Dimmable using touch sensor
- Motion sensor
- Ready to use

Application Area


Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Power                   | 80 W         |
| Colour Temperature | 4000 K    | Rated Input Voltage     | 220-240 V/AC |
| Luminous Flux      | 7400 lm   | Power Supply Unit incl. | Yes          |
| Length             | 610 mm    | Light Beam Angle        | 110 Degree   |
| Width              | 310 mm    | Light Beam Angle 2      | 90 Degree    |
| Height             | 1950 mm   | Primary Cable Length    | 1.5 m        |
| Base Length        | 460 mm    | Primary Connection End  | Power plug   |
| Base Width         | 300 mm    | CRI (Ra)                | 80           |
| Base Height        | 8 mm      | Motion Detector         | Yes          |

|         |               |          |
|---------|---------------|----------|
| Article | Housing Color | Price    |
| 343032  | Silver        | € 759.95 |






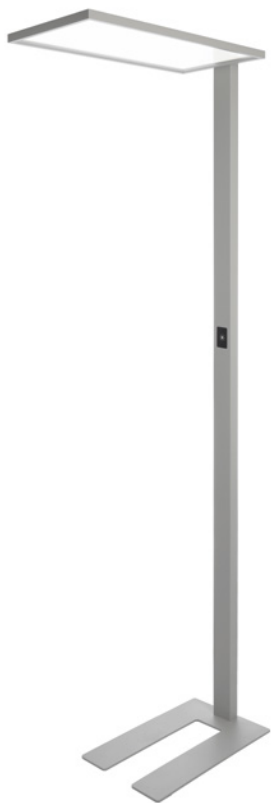

OFFICE ONE TRANSPARENT

**Application Area**  
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Power                   | 55 W         |
| Colour Temperature | 4000 K    | Rated Input Voltage     | 200-240 V/AC |
| Luminous Flux      | 6245 lm   | Power Supply Unit incl. | No           |
| Length             | 610 mm    | Light Beam Angle        | 150 Degree   |
| Width              | 310 mm    | Light Beam Angle 2      | 150 Degree   |
| Height             | 1950 mm   | Primary Cable Length    | 2.5 m        |
| Base Length        | 500 mm    | Primary Connection End  | Power plug   |
| Base Width         | 225 mm    | CRI (Ra)                | 80           |
| Base Height        | 8 mm      |                         |              |



343022

| Article | Housing Color | Price    |
|---------|---------------|----------|
| 343022  | Silver        | € 655.95 |





## OFFICE THREE

The OFFICE THREE series is our bestseller and problem solver for lighting individual workstations. Available as a free-standing or table lamp, the OFFICE THREE impresses with excellent light quality [Ra95] and glare-free [UGR<6] and ensures fatigue-free working in any situation. Thanks to the individually adjustable brightness for direct and indirect light, OFFICE THREE enables high-quality and flexible illumination of individual workstations. Optimised for tables with standard dimensions of 160 x 80 cm, the series is also suitable for other table sizes.



#### High-precision radar presence detector

- The 24Ghz presence sensor recognises even the smallest movements on the desk - such as movements of the computer mouse - and switches the light on automatically. Faulty switch-offs are effectively prevented despite the short run-on time.
- Without movement, the brightness is reduced to 30% after 5\*/15/30 minutes [\*default setting].
- If there is no movement, the light switches off after a further 5\*/15/30 minutes [\*default setting].

#### Daylight sensor

- Switch on the light and dim to the desired brightness [this setting is saved by the daylight sensor as the default].
- As soon as the ambient light changes, the sensor adjusts the brightness according to the stored standard [10% tolerance].



#### Touch panel

- Brightness of direct and indirect light separately or synchronised, infinitely adjustable
- Direct and indirect light can be switched separately
- Continuously adjustable light colour [PRO models only]
- Adjustable run-on time of the presence sensor



#### Universal table clamp

- table clamp can be used for table tops with a total thickness of 15-65 mm [incl. substructure] as required
- If part of the frame construction runs in the clamping area of the luminaire, the hard rubber buffers supplied must be used to compensate for the unevenness and create a flush clamping area.
- The universal design of the table clamp allows it to be mounted on almost all table tops.



#### Optional mounting kit

- For larger table tops or for free positioning on the table, the optional mounting kit can be used instead of the pre-installed table clamp. This is simply mounted through a drill hole in the table.
- suitable for table tops with a total thickness of 15-35 mm
- suitable for hole diameters from 22-30 mm






OFFICE THREE STANDARD FLOOR

- Suitable for workstations with screens (in accordance with EN 12464-1 BAP65 [L65 <=3,000 cd/m²])
- Eligible for BEG German federal funding for energy-efficient buildings
- Ideal for high-quality illumination of individual workstations
- Redesigned and extended lamp head for ideal illumination of 160 x 80 cm tables
- Direct and indirect light can be dimmed and switched separately using touch panel
- Adjustable switch-off delay of the sensor [5/15/30 mins]
- High-precision radar presence detector detects the smallest movements
- Daylight sensor for dynamic brightness adjustment

Application Area

Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Power                   | 80 W         |
| Colour Temperature | 4000 K    | Rated Input Voltage     | 180-264 V/AC |
| Luminous Flux      | 10100 lm  | Power Supply Unit incl. | Yes          |
| Length             | 1240 mm   | Light Beam Angle        | 120 Degree   |
| Width              | 64 mm     | Light Beam Angle 2      | 50 Degree    |
| Height             | 1950 mm   | Primary Cable Length    | 2.5 m        |
| Base Length        | 530 mm    | Primary Connection End  | Safety plug  |
| Base Width         | 225 mm    | CRI (Ra)                | 95           |
| Base Height        | 10 mm     | Motion Detector         | Yes          |



342228

| Article | Housing Color |    | Price    |
|---------|---------------|----|----------|
| 342228  | White         | NW | € 999.95 |
| 342229  | Light grey    | NW | € 999.95 |
| 342230  | Black         | NW | € 999.95 |








## OFFICE THREE STANDARD TABLE

- Suitable for workstations with screens (in accordance with EN 12464-1 BAP65 [ $L_{65} \leq 3,000 \text{ cd/m}^2$ ])
- Eligible for BEG German federal funding for energy-efficient buildings
- Ideal for high-quality illumination of height-adjustable individual workstations
- Redesigned and extended lamp head for ideal illumination of 160x80 cm tables
- Suitable for table designs with 15-65 mm thickness
- Direct and indirect light can be dimmed and switched separately using touch panel
- High-precision radar presence detector detects the smallest movements
- Adjustable switch-off delay of the sensor [5/15/30 mins]
- Daylight sensor for dynamic brightness adjustment
- Incl. 2.5 m connecting cable with safety plug and C21 mains plug
- Incl. hard rubber buffers for use with table designs that run close to the edge

### Application Area

Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Power                   | 80 W         |
| Colour Temperature | 4000 K    | Rated Input Voltage     | 180-264 V/AC |
| Luminous Flux      | 10100 lm  | Power Supply Unit incl. | Yes          |
| Length             | 1240 mm   | Light Beam Angle        | 120 Degree   |
| Width              | 64 mm     | Light Beam Angle 2      | 50 Degree    |
| Height             | 1194 mm   | Primary Cable Length    | 2.5 m        |
| Base Length        | 115 mm    | Primary Connection End  | Safety plug  |
| Base Width         | 80 mm     | CRI (Ra)                | 95           |
| Base Height        | 120 mm    | Motion Detector         | Yes          |



346063

| Article       | Housing Color                                       | Price           |
|---------------|-----------------------------------------------------|-----------------|
| <b>346063</b> | <input type="checkbox"/> White <span>NW</span>      | <b>€ 839.95</b> |
| <b>346064</b> | <input type="checkbox"/> Light grey <span>NW</span> | <b>€ 839.95</b> |
| <b>346065</b> | <input type="checkbox"/> Black <span>NW</span>      | <b>€ 839.95</b> |



### Accessories for 346063

**930727** Assembly kit for table lamp Office Three

 **€ 31.95**

### Accessories for 346064

**930728** Assembly kit for table lamp Office Three, light grey

 **€ 31.95**

### Accessories for 346065

**930729** Assembly kit for table lamp Office Three

 **€ 31.95**




OFFICE THREE PRO FLOOR

- Suitable for workstations with screens (in accordance with EN 12464-1 BAP65 [L65 <=3,000 cd/m²])
- Eligible for BEG German federal funding for energy-efficient buildings
- Ideal for high-quality illumination of individual workstations
- Redesigned and extended lamp head for ideal illumination of 160 x 80 cm tables
- Direct and indirect light can be dimmed and switched separately using touch panel
- Light colour adjustable via touch panel
- High-precision radar presence detector detects the smallest movements
- Adjustable switch-off delay of the sensor [5/15/30 mins]
- Daylight sensor for dynamic brightness adjustment

Application Area

Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

|                    |              |                         |              |
|--------------------|--------------|-------------------------|--------------|
| Housing            | Aluminium    | Power                   | 80 W         |
| Colour Temperature | 2700-6500 K  | Rated Input Voltage     | 180-264 V/AC |
| Luminous Flux      | 9000/9800 lm | Power Supply Unit incl. | Yes          |
| Length             | 1240 mm      | Light Beam Angle        | 120 Degree   |
| Width              | 64 mm        | Light Beam Angle 2      | 50 Degree    |
| Height             | 1950 mm      | Primary Cable Length    | 2.5 m        |
| Base Length        | 530 mm       | Primary Connection End  | Safety plug  |
| Base Width         | 225 mm       | CRI (Ra)                | 95           |
| Base Height        | 10 mm        | Motion Detector         | Yes          |



342231

| Article | Housing Color |  | Price     |
|---------|---------------|--|-----------|
| 342231  | White         |  | € 1167.95 |
| 342232  | Light grey    |  | € 1167.95 |
| 342233  | Black         |  | € 1167.95 |






OFFICE THREE PRO TABLE

- Suitable for workstations with screens (in accordance with EN 12464-1 BAP65 [L65 <=3,000 cd/m²])
- Eligible for BEG German federal funding for energy-efficient buildings
- Ideal for high-quality illumination of height-adjustable individual workstations
- Redesigned and extended lamp head for ideal illumination of 160 x 80 cm tables
- Suitable for table designs with 15-65 mm thickness
- Direct and indirect light can be dimmed and switched separately using touch panel
- Light colour adjustable via touch panel
- High-precision radar presence detector detects the smallest movements
- Daylight sensor for dynamic brightness adjustment

Application Area

Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

|                    |              |                         |              |
|--------------------|--------------|-------------------------|--------------|
| Housing            | Aluminium    | Power                   | 80 W         |
| Colour Temperature | 2700-6500 K  | Rated Input Voltage     | 180-264 V/AC |
| Luminous Flux      | 9000/9800 lm | Power Supply Unit incl. | Yes          |
| Length             | 1240 mm      | Light Beam Angle        | 120 Degree   |
| Width              | 64 mm        | Light Beam Angle 2      | 50 Degree    |
| Height             | 1194 mm      | Primary Cable Length    | 2.5 m        |
| Base Length        | 115 mm       | Primary Connection End  | Safety plug  |
| Base Width         | 80 mm        | CRI (Ra)                | 95           |
| Base Height        | 120 mm       | Motion Detector         | Yes          |



| Article | Housing Color                                                       | Price    |
|---------|---------------------------------------------------------------------|----------|
| 346066  | <input type="checkbox"/> White <span>WW</span> <span>CW</span>      | € 999.95 |
| 346067  | <input type="checkbox"/> Light grey <span>WW</span> <span>CW</span> | € 999.95 |
| 346068  | <input type="checkbox"/> Black <span>WW</span> <span>CW</span>      | € 999.95 |



Accessories for 346066

930727 Assembly kit for table lamp Office Three  € 31.95

Accessories for 346067

930728 Assembly kit for table lamp Office Three, light grey  € 31.95

Accessories for 346068

930729 Assembly kit for table lamp Office Three  € 31.95

# hall floodlights



page 219



page 220



page 222



page 225










## HIGHBAY BASIC

- cost-effective and powerful
- particularly energy-efficient and economical
- power adjustable in three stages
- light colour adjustable in three stages

### Application Area

Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse

|                    |                                 |                         |                     |
|--------------------|---------------------------------|-------------------------|---------------------|
| Housing            | Aluminium, Polycarbonate, Steel | Power Selectable        | 210 W, 160 W, 110 W |
| Colour Temperature | 4000/4500/5700 K                | Rated Input Voltage     | 100-277 V/AC        |
| Luminous Flux      | 33500/34500/33500 lm            | Power Supply Unit incl. | Yes                 |
| Height             | 111 mm                          | Light Beam Angle        | 90 Degree           |
| Ø                  | 302 mm                          | CRI (Ra)                | 80                  |
|                    |                                 | IK Protection Class     | IK08                |



732162

| Article       | Housing Color | Price           |
|---------------|---------------|-----------------|
| <b>732162</b> | Black         | <b>€ 140.95</b> |



### Accessories

|               |                                                                               |  |                |
|---------------|-------------------------------------------------------------------------------|--|----------------|
| <b>930977</b> | 60° Lens for Highbay Basic                                                    |  | <b>€ 15.95</b> |
| <b>930978</b> | 120° Lens for Highbay Basic                                                   |  | <b>€ 15.95</b> |
| <b>930641</b> | Chain suspension 1 m for Alludra / Highbay Basic / Vega                       |  | <b>€ 11.95</b> |
| <b>930685</b> | Chain suspension 3 m for Alludra / Highbay Basic / Vega                       |  | <b>€ 19.95</b> |
| <b>930742</b> | Wall assembly arm for Vega OnOff, Highbay Basic                               |  | <b>€ 31.95</b> |
| <b>930571</b> | Outdoor cable conn. 2 cables 4-14 mm, 2-5 strands 0.5-4 mm², 450 V AC/24 A    |  | <b>€ 7.95</b>  |
| <b>930573</b> | Outdoor Y connector for 3 cables 4-14 mm, 3 strands, 0.5-4 mm², 450 V AC/24 A |  | <b>€ 8.95</b>  |



### Lighting design

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.



## HIGHBAY BASIC DALI

The Highbay Basic DALI high-bay spotlight combines high light output with economic efficiency and flexible adaptability. Thanks to selectable output and switchable light color in three levels, the high bay spotlight is ideal for industrial halls, storage areas and production areas. The DALI-2/D4i control system enables modern lighting management including Intelli-Data function for luminaire, energy and maintenance data.






## HIGHBAY BASIC DALI

- cost-effective and high-performance
- particularly energy-efficient and economical
- output adjustable in three stages
- light colour adjustable in three stages
- with Intelli-Data: Dali parts 251, 252, 253 for lighting, energy and maintenance data
- with D4i driver for direct connection to DALI sensors

### Application Area

Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse

|                    |                                 |                         |                     |
|--------------------|---------------------------------|-------------------------|---------------------|
| Housing            | Aluminium, Polycarbonate, Steel | Power Selectable        | 210 W, 160 W, 110 W |
| Colour Temperature | 4000/4500/5700 K                | Rated Input Voltage     | 100-277 V/AC        |
| Luminous Flux      | 33500/34500/33500 lm            | Power Supply Unit incl. | Yes                 |
| Height             | 111 mm                          | Light Beam Angle        | 90 Degree           |
| Ø                  | 302 mm                          | Control                 | DALI 2 / DT6 D4i    |
|                    |                                 | CRI (Ra)                | 80                  |
|                    |                                 | IK Protection Class     | IK08                |



732163

| Article       | Housing Color                         | Price           |
|---------------|---------------------------------------|-----------------|
| <b>732163</b> | Black <span>NW</span> <span>CW</span> | <b>€ 167.95</b> |



### Accessories

|               |                                                                            |                |
|---------------|----------------------------------------------------------------------------|----------------|
| <b>930977</b> | 60° Lens for Highbay Basic                                                 | <b>€ 15.95</b> |
| <b>930978</b> | 120° Lens for Highbay Basic                                                | <b>€ 15.95</b> |
| <b>930641</b> | Chain suspension 1 m for Alludra / Highbay Basic / Vega                    | <b>€ 11.95</b> |
| <b>930685</b> | Chain suspension 3 m for Alludra / Highbay Basic / Vega                    | <b>€ 19.95</b> |
| <b>930742</b> | Wall assembly arm for Vega OnOff, Highbay Basic                            | <b>€ 31.95</b> |
| <b>930571</b> | Outdoor cable conn. 2 cables 4-14 mm, 2-5 strands 0.5-4 mm², 450 V AC/24 A | <b>€ 7.95</b>  |



### Technical data sheet

New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.





## VEGA

The VEGA high-bay light - quality that shines through. The high-bay light is the perfect solution for industrial halls/warehouses where first-class lighting is required. The variant with three selectable output levels can adapt to your requirements. The spotlights are also very energy efficient, which has a positive effect on your operating costs. A long service life of 50,000 hours (L80B20) ensures reliable, no-compromise lighting for a long time to come. With optional lenses, the VEGA spotlights can achieve a UGR value below 19, ensuring glare-free light. We also offer variants with DALI control capability for those wanting precise lighting control. The high-bay lights are also eligible for BEG German federal funding for energy-efficient buildings.






VEGA

- High-quality, flexible and powerful high-bay lights
- Suitable for fire-prone facilities (EN60598-2-24)
- Output adjustable in three stages
- UGR <19 with optional lens
- Particularly energy efficient

Application Area

Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse

|                  |                    |                         |              |
|------------------|--------------------|-------------------------|--------------|
| Housing          | Aluminium          | Rated Input Voltage     | 100-277 V/AC |
| Surface          | Powder-coated      | Power Supply Unit incl. | Yes          |
| Luminous Flux    | 28800 lm           | Light Beam Angle        | 120 Degree   |
| Height           | 120 mm             | Primary Cable Length    | 1.5 m        |
| Ø                | 400 mm             | CRI (Ra)                | 80           |
| Power Selectable | 90 W, 130 W, 160 W | IK Protection Class     | IK09         |



732156

| Article | Housing Color | Colour Temperature | Price    |
|---------|---------------|--------------------|----------|
| 732156  | Black         | NW 4000 K          | € 255.95 |
| 732158  | Black         | CW 5700 K          | € 255.95 |



Accessories

- 930742 Wall assembly arm for Vega OnOff, Highbay Basic
- 930743 60° lens for Vega
- 930641 Chain suspension 1 m for Alludra / Highbay Basic / Vega
- 930685 Chain suspension 3 m for Alludra / Highbay Basic / Vega



**5-year guarantee**  
Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.










VEGA DALI

- High-quality, flexible and powerful high-bay lights
- Suitable for fire-prone facilities (EN60598-2-24)
- UGR <19 with optional lens
- Particularly energy efficient

Application Area

Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse

|                     |               |                         |              |
|---------------------|---------------|-------------------------|--------------|
| Housing             | Aluminium     | Power Supply Unit incl. | Yes          |
| Surface             | Powder-coated | Light Beam Angle        | 120 Degree   |
| Luminous Flux       | 28800 lm      | Control                 | DALI 2 / DT6 |
| Height              | 122 mm        | Primary Cable Length    | 1.5 m        |
| Ø                   | 400 mm        | CRI (Ra)                | 80           |
| Power               | 160 W         | IK Protection Class     | IK09         |
| Rated Input Voltage | 100-277 V/AC  |                         |              |



732157

| Article | Housing Color | Colour Temperature | Price    |
|---------|---------------|--------------------|----------|
| 732157  | Black         | NW 4000 K          | € 295.95 |
| 732159  | Black         | CW 5700 K          | € 295.95 |



Accessories

|        |                                                         |
|--------|---------------------------------------------------------|
| 930743 | 60° lens for Vega                                       |
| 930775 | Wall assembly arm for Vega DALI                         |
| 930641 | Chain suspension 1 m for Alludra / Highbay Basic / Vega |
| 930685 | Chain suspension 3 m for Alludra / Highbay Basic / Vega |



**Onlineshop**  
You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

# damp-proof luminaires



■  
page 229



■  
page 230



■  
page 231



□ ■ ■  
page 232




□ ■ ■  
page 234



□ ■ ■  
page 235








## TRI PROOF BASIC

- Eligible for BEG German federal funding for energy-efficient buildings
- Particularly energy efficient
- Long service life of 50,000 hours L80B50
- Pre-installed feed-through wiring 3x1.5 mm²
- Cable entry point on the back
- Stainless steel clips on the cover can be locked with screws
- Robust polycarbonate [PC] plastic housing

### Application Area

Garage / carport / car park, Workshop / Craft / Warehouse, Industry / production / high-bay warehouse, Basement / damp room, Multi-storey car park / underground car park, Retrofit / Refurbishment

|                     |                      |                         |            |
|---------------------|----------------------|-------------------------|------------|
| Housing             | Polycarbonate, Steel | Number in Row max.      | 15         |
| Colour Temperature  | 4000 K               | Power Supply Unit incl. | Yes        |
| Width               | 82 mm                | Light Beam Angle        | 120 Degree |
| Height              | 75 mm                | CRI (Ra)                | 80         |
| Rated Input Voltage | 220-240 V/AC         | IK Protection Class     | IK08       |



730489

| Article       | Housing Color |    | Luminous Flux | Length  | Power  | Price   |
|---------------|---------------|----|---------------|---------|--------|---------|
| <b>730509</b> | Light grey    | NW | 1400 lm       | 610 mm  | 10.0 W | € 39.95 |
| <b>730483</b> | Light grey    | NW | 2520 lm       | 610 mm  | 18.0 W | € 43.95 |
| <b>730510</b> | Light grey    | NW | 2800 lm       | 1210 mm | 20.0 W | € 55.95 |
| <b>730511</b> | Light grey    | NW | 4200 lm       | 1510 mm | 30.0 W | € 63.95 |
| <b>730486</b> | Light grey    | NW | 5040 lm       | 1210 mm | 36.0 W | € 63.95 |
| <b>730489</b> | Light grey    | NW | 7700 lm       | 1510 mm | 55.0 W | € 75.95 |



### Accessories

- 930713** Cable suspension for Tri Proof Basic
- 931098** Cable gland PG/M20 incl. locknut + sealing ring, IP68



€ 15.95

€ 1.75



### Lighting design

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.




TRI PROOF BASIC MOTION

- Eligible for German BEG federal funding
- Particularly energy efficient
- Long service life of 50,000 hours (L80B50)
- Continuous 3x1.5 mm² wiring pre-installed
- Cable entry point on the back
- Stainless steel clips on the cover can be locked with screws
- Robust polycarbonate (PC) plastic housing
- Adjustable radar motion sensor

Application Area

Garage / carport / car park, Workshop / Craft / Warehouse, Industry / production / high-bay warehouse, Basement / damp room, Multi-storey car park / underground car park, Retrofit / Refurbishment

|                     |                         |                         |            |
|---------------------|-------------------------|-------------------------|------------|
| Housing             | Polycarbonate (PC)/iron | Number in Row max.      | 15         |
| Colour Temperature  | 4000 K                  | Power Supply Unit incl. | Yes        |
| Width               | 82 mm                   | Light Beam Angle        | 120 Degree |
| Height              | 75 mm                   | CRI (Ra)                | 80         |
| Rated Input Voltage | 220-240 V/AC            | Motion Detector         | Yes        |
|                     |                         | IK Protection Class     | IK08       |



730490

| Article | Housing Color | Luminous Flux | Length  | Power  | Price   |
|---------|---------------|---------------|---------|--------|---------|
| 730484  | Light grey    | 2520 lm       | 610 mm  | 18.0 W | € 59.95 |
| 730487  | Light grey    | 5040 lm       | 1210 mm | 36.0 W | € 79.95 |
| 730490  | Light grey    | 7700 lm       | 1510 mm | 55.0 W | € 91.95 |



Accessories

|        |                                                       |  |         |
|--------|-------------------------------------------------------|--|---------|
| 930713 | Cable suspension for Tri Proof Basic                  |  | € 15.95 |
| 931098 | Cable gland PG/M20 incl. locknut + sealing ring, IP68 |  | € 1.75  |



**5-year guarantee**  
Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.






## TRI PROOF BASIC DALI

- Eligible for BEG German federal funding for energy-efficient buildings
- Emergency power capable [180-264 V/DC EOFI: 15 %]
- Particularly energy efficient
- Long service life of 50,000 hours L80B50
- Pre-installed feed-through wiring 5x 1.5 mm²
- Cable entry point on the back
- Stainless steel clips on the cover can be locked with screws
- Robust plastic housing

### Application Area

Garage / carport / car park, Workshop / Craft / Warehouse, Industry / production / high-bay warehouse, Basement / damp room, Multi-storey car park / underground car park, Safety lighting / emergency lighting, Retrofit / Refurbishment

|                     |                          |                         |                                |
|---------------------|--------------------------|-------------------------|--------------------------------|
| Housing             | Polycarbonate (PC)/ iron | Power Supply Unit incl. | Yes                            |
| Colour Temperature  | 4000 K                   | Light Beam Angle        | 120 Degree                     |
| Width               | 82 mm                    | Control                 | DALI 2 / DT6, Intelli Push-Dim |
| Height              | 75 mm                    | CRI (Ra)                | 80                             |
| Rated Input Voltage | 220-240 V/AC             | IK Protection Class     | IK08                           |
| Number in Row max.  | 15                       |                         |                                |



730491

| Article       | Housing Color | Luminous Flux | Length  | Power  | Price           |
|---------------|---------------|---------------|---------|--------|-----------------|
| <b>730485</b> | Light grey    | 2520 lm       | 610 mm  | 18.0 W | <b>€ 83.95</b>  |
| <b>730488</b> | Light grey    | 5040 lm       | 1210 mm | 36.0 W | <b>€ 103.95</b> |
| <b>730491</b> | Light grey    | 7700 lm       | 1510 mm | 55.0 W | <b>€ 127.95</b> |



### Accessories


|               |                                                       |  |                |
|---------------|-------------------------------------------------------|--|----------------|
| <b>930713</b> | Cable suspension for Tri Proof Basic                  |  | <b>€ 15.95</b> |
| <b>931098</b> | Cable gland PG/M20 incl. locknut + sealing ring, IP68 |  | <b>€ 1.75</b>  |



### Lighting design

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.

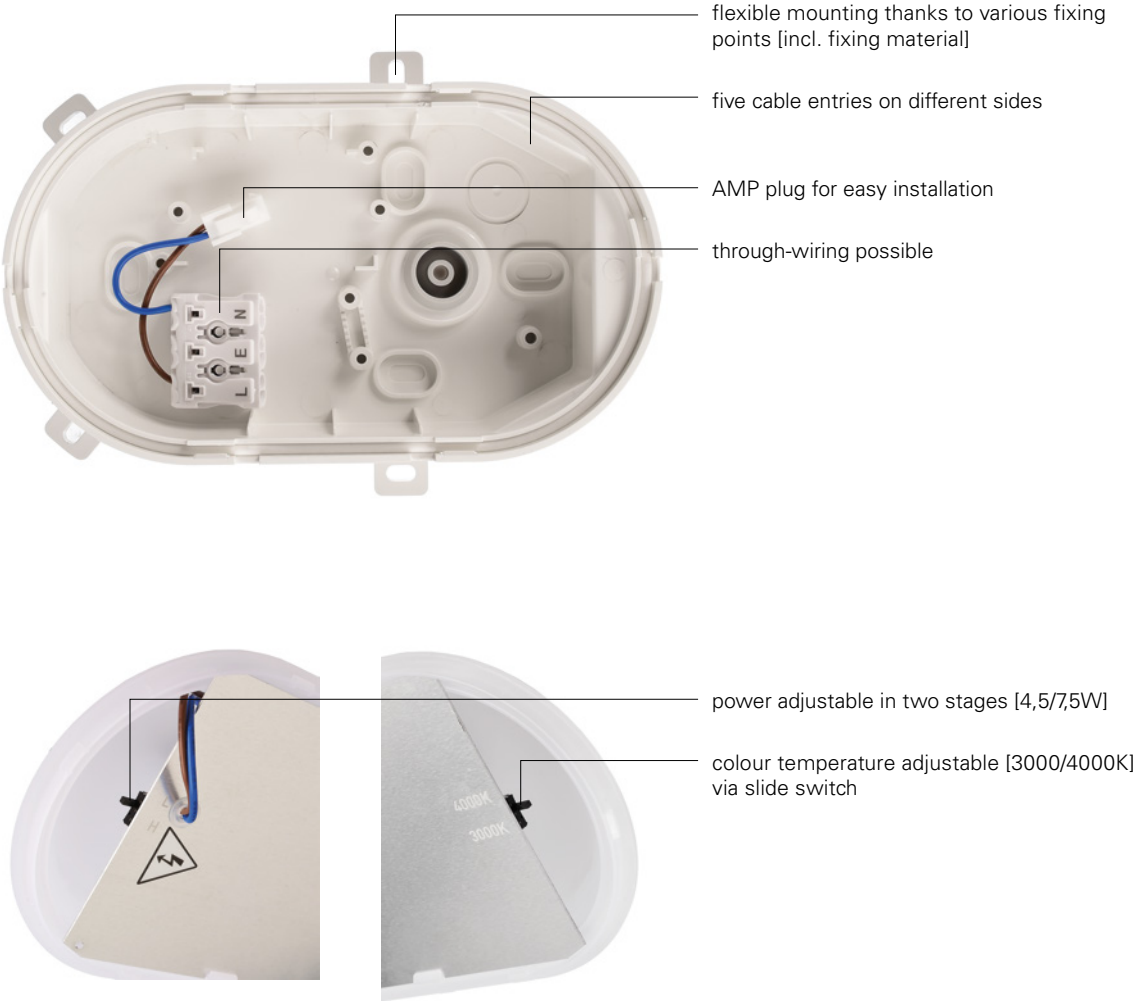




## SOTANO

- Classic cellar light with modern LED technology
- Colour temperature adjustable (3,000/4,000 K) via slide switch
- Output adjustable in two stages (4.5/7.5 W) via slide switch
- Six cable entry points on multiple sides
- Flexible installation

### Application Area

Garage / carport / car park, Workshop / Craft / Warehouse, Basement / damp room, Multi-storey car park / underground car park, Refurbishment

|                    |               |                         |              |
|--------------------|---------------|-------------------------|--------------|
| Housing            | Polycarbonate | Power Selectable        | 4.5 W, 7.5 W |
| Colour Temperature | 3000/4000 K   | Rated Input Voltage     | 220-240 V/AC |
| Luminous Flux      | 450/750 lm    | Power Supply Unit incl. | Yes          |
| Length             | 165 mm        | Light Beam Angle        | 120 Degree   |
| Width              | 120 mm        | Light Direction         | Front        |
| Height             | 65 mm         | IK Protection Class     | IK08         |



731160

| Article       | Housing Color |       | Price   |
|---------------|---------------|-------|---------|
| <b>731160</b> | White         | WW NW | € 13.95 |
| <b>731161</b> | Grey          | WW NW | € 13.95 |
| <b>731162</b> | Black         | WW NW | € 13.95 |



### 5-year guarantee

Benefit from the maximum quality promise:

All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



SOTANO RETRO ROUND

- Classic, low-cost cellar lamp
- Replaceable lamp [E27]
- Cable entry on multiple sides
- Several mounting points for flexible installation

Application Area

Garage / carport / car park, Workshop / Craft / Warehouse, Basement / damp room

|            |                    |                     |                                    |
|------------|--------------------|---------------------|------------------------------------|
| Housing    | PP - Polypropylene | Rated Input Voltage | 220-240 V/AC                       |
| Height     | 100 mm             | Control             | Dimmable via optional light source |
| Ø          | 180 mm             | IK Protection Class | IK06                               |
| Max. Power | 1x max. 60 W       |                     |                                    |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 731163  |  White | € 10.95 |
| 731164  |  Grey  | € 10.95 |
| 731165  |  Black | € 10.95 |



**Light sources**  
For all lights and bases:  
You can find the right light sources in the »Light sources« section.



## SOTANO RETRO OVAL


- Classic, low-cost cellar lamp
- Replaceable lamp [E27]
- Cable entry on multiple sides
- Several mounting points for flexible installation

### Application Area

Garage / carport / car park, Workshop / Craft / Warehouse, Basement / damp room

|            |                    |                     |                                    |
|------------|--------------------|---------------------|------------------------------------|
| Housing    | PP - Polypropylene | Rated Input Voltage | 220-240 V/AC                       |
| Length     | 186 mm             | Control             | Dimmable via optional light source |
| Width      | 122 mm             | IK Protection Class | IK06                               |
| Height     | 108 mm             |                     |                                    |
| Max. Power | 1x max. 60 W       |                     |                                    |

| Article       | Housing Color | Price         |
|---------------|---------------|---------------|
| <b>731166</b> | White         | <b>€ 8.95</b> |
| <b>731167</b> | Grey          | <b>€ 8.95</b> |
| <b>731168</b> | Black         | <b>€ 8.95</b> |



### Onlineshop

You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.





## TRUNKING SYSTEMS

240 trunking systems

# Trunking systems



☐ page 244



☐ page 247



☐ page 248



☐ page 249



☐ page 250



☐ page 251



☐ page 257



☐ page 257



☐ page 258



☐ page 259



☐ page 260



☐ page 261



## SANOTRUNK UNIVERSAL – THE SMART SOLUTION FOR MODERN LIGHTING REFURBISHMENTS

Want to modernize old T5 and T8 trunking systems efficiently and sustainably? With SANOTRUNK UNIVERSAL, you can make almost any trunking system fit for the future.

SANOTRUNK UNIVERSAL sets new standards in terms of compatibility. Thanks to quick-fit clips and tool-free installation, the system can be integrated into almost all standard trunking systems - whether from Philips, RIDI, Trilux, Zumtobel or other manufacturers. The continuous halogen-free 5 or 7-core through-wiring, the integrated plug connectors and a selection of interchangeable lens optics [including 30°, 90°, 25° asymmetrical on one or both sides] make adaptation to any application child's play. The conversion is carried out in five simple steps:



1 - old light inserts removed [wiring remains in]



2 - hang new LED modules in old mounting rail



3 - connect modules and adjust power if necessary



4 - click in the modules



5 - finished

## COMPATIBILITY OVERVIEW

| brand                | trunk name                                     | shape                                                                               |
|----------------------|------------------------------------------------|-------------------------------------------------------------------------------------|
| AEG                  | Gealux-TS XX                                   |    |
| AEG/PHILIPS          | Maxos                                          |    |
| Antaris              | Antaris                                        |    |
| Antaris              | trunking system                                |    |
| ClickLUX Tragschiene | 701501880016/<br>703002880017/<br>704503880018 |    |
| Fluolite             | TRX /<br>TRZ                                   |    |
| Fluora               | Mini-Fix                                       |    |
| Kandem               | SV70 /<br>SV75                                 |    |
| Lite Licht           | E-STN                                          |    |
| Lite Licht           | Q-EMMS                                         |                                                                                     |
| Lite Licht           | Q-Rail Q-TS                                    |    |
| Lite Licht           | Q-STN***                                       |                                                                                     |
| Litec                |                                                |    |
| Ludwig               | TR50W                                          |  |
| Lunix                | Q-STN***                                       |                                                                                     |
| MOLTOMX              | Prestige                                       |  |
| Newlec               | HSDT                                           |  |
| Norton               | NSL                                            |  |
| OMS                  | Prestige                                       |  |
| Philips              | Maxos TL5 /<br>Maxos TL-D                      |  |
| Philips              | TTX150                                         |                                                                                     |
| Philips              | TTX200                                         |                                                                                     |
| Philips              | TTX400                                         |  |
| Philips              | TTX400 T5 / TTX400<br>T8                       |  |
| Regent               | Traq                                           |  |


| brand                     | trunk name           | shape                                                                                 |
|---------------------------|----------------------|---------------------------------------------------------------------------------------|
| Regent                    | ICE**                |                                                                                       |
| Regiolux                  | SDT                  |    |
| Regiolux                  | SDT XX               |    |
| Regiolux                  | SMT /<br>SPT         |    |
| RIDI                      | VLG XX               |    |
| RIDI, new trunking system | VLT***               |    |
| RIDI, new trunking system | VLT XX               |                                                                                       |
| RZB                       | Planos               |    |
| Siemens                   | 5LJ80XX              |    |
| Siemens                   | 5LJ9*                |                                                                                       |
| Siemens                   | 5LS8..               |    |
| Siteco                    | DUS*                 |    |
| Siteco                    | Modario              |    |
| Thron                     | 090554 /<br>098287   |   |
| Trilux                    | 07650XX              |  |
| Trilux                    | 07690XX              |  |
| Trilux                    | 218120 (7761/7861)   |  |
| Trilux                    | 7910X** /<br>7920X** |  |
| Trilux                    | 7770                 |  |
| VEKO                      | PRN                  |  |
| Zumtobel                  | PNR                  |                                                                                       |
| Zumtobel                  | Tecton               |                                                                                       |
| Zumtobel                  | ZX1                  |  |
| Zumtobel                  | ZX2 T8 /<br>ZX2 T5   |  |

with optional mounting bracket

\* 930931 | \*\* 930932 | \*\*\* 930933

## BENEFITS FOR EVERY APPLICATION

The SANOTRUNK UNIVERSAL refurbishment insert offers a wide range of possible applications and enables sustainable modernisation of your lighting.

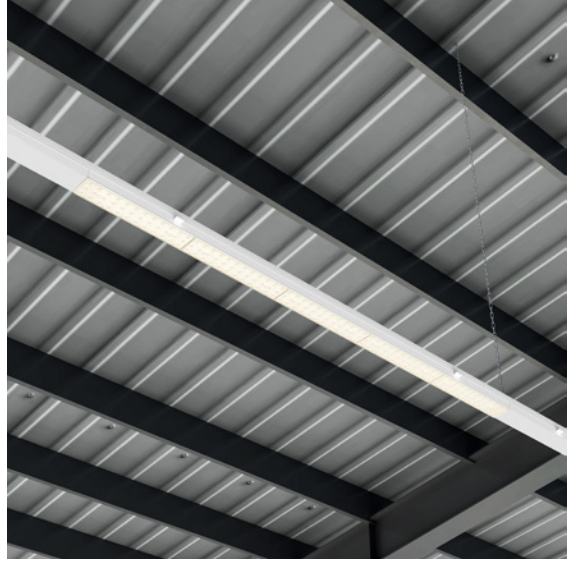

### Supermarket / Sales Area

Optic: 25° asymmetric, single- or double-sided  
Benefit: The asymmetric light distribution illuminates shelf areas precisely, avoids stray light in the aisles, and creates a pleasant, sales-promoting atmosphere.  
Promotional displays or end caps can be illuminated using the spot-light modules.



### Industrial and Production Halls

Optic: 90° beam angle  
Benefit: Uniform, standard-compliant illumination of work areas. Ideal for precision tasks and safety-relevant activities.





### **Warehouse / High-Bay Storage**

Optics: 30°, 60° or 90°

Benefit: Deep shelving aisles and varying storage heights can be illuminated with pinpoint accuracy. The light reaches the lowest and highest levels – without shadows or isolated light spots.

The shelving areas are also illuminated evenly, ensuring that shelf spaces remain clearly visible.




### **Workshops / Assembly Areas**

Optic: 120° beam angle

Benefit: Broad, low-shadow illumination of entire rooms. Perfect for fine assembly work, inspections, or manual tasks with high lighting requirements.

The homogeneous light-line appearance fully meets even the highest aesthetic demands.

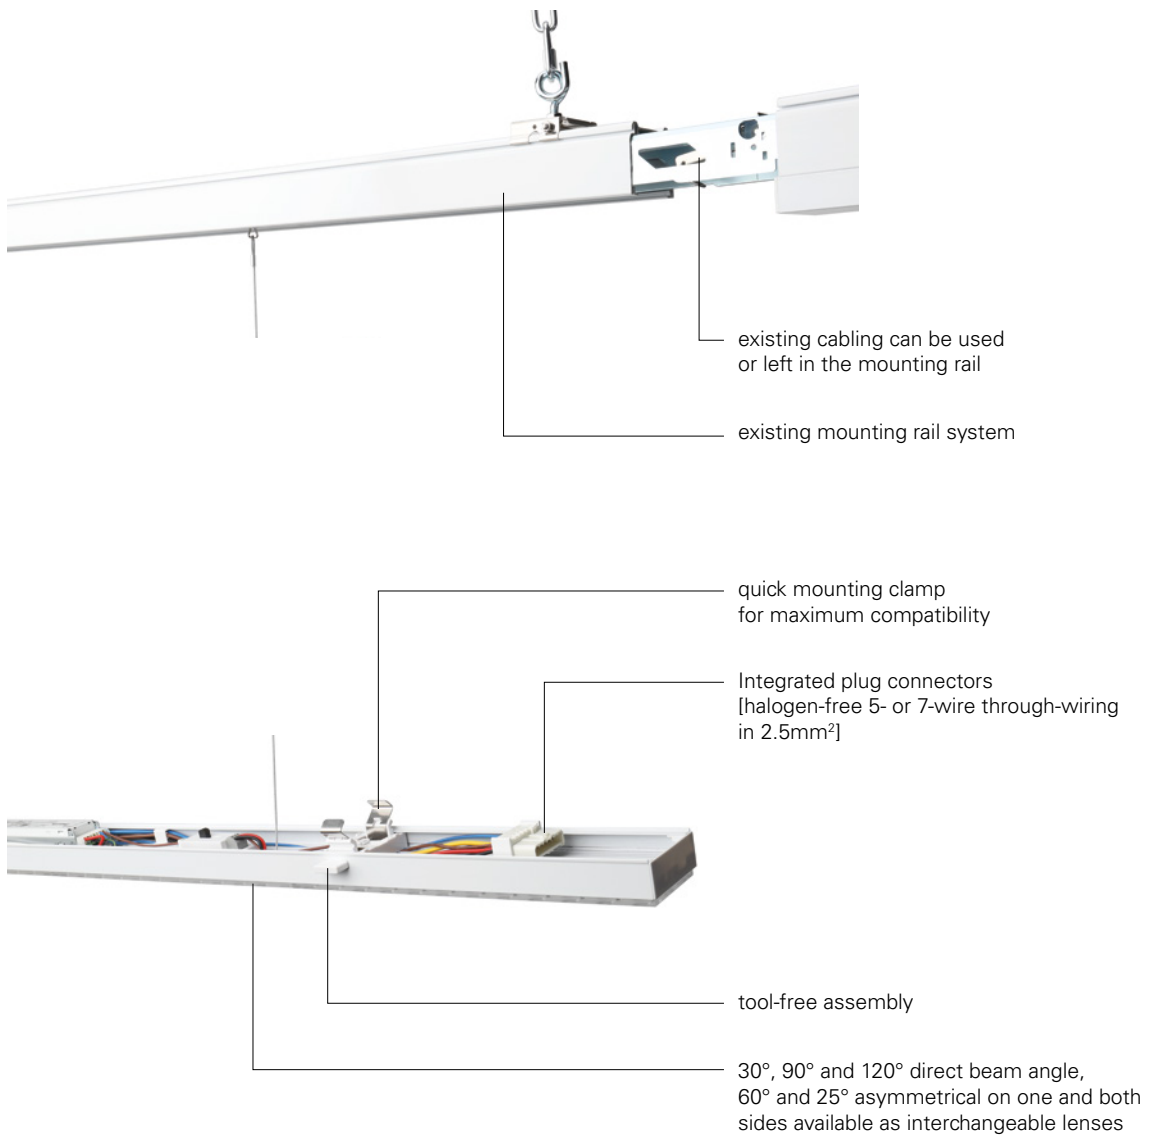

## SANOTRUNK UNIVERSAL

The SANOTRUNK trunking system is a specially developed retrofit solution for the fast and cost-effective modernisation of existing T5 and T8 trunking systems. By reusing existing trunking rails, installation effort is minimised and tool-free mounting is enabled. Thanks to its compatible system architecture, SANOTRUNK UNIVERSAL can be integrated into trunking systems from leading manufacturers such as Philips, Trilux, Siteco, Zumtobel, Regiolux, Ridi, Fluolite and many others.

In addition to retrofit projects, SANOTRUNK trunking rails are also suitable for extending existing installations and for creating completely new lighting systems.

The pre-wired through-wiring with 2.5 mm² conductor cross-section ensures reliable power distribution across long trunking runs and multiple circuits. Existing wiring can continue to be used as a power supply if required.

Power-switch technology or DALI control [depending on the model] allow flexible adaptation of the lighting system. Optional blank covers and connectors provide maximum flexibility when designing lighting layouts.






## SANOTRUNK UNIVERSAL

- Renovation solution for T5/T8 light strip systems
- Continued use of existing mounting rails possible
- Easy, quick and reliable installation
- Compatible with common manufacturers
- Eligible for BEG German federal funding for energy-efficient buildings
- Can run on emergency power
- Can be individually adapted to the lighting circumstances

### Application Area

Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse, Refurbishment, Safety lighting / emergency lighting

|                    |           |                     |              |
|--------------------|-----------|---------------------|--------------|
| Housing            | Aluminium | Height              | 31 mm        |
| Colour Temperature | 4000 K    | Rated Input Voltage | 198-264 V/AC |
| Length             | 1528 mm   | CRI (Ra)            | 80           |
| Width              | 65.6 mm   | IK Protection Class | IK04         |




707228

| Article       | Housing Color                  | Luminous Flux | Power Selectable                        | Light Beam Angle | Price           |
|---------------|--------------------------------|---------------|-----------------------------------------|------------------|-----------------|
| <b>707228</b> | <input type="checkbox"/> White | 11600 lm      | 75 / 68 / 59 / 52 / 42 / 36 / 27 / 21 W | 120 Degree       | <b>€ 179.95</b> |
| <b>707227</b> | <input type="checkbox"/> White | 12200 lm      | 70 / 64 / 55 / 49 / 39 / 34 / 26 / 20 W | 90 Degree        | <b>€ 179.95</b> |
| <b>707226</b> | <input type="checkbox"/> White | 12400 lm      | 70 / 64 / 55 / 49 / 39 / 34 / 26 / 20 W | 30 Degree        | <b>€ 179.95</b> |




### Accessories


|               |                                                                                          |  |                |
|---------------|------------------------------------------------------------------------------------------|--|----------------|
| <b>930915</b> | Sanotrunk Universal Lense, Set 5 pcs, 30 degree                                          |  | <b>€ 23.95</b> |
| <b>930916</b> | Sanotrunk Universal Lense, Set 5 pcs, 60 degree                                          |  | <b>€ 23.95</b> |
| <b>930917</b> | Sanotrunk Universal Lense, Set 5 pcs, 90 degree                                          |  | <b>€ 23.95</b> |
| <b>930918</b> | Sanotrunk Universal Lense, Set 5 pcs, 25 degree, single side asymmetrical                |  | <b>€ 23.95</b> |
| <b>930919</b> | Sanotrunk Universal Lense, Set 5 pcs, 25 degree, double side asymmetrical                |  | <b>€ 23.95</b> |
| <b>930920</b> | Sanotrunk universal dummy cover, shortenable, PC                                         |  | <b>€ 15.95</b> |
| <b>930922</b> | Sanotrunk Universal Blind Cover Aluminium                                                |  | <b>€ 31.95</b> |
| <b>930921</b> | Sanotrunk universal mounting clips for blind cover, can be shortened 2 pcs.              |  | <b>€ 3.95</b>  |
| <b>930931</b> | Sanotrunk universal mounting clips Siteco DUS / Simens 5LJ9 2 pcs.                       |  | <b>€ 3.95</b>  |
| <b>930932</b> | Sanotrunk universal mounting clamps Regent ICE 2 pcs.                                    |  | <b>€ 3.95</b>  |
| <b>930933</b> | Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs. |  | <b>€ 3.95</b>  |
| <b>930923</b> | Sanotrunk Universal Power feed socket WAGO 267-501                                       |  | <b>€ 9.95</b>  |
| <b>930924</b> | Sanotrunk Universal Power supply plug WAGO 267-510                                       |  | <b>€ 9.95</b>  |
| <b>930925</b> | Sanotrunk Universal Power supply socket On/Off wired WAGO 267-501                        |  | <b>€ 11.95</b> |
| <b>930927</b> | Sanotrunk Universal Power supply plug On/Off wired WAGO 267-510                          |  | <b>€ 13.95</b> |
| <b>930929</b> | Connector, Sanotrunk Universal                                                           |  | <b>€ 35.95</b> |

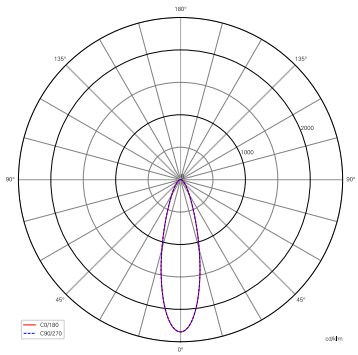


30°

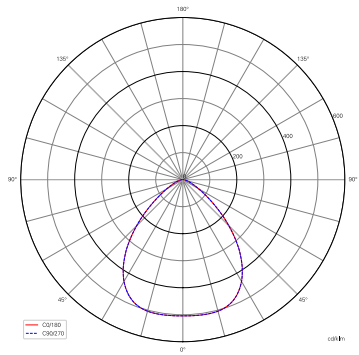


90°

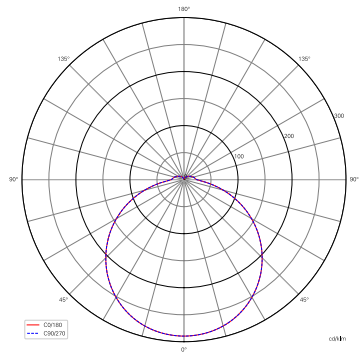


120°

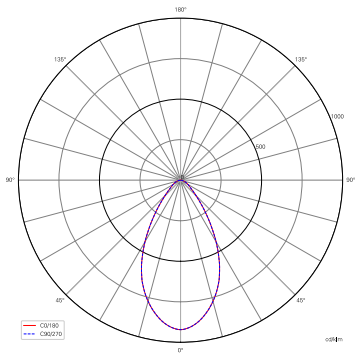

60°

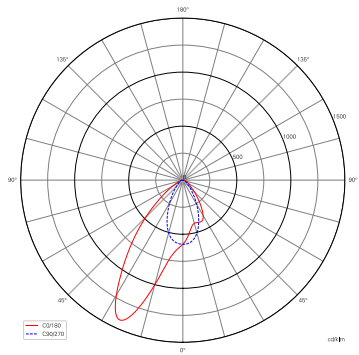

25°, asymmetrical on one side

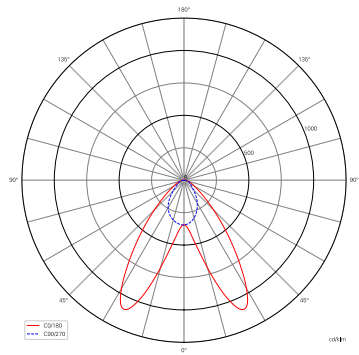

25°, double-sided asymmetrical






## SANOTRUNK UNIVERSAL DALI

- Renovation solution for T5/T8 light strip systems
- Continued use of existing mounting rails possible
- Easy, quick and reliable installation
- Compatible with common manufacturers
- Eligible for BEG German federal funding for energy-efficient buildings
- Can run on emergency power
- DALI versions with Intelli-Data: Dali parts 251, 252, 253 for lighting, energy and maintenance data
- Can be individually adapted to the lighting circumstances

### Application Area

Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse, Refurbishment, Safety lighting / emergency lighting

|                    |           |                     |                        |
|--------------------|-----------|---------------------|------------------------|
| Housing            | Aluminium | Rated Input Voltage | 198-264 V/AC           |
| Colour Temperature | 4000 K    | Control             | DALI 2 / DT6, Push-Dim |
| Length             | 1528 mm   | CRI (Ra)            | 80                     |
| Width              | 65.6 mm   | IK Protection Class | IK04                   |
| Height             | 31 mm     |                     |                        |



707229

| Article       | Housing Color                  | Luminous Flux | Power  | Light Beam Angle | Price           |
|---------------|--------------------------------|---------------|--------|------------------|-----------------|
| <b>707231</b> | <input type="checkbox"/> White | 11600 lm      | 75.0 W | 120 Degree       | <b>€ 219.95</b> |
| <b>707230</b> | <input type="checkbox"/> White | 12200 lm      | 70.0 W | 90 Degree        | <b>€ 219.95</b> |
| <b>707229</b> | <input type="checkbox"/> White | 12400 lm      | 70.0 W | 30 Degree        | <b>€ 219.95</b> |



### Accessories

|               |                                                                                          |  |                |
|---------------|------------------------------------------------------------------------------------------|--|----------------|
| <b>930915</b> | Sanotrunk Universal Lense, Set 5 pcs, 30 degree                                          |  | <b>€ 23.95</b> |
| <b>930916</b> | Sanotrunk Universal Lense, Set 5 pcs, 60 degree                                          |  | <b>€ 23.95</b> |
| <b>930917</b> | Sanotrunk Universal Lense, Set 5 pcs, 90 degree                                          |  | <b>€ 23.95</b> |
| <b>930918</b> | Sanotrunk Universal Lense, Set 5 pcs, 25 degree, single side asymmetrical                |  | <b>€ 23.95</b> |
| <b>930919</b> | Sanotrunk Universal Lense, Set 5 pcs, 25 degree, double side asymmetrical                |  | <b>€ 23.95</b> |
| <b>930920</b> | Sanotrunk universal dummy cover, shortenable, PC                                         |  | <b>€ 15.95</b> |
| <b>930922</b> | Sanotrunk Universal Blind Cover Aluminium                                                |  | <b>€ 31.95</b> |
| <b>930921</b> | Sanotrunk universal mounting clips for blind cover, can be shortened 2 pcs.              |  | <b>€ 3.95</b>  |
| <b>930931</b> | Sanotrunk universal mounting clips Siteco DUS / Simens 5LJ9 2 pcs.                       |  | <b>€ 3.95</b>  |
| <b>930932</b> | Sanotrunk universal mounting clamps Regent ICE 2 pcs.                                    |  | <b>€ 3.95</b>  |
| <b>930933</b> | Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs. |  | <b>€ 3.95</b>  |
| <b>930923</b> | Sanotrunk Universal Power feed socket WAGO 267-501                                       |  | <b>€ 9.95</b>  |
| <b>930924</b> | Sanotrunk Universal Power supply plug WAGO 267-510                                       |  | <b>€ 9.95</b>  |
| <b>930926</b> | Sanotrunk Universal Power supply socket DALI wired WAGO 267-501                          |  | <b>€ 11.95</b> |
| <b>930928</b> | Sanotrunk Universal Power supply plug DALI wired WAGO 267-510                            |  | <b>€ 13.95</b> |
| <b>930930</b> | Connector, Sanotrunk Universal                                                           |  | <b>€ 39.95</b> |






SANOTRUNK UNIVERSAL SPOT

- Refurbishment solution for T5/T8 trunking systems
- Further use of existing trunking possible
- Simple, quick and safe installation
- Compatible with leading manufacturers
- BEG eligible
- Emergency power capable
- Can be customised to lighting scenarios
- Reflector can be replaced
- ideal for promotional displays or shelf end caps

**Application Area**  
Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse, Refurbishment, Safety lighting / emergency lighting

|                     |              |                         |            |
|---------------------|--------------|-------------------------|------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes        |
| Colour Temperature  | 4000 K       | Light Beam Angle        | 36 Degree  |
| Length              | 764 mm       | Rotation Angle          | 355 Degree |
| Width               | 65 mm        | Swivelling Angle        | 90 Degree  |
| Height              | 144 mm       | CRI (Ra)                | 90         |
| Rated Input Voltage | 198-264 V/AC | IK Protection Class     | IK04       |



707274

| Article | Housing Color                  | Luminous Flux | Power Selectable                                                  | Price    |
|---------|--------------------------------|---------------|-------------------------------------------------------------------|----------|
| 707274  | <input type="checkbox"/> White | 4260 lm       | 30 / 28 / 26 / 24 / 22 / 20 / 18 / 16 / 14 / 12 W                 | € 143.95 |
| 707277  | <input type="checkbox"/> White | 8580 lm       | 60 / 58, / 56 / 54 / 52 / 50 / 48 / 46 / 44 / 42 / 40 / 38 / 30 W | € 231.95 |



Accessories

- 931170 Sanotrunk Universal Spot, reflector 15 degrees
- 931171 Sanotrunk Universal Spot, reflector 24 degrees
- 931172 Sanotrunk Universal Spot, reflector 36 degrees
- 930923 Sanotrunk Universal Power feed socket WAGO 267-501
- 930924 Sanotrunk Universal Power supply plug WAGO 267-510
- 930925 Sanotrunk Universal Power supply socket On/Off wired WAGO 267-501
- 930927 Sanotrunk Universal Power supply plug On/Off wired WAGO 267-510
- 930931 Sanotrunk universal mounting clips Siteco DUS / Simens 5LJ9 2 pcs.
- 930932 Sanotrunk universal mounting clamps Regent ICE 2 pcs.
- 930933 Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs.

|  |         |
|--|---------|
|  | € 5.45  |
|  | € 5.45  |
|  | € 5.45  |
|  | € 9.95  |
|  | € 9.95  |
|  | € 11.95 |
|  | € 13.95 |
|  | € 3.95  |
|  | € 3.95  |
|  | € 3.95  |






## SANOTRUNK UNIVERSAL SPOT DALI

- Refurbishment solution for T5/T8 trunking systems
- Further use of existing trunking possible
- Simple, quick and safe installation
- Compatible with leading manufacturers
- BEG eligible
- Emergency power capable
- Can be customised to lighting scenarios
- Reflector can be replaced
- with Intelli-Data: Dali Parts 251, 252, 253 for luminaire, energy and maintenance data
- ideal for promotional displays or shelf end caps

### Application Area

Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse, Refurbishment, Safety lighting / emergency lighting

|                         |           |                     |                                |
|-------------------------|-----------|---------------------|--------------------------------|
| Housing                 | Aluminium | Rotation Angle      | 355 Degree                     |
| Colour Temperature      | 4000 K    | Swivelling Angle    | 90 Degree                      |
| Length                  | 764 mm    | Control             | DALI 2 / DT6, Intelli Push-Dim |
| Width                   | 65 mm     | CRI (Ra)            | 90                             |
| Height                  | 144 mm    | IK Protection Class | IK04                           |
| Power Supply Unit incl. | Yes       |                     |                                |
| Light Beam Angle        | 36 Degree |                     |                                |



707280

| Article       | Housing Color                  | Lum. Flux | Power Selectable                                                 | Rated Input Voltage | Price           |
|---------------|--------------------------------|-----------|------------------------------------------------------------------|---------------------|-----------------|
| <b>707280</b> | <input type="checkbox"/> White | 4260 lm   | 30 / 28 / 26 / 24 / 22 / 20 / 18 / 16 / 14 / 12 W                | 198-264 V/AC        | <b>€ 175.95</b> |
| <b>707283</b> | <input type="checkbox"/> White | 8580 lm   | 60 / 58 / 56 / 54 / 52 / 50 / 48 / 46 / 44 / 42 / 40 / 38 / 36 W | 180-264 V/AC        | <b>€ 263.95</b> |



### Accessories

|               |                                                                                          |  |                |
|---------------|------------------------------------------------------------------------------------------|--|----------------|
| <b>931170</b> | Sanotrunk Universal Spot, reflector 15 degrees                                           |  | <b>€ 5.45</b>  |
| <b>931171</b> | Sanotrunk Universal Spot, reflector 24 degrees                                           |  | <b>€ 5.45</b>  |
| <b>931172</b> | Sanotrunk Universal Spot, reflector 36 degrees                                           |  | <b>€ 5.45</b>  |
| <b>930923</b> | Sanotrunk Universal Power feed socket WAGO 267-501                                       |  | <b>€ 9.95</b>  |
| <b>930924</b> | Sanotrunk Universal Power supply plug WAGO 267-510                                       |  | <b>€ 9.95</b>  |
| <b>930926</b> | Sanotrunk Universal Power supply socket DALI wired WAGO 267-501                          |  | <b>€ 11.95</b> |
| <b>930928</b> | Sanotrunk Universal Power supply plug DALI wired WAGO 267-510                            |  | <b>€ 13.95</b> |
| <b>930931</b> | Sanotrunk universal mounting clips Siteco DUS / Simens 5LJ9 2 pcs.                       |  | <b>€ 3.95</b>  |
| <b>930932</b> | Sanotrunk universal mounting clamps Regent ICE 2 pcs.                                    |  | <b>€ 3.95</b>  |
| <b>930933</b> | Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs. |  | <b>€ 3.95</b>  |



SANOTRUNK UNIVERSAL SENSOR AND DEVICE CARRIER

- Accessory mounting up to 9kg [sensor, camera, shield]
- for electrical or mechanical accessories
- Integrated connection terminals for electrical accessories
- compatible with common motion, presence and daylight sensors [not included]

|         |           |                     |              |
|---------|-----------|---------------------|--------------|
| Housing | Aluminium | Height              | 0.3 mm       |
| Length  | 51 mm     | Rated Input Voltage | 180-264 V/AC |
| Width   | 6.6 mm    | IK Protection Class | IK04         |

| Article | Housing Color                  | Price   |
|---------|--------------------------------|---------|
| 931168  | <input type="checkbox"/> White | € 59.95 |




Accessories

|        |                                                                                          |  |         |
|--------|------------------------------------------------------------------------------------------|--|---------|
| 930931 | Sanotrunk universal mounting clips Siteco DUS / Simens 5LJ9 2 pcs.                       |  | € 3.95  |
| 930932 | Sanotrunk universal mounting clamps Regent ICE 2 pcs.                                    |  | € 3.95  |
| 930933 | Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs. |  | € 3.95  |
| 930923 | Sanotrunk Universal Power feed socket WAGO 267-501                                       |  | € 9.95  |
| 930924 | Sanotrunk Universal Power supply plug WAGO 267-510                                       |  | € 9.95  |
| 930925 | Sanotrunk Universal Power supply socket On/Off wired WAGO 267-501                        |  | € 11.95 |
| 930927 | Sanotrunk Universal Power supply plug On/Off wired WAGO 267-510                          |  | € 13.95 |



**Lighting design**  
 Interested in our lighting design service?  
 Your contact person will be happy to answer any questions you may have.

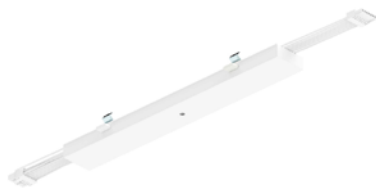

**SANOTRUNK UNIVERSAL DALI SENSOR AND DEVICE CARRIER**

- Accessory mounting up to 9kg [sensor, camera, shield]
- for electrical or mechanical accessories
- Integrated connection terminals for electrical accessories
- compatible with common motion, presence and daylight sensors [not included]

|                     |              |                     |                                                                                            |
|---------------------|--------------|---------------------|--------------------------------------------------------------------------------------------|
| Housing             | Aluminium    | Control             | DALI 1 / DT6, DALI 1 / DT8, DALI 2 / DT6, DALI 2 / DT6 D4i, DALI 2 / DT8, DALI 2 / DT8 D4i |
| Length              | 51 mm        |                     |                                                                                            |
| Width               | 6.6 mm       |                     |                                                                                            |
| Height              | 0.3 mm       |                     |                                                                                            |
| Rated Input Voltage | 180-264 V/AC | IK Protection Class | IK04                                                                                       |

| Article | Housing Color                  | Price   |
|---------|--------------------------------|---------|
| 931169  | <input type="checkbox"/> White | € 63.95 |



Accessories

|        |                                                                                          |  |         |
|--------|------------------------------------------------------------------------------------------|--|---------|
| 930931 | Sanotrunk universal mounting clips Siteco DUS / Siemens 5LJ9 2 pcs.                      |  | € 3.95  |
| 930932 | Sanotrunk universal mounting clamps Regent ICE 2 pcs.                                    |  | € 3.95  |
| 930933 | Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs. |  | € 3.95  |
| 930923 | Sanotrunk Universal Power feed socket WAGO 267-501                                       |  | € 9.95  |
| 930924 | Sanotrunk Universal Power supply plug WAGO 267-510                                       |  | € 9.95  |
| 930926 | Sanotrunk Universal Power supply socket DALI wired WAGO 267-501                          |  | € 11.95 |
| 930928 | Sanotrunk Universal Power supply plug DALI wired WAGO 267-510                            |  | € 13.95 |




**5-year guarantee**  
Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

SANOTRUNKTRUNKING SYSTEM



| components                                           | illust. | item          | page |
|------------------------------------------------------|---------|---------------|------|
| mounting rail L: 1500 mm                             | 01      | <b>930946</b> | 257  |
| mounting rail L: 3000 mm                             | 01      | <b>930947</b> | 257  |
| feed-in box                                          | 02      | <b>931088</b> | 258  |
| end piece                                            | 03      | <b>931089</b> | 258  |
| end cap [2 pcs.]                                     | 04      | <b>930950</b> | 257  |
| mounting clips for blind cover [2 pcs.]              | 05      | <b>930921</b> | 257  |
| L-connector left                                     | 06      | <b>930954</b> | 259  |
| L-connector right                                    | 07      | <b>930955</b> | 259  |
| T-connector left                                     | 08      | <b>931090</b> | 260  |
| T-connector right type A                             | 09      | <b>930957</b> | 260  |
| T-connector right type B                             | 10      | <b>931091</b> | 260  |
| T-connector double                                   | 11      | <b>930956</b> | 260  |
| X-connector straight                                 | 12      | <b>930958</b> | 261  |
| X-connector threefold                                | 13      | <b>930959</b> | 261  |
| cable gland M20                                      | 14      | <b>931098</b> | 257  |
| mountg bracket for mounting rail [10 pcs.]           | 15      | <b>930951</b> | 257  |
| suspension kit 5000 mm for mounting rail [10 pcs.]   | 16      | <b>930952</b> | 257  |
| bracket chain suspension for mounting rail [10 pcs.] | 17      | <b>930953</b> | 257  |
| chain suspension 3000 mm                             | 17      | <b>931087</b> | 257  |
| holder for chain suspension for connector [10 pcs.]  | 18      | <b>931086</b> | 259  |

ILLUSTRATION OF THE COMPONENTS

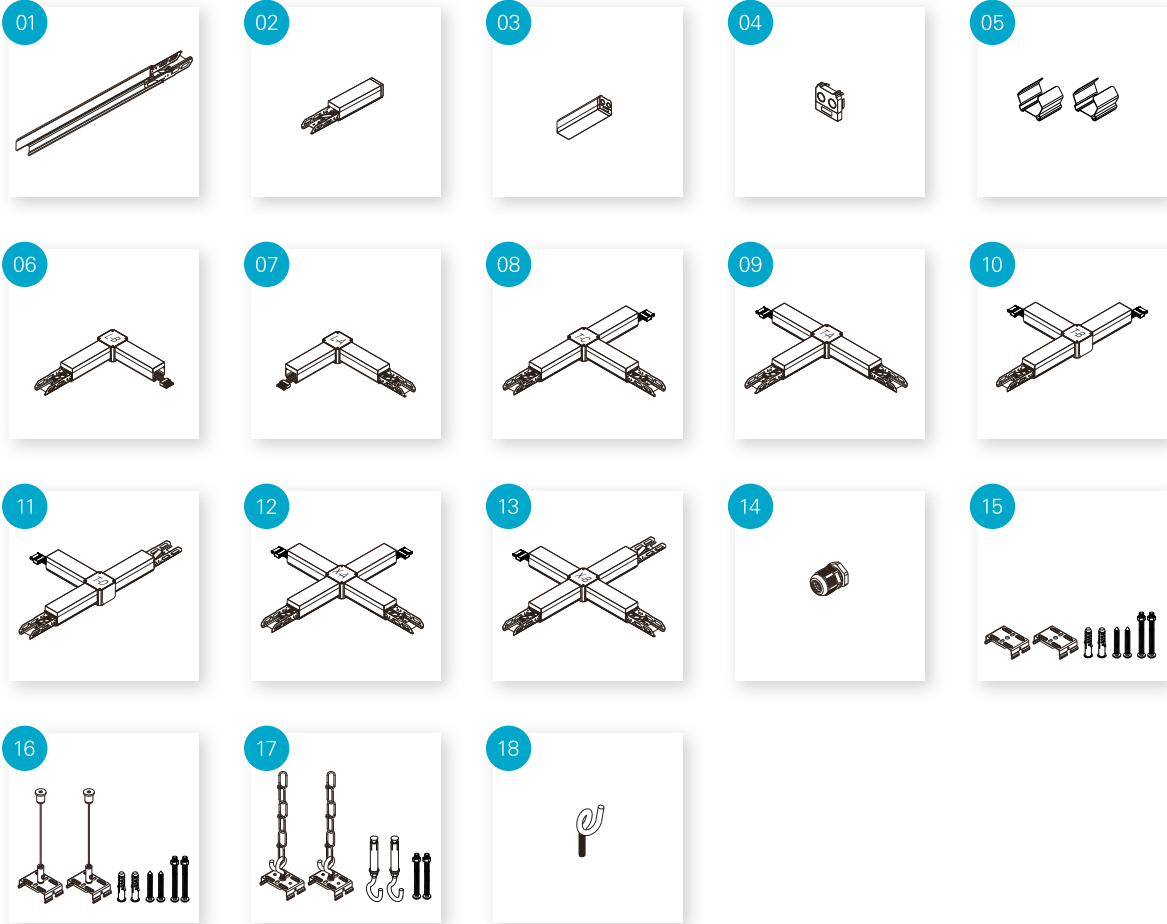


MOUNTING POINTS

1528 mm INSTALLATION

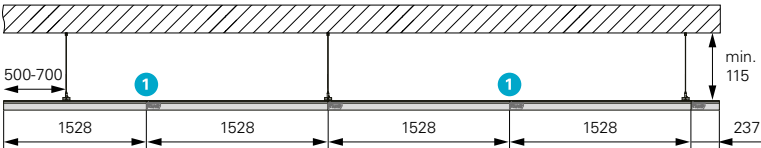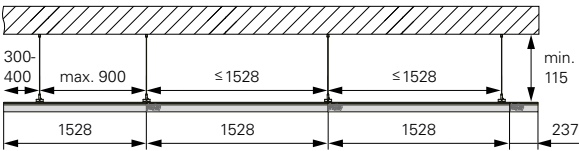


1 Before assembly, join two 1.5-metre mounting rails securely and treat them as a single 3-metre support rail from then on.

3056 mm INSTALLATION

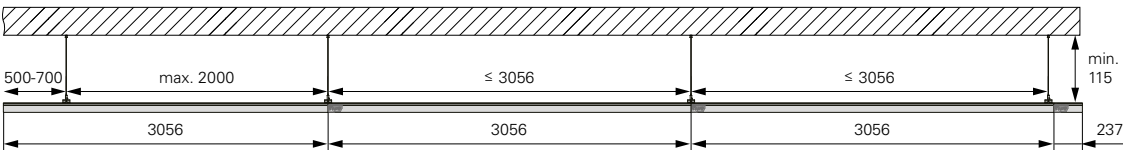


INSTALLATION OF THE LIGHT FITTINGS

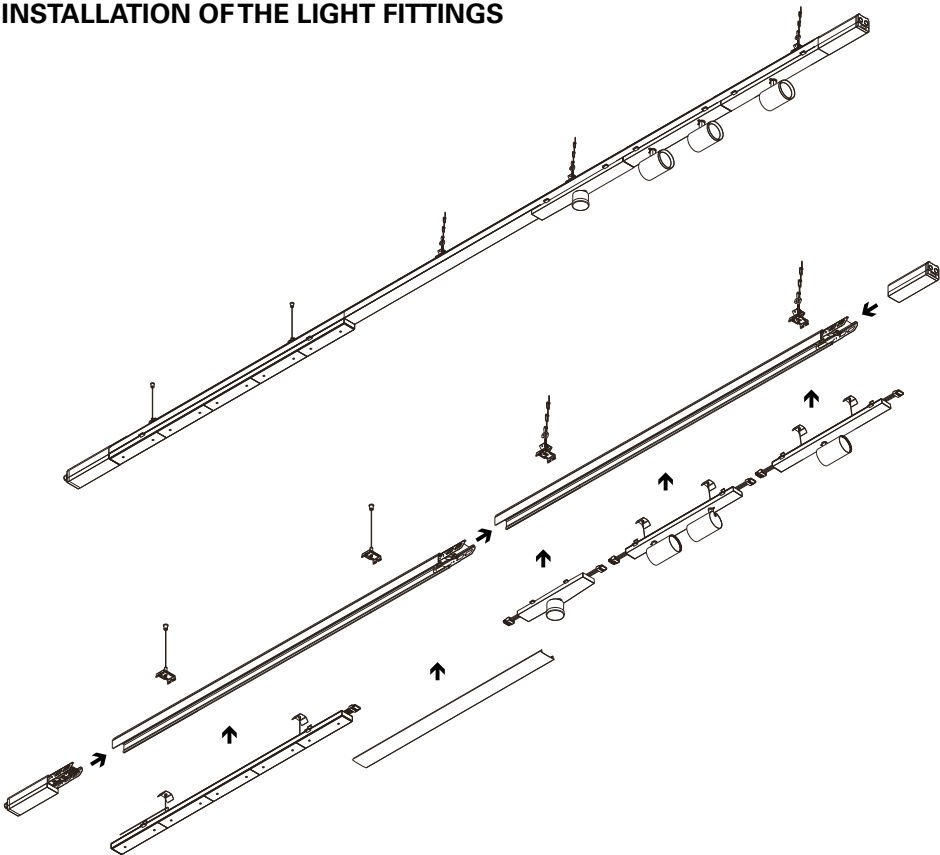





## PLANNING GUIDE

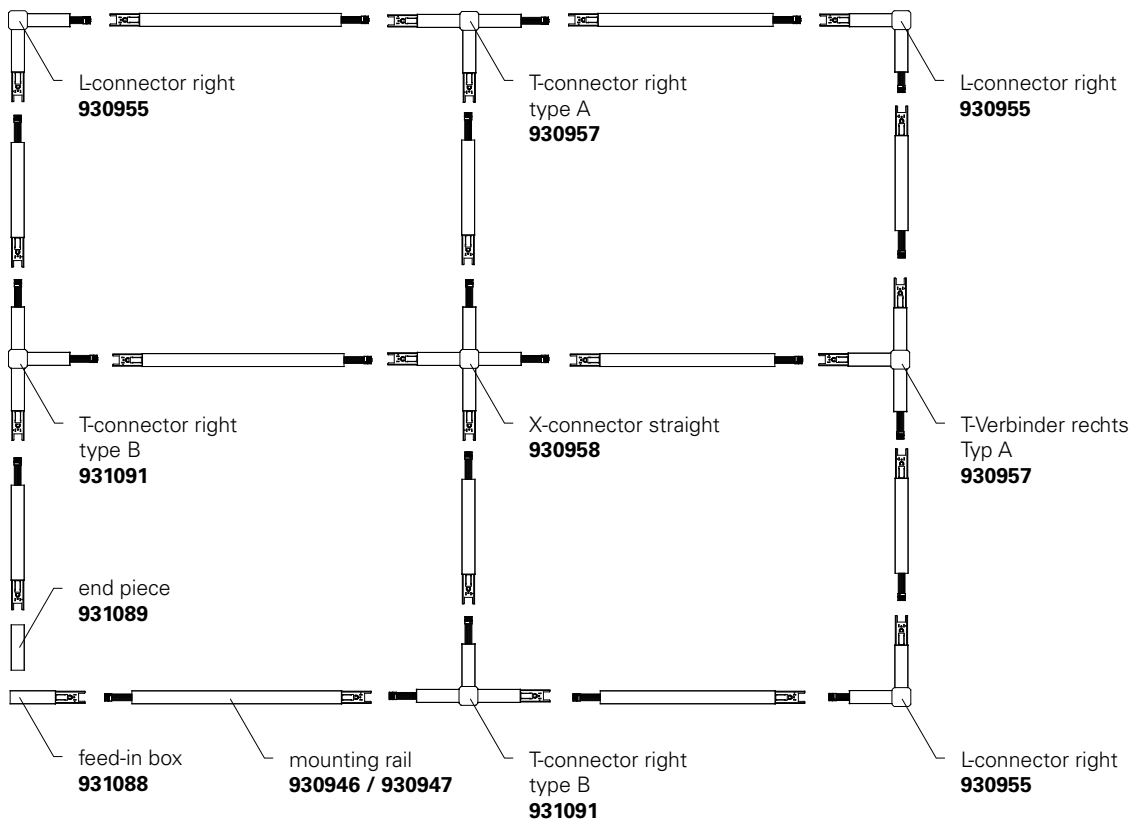

### Lighting design

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.

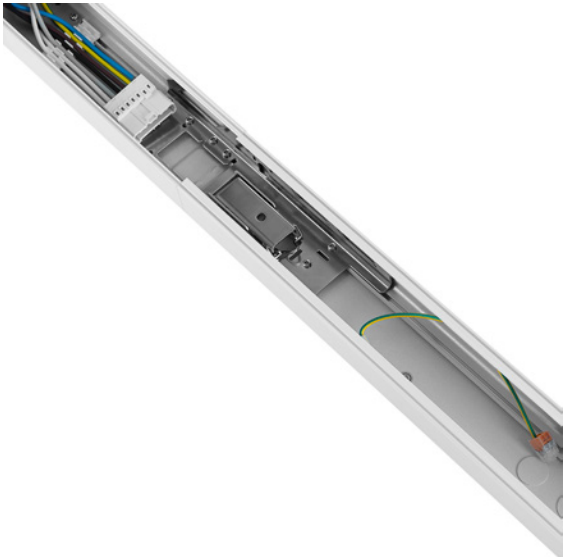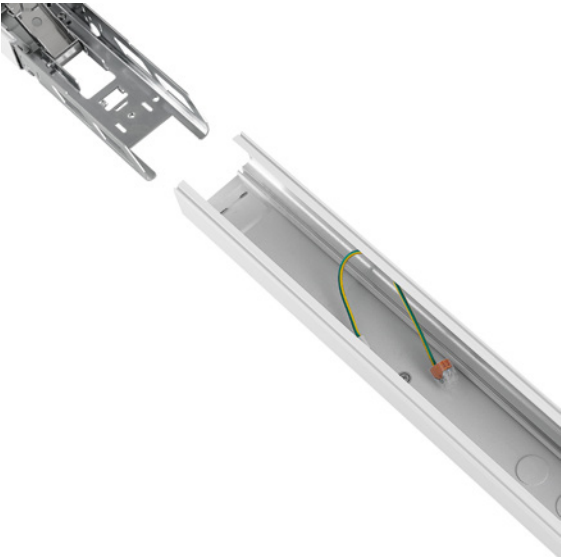



SANOTRUNK MOUNTING RAILS

|         |       |        |       |
|---------|-------|--------|-------|
| Housing | Steel | Height | 45 mm |
| Width   | 65 mm |        |       |

| Article | Housing Color | Length  | Price   |
|---------|---------------|---------|---------|
| 930946  | White         | 1528 mm | € 19.95 |
| 930947  | White         | 3056 mm | € 33.95 |

Accessories

|        |                                                                    |                                                                                   |         |
|--------|--------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------|
| 930951 | Sanotrunk, mounting Bracket for Trunking Rail, Set 10 Pcs.         |  | € 13.95 |
| 930952 | Sanotrunk, Suspension Kit 5,0 m for Trunking Rail, Set 10 Pcs.     |  | € 71.95 |
| 930953 | Sanotrunk, Bracket Chain Suspension for Trunking Rail, Set 10 Pcs. |  | € 23.95 |
| 930950 | Sanotrunk, Endcap for Trunking Rail, Set 2 Pcs.                    |  | € 4.95  |
| 930948 | Sanotrunk, Cover for Trunking Rail 1,5 m                           |  | € 7.95  |
| 930949 | Sanotrunk, Cover for Trunking Rail 3,0 m                           |  | € 15.95 |
| 931087 | Sanotrunk, chain suspension, 3m                                    |  | € 7.95  |
| 931098 | Cable gland PG/M20 incl. locknut + sealing ring, IP68              |  | € 1.75  |



SANOTRUNK UNIVERSAL BLIND COVER

|        |         |
|--------|---------|
| Length | 1528 mm |
|--------|---------|

| Article | Housing Color | Housing       | Width                     | Height  | Price   |
|---------|---------------|---------------|---------------------------|---------|---------|
| 930922  | White         | Aluminium     | 65.6 mm                   | 26 mm   | € 31.95 |
| 930920  | White         | Polycarbonate | can be shortened<br>62 mm | 19.2 mm | € 15.95 |

Accessories for 930920

|        |                                                                             |                                                                                      |        |
|--------|-----------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------|
| 930921 | Sanotrunk universal mounting clips for blind cover, can be shortened 2 pcs. |  | € 3.95 |
|--------|-----------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------|



SANOTRUNK FEED-IN BOX + END PIECE

|         |           |         |                                                                                            |
|---------|-----------|---------|--------------------------------------------------------------------------------------------|
| Housing | Aluminium | Control | DALI 1 / DT6, DALI 1 / DT8, DALI 2 / DT6, DALI 2 / DT6 D4i, DALI 2 / DT8, DALI 2 / DT8 D4i |
| Width   | 64.7 mm   |         |                                                                                            |
| Height  | 65.5 mm   |         |                                                                                            |

| Article | Housing Color                  | Type                                             | Length   | Price   |
|---------|--------------------------------|--------------------------------------------------|----------|---------|
| 931088  | <input type="checkbox"/> White | feed piece including integrated connection block | 383.1 mm | € 33.95 |
| 931089  | <input type="checkbox"/> White | end piece                                        | 237.1 mm | € 15.95 |




Accessories

|        |                                                                    |  |         |
|--------|--------------------------------------------------------------------|--|---------|
| 930951 | Sanotrunk, mounting Bracket for Trunking Rail, Set 10 Pcs.         |  | € 13.95 |
| 930952 | Sanotrunk, Suspension Kit 5,0 m for Trunking Rail, Set 10 Pcs.     |  | € 71.95 |
| 930953 | Sanotrunk, Bracket Chain Suspension for Trunking Rail, Set 10 Pcs. |  | € 23.95 |
| 931087 | Sanotrunk, chain suspension, 3m                                    |  | € 7.95  |
| 931098 | Cable gland PG/M20 incl. locknut + sealing ring, IP68              |  | € 1.75  |



**Onlineshop**  
You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

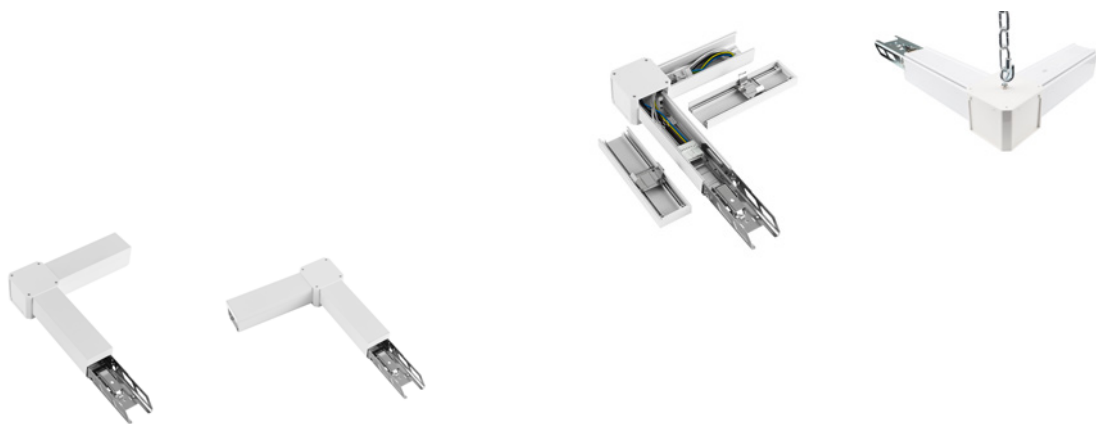

**SANOTRUNK L-CONNECTOR**

- Pre-wiring with 7 cores, incl. DALI cables
- suitable for DALI and ON / OFF

|         |           |         |                                                                                            |
|---------|-----------|---------|--------------------------------------------------------------------------------------------|
| Housing | Aluminium | Control | DALI 1 / DT6, DALI 1 / DT8, DALI 2 / DT6, DALI 2 / DT6 D4i, DALI 2 / DT8, DALI 2 / DT8 D4i |
| Length  | 304.3 mm  |         |                                                                                            |
| Width   | 304.3 mm  |         |                                                                                            |
| Height  | 73 mm     |         |                                                                                            |

| Article | Housing Color | Type  | Price   |
|---------|---------------|-------|---------|
| 930954  | White         | left  | € 63.95 |
| 930955  | White         | right | € 65.95 |



Accessories

|        |                                                                     |                                                                                     |         |
|--------|---------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 930951 | Sanotrunk, mounting Bracket for Trunking Rail, Set 10 Pcs.          |  | € 13.95 |
| 930952 | Sanotrunk, Suspension Kit 5,0 m for Trunking Rail, Set 10 Pcs.      |  | € 71.95 |
| 930953 | Sanotrunk, Bracket Chain Suspension for Trunking Rail, Set 10 Pcs.  |  | € 23.95 |
| 931086 | Sanotrunk, set of 10 pcs. Holder for chain suspension for connector |  | € 9.95  |
| 931087 | Sanotrunk, chain suspension, 3m                                     |  | € 7.95  |



**Technical data sheet**  
New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.



SANOTRUNK T-CONNECTOR

- Pre-wiring with 7 cores, incl. DALI cables
- suitable for DALI and ON / OFF

|         |           |         |                                                                                            |
|---------|-----------|---------|--------------------------------------------------------------------------------------------|
| Housing | Aluminium | Control | DALI 1 / DT6, DALI 1 / DT8, DALI 2 / DT6, DALI 2 / DT6 D4i, DALI 2 / DT8, DALI 2 / DT8 D4i |
| Length  | 515.4 mm  |         |                                                                                            |
| Width   | 304.3 mm  |         |                                                                                            |
| Height  | 73 mm     |         |                                                                                            |

| Article | Housing Color                  | Type         | Price   |
|---------|--------------------------------|--------------|---------|
| 931090  | <input type="checkbox"/> White | left         | € 83.95 |
| 930957  | <input type="checkbox"/> White | right type A | € 93.95 |
| 931091  | <input type="checkbox"/> White | right type B | € 83.95 |
| 930956  | <input type="checkbox"/> White | double       | € 91.95 |



Accessories

|        |                                                                     |
|--------|---------------------------------------------------------------------|
| 930951 | Sanotrunk, mounting Bracket for Trunking Rail, Set 10 Pcs.          |
| 930952 | Sanotrunk, Suspension Kit 5,0 m for Trunking Rail, Set 10 Pcs.      |
| 930953 | Sanotrunk, Bracket Chain Suspension for Trunking Rail, Set 10 Pcs.  |
| 931086 | Sanotrunk, set of 10 pcs. Holder for chain suspension for connector |
| 931087 | Sanotrunk, chain suspension, 3m                                     |

|  |         |
|--|---------|
|  | € 13.95 |
|  | € 71.95 |
|  | € 23.95 |
|  | € 9.95  |
|  | € 7.95  |



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.





**SANOTRUNK X-CONNECTOR**

- Pre-wiring with 7 cores, incl. DALI cables
- suitable for DALI and ON / OFF

|         |           |         |                                                                                            |
|---------|-----------|---------|--------------------------------------------------------------------------------------------|
| Housing | Aluminium | Control | DALI 1 / DT6, DALI 1 / DT8, DALI 2 / DT6, DALI 2 / DT6 D4i, DALI 2 / DT8, DALI 2 / DT8 D4i |
| Length  | 515.4 mm  |         |                                                                                            |
| Width   | 515.4 mm  |         |                                                                                            |
| Height  | 73 mm     |         |                                                                                            |

| Article | Housing Color                  | Type     | Price    |
|---------|--------------------------------|----------|----------|
| 930958  | <input type="checkbox"/> White | straight | € 119.95 |
| 930959  | <input type="checkbox"/> White | dreifach | € 123.95 |



Accessories

|        |                                                                     |  |         |
|--------|---------------------------------------------------------------------|--|---------|
| 930951 | Sanotrunk, mounting Bracket for Trunking Rail, Set 10 Pcs.          |  | € 13.95 |
| 930952 | Sanotrunk, Suspension Kit 5,0 m for Trunking Rail, Set 10 Pcs.      |  | € 71.95 |
| 930953 | Sanotrunk, Bracket Chain Suspension for Trunking Rail, Set 10 Pcs.  |  | € 23.95 |
| 931086 | Sanotrunk, set of 10 pcs. Holder for chain suspension for connector |  | € 9.95  |
| 931087 | Sanotrunk, chain suspension, 3m                                     |  | € 7.95  |



**5-year guarantee**  
Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



## POWER RAILS

- 266 D ONE 1-phase power rail system
- 286 1-phase power rail luminaires
- 302 D LINE 3-phase power rail system
- 334 D LINE DALI 3-phase power rail system
- 364 power rail luminaires

# D ONE system



page 270



page 273



page 274



page 274



page 275



page 275



page 276



page 276



page 277



page 277



page 278



page 278



☐ ☒  
page 279



☐ ☒  
page 280



☐ ☒  
page 280



☐ ☒  
page 281



☐ ☒  
page 282



☐ ☒  
page 282



☐ ☒  
page 283



☐ ☒  
page 283


**D ONE MOUNTING POWER RAIL SYSTEM 1-PHASE 230V**

| mounting modules                                      | illust. | white         | black         | page |
|-------------------------------------------------------|---------|---------------|---------------|------|
| mounting power rail L: 1000 mm                        | 01      | <b>720000</b> | <b>720003</b> | 271  |
| mounting power rail L: 2000 mm                        | 01      | <b>720001</b> | <b>720004</b> | 271  |
| mounting power rail L: 3000 mm                        | 01      | <b>720002</b> | <b>720005</b> | 271  |
| mounting power rail curved 90° left                   | 01      | <b>720042</b> | <b>720044</b> | 273  |
| mounting power rail curved 90° right                  | 01      | <b>720043</b> | <b>720045</b> | 273  |
| feeder left                                           | 02      | <b>720006</b> | <b>720007</b> | 274  |
| feeder right                                          | 03      | <b>720008</b> | <b>720009</b> | 274  |
| flex feeder with ceiling canopy                       | 04      | <b>720010</b> | <b>720011</b> | 275  |
| electrical straight connector with center feed option | 05      | <b>720012</b> | <b>720013</b> | 275  |
| electrical connector                                  | 06      | <b>720014</b> | <b>720015</b> | 276  |
| 90°-joint left                                        | 07      | <b>720016</b> | <b>720017</b> | 276  |
| 90°-joint right                                       | 08      | <b>720018</b> | <b>720019</b> | 277  |
| T-joint left-right-right                              | 09      | <b>720020</b> | <b>720021</b> | 277  |
| T-joint right-right-left                              | 10      | <b>720022</b> | <b>720023</b> | 278  |
| T-joint left-left-right                               | 11      | <b>720024</b> | <b>720025</b> | 279  |
| T-joint right-left-left                               | 12      | <b>720026</b> | <b>720027</b> | 278  |
| X-joint left-left-right-right                         | 13      | <b>720028</b> | <b>720029</b> | 279  |
| endcap                                                | 14      | <b>720030</b> | <b>720031</b> | 280  |
| cover panel                                           | 15      | <b>720038</b> | <b>720039</b> | 280  |
| ceiling mounting bracket flex                         | 16      | <b>720032</b> | <b>720033</b> | 282  |
| wall bracket                                          | 17      | <b>720040</b> | <b>720041</b> | 282  |
| wire suspension bracket 3000 mm                       | 18      | <b>720034</b> | <b>720035</b> | 283  |
| wire suspension bracket curved 3000 mm                | 19      | <b>720046</b> | <b>720047</b> | 283  |
| 1-phase adapter for light installation                | 20      | <b>720036</b> | <b>720037</b> | 281  |



## ILLUSTRATIONS WITH PLANNING-RELEVANT DIMENSIONS

01




02




03



04




05




06




07




08




09




10




11



12



13



14




15




16




17




18



19




20




FIXING POINTS

|            |        |        |        |         |
|------------|--------|--------|--------|---------|
| power rail | a      | b      | c      | d       |
| 1000 mm    | 125 mm |        |        |         |
| 2000 mm    | 125 mm | 870 mm |        |         |
| 3000 mm    | 125 mm |        | 790 mm | 1160 mm |

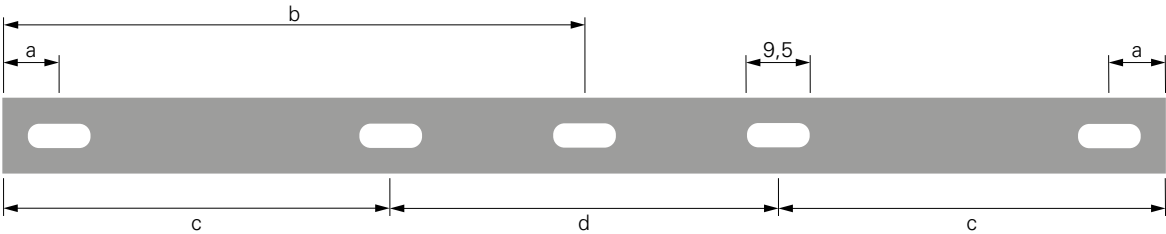


MECHANICAL LOAD TRACK POWER RAIL 1000 MM

10 N ± 1,02 kg  
dimension in mm

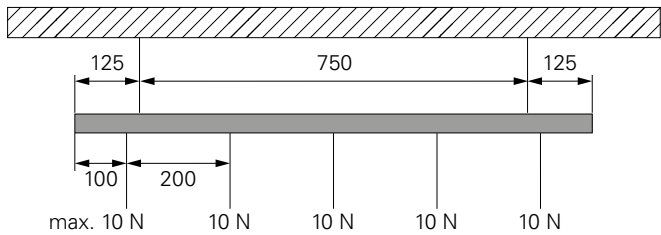


MECHANICAL LOAD TRACK POWER RAIL 2000MM

10 N ± 1,02 kg  
dimension in mm

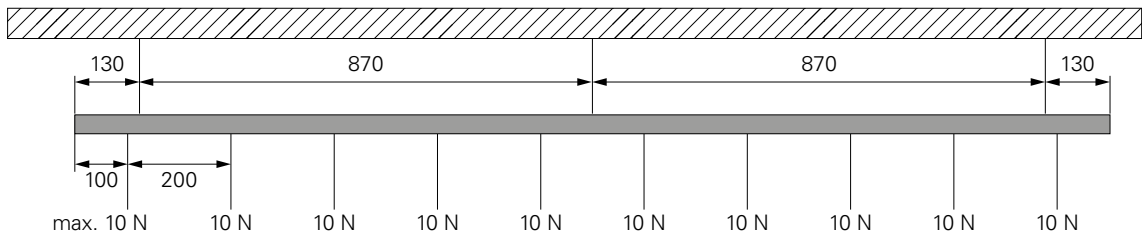


MECHANICAL LOAD TRACK POWER RAIL 3000MM

10 N ± 1,02 kg  
dimension in mm

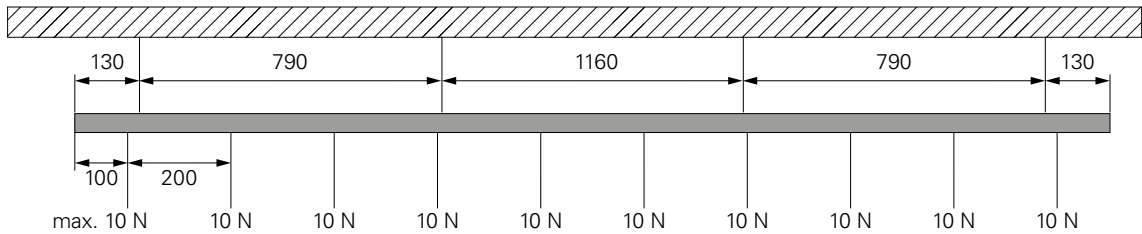

PLANNING GUIDE D ONE TRACK SYSTEM 1-PHASE 230V

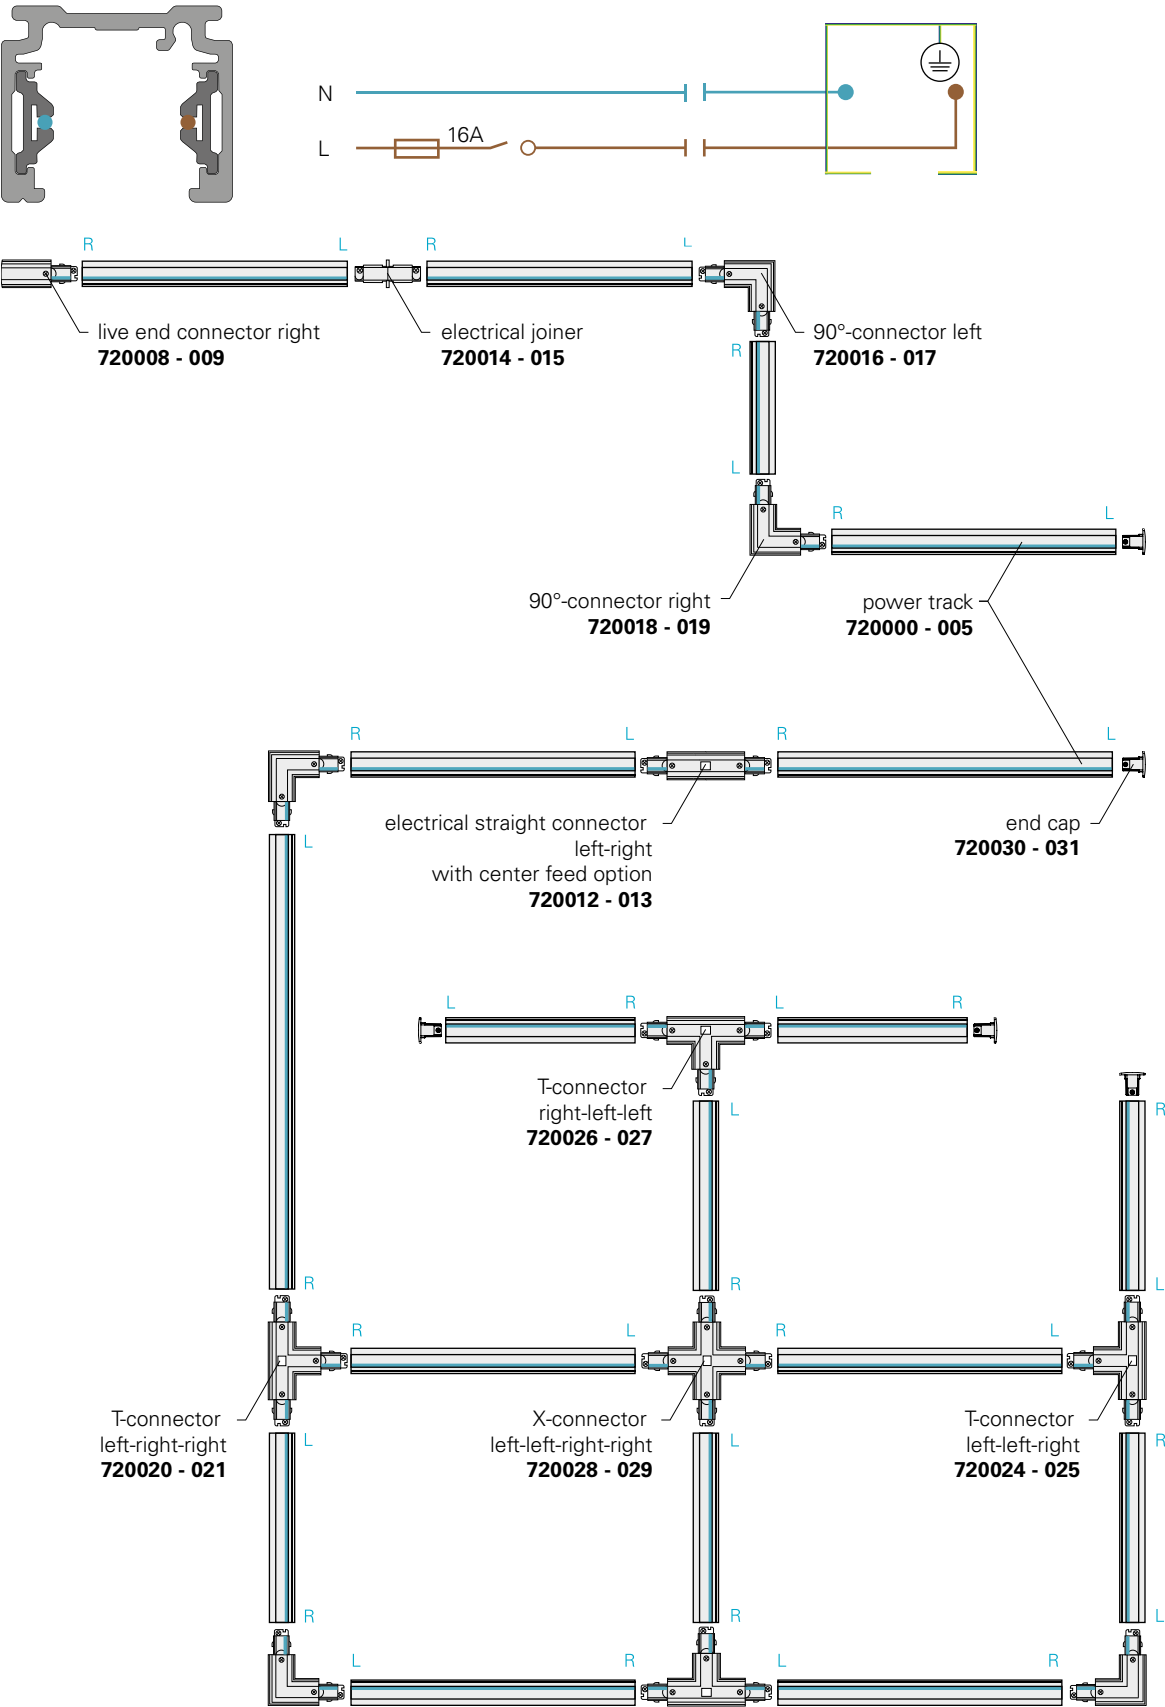



## D ONE SURFACE-MOUNTED POWER TRACK

D ONE is the single-phase, 230 V busbar system from DEKO-LIGHT. This extremely compact and sophisticated system combines the benefits of 48 V low-voltage busbars [slim design] with the practical advantages of fully fledged 230 V systems [no transformer required for operation]. Their small size allows all D ONE components to integrate seamlessly into an extremely wide variety of environments, adding a timeless, understated, premium look to private dwellings and commercial facilities like shops and bars. All D ONE components are available in the universally suitable colours black and white, allowing a wide variety of installation options for flexible and universal use. The flexible infeed with ceiling canopy even allows D ONE busbars to be installed in places where there is no power supply available in the immediate vicinity.



D ONE SURFACE-MOUNTED POWER TRACK

- elegant and compact mini design
- easy to install
- many different designs available
- Mini design with one current phase

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |           |                     |              |
|---------|-----------|---------------------|--------------|
| Housing | Aluminium | Rated Input Voltage | 220-240 V/AC |
| Width   | 26.2 mm   | Output Current      | 16 A         |
| Height  | 22.2 mm   |                     |              |

| Article | Housing Color                             | Length  | Price   |
|---------|-------------------------------------------|---------|---------|
| 720000  | <input type="checkbox"/> White            | 1000 mm | € 31.95 |
| 720003  | <input checked="" type="checkbox"/> Black | 1000 mm | € 31.95 |
| 720001  | <input type="checkbox"/> White            | 2000 mm | € 55.95 |
| 720004  | <input checked="" type="checkbox"/> Black | 2000 mm | € 55.95 |
| 720002  | <input type="checkbox"/> White            | 3000 mm | € 79.95 |
| 720005  | <input checked="" type="checkbox"/> Black | 3000 mm | € 79.95 |



Accessories for **720000, 720001, 720002**  
**720038** D One cover panel for integrated busbar, white


 € 4.95

Accessories for **720003, 720004, 720005**  
**720039** D One cover panel for integrated busbar, black


 € 4.95




**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.

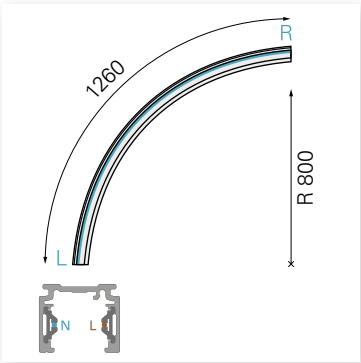

720042, 720044

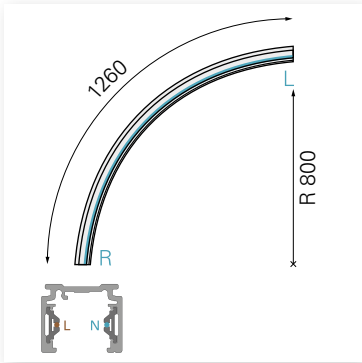

720043, 720045

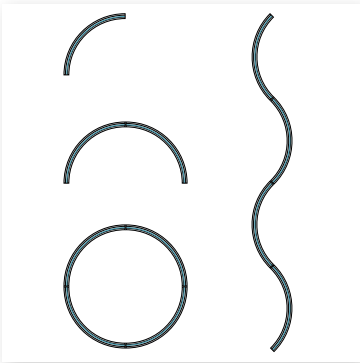

examples of designs





D ONE SURFACE-MOUNTED POWER TRACK CURVED

- Curved track 90° (radius 0.8m)
- Enables completely new design shapes (corner, semicircle, circle, wave)
- Segment length 1.26m
- Only suitable for standard track adapters (max. length 8cm)
- Mini design with one power phase

Application Area  
Home / Living, Shop / Retail / Sales area

|         |           |                     |              |
|---------|-----------|---------------------|--------------|
| Housing | Aluminium | Height              | 26.2 mm      |
| Length  | 1260 mm   | Rated Input Voltage | 220-240 V/AC |
| Width   | 22.2 mm   | Output Current      | 16 A         |

| Article | Housing Color |       | Price   |
|---------|---------------|-------|---------|
| 720042  | White         | left  | € 67.95 |
| 720044  | Black         | left  | € 67.95 |
| 720043  | White         | right | € 67.95 |
| 720045  | Black         | right | € 67.95 |



Accessories for 720042, 720043

- 720032 D One ceiling mounting bracket Flex, white
- 720046 D One CURVED suspension bracket with 3 m cable, white

|  |         |
|--|---------|
|  | € 4.95  |
|  | € 13.95 |

Accessories for 720044, 720045

- 720033 D One ceiling mounting bracket Flex, black
- 720047 D One CURVED suspension bracket with 3 m cable, black

|  |         |
|--|---------|
|  | € 4.95  |
|  | € 13.95 |



### D ONE ELECTRIC FEEDER LEFT

- Power can be fed in from above (ceiling) or from the side
- Elegant and compact mini design
- Simple installation
- Enables flexible installation options

**Application Area**

Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 22.2 mm      |
| Length  | 71 mm   | Rated Input Voltage | 220-240 V/AC |
| Width   | 26 mm   | Output Current      | 16 A         |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 720006  |  White | € 10.95 |
| 720007  |  Black | € 10.95 |



### D ONE ELECTRIC FEEDER RIGHT

- Power can be fed in from above (ceiling) or from the side
- elegant and compact mini design
- easy to install
- enables flexible installation options

**Application Area**

Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 22.2 mm      |
| Length  | 71 mm   | Rated Input Voltage | 220-240 V/AC |
| Width   | 26 mm   | Output Current      | 16 A         |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 720008  |  White | € 10.95 |
| 720009  |  Black | € 10.95 |





D ONE FLEX FEEDER WITH CEILING CANOPY

- Elegant and compact mini design
- Easy to install
- Power supply via ceiling baldachin/current track adapter (200-1,000 mm)
- Enables various installation options

Application Area

Home / Living, Shop / Retail / Sales area

|         |                |                     |              |
|---------|----------------|---------------------|--------------|
| Housing | Plastic, Metal | Rated Input Voltage | 220-240 V/AC |
| Length  | 1000 mm        | Output Current      | 6 A          |
| Width   | 120 mm         | Connected Load max. | 1320 W       |
| Height  | 28 mm          |                     |              |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 720010  |  White | € 31.95 |
| 720011  |  Black | € 31.95 |



D ONE ELECTRICAL STRAIGHT CONNECTOR WITH FEED OPTION

- Elegant and compact mini design
- Easy to install
- Power supply from above (from ceiling)

Application Area

Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 22.2 mm      |
| Length  | 121 mm  | Rated Input Voltage | 220-240 V/AC |
| Width   | 26 mm   | Output Current      | 16 A         |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 720012  |  White | € 19.95 |
| 720013  |  Black | € 19.95 |






D ONE MINI-STRAIGHT CONNECTOR

- elegant and compact mini design
- easy to install

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 22 mm        |
| Length  | 62 mm   | Rated Input Voltage | 220-240 V/AC |
| Width   | 26 mm   | Output Current      | 16 A         |

| Article | Housing Color                                                                           | Price  |
|---------|-----------------------------------------------------------------------------------------|--------|
| 720014  |  White | € 7.45 |
| 720015  |  Black | € 7.45 |



D ONE 90°-CONNECTOR LEFT


- Optional power supply from above (from ceiling)
- Elegant and compact mini design
- Easy to install
- Many different design shapes possible

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 22.2 mm      |
| Length  | 73 mm   | Rated Input Voltage | 220-240 V/AC |
| Width   | 73 mm   | Output Current      | 16 A         |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 720016  |  White | € 19.95 |
| 720017  |  Black | € 19.95 |





### D ONE 90°-CONNECTOR RIGHT


- Optional power supply from above (from ceiling)
- Elegant and compact mini design
- Easy to install
- Many different design shapes possible

#### Application Area

Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 22.2 mm      |
| Length  | 73 mm   | Rated Input Voltage | 220-240 V/AC |
| Width   | 73 mm   | Output Current      | 16 A         |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 720018  |  White | € 19.95 |
| 720019  |  Black | € 19.95 |



### D ONE T-CONNECTOR RIGHT-LEFT-LEFT

- Optional power supply from above (from ceiling)
- Elegant and compact mini design
- Easy to install
- Many different design shapes possible


#### Application Area

Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 22.2 mm      |
| Length  | 121 mm  | Rated Input Voltage | 220-240 V/AC |
| Width   | 73 mm   | Output Current      | 16 A         |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 720026  |  White | € 27.95 |
| 720027  |  Black | € 27.95 |





D ONE T-CONNECTOR RIGHT-RIGHT-LEFT


- Optional power supply from above (from ceiling)
- Elegant and compact mini design
- Easy to install
- Many different design shapes possible

Application Area

Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 22.2 mm      |
| Length  | 121 mm  | Rated Input Voltage | 220-240 V/AC |
| Width   | 73 mm   | Output Current      | 16 A         |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 720022  |  White | € 27.95 |
| 720023  |  Black | € 27.95 |



D ONE T-CONNECTOR LEFT-RIGHT-RIGHT

- Power can be fed in from above [via ceiling]
- Elegant and compact mini design
- Easy to install
- Enables many different design shapes

Application Area


Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 22.2 mm      |
| Length  | 121 mm  | Rated Input Voltage | 220-240 V/AC |
| Width   | 73 mm   | Output Current      | 16 A         |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 720020  |  White | € 27.95 |
| 720021  |  Black | € 27.95 |







D ONE T-CONNECTOR LEFT-LEFT-RIGHT


- Power can be fed in from above [via ceiling]
- Elegant and compact mini design
- Easy to install
- Enables many different design shapes

Application Area

Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 22.2 mm      |
| Length  | 121 mm  | Rated Input Voltage | 220-240 V/AC |
| Width   | 73 mm   | Output Current      | 16 A         |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 720024  |  White | € 27.95 |
| 720025  |  Black | € 27.95 |



D ONE X-CONNECTOR

- Power can be fed in from above [via ceiling]
- Easy to install

Application Area

Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 22.2 mm      |
| Length  | 121 mm  | Rated Input Voltage | 220-240 V/AC |
| Width   | 121 mm  | Output Current      | 16 A         |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 720028  |  White | € 37.95 |
| 720029  |  Black | € 37.95 |





D ONE COVER PANEL

- suitable for D-One surface-mounted system
- for covering live busbars < 2.30 m high (contact zone)

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |         |        |         |
|---------|---------|--------|---------|
| Housing | Plastic | Width  | 16.5 mm |
| Length  | 1000 mm | Height | 6.8 mm  |

| Article | Housing Color                                                                           | Price  |
|---------|-----------------------------------------------------------------------------------------|--------|
| 720038  |  White | € 4.95 |
| 720039  |  Black | € 4.95 |



D ONE END CAP

- Current touch protection
- For closing open current track ends

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |         |        |         |
|---------|---------|--------|---------|
| Housing | Plastic | Width  | 26 mm   |
| Length  | 15 mm   | Height | 22.2 mm |

| Article | Housing Color                                                                             | Price  |
|---------|-------------------------------------------------------------------------------------------|--------|
| 720030  |  White | € 3.45 |
| 720031  |  Black | € 3.45 |





D ONE 1-PHASE ADAPTER FOR LIGHT INSTALLATION

- Elegant and compact mini design
- Easy to install
- 230 V adapter for converting lights
- Delivery incl. mounting material (reduction bush, flat M10 nut, strain relief)

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |                |                     |              |
|---------|----------------|---------------------|--------------|
| Housing | Plastic, Metal | Rated Input Voltage | 220-240 V/AC |
| Length  | 70 mm          | Output Current      | 6 A          |
| Width   | 26 mm          | Loading Weight max. | 10 kg        |
| Height  | 30 mm          | Load Force max.     | 100 N        |

| Article | Housing Color                             | Price   |
|---------|-------------------------------------------|---------|
| 720036  | <input type="checkbox"/> White            | € 13.95 |
| 720037  | <input checked="" type="checkbox"/> Black | € 13.95 |





D ONE MOUNTING BRACKET FLEX

- Simplifies the installation of more complex track shapes
- Enables numerous design forms
- Expands options for installation

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |       |                     |         |
|---------|-------|---------------------|---------|
| Housing | Metal | Height              | 10.5 mm |
| Length  | 30 mm | Loading Weight max. | 25 kg   |
| Width   | 28 mm |                     |         |

| Article | Housing Color                                                                           | Price  |
|---------|-----------------------------------------------------------------------------------------|--------|
| 720032  |  White | € 4.95 |
| 720033  |  Black | € 4.95 |



D ONE WALL BRACKET

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |           |                     |       |
|---------|-----------|---------------------|-------|
| Housing | Aluminium | Height              | 80 mm |
| Length  | 91.9 mm   | Loading Weight max. | 10 kg |
| Width   | 25 mm     |                     |       |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 720040  |  White | € 11.95 |
| 720041  |  Black | € 11.95 |





D ONE ROPE SUSPENSION BRACKET

- Stylish and sophisticated suspended mounting
- Enables numerous design forms
- Expands options for installation
- Can be cut to length for hanger lengths: 70-3,020 mm

Application Area  
Home / Living, Shop / Retail / Sales area

|         |        |                     |         |
|---------|--------|---------------------|---------|
| Housing | Metal  | Height              | 3020 mm |
| Length  | 120 mm | Loading Weight max. | 25 kg   |
| Width   | 28 mm  |                     |         |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 720034  |  White | € 15.95 |
| 720035  |  Black | € 15.95 |



D ONE ROPE SUSPENSION BRACKET CURVED

|         |       |                     |         |
|---------|-------|---------------------|---------|
| Housing | Metal | Height              | 3020 mm |
| Length  | 30 mm | Loading Weight max. | 8 kg    |
| Width   | 28 mm |                     |         |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 720046  |  White | € 13.95 |
| 720047  |  Black | € 13.95 |



# 1-phase power rail luminaires



page 287



page 289



page 292



page 294



page 295



page 296



page 297









CAN

- Replaceable light source to offer an individual lighting solution
- Can be combined with the comprehensive CAN series product family

Application Area

Home / Living, Reception / Communication, Hotel / catering

|            |                          |                     |                                    |
|------------|--------------------------|---------------------|------------------------------------|
| Housing    | Aluminium, Polycarbonate | Rated Input Voltage | 220-240 V/AC                       |
| Height     | 134 mm                   | Control             | Dimmable via optional light source |
| Ø          | 60 mm                    | Rotation Angle      | 350 Degree                         |
| Max. Power | 1 x max. 7.5 W           | Swivelling Angle    | 90 Degree                          |


| Article | Housing Color | Price   |
|---------|---------------|---------|
| 707155  | White         | € 33.95 |
| 707156  | Black         | € 33.95 |

Accessories

|        |                                                                  |  |        |
|--------|------------------------------------------------------------------|--|--------|
| 930301 | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | € 3.95 |
| 930302 | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | € 3.95 |
| 930303 | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | € 3.95 |
| 930307 | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | € 6.95 |
| 930308 | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | € 6.95 |
| 930309 | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | € 6.95 |
| 930310 | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | € 6.95 |
| 930366 | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | € 3.95 |
| 931065 | Acrylic attachment for Can                                       |  | € 3.95 |





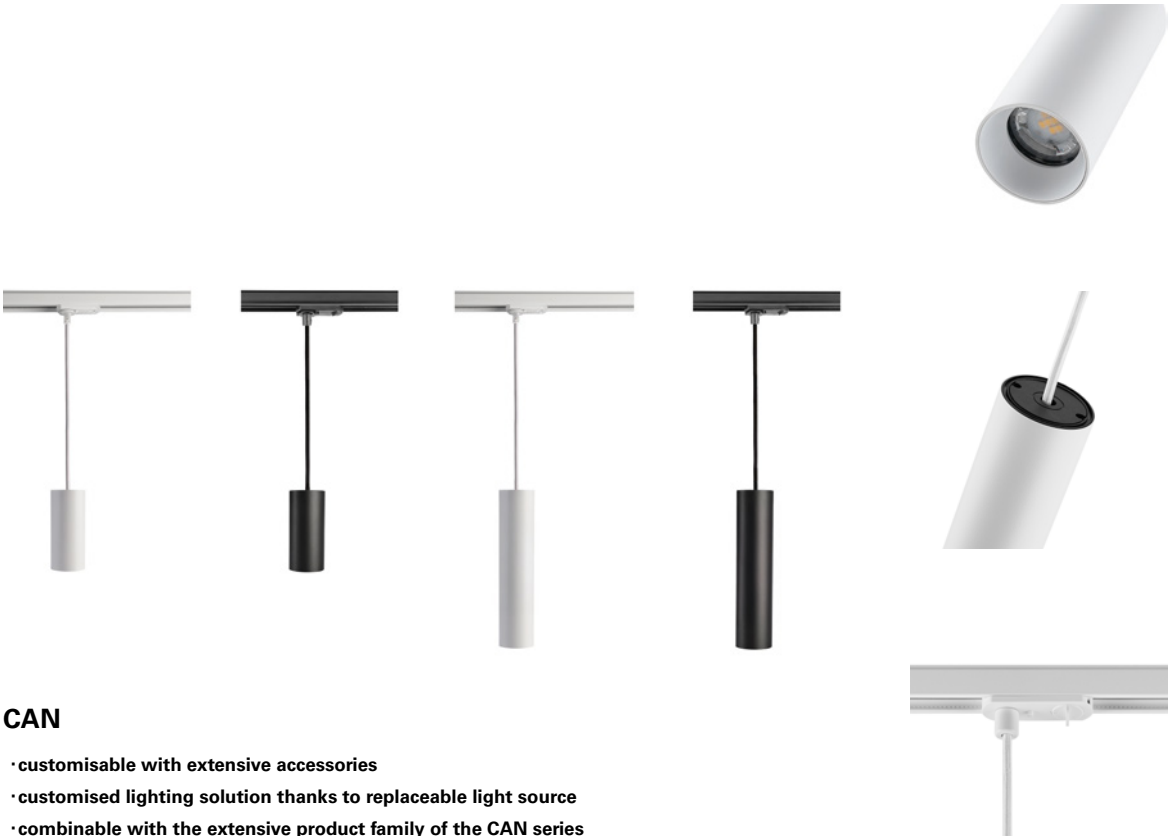

CAN

- customisable with extensive accessories
- customised lighting solution thanks to replaceable light source
- combinable with the extensive product family of the CAN series

|                 |               |                     |                                    |
|-----------------|---------------|---------------------|------------------------------------|
| Housing         | Aluminium     | Rated Input Voltage | 220-240 V/AC                       |
| Ø               | 60 mm         | Control             | Dimmable via optional light source |
| Pendulum Length | 1500 mm       |                     |                                    |
| Max. Power      | 1x max. 7.5 W |                     |                                    |

| Article | Housing Color | Height | Price   |
|---------|---------------|--------|---------|
| 707253  | White         | 150 mm | € 61.95 |
| 707254  | Black         | 150 mm | € 61.95 |
| 707257  | White         | 350 mm | € 73.95 |
| 707258  | Black         | 350 mm | € 73.95 |



Accessories

|        |                                                                  |  |        |
|--------|------------------------------------------------------------------|--|--------|
| 930301 | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | € 3.95 |
| 930302 | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | € 3.95 |
| 930303 | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | € 3.95 |
| 930307 | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | € 6.95 |
| 930308 | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | € 6.95 |
| 930309 | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | € 6.95 |
| 930310 | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | € 6.95 |
| 930366 | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | € 3.95 |
| 931065 | Acrylic attachment for Can                                       |  | € 3.95 |





CAN BASE MIX'N MATCH 1/3

- customised lighting solution thanks to interchangeable light source
- can be customised with cylinder housing in 6 different colours
- can be combined with the extensive product family of the CAN series

|                     |               |                  |                                    |
|---------------------|---------------|------------------|------------------------------------|
| Housing             | Aluminium     | Control          | Dimmable via optional light source |
| Height              | 74 mm         | Rotation Angle   | 350 Degree                         |
| Ø                   | 70 mm         | Swivelling Angle | 90 Degree                          |
| Max. Power          | 1x max. 7.5 W |                  |                                    |
| Rated Input Voltage | 220-240 V/AC  |                  |                                    |

| Article | Housing Color                             | Price   |
|---------|-------------------------------------------|---------|
| 707249  | <input type="checkbox"/> White            | € 28.95 |
| 707250  | <input checked="" type="checkbox"/> Black | € 28.95 |







CYLINDER HOOUSING FOR CAN MIX'N MATCH 2/3

Housing                      Aluminium                      Ø                      60 mm  
Height                      98 mm

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 931053  | White         | € 6.45  |
| 931054  | Black         | € 6.45  |
| 931055  | Bronze        | € 14.95 |
| 931056  | Brass         | € 14.95 |
| 931057  | Black grey    | € 14.95 |
| 931058  | Rosé          | € 14.95 |

IP20



REFLECTOR RING FOR CAN MIX'N MATCH 3/3

Housing                      Plastic                      Ø                      57 mm  
Height                      28 mm

| Article | Housing Color | Price  |
|---------|---------------|--------|
| 930301  | White         | € 3.95 |
| 930302  | Black         | € 3.95 |
| 930303  | Gold          | € 3.95 |
| 930366  | Silver        | € 3.95 |

IP20



UNI 2 MINI

The UNI 2 MINI is a compact and flexibly customisable single-circuit track luminaire for professional lighting concepts. The rotatable and swivelling LED spot impresses with its decorative "glow" effect on the reflector ring and numerous customisation options using interchangeable reflectors, lenses, reflector rings and accessories. Ideal for living areas, reception areas, hotels and the catering trade.






UNI 2 MINI

- „Glow“ effect on the reflector ring
- Rotatable and swivelling
- Can be customised with a wide range of accessories

Application Area

Home / Living, Reception / Communication, Hotel / catering

|                     |                                    |                         |                                              |
|---------------------|------------------------------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium, Steel,<br>Polycarbonate | Power Supply Unit incl. | Yes                                          |
| Colour Temperature  | 2700 K                             | Light Beam Angle        | 36 Degree                                    |
| Height              | 128 mm                             | Rotation Angle          | 350 Degree                                   |
| Ø                   | 75 mm                              | Swivelling Angle        | 90 Degree                                    |
| Power               | 11.3 W                             | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Rated Input Voltage | 220-240 V/AC                       | CRI (Ra)                | 90                                           |



707187

| Article | Housing Color                                                                                                                                                                 | Luminous Flux | Price    |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------|
| 707188  | Black   | 700 lm        | € 110.95 |
| 707187  | White   | 730 lm        | € 110.95 |




Accessories

|        |                                              |                                                                                     |        |
|--------|----------------------------------------------|-------------------------------------------------------------------------------------|--------|
| 930327 | Rear black cover for Uni II Mini series      |  | € 2.95 |
| 930328 | White heat sink cover for Uni II Mini series |  | € 2.95 |
| 930329 | Black heat sink cover for Uni II Mini series |  | € 2.45 |
| 930330 | Reflector ring white for Uni II Mini series  |  | € 8.95 |
| 930331 | Reflector ring black for Uni II Mini series  |  | € 8.95 |
| 930332 | Reflector ring gold for Uni II Mini series   |  | € 8.95 |
| 930333 | Reflector ring chrome for Uni II Mini series |  | € 8.95 |
| 930770 | Reflector 24° for Uni II Mini series         |  | € 8.95 |
| 930771 | Reflector 48° for Uni II Mini series         |  | € 8.95 |



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.

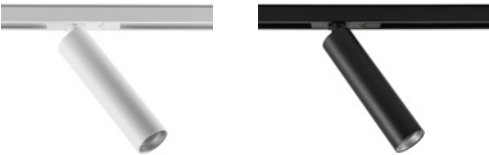


SLIM

- glare-free thanks to low UGR value (<19)
- slim design with just 39 mm diameter
- incl. silver-coloured reflector ring

Application Area

Home / Living, Reception / Communication, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Colour Temperature  | 2700 K       | Light Beam Angle        | 36 Degree                                    |
| Luminous Flux       | 500 lm       | Rotation Angle          | 330 Degree                                   |
| Height              | 197 mm       | Swivelling Angle        | 60 Degree                                    |
| Ø                   | 39 mm        | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Power               | 5 W          | CRI (Ra)                | 90                                           |
| Rated Input Voltage | 220-240 V/AC |                         |                                              |



707201

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 707201  | White         | € 66.95 |
| 707202  | Black         | € 66.95 |



Accessories

|        |                                              |  |        |
|--------|----------------------------------------------|--|--------|
| 930744 | Reflector ring white for Slim series         |  | € 3.95 |
| 930745 | Reflector ring black for Slim series         |  | € 3.95 |
| 930746 | Reflector ring gold-coloured for Slim series |  | € 4.75 |
| 930747 | 24° lens for Slim series                     |  | € 3.95 |
| 930748 | 36° lens for Slim series                     |  | € 3.95 |
| 930749 | 60° lens for Slim series                     |  | € 3.95 |



page 24

page 295

page 408




SLIM

- Extra-soft fabric cable
- Glare-free, due to low UGR value [ $<19$ ]
- Slim design at just 39 mm in diameter
- Max. suspended mounting: 1,800 mm

Application Area

Home / Living, Reception / Communication, Hotel / catering

|                    |           |                         |                                              |
|--------------------|-----------|-------------------------|----------------------------------------------|
| Housing            | Aluminium | Rated Input Voltage     | 220-240 V/AC                                 |
| Colour Temperature | 2700 K    | Power Supply Unit incl. | Yes                                          |
| Luminous Flux      | 500 lm    | Light Beam Angle        | 24 Degree                                    |
| Height             | 300 mm    | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                  | 39 mm     | CRI (Ra)                | 90                                           |
| Pendulum Length    | 1800 mm   |                         |                                              |
| Power              | 5 W       |                         |                                              |



707163


| Article | Housing Color | Price   |
|---------|---------------|---------|
| 707163  | Black         | € 74.95 |
| 707164  | White         | € 74.95 |



Accessories

|        |                                              |        |
|--------|----------------------------------------------|--------|
| 930744 | Reflector ring white for Slim series         | € 3.95 |
| 930745 | Reflector ring black for Slim series         | € 3.95 |
| 930746 | Reflector ring gold-coloured for Slim series | € 4.75 |
| 930747 | 24° lens for Slim series                     | € 3.95 |
| 930749 | 60° lens for Slim series                     | € 3.95 |
| 930748 | 36° lens for Slim series                     | € 3.95 |



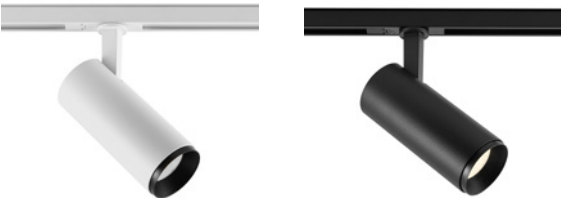


LUCEA

- incl. black reflector ring
- Can be customised with a wide range of accessories

**Application Area**  
Home / Living, Reception / Communication, Hotel / catering

|                         |              |                     |                                              |
|-------------------------|--------------|---------------------|----------------------------------------------|
| Housing                 | Aluminium    | Rotation Angle      | 350 Degree                                   |
| Colour Temperature      | 2700 K       | Swivelling Angle    | 90 Degree                                    |
| Height                  | 157 mm       | Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                       | 65 mm        | CRI (Ra)            | 90                                           |
| Rated Input Voltage     | 200-240 V/AC | IK Protection Class | IK03                                         |
| Power Supply Unit incl. | Yes          |                     |                                              |
| Light Beam Angle        | 36 Degree    |                     |                                              |



707165

| Article | Housing Color |       | Luminous Flux | Power  | Price   |
|---------|---------------|-------|---------------|--------|---------|
| 707165  |               | White | 800 lm        | 6.0 W  | € 72.95 |
| 707166  |               | Black | 800 lm        | 6.0 W  | € 72.95 |
| 707167  |               | White | 1300 lm       | 10.0 W | € 77.95 |
| 707168  |               | Black | 1300 lm       | 10.0 W | € 77.95 |



Accessories

|        |                                     |  |         |
|--------|-------------------------------------|--|---------|
| 930679 | Lens 24° for Lucea 6/10             |  | € 7.95  |
| 930752 | Door panel for Lucea 6/10 white     |  | € 17.95 |
| 930753 | Door panel for Lucea 6/10 black     |  | € 17.95 |
| 930756 | Reflector ring for Lucea 6/10 white |  | € 3.95  |
| 930757 | Reflector ring for Lucea 6/10 black |  | € 3.95  |
| 930758 | Reflector ring for Lucea 6/10 gold  |  | € 3.95  |



page 28

page 64

page 65

page 297






LUCEA

- Particularly soft textile cable
- incl. black reflector ring

Application Area

Home / Living, Reception / Communication, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Colour Temperature  | 2700 K       | Light Beam Angle        | 36 Degree                                    |
| Height              | 157 mm       | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                   | 65 mm        | CRI (Ra)                | 90                                           |
| Pendulum Length     | 1600 mm      | IK Protection Class     | IK03                                         |
| Rated Input Voltage | 200-240 V/AC |                         |                                              |



707175

| Article | Housing Color | Luminous Flux | Power  | Price   |
|---------|---------------|---------------|--------|---------|
| 707175  | White         | 800 lm        | 6.0 W  | € 96.95 |
| 707176  | Black         | 800 lm        | 6.0 W  | € 96.95 |
| 707177  | White         | 1300 lm       | 10.0 W | € 99.95 |
| 707178  | Black         | 1300 lm       | 10.0 W | € 99.95 |



Accessories

|        |                                     |         |
|--------|-------------------------------------|---------|
| 930679 | Lens 24° for Lucea 6/10             | € 7.95  |
| 930752 | Door panel for Lucea 6/10 white     | € 17.95 |
| 930753 | Door panel for Lucea 6/10 black     | € 17.95 |
| 930756 | Reflector ring for Lucea 6/10 white | € 3.95  |
| 930757 | Reflector ring for Lucea 6/10 black | € 3.95  |
| 930758 | Reflector ring for Lucea 6/10 gold  | € 3.95  |



page 28





page 64



page 65



page 296

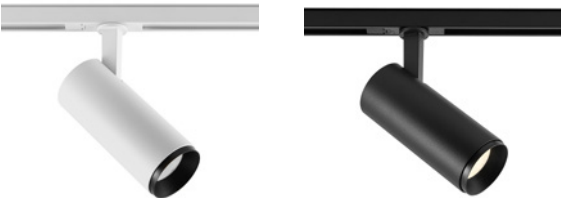


LUCEA DTW

- Dim-to-warm 1,800K - 2,700K
- incl. black reflector ring
- Can be customised with a wide range of accessories

Application Area

Home / Living, Reception / Communication, Hotel / catering

|                         |              |                     |                                              |
|-------------------------|--------------|---------------------|----------------------------------------------|
| Housing                 | Aluminium    | Light Beam Angle    | 36 Degree                                    |
| Colour Temperature      | 1800-2700 K  | Rotation Angle      | 350 Degree                                   |
| Luminous Flux           | 750 lm       | Swivelling Angle    | 90 Degree                                    |
| Height                  | 249 mm       | Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                       | 65 mm        | CRI (Ra)            | 90                                           |
| Power                   | 10 W         | IK Protection Class | IK03                                         |
| Rated Input Voltage     | 200-240 V/AC |                     |                                              |
| Power Supply Unit incl. | Yes          |                     |                                              |



707211


| Article | Housing Color |    | Price   |
|---------|---------------|----|---------|
| 707211  | White         | ww | € 83.95 |
| 707212  | Black         | ww | € 83.95 |



Accessories

|        |                                     |  |         |
|--------|-------------------------------------|--|---------|
| 930752 | Door panel for Lucea 6/10 white     |  | € 17.95 |
| 930753 | Door panel for Lucea 6/10 black     |  | € 17.95 |
| 930756 | Reflector ring for Lucea 6/10 white |  | € 3.95  |
| 930757 | Reflector ring for Lucea 6/10 black |  | € 3.95  |
| 930758 | Reflector ring for Lucea 6/10 gold  |  | € 3.95  |






LUCEA DTW

- high colour rendering
- Dim-to-warm 1,800K-2,700K
- incl. black reflector ring

Application Area

Home / Living, Reception / Communication, Hotel / catering

|                    |             |                         |                                              |
|--------------------|-------------|-------------------------|----------------------------------------------|
| Housing            | Aluminium   | Rated Input Voltage     | 200-240 V/AC                                 |
| Colour Temperature | 1800-2700 K | Power Supply Unit incl. | Yes                                          |
| Luminous Flux      | 750 lm      | Light Beam Angle        | 36 Degree                                    |
| Height             | 157 mm      | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                  | 65 mm       | CRI (Ra)                | 90                                           |
| Pendulum Length    | 1800 mm     | IK Protection Class     | IK03                                         |
| Power              | 10 W        |                         |                                              |



707215

| Article | Housing Color |    | Price    |
|---------|---------------|----|----------|
| 707215  | White         | WW | € 108.95 |
| 707216  | Black         | WW | € 108.95 |



Accessories

|        |                                     |  |         |
|--------|-------------------------------------|--|---------|
| 930752 | Door panel for Lucea 6/10 white     |  | € 17.95 |
| 930753 | Door panel for Lucea 6/10 black     |  | € 17.95 |
| 930756 | Reflector ring for Lucea 6/10 white |  | € 3.95  |
| 930757 | Reflector ring for Lucea 6/10 black |  | € 3.95  |
| 930758 | Reflector ring for Lucea 6/10 gold  |  | € 3.95  |



page 26



page 60



page 62



page 400



page 404

# D LINE system



page 310



page 312



page 313



page 314



page 314



page 315



page 315



page 316



page 316



page 317



page 318



page 318



   
page 319



    
page 320



   
page 320



   
page 321



   
page 321



   
page 322



   
page 322



   
page 323



   
page 323



   
page 324



   
page 324



   
page 325



   
page 325



  
page 326



  
page 326



   
page 327



   
page 328



   
page 329



   
page 330



   
page 331



   
page 331



  
page 333

**D LINE MOUNTING POWER RAIL SYSTEM 3-PHASE 220-440V**


| mounting modules                                                                             | illust. | white         | black         | page |
|----------------------------------------------------------------------------------------------|---------|---------------|---------------|------|
| mounting power rail L: 1000 mm                                                               | 01      | <b>710000</b> | <b>710002</b> | 311  |
| mounting power rail L: 2000 mm                                                               | 01      | <b>710003</b> | <b>710005</b> | 311  |
| mounting power rail L: 3000 mm                                                               | 01      | <b>710006</b> | <b>710008</b> | 311  |
| mounting power rail curved 90° left                                                          | 01      | <b>710113</b> | <b>710115</b> | 312  |
| mounting power rail curved 90° right                                                         | 01      | <b>710114</b> | <b>710116</b> | 213  |
| mounting adapter for lights                                                                  | 02      | <b>710045</b> | <b>710047</b> | 313  |
| live end feeder left                                                                         | 03      | <b>710009</b> | <b>710011</b> | 314  |
| live end feeder right side                                                                   | 04      | <b>710012</b> | <b>710014</b> | 314  |
| electrical straight connector with center feed option                                        | 05      | <b>710042</b> | <b>710044</b> | 315  |
| flexible-connector left-right side                                                           | 06      | <b>710039</b> | <b>710041</b> | 315  |
| electrical joint                                                                             | 07      | <b>710015</b> | <b>710017</b> | 316  |
| mechanical joint                                                                             | 08      | <b>710018</b> | <b>710020</b> | 316  |
| 90°-joint left-right with exchange mechanism                                                 | 09      | <b>710036</b> | <b>710038</b> | 317  |
| T-joint left-left-right with exchange mechanism                                              | 10      | <b>710027</b> | <b>710029</b> | 318  |
| T-joint right-right-left with exchange mechanism                                             | 11      | <b>710030</b> | <b>710032</b> | 318  |
| X-joint left-left-right-right                                                                | 12      | <b>710033</b> | <b>710035</b> | 319  |
| cover plate built in track                                                                   | 13      | <b>710077</b> | <b>710079</b> | 320  |
| endcap                                                                                       | 14      | <b>710066</b> | <b>710068</b> | 320  |
| ceiling mounting bracket flex                                                                | 15      | <b>710063</b> | <b>710065</b> | 321  |
| suspension clamp for track connection                                                        | 16      | <b>710057</b> | <b>710059</b> | 322  |
| ceiling suspension rigid [635 mm] with canopy                                                | 17      | <b>710078</b> | <b>710084</b> | 323  |
| extension for ceiling suspension [300 mm]                                                    | 17      | <b>710086</b> | <b>710087</b> | 323  |
| wire suspension bracket with ceiling rosette 1500 mm                                         | 18      | <b>710048</b> | <b>710050</b> | 324  |
| rope suspension bracket Mini mit Abhängeseil 5000 mm                                         | 19      | <b>710094</b> | <b>710096</b> | 324  |
| curved suspension cable bracket                                                              | 20      | <b>710117</b> | <b>710118</b> | 325  |
| suspension cable bracket with adjustment crossbar                                            | 21      | <b>710110</b> | <b>710112</b> | 325  |
| quick mounting bracket for grid ceilings                                                     | 22      | <b>710051</b> | <b>710053</b> | 327  |
| quick mounting bracket for grid ceilings for or mini cable suspension                        | 23      | <b>710108</b> | <b>710109</b> | 321  |
| wall bracket                                                                                 | 24      | <b>710104</b> | <b>710106</b> | 322  |
| truss adapter   silver coloured                                                              | 25      | -             | -             | 327  |
| quick mounting clamp for exhibition stand construction                                       | 26      | -             | <b>710082</b> | 326  |
| 3-circuits adapter for light installation                                                    | 27      | <b>710097</b> | <b>710099</b> | 328  |
| 3-circuits adapter with Multi CC power supply 250/350/450/500 mA   6,30 - 21,00 W   25-42V   | 28      | <b>862180</b> | <b>862183</b> | 329  |
| 3-circuits adapter with Multi CC power supply 600/700/750/800 mA   15,00 - 33,60 W   25-42V  | 28      | <b>862181</b> | <b>862184</b> | 329  |
| 3-circuits adapter with Multi CC power supply 850/900/950/1050 mA   23,00 - 44,10 W   27-42V | 28      | <b>862182</b> | <b>862185</b> | 329  |
| electrical outlet adapter                                                                    | 29      | <b>710024</b> | <b>710026</b> | 330  |
| mounting adapter for additional components max. 10kg                                         | 30      | <b>710054</b> | <b>710056</b> | 330  |
| signs hook, max. load 5kg                                                                    | 31      | <b>710060</b> | <b>710062</b> | 331  |




**Note:** Recessed track systems can be found in the D LINE DALI 3-phase power rail luminaires chapter.



## ILLUSTRATIONS WITH PLANNING-WRELEVANT DIMENSIONS

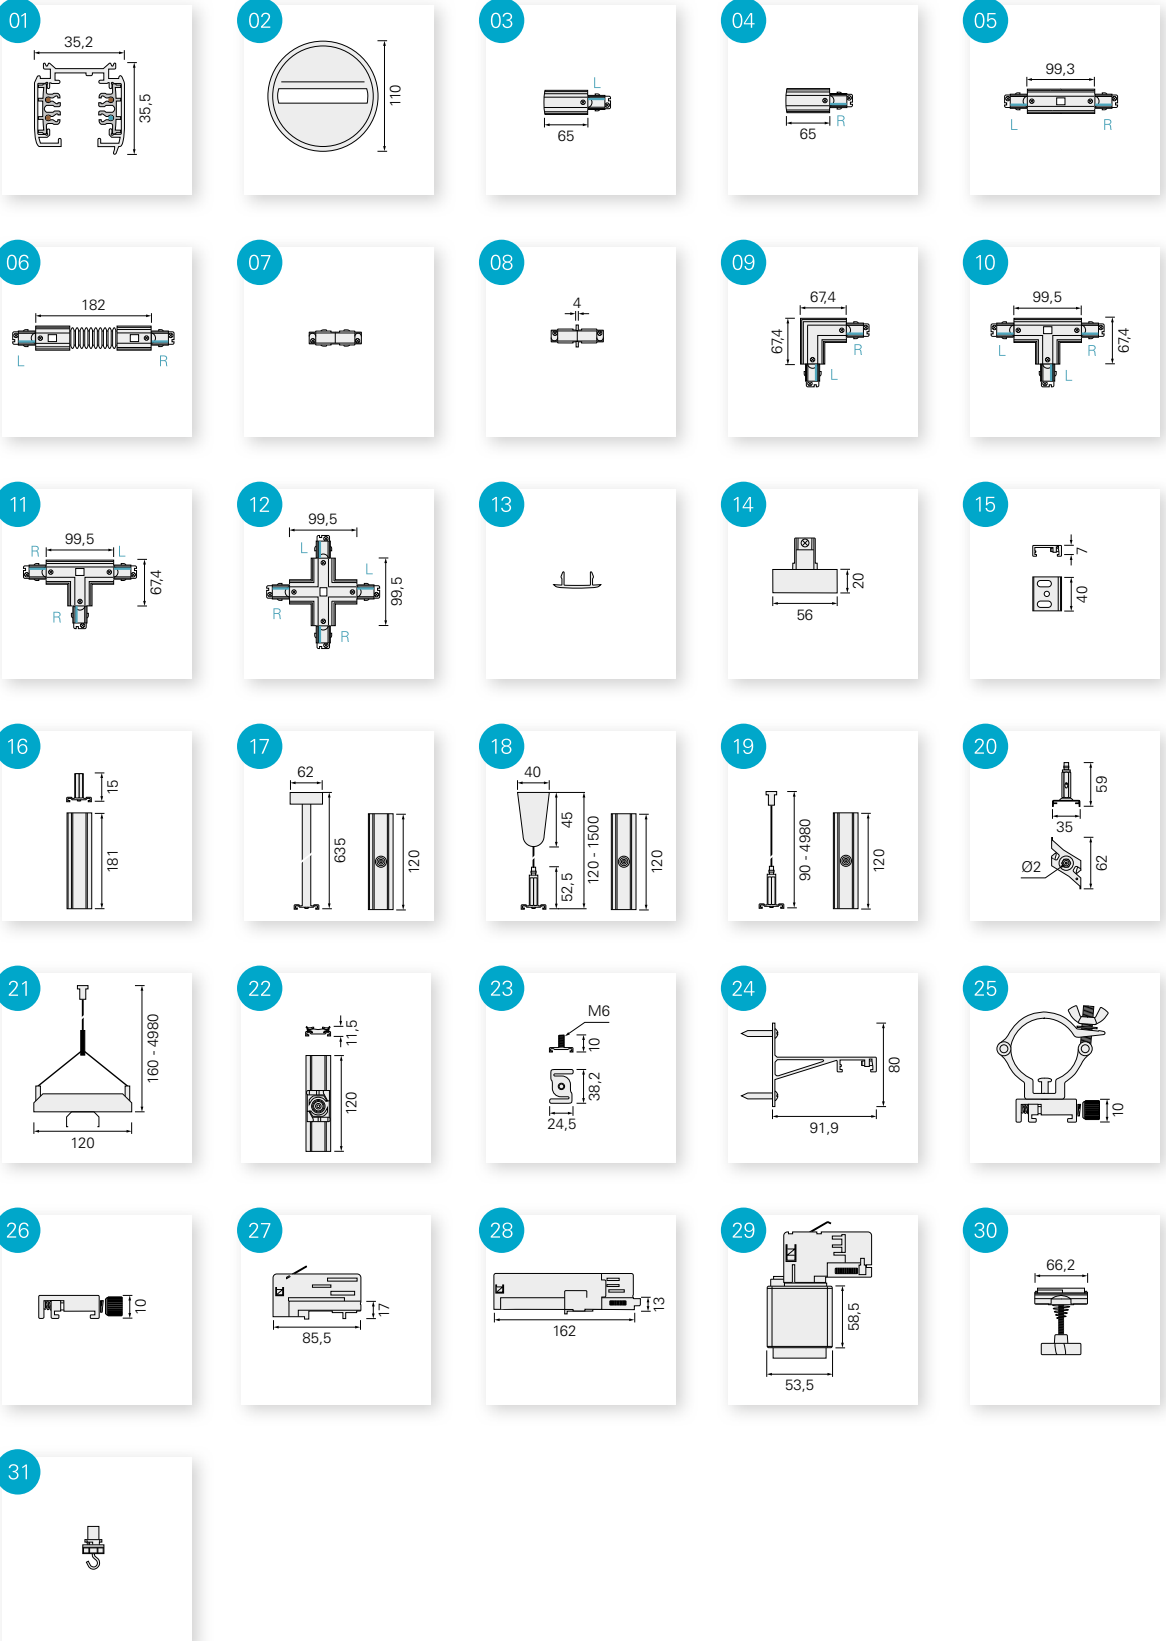


FIXING POINTS

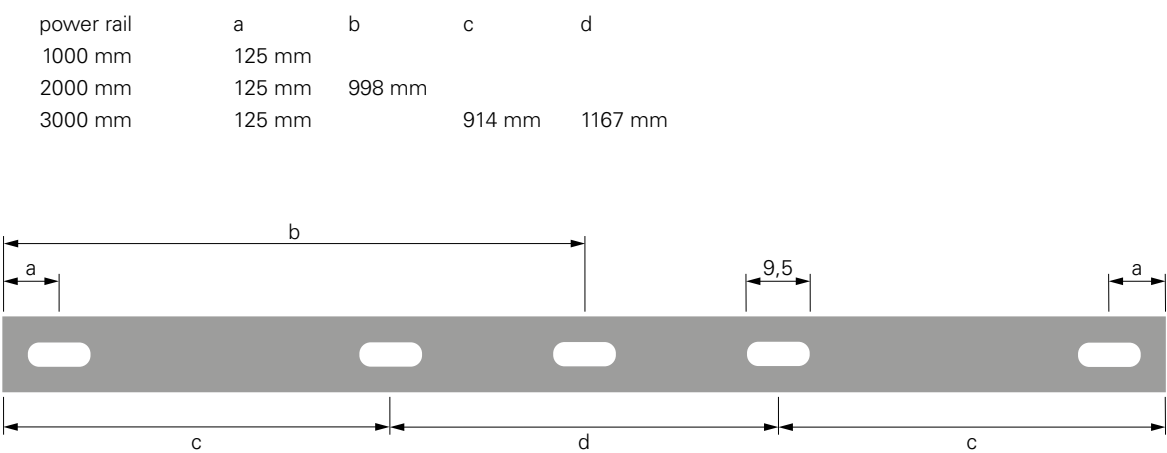


MECHANICAL LOAD TRACK POWER RAIL 1000 MM

50 N  $\triangleq$  5,09 kg  
dimension in mm



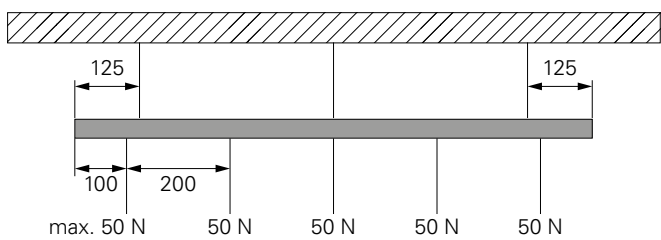



MECHANICAL LOAD TRACK POWER RAIL 2000/3000 MM

50 N  $\triangleq$  5,09 kg  
dimension in mm

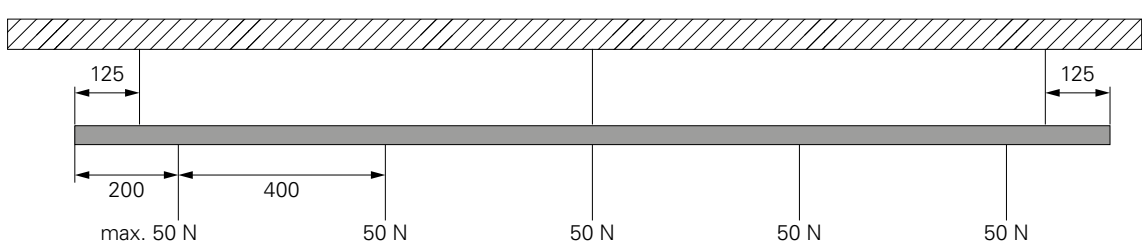


# PLANNING GUIDE D LINE MOUNTING POWER RAIL SYSTEM 3-PHASE 220-440V

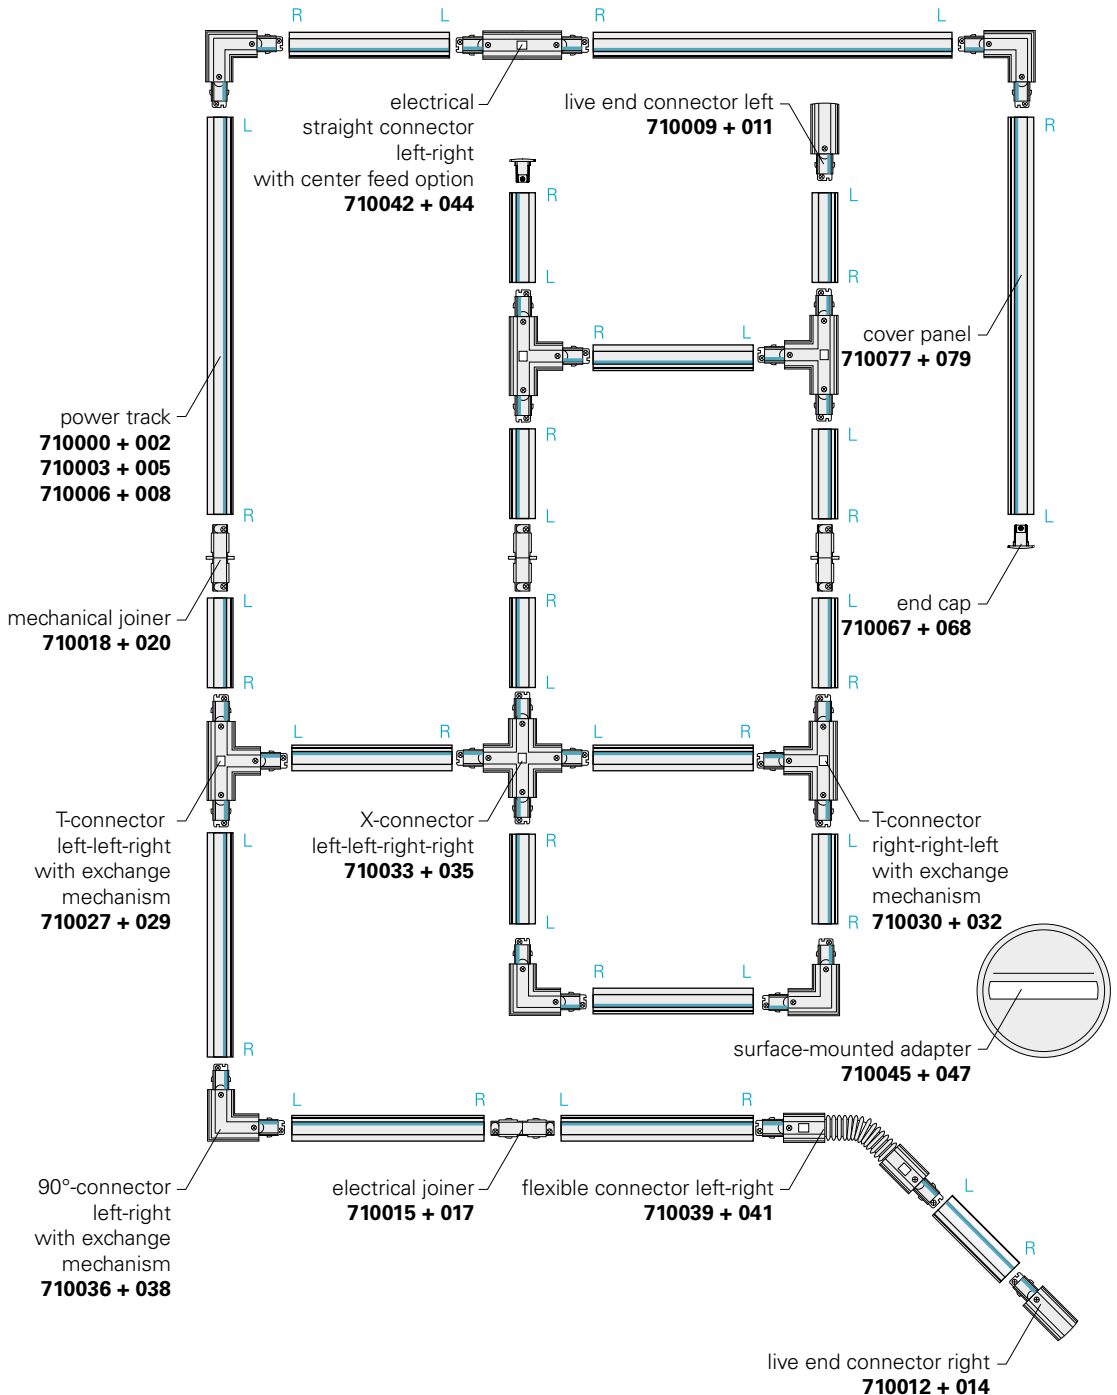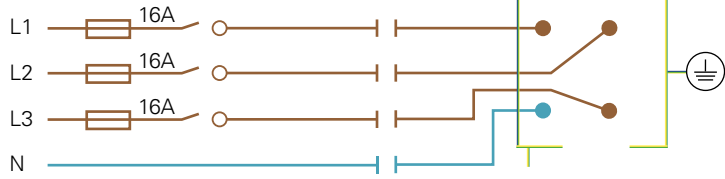


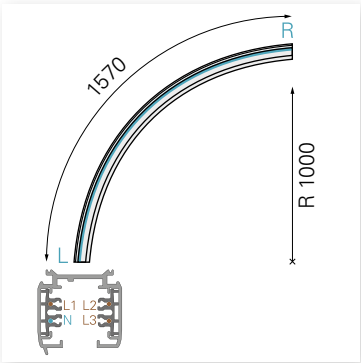

710113, 710115

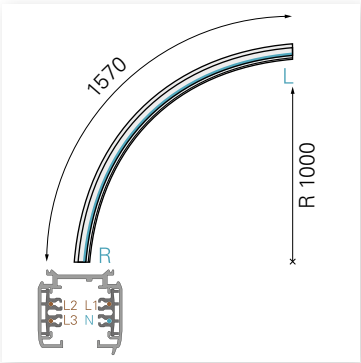

710114, 710116

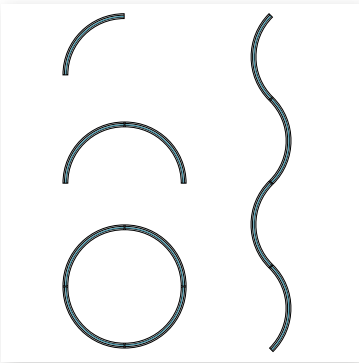

examples of designs



## D LINE CURVED


The D LINE CURVED track enables completely new design possibilities for modern lighting concepts. Featuring a 90° curve with a 1 m radius, it allows the creation of semicircles, circles and wave-shaped layouts. The 1.57 m segments can be used as either D LINE DALI or D LINE Standard tracks. A variety of mounting options ensures maximum installation flexibility.




D LINE POWER RAIL SYSTEM 3-PHASE 220-440V

The D LINE track system is available exclusively from DEKO-LIGHT and is extremely easy to plan and install thanks to its components, some of which have been completely redesigned. It is also compatible with all common track adapters and luminaires. The elegant and timeless design is available in white, black and grey, and the wide range

of accessories and mounting components means that there are no limits to its use and installation. Thanks to the interchangeable mechanism of the 90° and T connectors, planning is easier than ever before and the installation of even complex shapes will be child's play in the future.

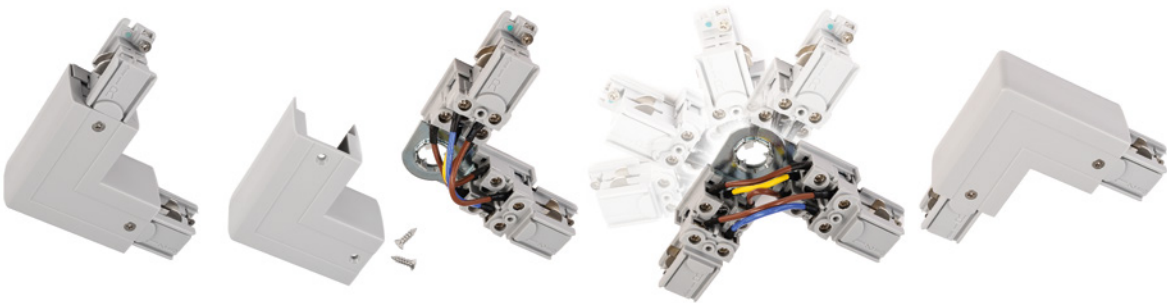

COMPATIBILITY OVERVIEW



D LINE 3-phase track is compatible with the following track lights / adapters:

| manufacturer     | system name            |
|------------------|------------------------|
| DEKO-LIGHT       | all 3-phase spotlights |
| Molto Luce       | 3-Phase-Track*         |
| Global / Nordic  | Trac Pro 3*            |
| Ivela            | LKM Square / Quadro*   |
| Erco             | 3-Phasen*              |
| Hoffmeister      | 3-Phasen*              |
| Zumtobel / Staff | 3-Phasen*              |
| Eutrac           | One Track*             |
| SLV              | S-Track                |

\*compatible with all DEKO-LIGHT 3-circuit spotlights, except 3-circuit adapters with integrated Multi-CC driver [p. 329]

All information is provided without guarantee. Technical data and dimensions are subject to change without prior notice. To ensure proper functionality, compatibility should be verified using a sample during the project planning phase.





On request, all D LINE busbars can be supplied ready-made and cut to size according to your specifications for a small surcharge. This allows you to start installation directly on site at the customer's premises. Please contact



## D LINE SURFACE-MOUNTED POWER TRACK

The D LINE busbar system is available exclusively from DEKO-LIGHT and is now extremely easy to plan and install thanks to a complete redesign of several components. It is also compatible with all common busbar adapters and lights. The elegant and timeless design is available in white, black and grey, and with a huge range of accessories and assembly components available, the possibilities are almost endless when it comes to application and installation. The reversal mechanism of the 90° and T-connectors makes planning easier than ever before, and in the future installing even complex shapes will be a breeze.



**Note:** Recessed track systems can be found in the D LINE DALI 3-phase power rail luminaires chapter.



D LINE SURFACE-MOUNTED POWER TRACK

- Up to three phases (3x 16 A) can be fed in
- Numerous attachment options

Application Area

Home / Living, Shop / Retail / Sales area

|               |              |                     |              |
|---------------|--------------|---------------------|--------------|
| Housing       | Aluminium    | Height              | 35.5 mm      |
| Mounting Type | Top mounting | Rated Input Voltage | 220-440 V/AC |
| Width         | 35.2 mm      | Output Current      | 16 A         |

| Article | Housing Color                             | Length  | Price    |
|---------|-------------------------------------------|---------|----------|
| 710000  | <input type="checkbox"/> White            | 1000 mm | € 35.95  |
| 710002  | <input checked="" type="checkbox"/> Black | 1000 mm | € 35.95  |
| 710003  | <input type="checkbox"/> White            | 2000 mm | € 71.95  |
| 710005  | <input checked="" type="checkbox"/> Black | 2000 mm | € 71.95  |
| 710006  | <input type="checkbox"/> White            | 3000 mm | € 103.95 |
| 710008  | <input checked="" type="checkbox"/> Black | 3000 mm | € 103.95 |



Accessories for 710000, 710003, 710006

710077 D Line/Dali cover panel for integrated busbar, white

 € 4.95

Accessories for 710002, 710005, 710008

710079 D Line/Dali cover panel for integrated busbar, black

 € 4.95




Lighting design

Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.



D LINE/DALI SURFACE-MOUNTED POWER TRACK CURVED

- Curved track 90° (radius 1m)
- Enables completely new design forms (corner, semicircle, circle, wave)
- Segment length 1.57m
- Can be used as D-Line DALI or D-Line standard track
- only suitable for standard track adapters (max. length 12cm)
- up to 3 phases [3x 16A] can be fed in
- cutting tool required for Dali customised assembly
- Many different mounting options

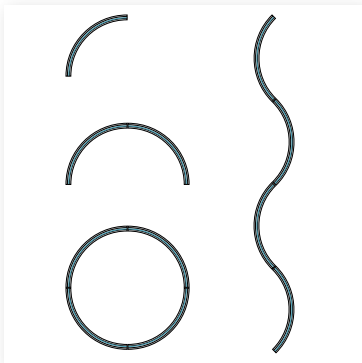

examples of designs

Application Area

Home / Living, Shop / Retail / Sales area

|               |              |                     |              |
|---------------|--------------|---------------------|--------------|
| Housing       | Aluminium    | Height              | 35.5 mm      |
| Mounting Type | Top mounting | Rated Input Voltage | 220-440 V/AC |
| Length        | 1570 mm      | Output Current      | 16 A         |
| Width         | 35.2 mm      |                     |              |

| Article | Housing Color                             |       | Price    |
|---------|-------------------------------------------|-------|----------|
| 710113  | <input type="checkbox"/> White            | left  | € 211.95 |
| 710115  | <input checked="" type="checkbox"/> Black | left  | € 211.95 |
| 710114  | <input type="checkbox"/> White            | right | € 211.95 |
| 710116  | <input checked="" type="checkbox"/> Black | right | € 211.95 |





D LINE SURFACE-MOUNTED ADAPTER

- Surface-mounted housing for converting busbar spotlights
- Single phase (1x 16 A) feed
- Easy to install

Application Area

Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Rated Input Voltage | 220-240 V/AC |
| Height  | 35 mm   | Output Current      | 16 A         |
| Ø       | 110 mm  |                     |              |

| Article | Housing Color                             | Price   |
|---------|-------------------------------------------|---------|
| 710045  | <input type="checkbox"/> White            | € 23.95 |
| 710047  | <input checked="" type="checkbox"/> Black | € 23.95 |





D LINE ELECTRIC FEEDER LEFT

- Up to three phases (3x 16 A) can be fed in
- Power can be fed in from above (ceiling) or from the side
- Suitable for surface-mounted and recessed systems

**Application Area**  
 Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 98.5 mm | Rated Input Voltage | 220-440 V/AC |
| Width   | 35.2 mm | Output Current      | 16 A         |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 710009  |  White | € 12.95 |
| 710011  |  Black | € 12.95 |



D LINE ELECTRIC FEEDER RIGHT

- Up to three phases (3x 16 A) can be fed in
- Power can be fed in from above (ceiling) or from the side
- Suitable for surface-mounted and recessed systems

**Application Area**  
 Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 98.5 mm | Rated Input Voltage | 220-440 V/AC |
| Width   | 35.2 mm | Output Current      | 16 A         |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 710012  |  White | € 12.95 |
| 710014  |  Black | € 12.95 |



Accessories  
**710089** D Line cover panel feed left/right




€ 3.45





D LINE ELECTRICAL LONGITUDINAL CONNECTOR WITH FEED OPTION



- Up to three phases (3x 16 A) can be fed in
- Power supply from above (from ceiling)
- Suitable for surface-mounted and recessed systems

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 166 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 35 mm   | Output Current      | 16 A         |


| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 710042  |  White | € 26.95 |
| 710044  |  Black | € 26.95 |



**Accessories**  
710090 D Line/Dali cover panel for longitudinal connector, white



€ 3.45



D LINE FLEXIBLE CONNECTOR, LEFT-RIGHT

- Compensates for height or angle differences
- Suitable for surface-mounted systems

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 248 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 35 mm   | Output Current      | 16 A         |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 710039  |  White | € 34.95 |
| 710041  |  Black | € 34.95 |





D LINE ELECTRIC CONNECTOR

·suitable for surface-mounted and recessed systems

Application Area

Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 26.5 mm      |
| Length  | 68 mm   | Rated Input Voltage | 220-440 V/AC |
| Width   | 20.5 mm | Output Current      | 16 A         |

| Article | Housing Color                                                                           | Price  |
|---------|-----------------------------------------------------------------------------------------|--------|
| 710015  |  White | € 7.95 |
| 710017  |  Black | € 7.95 |



D LINE MECHANICAL CONNECTOR

- Mechanical connector without electrical contacts
- For electrical separation of two different power circuits within one track system
- Suitable for surface-mounted and recessed systems



Application Area

Home / Living, Shop / Retail / Sales area

|         |         |        |       |
|---------|---------|--------|-------|
| Housing | Plastic | Width  | 20 mm |
| Length  | 66.4 mm | Height | 27 mm |

| Article | Housing Color                                                                             | Price  |
|---------|-------------------------------------------------------------------------------------------|--------|
| 710018  |  White | € 5.95 |
| 710020  |  Black | € 5.95 |



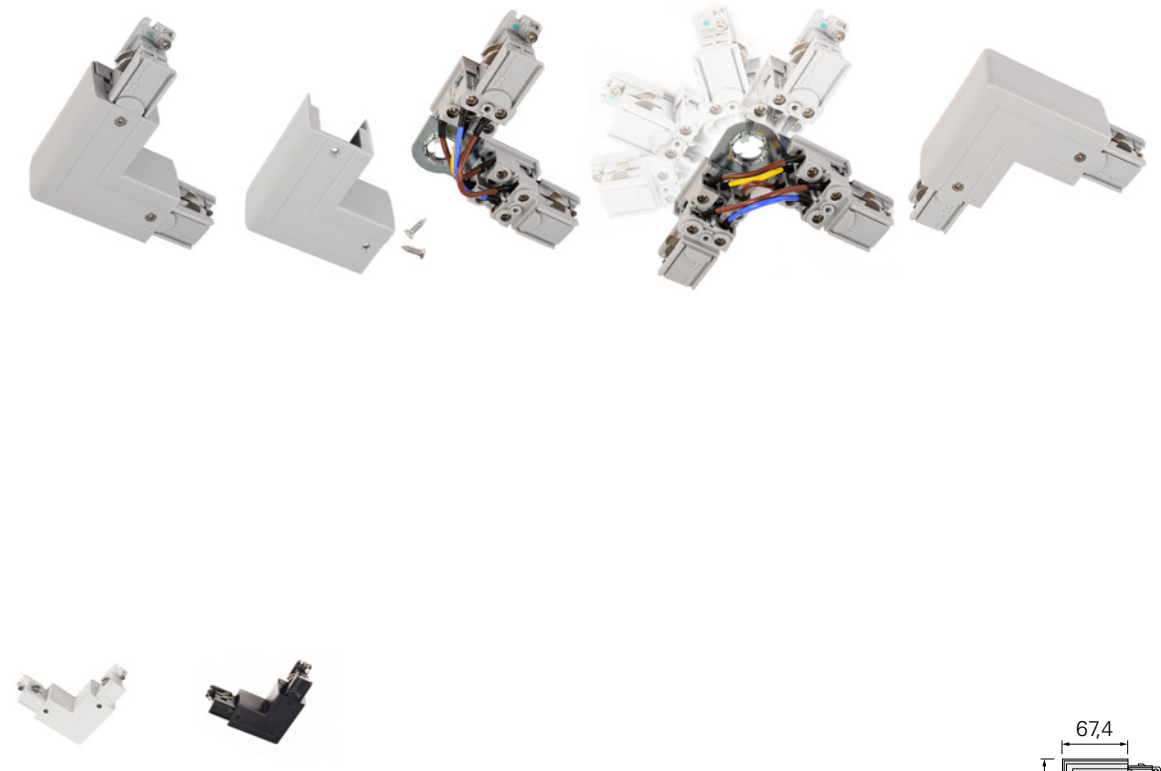

D LINE 90° CONNECTOR LEFT-RIGHT WITH REVERSAL MECHANISM

- With reversal mechanism for switching the orientation between left and right
- Suitable for surface-mounted and recessed systems

Application Area  
Home / Living, Shop / Retail / Sales area

|         |          |                     |              |
|---------|----------|---------------------|--------------|
| Housing | Plastic  | Height              | 35.5 mm      |
| Length  | 100.7 mm | Rated Input Voltage | 220-440 V/AC |
| Width   | 100.7 mm | Output Current      | 16 A         |


| Article | Housing Color | Price   |
|---------|---------------|---------|
| 710036  | White         | € 28.95 |
| 710038  | Black         | € 28.95 |



Accessories  
710091 D Line/Dali cover panel for 90° connector, white



€ 3.45




D LINE T-CONNECTOR LEFT-LEFT-RIGHT WITH REVERSAL MECHANISM

- with reversal mechanism for switching the orientation between left / right
- suitable for surface-mounted and recessed systems

Application Area  
Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 166 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 101 mm  | Output Current      | 16 A         |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 710027  |  White | € 40.95 |
| 710029  |  Black | € 40.95 |



D LINE T-CONNECTOR RIGHT/RIGHT/LEFT WITH EXCHANGE MECHANICS

- with reversal mechanism for switching the orientation between left / right
- suitable for surface-mounted and recessed systems

Application Area  
Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 166 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 101 mm  | Output Current      | 16 A         |



| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 710030  |  White | € 40.95 |
| 710032  |  Black | € 40.95 |



Accessories  
710093 D Line/Dali cover panel for T-connector, white



€ 3.45

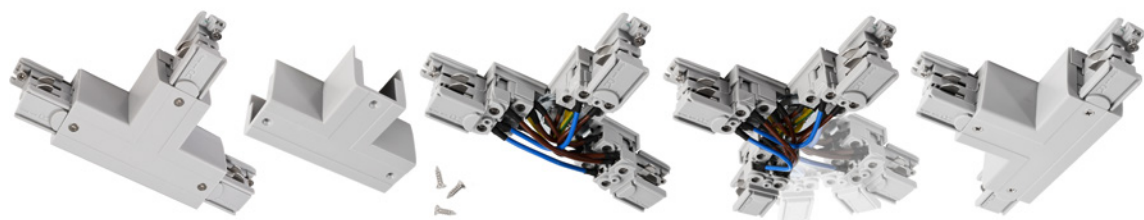

D LINE X-CONNECTOR LEFT-LEFT-RIGHT-RIGHT

- Easy to install
- Suitable for surface-mounted and recessed systems

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 166 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 166 mm  | Output Current      | 16 A         |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 710033  | White         | € 52.95 |
| 710035  | Black         | € 52.95 |



**Accessories**  
710092 D Line/Dali cover panel for X-connector, white



€ 3.95



D LINE COVER PANEL

- Suitable for surface-mounted and recessed systems
- For sealing publicly accessible busbars within a contact zone of less than 2.30 m

Application Area  
Home / Living, Shop / Retail / Sales area

|         |         |        |         |
|---------|---------|--------|---------|
| Housing | Plastic | Width  | 21.5 mm |
| Length  | 1000 mm | Height | 7.5 mm  |

| Article | Housing Color                                                                           | Price  |
|---------|-----------------------------------------------------------------------------------------|--------|
| 710077  |  White | € 4.95 |
| 710079  |  Black | € 4.95 |



D LINE END CAP

- For closing open current track ends (touch protection)
- Easy to install
- Suitable for surface-mounted systems

Application Area  
Home / Living, Shop / Retail / Sales area

|         |         |        |         |
|---------|---------|--------|---------|
| Housing | Plastic | Height | 32.5 mm |
|---------|---------|--------|---------|

| Article | Housing Color                                                                             | Length  | Width   | Price  |
|---------|-------------------------------------------------------------------------------------------|---------|---------|--------|
| 710066  |  White | 31.3 mm | 35.2 mm | € 2.45 |
| 710068  |  Black | 31.3 mm | 35.2 mm | € 2.45 |
| 710103  |  White | 56 mm   | 47.9 mm | € 2.45 |
| 710538  |  Black | 56 mm   | 47.9 mm | € 2.45 |







### D LINE MOUNTING BRACKET FLEX

- Suitable for surface-mounted systems
- Simplifies installation of complex shapes
- Current track can still be slid during installation

**Application Area**

Home / Living, Shop / Retail / Sales area

|         |       |        |         |
|---------|-------|--------|---------|
| Housing | Metal | Width  | 33.8 mm |
| Length  | 40 mm | Height | 12.5 mm |

| Article | Housing Color                                                                           | Price  |
|---------|-----------------------------------------------------------------------------------------|--------|
| 710063  |  White | € 4.95 |
| 710065  |  Black | € 4.95 |



### D LINE/DALI GRID-CEILING QUICK-MOUNTING BRACKET FOR MINI CABLE SUSPENSION

- Suitable for surface-mounted systems
- For universal use for mounting other components using M6 thread stud bolts on grid ceilings
- Suitable for 22-24 mm grid-ceiling support rails
- Suitable for steel cables up to 2.6 mm
- Mechanical load up to 7 kg/70 N

**Application Area**

Home / Living, Shop / Retail / Sales area

|         |       |        |       |
|---------|-------|--------|-------|
| Housing | Steel | Width  | 39 mm |
| Length  | 25 mm | Height | 27 mm |

| Article | Housing Color                                                                             | Price  |
|---------|-------------------------------------------------------------------------------------------|--------|
| 710108  |  White | € 3.45 |
| 710109  |  Black | € 3.45 |





D LINE WALL BRACKET

- Suitable for surface-mounted systems
- Simplifies installation of current tracks near walls
- Ideal for illuminating pictures and objects, for example in exhibitions, collections and museums

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |           |        |       |
|---------|-----------|--------|-------|
| Housing | Aluminium | Width  | 25 mm |
| Length  | 91.9 mm   | Height | 80 mm |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 710104  |  White | € 11.95 |
| 710106  |  Black | € 11.95 |



D LINE SUSPENSION CONNECTION BRACKET

- Suitable for surface-mounted systems
- For chain installation or similar (chain not included in the scope of delivery)

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |        |        |       |
|---------|--------|--------|-------|
| Housing | Metal  | Width  | 32 mm |
| Length  | 181 mm | Height | 20 mm |

| Article | Housing Color                                                                             | Price  |
|---------|-------------------------------------------------------------------------------------------|--------|
| 710057  |  White | € 7.95 |
| 710059  |  Black | € 7.95 |





D LINE CEILING SUSPENSION RIGID

- Sturdy, elegant ceiling hanger
- Suitable for surface-mounted systems
- Hanger dimension 635 mm (can be shortened to 335 mm)
- Hanger can be extended with accessories

Application Area  
Home / Living, Shop / Retail / Sales area

|         |           |       |       |
|---------|-----------|-------|-------|
| Housing | Aluminium | Width | 60 mm |
| Length  | 635 mm    |       |       |

| Article | Housing Color                             | Price   |
|---------|-------------------------------------------|---------|
| 710078  | <input type="checkbox"/> White            | € 24.95 |
| 710084  | <input checked="" type="checkbox"/> Black | € 24.95 |



D LINE EXTENSION FOR CEILING SUSPENSION RIGID

- Suitable for rigid ceiling hangers
- Extends the hanger length by 300 mm

Application Area  
Home / Living, Shop / Retail / Sales area

|         |           |       |       |
|---------|-----------|-------|-------|
| Housing | Aluminium | Width | 10 mm |
| Length  | 310 mm    |       |       |

| Article | Housing Color                             | Price  |
|---------|-------------------------------------------|--------|
| 710086  | <input type="checkbox"/> White            | € 4.95 |
| 710087  | <input checked="" type="checkbox"/> Black | € 4.95 |





D LINE ROPE SUSPENSION BRACKET

- Can be cut to length for suspension dimension: 120-1,500 mm
- suitable for surface-mounted systems

Application Area  
Home / Living, Shop / Retail / Sales area

|         |        |        |       |
|---------|--------|--------|-------|
| Housing | Metal  | Width  | 31 mm |
| Length  | 120 mm | Height | 52 mm |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 710048  |  White | € 11.95 |
| 710050  |  Black | € 11.95 |



Accessories  
710081 D Line/Dali cable for cable suspension 4.0 m



€ 6.95



D LINE ROPE SUSPENSION BRACKET MINI

- Stylish and sophisticated suspended mounting
- Can be cut to length for hanger lengths: 90-4,960 mm
- Suitable for surface-mounted systems

Application Area  
Home / Living, Shop / Retail / Sales area

|         |        |        |       |
|---------|--------|--------|-------|
| Housing | Metal  | Width  | 31 mm |
| Length  | 120 mm | Height | 58 mm |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 710094  |  White | € 15.95 |
| 710096  |  Black | € 15.95 |




Accessories  
710108 D Line/Dali grid ceiling quick-mounting clip for wire suspension Mini white  
710109 D Line/Dali grid ceiling quick-mounting clip for wire suspension Mini black



€ 3.45



€ 3.45



D LINE/DALI ROPE SUSPENSION BRACKET

- special wire suspension for D-Line/DALI Curved tracks
- enables and extends the mounting options
- Suspension dimension can be individually shortened: 90 - 4960 mm

|         |       |                     |       |
|---------|-------|---------------------|-------|
| Housing | Metal | Height              | 59 mm |
| Length  | 62 mm | Loading Weight max. | 10 kg |
| Width   | 35 mm | Load Force max.     | 100 N |

| Article | Housing Color                             | Price   |
|---------|-------------------------------------------|---------|
| 710117  | <input type="checkbox"/> White            | € 14.95 |
| 710118  | <input checked="" type="checkbox"/> Black | € 14.95 |



D LINE/DALI CABLE SUSPENSION BRACKET WITH ADJUSTMENT TRAVERSE

- Set consisting of wire suspension with ceiling attachment and adjustment traverse
- Compensation of asymmetrical weight loads in the track system through one-sided spotlight mounting
- Easy and quick adjustment
- Suspension dimension can be individually shortened: 160-4960 mm
- Suitable for D Line/Dali mounting system

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |        |        |        |
|---------|--------|--------|--------|
| Housing | Metal  | Width  | 32 mm  |
| Length  | 120 mm | Height | 120 mm |

| Article | Housing Color                             | Price   |
|---------|-------------------------------------------|---------|
| 710110  | <input type="checkbox"/> White            | € 20.95 |
| 710112  | <input checked="" type="checkbox"/> Black | € 20.95 |





D LINE FAST-MOUNTING BRACKET

- Suitable for surface-mounted systems
- Current track can be installed without tools using knurled thumb screw and spring clamps
- Quick installation and removal for e.g. trade fair construction

Application Area  
Home / Living, Shop / Retail / Sales area

|         |           |        |         |
|---------|-----------|--------|---------|
| Housing | Aluminium | Width  | 30 mm   |
| Length  | 40 mm     | Height | 11.9 mm |

| Article | Housing Color                                                                           | Price  |
|---------|-----------------------------------------------------------------------------------------|--------|
| 710082  |  Black | € 8.95 |



D LINE TRUSS ADAPTER

- Suitable for surface-mounted systems
- Quick-action couplers for fast mounting of current tracks on cross rail structures
- Fits all 50 mm aluminium cross rails in event/trade fair construction

Application Area  
Home / Living, Shop / Retail / Sales area

|         |           |        |         |
|---------|-----------|--------|---------|
| Housing | Aluminium | Width  | 30 mm   |
| Length  | 40 mm     | Height | 11.9 mm |

| Article | Housing Color                                                                              | Price   |
|---------|--------------------------------------------------------------------------------------------|---------|
| 710083  |  Silver | € 25.95 |



This little »jack-of-all-trades« makes mounting a track on an existing grid ceiling child's play. The installation time is only a fraction of what it used to be. In the first step, the clip is simply clicked into the visible metal strips of the grid ceiling and is held bomb-proof on the ceiling by means of a safety spring clip. After that, the conductor rail is simply pushed onto it and the installation is finished.



**D LINE GRID CEILING FAST-MOUNTING BRACKET**

- Suitable for surface-mounted systems
- Quick and easy to install on grid ceilings
- Mechanical load up to 15.0 kg/150 N
- Suitable for 22-24 mm ceiling grid support rails

**Application Area**

Home / Living, Shop / Retail / Sales area

|         |        |        |       |
|---------|--------|--------|-------|
| Housing | Metal  | Width  | 31 mm |
| Length  | 120 mm | Height | 11 mm |

| Article | Housing Color                             | Price  |
|---------|-------------------------------------------|--------|
| 710051  | <input type="checkbox"/> White            | € 9.95 |
| 710053  | <input checked="" type="checkbox"/> Black | € 9.95 |







D LINE 3-PHASE ADAPTER FOR LIGHT INSTALLATION

- Suitable for surface-mounted and recessed systems
- Includes reduction bush, M10 flat nut and strain relief grommet
- Easy to install
- Integrated secondary drop protection
- Max. load 10 kg/100 N

Application Area  
Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 54 mm        |
| Length  | 84 mm   | Rated Input Voltage | 220-240 V/AC |
| Width   | 32 mm   | Output Current      | 10 A         |

| Article | Housing Color                             | Price   |
|---------|-------------------------------------------|---------|
| 710097  | <input type="checkbox"/> White            | € 15.95 |
| 710099  | <input checked="" type="checkbox"/> Black | € 15.95 |






D LINE THREE-PHASE ADAPTER WITH INTEGRATED MULTI CC POWER SUPPLY

- Suitable for surface-mounted and recessed systems
- Integrated secondary drop protection
- Supplied with trumpet nipple and M10 flat nut
- Stable integrated adjustable power supply [CC]
- Check suitability of the intended lamp
- Max. 10 kg/100 N
- Exclusively for D LINE, Ivela and Hoffmeister three-phase current tracks

Application Area  
Home / Living, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 41 mm        |
| Length  | 162 mm  | Rated Input Voltage | 220-240 V/AC |
| Width   | 31 mm   |                     |              |

| Article |                                     | Output Current Selectable          | Power       | Output Voltage | Price   |
|---------|-------------------------------------|------------------------------------|-------------|----------------|---------|
| 862180  | <input type="checkbox"/>            | 250 mA / 350 mA / 450 mA / 500 mA  | 6.2-21.0 W  | 25-42 V/DC     | € 25.95 |
| 862183  | <input checked="" type="checkbox"/> | 250 mA / 350 mA / 450 mA / 500 mA  | 6.2-21.0 W  | 25-42 V/DC     | € 25.95 |
| 862181  | <input type="checkbox"/>            | 600 mA / 700 mA / 750 mA / 800 mA  | 15.0-33.0 W | 25-42 V/DC     | € 27.95 |
| 862184  | <input checked="" type="checkbox"/> | 600 mA / 700 mA / 750 mA / 800 mA  | 15.0-33.0 W | 25-42 V/DC     | € 27.95 |
| 862182  | <input type="checkbox"/>            | 850 mA / 900 mA / 950 mA / 1050 mA | 22.0-44.0 W | 27-42 V/DC     | € 29.95 |
| 862185  | <input checked="" type="checkbox"/> | 850 mA / 900 mA / 950 mA / 1050 mA | 22.0-44.0 W | 27-42 V/DC     | € 29.95 |





D LINE SOCKET ADAPTER

- easy to install
- suitable for surface-mounted and recessed systems
- as power distribution system in current tracks
- max. 1,380 W
- integrated plug fuse

Application Area  
Home / Living, Shop / Retail / Sales area

|         |         |                     |          |
|---------|---------|---------------------|----------|
| Housing | Plastic | Rated Input Voltage | 230 V/AC |
| Length  | 58.5 mm | Output Current      | 6 A      |
| Width   | 53.5 mm | Connected Load max. | 1380 W   |
| Height  | 103 mm  |                     |          |

| Article | Housing Color                             | Price   |
|---------|-------------------------------------------|---------|
| 710024  | <input type="checkbox"/> White            | € 22.95 |
| 710026  | <input checked="" type="checkbox"/> Black | € 22.95 |





D LINE MOUNTING ADAPTER FOR ADDITIONAL COMPONENTS

- Suitable for surface-mounted and recessed systems
- Mounting adapter (M6 thread) for holding additional devices and lights
- Ideal for use with optional D Line socket adapter
- Load max. 10 kg/100 N

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |                |        |         |
|---------|----------------|--------|---------|
| Housing | Metal, Plastic | Width  | 31.5 mm |
| Length  | 66.5 mm        | Height | 84 mm   |

| Article | Housing Color                                                                           | Price  |
|---------|-----------------------------------------------------------------------------------------|--------|
| 710054  |  White | € 8.95 |
| 710056  |  Black | € 8.95 |



D LINE SIGN HOOK

- Suitable for surface-mounted and recessed systems
- Hook for attaching information signs etc.
- Load max. 5kg / 50N

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |                |   |       |
|---------|----------------|---|-------|
| Housing | Plastic, Steel | Ø | 25 mm |
| Height  | 52 mm          |   |       |

| Article | Housing Color                                                                             | Price  |
|---------|-------------------------------------------------------------------------------------------|--------|
| 710060  |  White | € 2.45 |
| 710062  |  Black | € 2.45 |



# D LINE DALI system



page 340



page 341



page 343



page 344



page 345



page 346



page 347



page 347



page 348



page 348



page 349



page 350



☐ ☒  
page 351



☐ ☒  
page 353



☐ ☒  
page 353



☐ ☒  
page 354



☐ ☒  
page 354



☐ ☒  
page 355



☐ ☒  
page 355



☐ ☒  
page 356



☐ ☒  
page 356



☐ ☒  
page 357



☐ ☒  
page 357



☐ ☒  
page 359



☐ ☒  
page 360



☐ ☒  
page 361




☐ ☒  
page 361

**D LINE DALI MOUNTING POWER RAIL SYSTEM 3-PHASE 220-440V**

| mounting modules                                                      | illustr. | white         | black         | page |
|-----------------------------------------------------------------------|----------|---------------|---------------|------|
| mounting power rail L: 1000 mm                                        | 01       | <b>710500</b> | <b>710501</b> | 340  |
| mounting power rail L: 2000 mm                                        | 01       | <b>710502</b> | <b>710503</b> | 340  |
| mounting power rail L: 3000 mm                                        | 01       | <b>710504</b> | <b>710505</b> | 340  |
| mounting power rail curved 90° left                                   | 01       | <b>710113</b> | <b>710115</b> | 343  |
| mounting power rail curved 90° right                                  | 01       | <b>710114</b> | <b>710116</b> | 343  |
| mounting adapter for lights                                           | 02       | <b>710512</b> | <b>710513</b> | 341  |
| live end feeder left                                                  | 03       | <b>710514</b> | <b>710515</b> | 346  |
| live end feeder right side                                            | 04       | <b>710516</b> | <b>710517</b> | 346  |
| electrical straight connector with center feed option                 | 05       | <b>710520</b> | <b>710521</b> | 347  |
| flexible-connector left-right side                                    | 06       | <b>710523</b> | <b>710524</b> | 347  |
| electrical joint                                                      | 07       | <b>710525</b> | <b>710526</b> | 348  |
| mechanical joint                                                      | 08       | <b>710018</b> | <b>710020</b> | 348  |
| 90°-joint left-right with exchange mechanism                          | 09       | <b>710527</b> | <b>710528</b> | 349  |
| T-joint left-left-right with exchange mechanism                       | 10       | <b>710530</b> | <b>710531</b> | 350  |
| T-joint right-right-left with exchange mechanism                      | 11       | <b>710532</b> | <b>710533</b> | 350  |
| X-joint left-left-right-right                                         | 12       | <b>710535</b> | <b>710536</b> | 351  |
| cover plate                                                           | 13       | <b>710077</b> | <b>710079</b> | 352  |
| endcap                                                                | 14       | <b>710066</b> | <b>710068</b> | 352  |
| ceiling mounting bracket flex                                         | 15       | <b>710063</b> | <b>710065</b> | 353  |
| suspension clamp for track connection                                 | 16       | <b>710057</b> | <b>710059</b> | 354  |
| ceiling suspension rigid [635 mm] with canopy                         | 17       | <b>710078</b> | <b>710084</b> | 355  |
| extension for ceiling suspension [300 mm]                             | 17       | <b>710086</b> | <b>710087</b> | 355  |
| wire suspension bracket with ceiling rosette 1500 mm                  | 18       | <b>710048</b> | <b>710050</b> | 356  |
| rope suspension bracket Mini mit Abhängeseil 5000 mm                  | 19       | <b>710094</b> | <b>710096</b> | 356  |
| curved suspension cable bracket                                       | 20       | <b>710117</b> | <b>710118</b> | 357  |
| suspension cable bracket with adjustment crossbar                     | 21       | <b>710110</b> | <b>710112</b> | 357  |
| quick mounting bracket for grid ceilings                              | 22       | <b>710051</b> | <b>710053</b> | 359  |
| quick mounting bracket for grid ceilings for or mini cable suspension | 23       | <b>710108</b> | <b>710109</b> | 353  |
| wall bracket                                                          | 24       | <b>710104</b> | <b>710106</b> | 354  |
| truss adapter   silver coloured                                       | 25       | <b>710083</b> | <b>710083</b> | 358  |
| quick mounting clamp for exhibition stand construction                | 26       | -             | <b>710082</b> | 358  |
| 3-circuits adapter for light installation                             | 27       | <b>710539</b> | <b>710540</b> | 360  |
| electrical outlet adapter                                             | 28       | <b>710024</b> | <b>710026</b> | 360  |
| mounting adapter for additional components max. 10kg                  | 29       | <b>710054</b> | <b>710056</b> | 361  |
| signs hook, max. load 5kg                                             | 30       | <b>710060</b> | <b>710062</b> | 361  |



## ILLUSTRATIONS WITH PLANNING RELEVANT DIMENSIONS

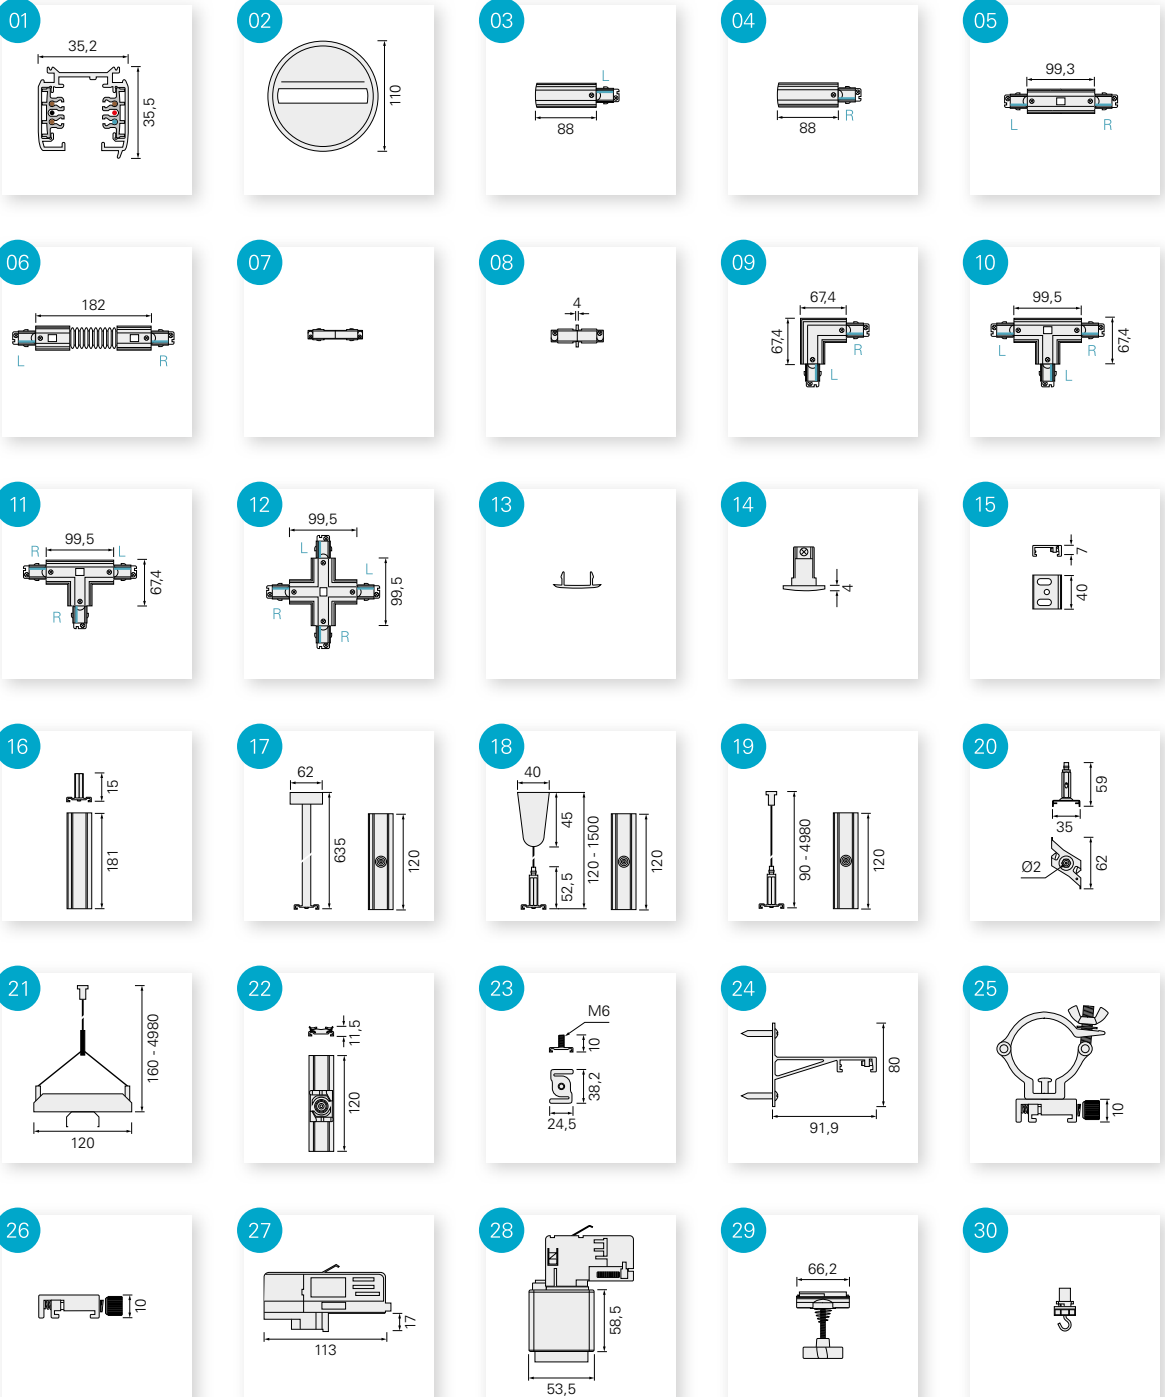























D LINE DALI BUILT IN POWER RAL SYSTEM 3-PHASE 220-440V

| built in modules                                      | illust. | white         | cover         | black         | cover         | page |
|-------------------------------------------------------|---------|---------------|---------------|---------------|---------------|------|
| built in power rail L:1000 mm                         | 01      | <b>710506</b> | -             | <b>710507</b> | -             | 344  |
| built in power rail L: 2000 mm                        | 01      | <b>710508</b> | -             | <b>710509</b> | -             | 344  |
| built in power rail L: 3000 mm                        | 01      | <b>710510</b> | -             | <b>710511</b> | -             | 344  |
| electric feeder left side                             | 02+18   | <b>710514</b> | <b>710518</b> | <b>710515</b> | <b>710519</b> | 346  |
| electric feeder right side                            | 03+18   | <b>710516</b> | <b>710518</b> | <b>710517</b> | <b>710519</b> | 346  |
| electrical straight connector with center feed option | 04+19   | <b>710520</b> | <b>710090</b> | <b>710521</b> | <b>710522</b> | 347  |
| electrical joint                                      | 05      | <b>710525</b> | -             | <b>710526</b> | -             | 348  |
| mechanical joint                                      | 06      | <b>710018</b> | -             | <b>710020</b> | -             | 348  |
| 90°-joint left-right                                  | 07+20   | <b>710527</b> | <b>710091</b> | <b>710528</b> | <b>710529</b> | 349  |
| T-joint left-left-right                               | 08+21   | <b>710530</b> | <b>710093</b> | <b>710531</b> | <b>710534</b> | 350  |
| T-joint right-right-left                              | 09+21   | <b>710532</b> | <b>710093</b> | <b>710533</b> | <b>710534</b> | 350  |
| X-joint left-left-right-right                         | 10+22   | <b>710535</b> | <b>710092</b> | <b>710536</b> | <b>710537</b> | 351  |
| cover plate                                           | 11      | <b>710077</b> | -             | <b>710079</b> | -             | 352  |
| endcap                                                | 12      | <b>710103</b> | -             | <b>710538</b> | -             | 352  |
| quick-mounting bracket for installation rail          | 13      | <b>710107</b> | -             | -             | -             | 345  |
| 3-circuits adapter for light installation             | 14      | <b>710539</b> | -             | <b>710540</b> | -             | 360  |
| electrical outlet adapter                             | 15      | <b>710024</b> | -             | <b>710026</b> | -             | 360  |
| mounting adapter for additional components max. 10kg  | 16      | <b>710054</b> | -             | <b>710056</b> | -             | 361  |
| signs hook, max. load 5kg                             | 17      | <b>710060</b> | -             | <b>710062</b> | -             | 361  |




Unlike other Dali systems, you do not need any additional or special electrical components such as feeders, connectors, corners or T-connectors for the recessed tracks, corners or T-connectors. All the standard components of the system are used and only the matching plastic cover is replaced; the recessed version is ready. This simplifies stock-keeping and also provides significantly more flexibility.

## ILLUSTRATIONS WITH PLANNING RELEVANT DIMENSIONS




FIXING POINTS

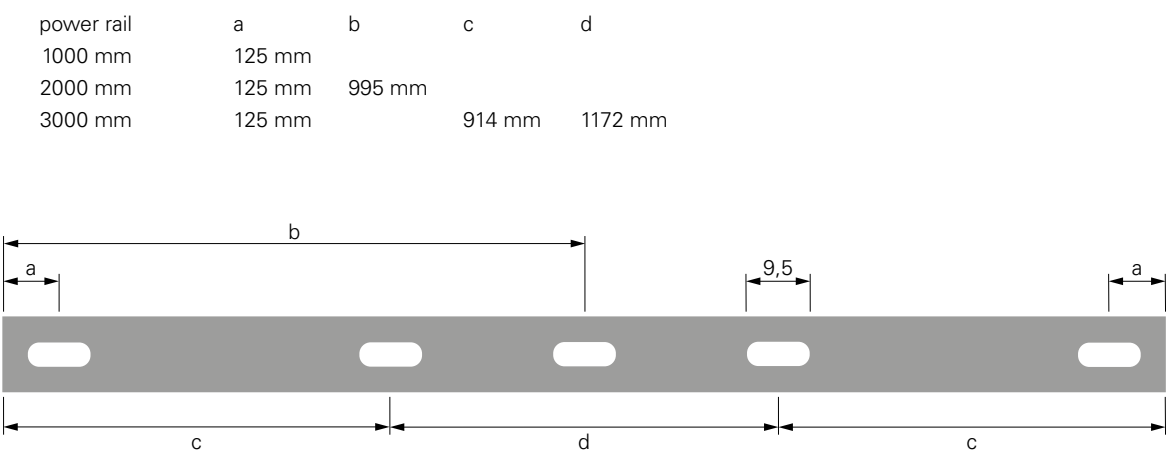


MECHANICAL LOAD TRACK POWER RAIL 1000 MM

60 N  $\triangleq$  6,12 kg  
dimension in mm



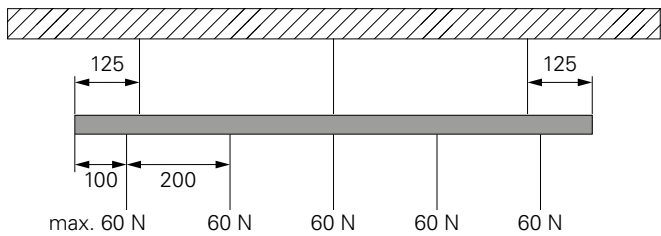



MECHANICAL LOAD TRACK POWER RAIL 2000/3000 MM

30 N  $\triangleq$  3,06 kg  
dimension in mm

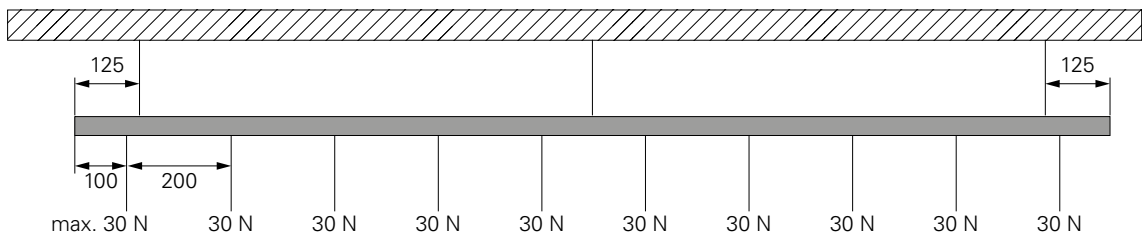

# PLANNING GUIDE D LINE DALI MOUNTING POWER RAIL SYSTEM 220-440V

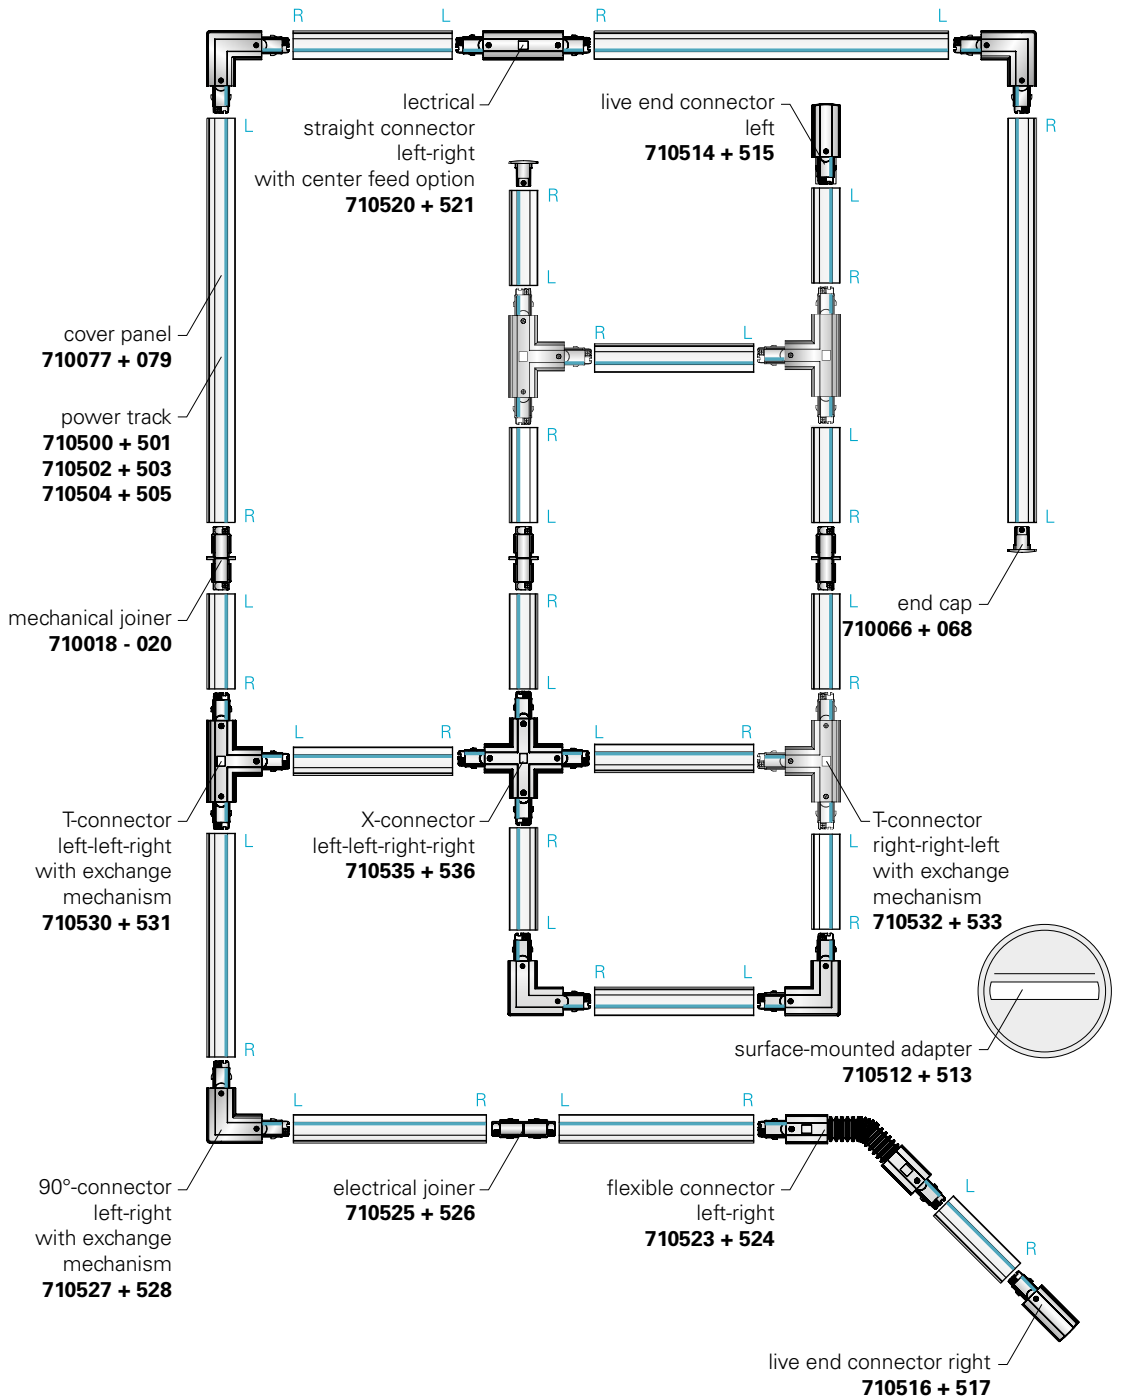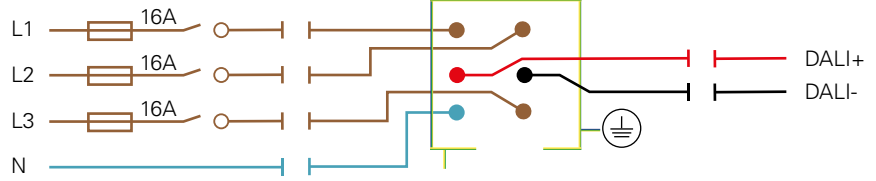

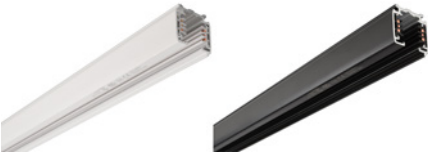

D LINE DALI SURFACE-MOUNTED TRACK RAIL

- Can be controlled with DALI
- Up to three phases [3x 16 A] can be fed in
- Cutting tool required for in-house assembly
- Numerous attachment options

Application Area

Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

|         |           |                     |              |
|---------|-----------|---------------------|--------------|
| Housing | Aluminium | Rated Input Voltage | 220-440 V/AC |
| Width   | 35.2 mm   | Output Current      | 16 A         |
| Height  | 35.5 mm   |                     |              |

| Article | Housing Color | Length  | Price    |
|---------|---------------|---------|----------|
| 710500  | White         | 1000 mm | € 38.95  |
| 710501  | Black         | 1000 mm | € 38.95  |
| 710502  | White         | 2000 mm | € 73.95  |
| 710503  | Black         | 2000 mm | € 73.95  |
| 710504  | White         | 3000 mm | € 107.95 |
| 710505  | Black         | 3000 mm | € 107.95 |



Accessories

931066 D LINE DALI, cut-back tool for shortening the DALI wires  € 154.95

Accessories for 710500, 710502, 710504

710077 D Line/Dali cover panel for integrated busbar, white  € 4.95

Accessories for 710501, 710503, 710505

710079 D Line/Dali cover panel for integrated busbar, black  € 4.95



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.



D LINE DALI SURFACE-MOUNTED ADAPTER

- Can be controlled with DALI
- Surface-mounted housing for converting busbar spotlights
- Single phase (1x 16 A) feed
- Easy to install

Application Area


Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Rated Input Voltage | 220-240 V/AC |
| Height  | 35 mm   | Output Current      | 16 A         |
| Ø       | 143 mm  |                     |              |


| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 710512  |  White | € 26.95 |
| 710513  |  Black | € 26.95 |






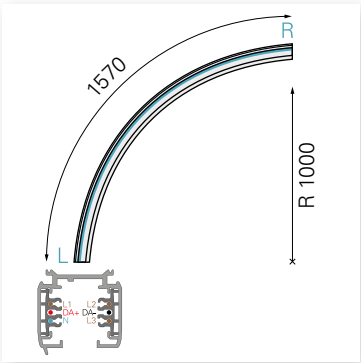

710113, 710115

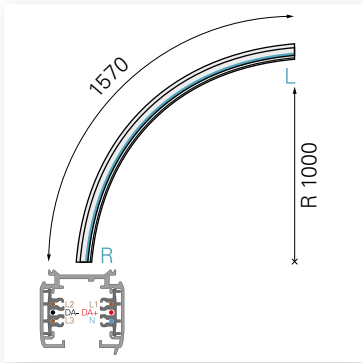

710114, 710116

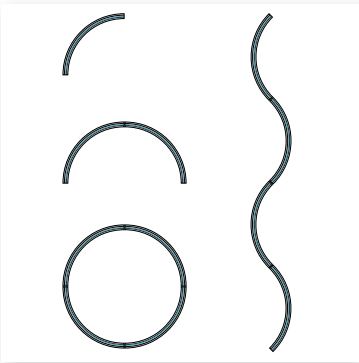

examples of designs



D LINE/DALI SURFACE-MOUNTED POWERTRACK CURVED

- Curved track 90° (radius 1m)
- Enables completely new design forms (corner, semicircle, circle, wave)
- Segment length 1.57m
- Can be used as D-Line DALI or D-Line standard track
- only suitable for standard track adapters (max. length 12cm)
- up to 3 phases [3x 16A] can be fed in
- cutting tool required for Dali customised assembly
- Many different mounting options

Application Area

Home / Living, Shop / Retail / Sales area

|               |              |                     |              |
|---------------|--------------|---------------------|--------------|
| Housing       | Aluminium    | Height              | 35.5 mm      |
| Mounting Type | Top mounting | Rated Input Voltage | 220-440 V/AC |
| Length        | 1570 mm      | Output Current      | 16 A         |
| Width         | 35.2 mm      |                     |              |

| Article | Housing Color                             |       | Price    |
|---------|-------------------------------------------|-------|----------|
| 710113  | <input type="checkbox"/> White            | left  | € 211.95 |
| 710115  | <input checked="" type="checkbox"/> Black | left  | € 211.95 |
| 710114  | <input type="checkbox"/> White            | right | € 211.95 |
| 710116  | <input checked="" type="checkbox"/> Black | right | € 211.95 |





D LINE DALI RECESSED TRACK RAIL

- Can be controlled with DALI
- Up to three phases [3x 16 A] can be fed in
- Cutting tool required for in-house assembly
- Numerous attachment options

Application Area

Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

|         |           |                     |              |
|---------|-----------|---------------------|--------------|
| Housing | Aluminium | Rated Input Voltage | 220-440 V/AC |
| Width   | 56 mm     | Output Current      | 16 A         |
| Height  | 35.5 mm   |                     |              |

| Article | Housing Color | Length  | Price    |
|---------|---------------|---------|----------|
| 710506  | White         | 1000 mm | € 45.95  |
| 710507  | Black         | 1000 mm | € 45.95  |
| 710508  | White         | 2000 mm | € 83.95  |
| 710509  | Black         | 2000 mm | € 83.95  |
| 710510  | White         | 3000 mm | € 119.95 |
| 710511  | Black         | 3000 mm | € 119.95 |



Accessories

931066 D LINE DALI, cut-back tool for shortening the DALI wires  € 154.95

Accessories for 710506, 710508, 710510

710077 D Line/Dali cover panel for integrated busbar, white  € 4.95

Accessories for 710507, 710509, 710511

710079 D Line/Dali cover panel for integrated busbar, black  € 4.95



Onlineshop

You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.



D LINE QUICK-MOUNTING BRACKET FOR INSTALLATION RAIL

- Suitable for recessed systems
- Simplifies installation of recessed current tracks
- No additional substructure is required for mounting (check admissible load of ceiling construction)

Application Area

Home / Living, Shop / Retail / Sales area

|         |       |        |       |
|---------|-------|--------|-------|
| Housing | Steel | Width  | 45 mm |
| Length  | 70 mm | Height | 25 mm |

| Article | Housing Color                                                                            | Price  |
|---------|------------------------------------------------------------------------------------------|--------|
| 710107  |  Silver | € 3.95 |




Lighting design

Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.



D LINE DALI ELECTRIC FEEDER LEFT

- Can be controlled using DALI
- Up to three phases (3x 16 A) can be fed in
- Power can be fed in from above (ceiling) or from the side
- Suitable for surface-mounted and recessed systems



Application Area

Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area


|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 139 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 35.2 mm | Output Current      | 16 A         |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 710514  | White         | € 14.95 |
| 710515  | Black         | € 14.95 |



D LINE DALI ELECTRIC FEEDER RIGHT

- Can be controlled using DALI
- Up to three phases (3x 16 A) can be fed in
- Power can be fed in from above (ceiling) or from the side
- Suitable for surface-mounted and recessed systems



Application Area

Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 139 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 35.2 mm | Output Current      | 16 A         |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 710516  | White         | € 14.95 |
| 710517  | Black         | € 14.95 |




- Accessories for 710516
- 710518 D Line DALI cover panel feed left/right, white
- Accessories for 710517
- 710519 D Line DALI cover panel feed left/right, black





## D LINE DALI STRAIGHT CONNECTOR WITH FEED OPTION

- Can be controlled using DALI
- Up to three phases (3x 16 A) can be fed in
- Power supply from above (ceiling)
- Suitable for surface-mounted and recessed systems



### Application Area

Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 203 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 35.2 mm | Output Current      | 16 A         |

| Article       | Housing Color | Price          |
|---------------|---------------|----------------|
| <b>710520</b> | White         | <b>€ 28.95</b> |
| <b>710521</b> | Black         | <b>€ 28.95</b> |



### Accessories for 710520

**710090** D Line/Dali cover panel for longitudinal connector, white



**€ 3.45**

### Accessories for 710521

**710522** D Line DALI cover panel for longitudinal connector, black




**€ 3.45**



## D LINE DALI FLEX CONNECTOR

- Can be controlled using DALI
- Easy to install
- Compensates for height or angle differences within a track system
- Suitable for surface-mounted systems



### Application Area

Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 285 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 35.2 mm | Output Current      | 16 A         |

| Article       | Housing Color | Price          |
|---------------|---------------|----------------|
| <b>710523</b> | White         | <b>€ 37.95</b> |
| <b>710524</b> | Black         | <b>€ 37.95</b> |





D LINE DALI ELECTRIC CONNECTOR

- easy to install
- suitable for surface-mounted and recessed systems

Application Area

Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 26.5 mm      |
| Length  | 107 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 20.5 mm | Output Current      | 16 A         |

| Article | Housing Color                                                                           | Price  |
|---------|-----------------------------------------------------------------------------------------|--------|
| 710525  |  White | € 9.95 |
| 710526  |  Black | € 9.95 |



D LINE MECHANICAL CONNECTOR

- Mechanical connector without electrical contacts
- For electrical separation of two different power circuits within one track system
- Suitable for surface-mounted and recessed systems

Application Area

Home / Living, Shop / Retail / Sales area

|         |         |        |       |
|---------|---------|--------|-------|
| Housing | Plastic | Width  | 20 mm |
| Length  | 66.4 mm | Height | 27 mm |

| Article | Housing Color                                                                             | Price  |
|---------|-------------------------------------------------------------------------------------------|--------|
| 710018  |  White | € 5.95 |
| 710020  |  Black | € 5.95 |







D LINE DALI 90°-CONNECTOR

- with reversal mechanism for switching the orientation between left and right
- easy to install
- suitable for surface-mounted and recessed systems

Application Area

Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 119 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 119 mm  | Output Current      | 16 A         |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 710527  | White         | € 31.95 |
| 710528  | Black         | € 31.95 |



Accessories for 710527

710091 D Line/Dali cover panel for 90° connector, white

 € 3.45

Accessories for 710528


710529 D Line DALI cover panel for 90° connector, black

 € 3.45



D LINE DALI T-CONNECTOR LEFT-LEFT-RIGHT

- with reversal mechanism for switching the orientation between left and right
- easy to install
- suitable for surface-mounted and recessed systems



Application Area

Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area


|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 203 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 119 mm  | Output Current      | 16 A         |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 710530  | White         | € 44.95 |
| 710531  | Black         | € 44.95 |



D LINE DALI T-CONNECTOR RIGHT-RIGHT-LEFT

- with reversal mechanism for switching the orientation between left and right
- easy to install
- suitable for surface-mounted and recessed systems



Application Area

Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 203 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 119 mm  | Output Current      | 16 A         |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 710532  | White         | € 44.95 |
| 710533  | Black         | € 44.95 |



Accessories for 710532

710093 D Line/Dali cover panel for T-connector, white




€ 3.45

Accessories for 710533

710534 D Line DALI cover panel for T-connector, black



€ 3.45

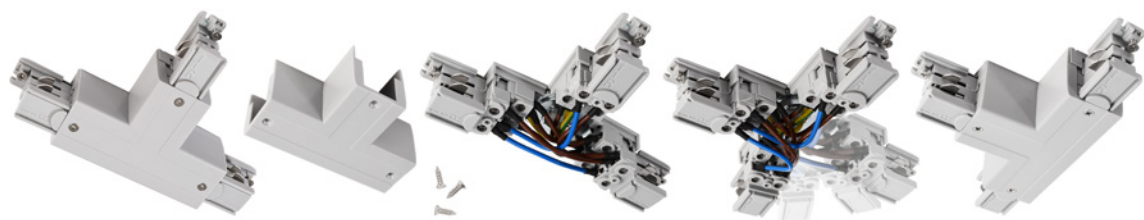


D LINE DALI X-CONNECTOR

- easy to install
- suitable for surface-mounted and recessed systems

Application Area

Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area



|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 35.5 mm      |
| Length  | 203 mm  | Rated Input Voltage | 220-440 V/AC |
| Width   | 203 mm  | Output Current      | 16 A         |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 710535  | White         | € 56.95 |
| 710536  | Black         | € 56.95 |



Accessories for 710535

710092 D Line/Dali cover panel for X-connector, white



€ 3.95

Accessories for 710536

710537 D Line DALI cover panel for X-connector, black



€ 3.95



D LINE COVER PANEL

- Suitable for surface-mounted and recessed systems
- For sealing publicly accessible busbars within a contact zone of less than 2.30 m

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |         |        |         |
|---------|---------|--------|---------|
| Housing | Plastic | Width  | 21.5 mm |
| Length  | 1000 mm | Height | 7.5 mm  |

| Article | Housing Color                                                                           | Price  |
|---------|-----------------------------------------------------------------------------------------|--------|
| 710077  |  White | € 4.95 |
| 710079  |  Black | € 4.95 |



D LINE END CAP

- For closing open current track ends (touch protection)
- Easy to install
- Suitable for surface-mounted systems

**Application Area**  
Home / Living, Shop / Retail / Sales area

|         |         |        |         |
|---------|---------|--------|---------|
| Housing | Plastic | Height | 32.5 mm |
|---------|---------|--------|---------|

| Article | Housing Color                                                                             | Length  | Width   | Price  |
|---------|-------------------------------------------------------------------------------------------|---------|---------|--------|
| 710066  |  White | 31.3 mm | 35.2 mm | € 2.45 |
| 710068  |  Black | 31.3 mm | 35.2 mm | € 2.45 |
| 710103  |  White | 56 mm   | 47.9 mm | € 2.45 |
| 710538  |  Black | 56 mm   | 47.9 mm | € 2.45 |





### D LINE MOUNTING BRACKET FLEX

- Suitable for surface-mounted systems
- Simplifies installation of complex shapes
- Current track can still be slid during installation

**Application Area**

Home / Living, Shop / Retail / Sales area

|         |       |        |         |
|---------|-------|--------|---------|
| Housing | Metal | Width  | 33.8 mm |
| Length  | 40 mm | Height | 12.5 mm |

| Article | Housing Color                                                                           | Price  |
|---------|-----------------------------------------------------------------------------------------|--------|
| 710063  |  White | € 4.95 |
| 710065  |  Black | € 4.95 |



### D LINE/DALI GRID-CEILING QUICK-MOUNTING BRACKET FOR MINI CABLE SUSPENSION

- Suitable for surface-mounted systems
- For universal use for mounting other components using M6 thread stud bolts on grid ceilings
- Suitable for 22-24 mm grid-ceiling support rails
- Suitable for steel cables up to 2.6 mm
- Mechanical load up to 7 kg/70 N

**Application Area**

Home / Living, Shop / Retail / Sales area

|         |       |        |       |
|---------|-------|--------|-------|
| Housing | Steel | Width  | 39 mm |
| Length  | 25 mm | Height | 27 mm |

| Article | Housing Color                                                                             | Price  |
|---------|-------------------------------------------------------------------------------------------|--------|
| 710108  |  White | € 3.45 |
| 710109  |  Black | € 3.45 |





D LINE WALL BRACKET

- Suitable for surface-mounted systems
- Simplifies installation of current tracks near walls
- Ideal for illuminating pictures and objects, for example in exhibitions, collections and museums

Application Area  
Home / Living, Shop / Retail / Sales area

|         |           |        |       |
|---------|-----------|--------|-------|
| Housing | Aluminium | Width  | 25 mm |
| Length  | 91.9 mm   | Height | 80 mm |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 710104  |  White | € 11.95 |
| 710106  |  Black | € 11.95 |



D LINE SUSPENSION CONNECTION BRACKET


- Suitable for surface-mounted systems
- For chain installation or similar (chain not included in the scope of delivery)

Application Area  
Home / Living, Shop / Retail / Sales area

|         |        |        |       |
|---------|--------|--------|-------|
| Housing | Metal  | Width  | 32 mm |
| Length  | 181 mm | Height | 20 mm |

| Article | Housing Color                                                                             | Price  |
|---------|-------------------------------------------------------------------------------------------|--------|
| 710057  |  White | € 7.95 |
| 710059  |  Black | € 7.95 |



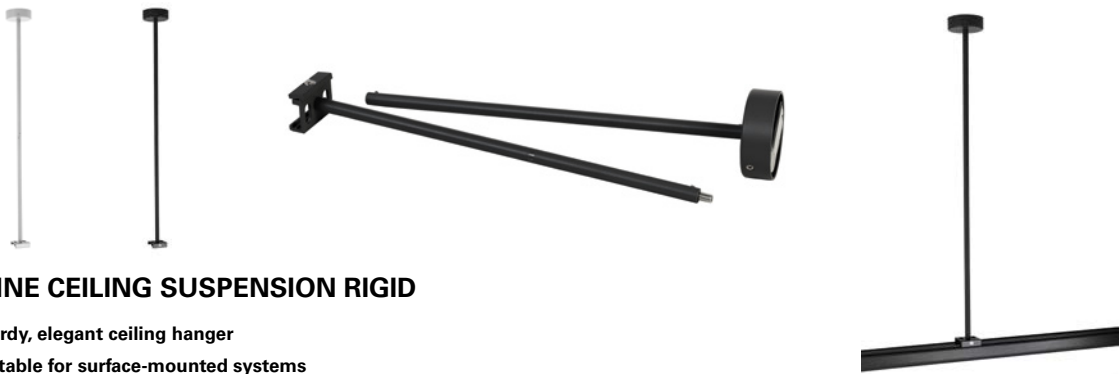

D LINE CEILING SUSPENSION RIGID

- Sturdy, elegant ceiling hanger
- Suitable for surface-mounted systems
- Hanger dimension 635 mm (can be shortened to 335 mm)
- Hanger can be extended with accessories

Application Area  
Home / Living, Shop / Retail / Sales area

|         |           |       |       |
|---------|-----------|-------|-------|
| Housing | Aluminium | Width | 60 mm |
| Length  | 635 mm    |       |       |

| Article | Housing Color                             | Price   |
|---------|-------------------------------------------|---------|
| 710078  | <input type="checkbox"/> White            | € 24.95 |
| 710084  | <input checked="" type="checkbox"/> Black | € 24.95 |



D LINE EXTENSION FOR CEILING SUSPENSION RIGID

- Suitable for rigid ceiling hangers
- Extends the hanger length by 300 mm

Application Area  
Home / Living, Shop / Retail / Sales area

|         |           |       |       |
|---------|-----------|-------|-------|
| Housing | Aluminium | Width | 10 mm |
| Length  | 310 mm    |       |       |

| Article | Housing Color                             | Price  |
|---------|-------------------------------------------|--------|
| 710086  | <input type="checkbox"/> White            | € 4.95 |
| 710087  | <input checked="" type="checkbox"/> Black | € 4.95 |







D LINE ROPE SUSPENSION BRACKET

- Can be cut to length for suspension dimension: 120-1,500 mm
- suitable for surface-mounted systems

Application Area  
Home / Living, Shop / Retail / Sales area

|         |        |        |       |
|---------|--------|--------|-------|
| Housing | Metal  | Width  | 31 mm |
| Length  | 120 mm | Height | 52 mm |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 710048  | White         | € 11.95 |
| 710050  | Black         | € 11.95 |



Accessories  
710081 D Line/Dali cable for cable suspension 4.0 m



€ 6.95



D LINE ROPE SUSPENSION BRACKET MINI

- Stylish and sophisticated suspended mounting
- Can be cut to length for hanger lengths: 90-4,960 mm
- Suitable for surface-mounted systems



Application Area  
Home / Living, Shop / Retail / Sales area

|         |        |        |       |
|---------|--------|--------|-------|
| Housing | Metal  | Width  | 31 mm |
| Length  | 120 mm | Height | 58 mm |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 710094  | White         | € 15.95 |
| 710096  | Black         | € 15.95 |



Accessories  
710108 D Line/Dali grid ceiling quick-mounting clip for wire suspension Mini white  
710109 D Line/Dali grid ceiling quick-mounting clip for wire suspension Mini black



€ 3.45



€ 3.45



D LINE/DALI CABLE SUSPENSION BRACKET WITH ADJUSTMENT TRAVERSE

- Set consisting of wire suspension with ceiling attachment and adjustment traverse
- Compensation of asymmetrical weight loads in the track system through one-sided spotlight mounting
- Easy and quick adjustment
- Suspension dimension can be individually shortened: 160-4960 mm
- Suitable for D Line/Dali mounting system



Application Area

Home / Living, Shop / Retail / Sales area

|         |        |        |        |
|---------|--------|--------|--------|
| Housing | Metal  | Width  | 32 mm  |
| Length  | 120 mm | Height | 120 mm |

| Article | Housing Color                                                                           | Price   |
|---------|-----------------------------------------------------------------------------------------|---------|
| 710110  |  White | € 20.95 |
| 710112  |  Black | € 20.95 |




D LINE/DALI ROPE SUSPENSION BRACKET

- special wire suspension for D-Line/DALI Curved tracks
- enables and extends the mounting options
- Suspension dimension can be individually shortened: 90 - 4960 mm

|         |       |                     |       |
|---------|-------|---------------------|-------|
| Housing | Metal | Height              | 59 mm |
| Length  | 62 mm | Loading Weight max. | 10 kg |
| Width   | 35 mm | Load Force max.     | 100 N |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 710117  |  White | € 14.95 |
| 710118  |  Black | € 14.95 |

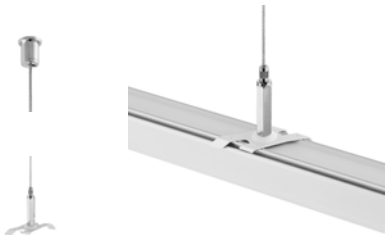



D LINE FAST-MOUNTING BRACKET

- Suitable for surface-mounted systems
- Current track can be installed without tools using knurled thumb screw and spring clamps
- Quick installation and removal for e.g. trade fair construction

Application Area  
Home / Living, Shop / Retail / Sales area

|         |           |        |         |
|---------|-----------|--------|---------|
| Housing | Aluminium | Width  | 30 mm   |
| Length  | 40 mm     | Height | 11.9 mm |

| Article | Housing Color                                                                           | Price  |
|---------|-----------------------------------------------------------------------------------------|--------|
| 710082  |  Black | € 8.95 |



D LINE TRUSS ADAPTER

- Suitable for surface-mounted systems
- Quick-action couplers for fast mounting of current tracks on cross rail structures
- Fits all 50 mm aluminium cross rails in event/trade fair construction

Application Area  
Home / Living, Shop / Retail / Sales area

|         |           |        |         |
|---------|-----------|--------|---------|
| Housing | Aluminium | Width  | 30 mm   |
| Length  | 40 mm     | Height | 11.9 mm |

| Article | Housing Color                                                                              | Price   |
|---------|--------------------------------------------------------------------------------------------|---------|
| 710083  |  Silver | € 25.95 |



This little »jack-of-all-trades« makes mounting a track on an existing grid ceiling child's play. The installation time is only a fraction of what it used to be. In the first step, the clip is simply clicked into the visible metal strips of the grid ceiling and is held bomb-proof on the ceiling by means of a safety spring clip. After that, the conductor rail is simply pushed onto it and the installation is finished.



## D LINE GRID CEILING FAST-MOUNTING BRACKET

- Suitable for surface-mounted systems
- Quick and easy to install on grid ceilings
- Mechanical load up to 15.0 kg/150 N
- Suitable for 22-24 mm ceiling grid support rails

### Application Area

Home / Living, Shop / Retail / Sales area

|         |        |        |       |
|---------|--------|--------|-------|
| Housing | Metal  | Width  | 31 mm |
| Length  | 120 mm | Height | 11 mm |

| Article       | Housing Color                             | Price         |
|---------------|-------------------------------------------|---------------|
| <b>710051</b> | <input type="checkbox"/> White            | <b>€ 9.95</b> |
| <b>710053</b> | <input checked="" type="checkbox"/> Black | <b>€ 9.95</b> |





D LINE DALI THREE-PHASE ADAPTER FOR INSTALLING LAMPS


- can be controlled with DALI, up to three phases can be fed in
- easy to install
- suitable for surface-mounted and recessed systems

Application Area

Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 51 mm        |
| Length  | 113 mm  | Rated Input Voltage | 220-240 V/AC |
| Width   | 32 mm   | Output Current      | 10 A         |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 710539  | White         | € 19.95 |
| 710540  | Black         | € 19.95 |



D LINE SOCKET ADAPTER

- easy to install
- suitable for surface-mounted and recessed systems
- as power distribution system in current tracks
- max. 1,380 W
- integrated plug fuse

Application Area

Home / Living, Shop / Retail / Sales area

|         |         |                     |          |
|---------|---------|---------------------|----------|
| Housing | Plastic | Rated Input Voltage | 230 V/AC |
| Length  | 58.5 mm | Output Current      | 6 A      |
| Width   | 53.5 mm | Connected Load max. | 1380 W   |
| Height  | 103 mm  |                     |          |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 710024  | White         | € 22.95 |
| 710026  | Black         | € 22.95 |





D LINE MOUNTING ADAPTER FOR ADDITIONAL COMPONENTS

- Suitable for surface-mounted and recessed systems
- Mounting adapter (M6 thread) for holding additional devices and lights
- Ideal for use with optional D Line socket adapter
- Load max. 10 kg/100 N

Application Area  
Home / Living, Shop / Retail / Sales area

|         |                |        |         |
|---------|----------------|--------|---------|
| Housing | Metal, Plastic | Width  | 31.5 mm |
| Length  | 66.5 mm        | Height | 84 mm   |

| Article | Housing Color                             | Price  |
|---------|-------------------------------------------|--------|
| 710054  | <input type="checkbox"/> White            | € 8.95 |
| 710056  | <input checked="" type="checkbox"/> Black | € 8.95 |



D LINE SIGN HOOK

- Suitable for surface-mounted and recessed systems
- Hook for attaching information signs etc.
- Load max. 5kg / 50N

Application Area  
Home / Living, Shop / Retail / Sales area

|         |                |   |       |
|---------|----------------|---|-------|
| Housing | Plastic, Steel | Ø | 25 mm |
| Height  | 52 mm          |   |       |

| Article | Housing Color                             | Price  |
|---------|-------------------------------------------|--------|
| 710060  | <input type="checkbox"/> White            | € 2.45 |
| 710062  | <input checked="" type="checkbox"/> Black | € 2.45 |



# 3-phases power luminaires



page 364



page 365



page 366



page 367



page 368



page 369



page 369



page 372



page 375



page 373



page 376



page 377





□ ■  
page 378



□ ■  
page 379



□ ■  
page 381



□ ■ ■  
page 383



□ ■ ■  
page 384



■ □  
page 386



□ ■  
page 389



□ ■ ■  
page 390



□ ■ ■  
page 391



□ ■  
page 392



□ ■  
page 398



□ ■  
page 399



□ ■  
page 400



□ ■  
page 401



□ ■  
page 404



□ ■  
page 406



□ ■  
page 407



■ □  
page 408




□ ■  
page 409



FOCARIS DIM

- Infinitely adjustable beam angle
- no reflector change necessary
- Homogeneous light image
- opt. honeycomb filter available

|                         |                          |                     |                      |
|-------------------------|--------------------------|---------------------|----------------------|
| Housing                 | Aluminium, Polycarbonate | Rotation Angle      | 355 Degree           |
| Colour Temperature      | 2700/3000/4000 K         | Swivelling Angle    | 90 Degree            |
| Length                  | 158 mm                   | Control             | Trailing-edge dimmer |
| Rated Input Voltage     | 198-264 V/AC             | CRI (Ra)            | 90                   |
| Power Supply Unit incl. | Yes                      | Light Direction     | Front                |
| Light Beam Angle        | 15 Degree                | IK Protection Class | IK04                 |



707268

| Article | Housing Color |  | Luminous Flux     | W x H        | Power  | Light Beam Angle 2 | Price    |
|---------|---------------|--|-------------------|--------------|--------|--------------------|----------|
| 707268  | White         |  | 1210/1350/1350 lm | 80 x 142 mm  | 15.0 W | 50 Degree          | € 111.95 |
| 707269  | Black         |  | 1100/1250/1250 lm | 80 x 142 mm  | 15.0 W | 50 Degree          | € 111.95 |
| 707270  | White         |  | 3015/3450/3450 lm | 118 x 181 mm | 37.0 W | 60 Degree          | € 175.95 |
| 707271  | Black         |  | 3015/3450/3450 lm | 118 x 181 mm | 37.0 W | 60 Degree          | € 175.95 |



Accessories for 707268, 707269

931166 Focar, Honeycomb filter 80 mm

€ 3.95

Accessories for 707270, 707271

931167 Focar, Honeycomb filter 118 mm

€ 4.95



Lighting design


Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.



FOCARIS DALI

- Infinitely adjustable beam angle
- no reflector change necessary
- Homogeneous light image
- opt. honeycomb filter available

|                         |                          |                     |                                |
|-------------------------|--------------------------|---------------------|--------------------------------|
| Housing                 | Aluminium, Polycarbonate | Swivelling Angle    | 90 Degree                      |
| Colour Temperature      | 2700/3000/4000 K         | Control             | DALI 2 / DT6, Intelli Push-Dim |
| Rated Input Voltage     | 198-264 V/AC             | CRI (Ra)            | 90                             |
| Power Supply Unit incl. | Yes                      | Light Direction     | Front                          |
| Light Beam Angle        | 15 Degree                | IK Protection Class | IK04                           |
| Rotation Angle          | 355 Degree               |                     |                                |



707264

| Article | Housing Color |  | Luminous Flux     | L x W x H          | Light Beam Angle 2 | Power  | Price    |
|---------|---------------|--|-------------------|--------------------|--------------------|--------|----------|
| 707264  | White         |  | 1210/1350/1350 lm | 198 x 80 x 144 mm  | 50 Grad            | 15.0 W | € 135.95 |
| 707265  | Black         |  | 1100/1250/1250 lm | 198 x 80 x 144 mm  | 50 Grad            | 15.0 W | € 135.95 |
| 707266  | White         |  | 3015/3450/3450 lm | 238 x 118 x 180 mm | 60 Grad            | 37.0 W | € 191.95 |
| 707267  | Black         |  | 3015/3450/3450 lm | 238 x 118 x 180 mm | 60 Grad            | 37.0 W | € 191.95 |



Accessories for 707264, 707265

931166 Focaris, Honeycomb filter 80 mm

€ 3.95

Accessories for 707266, 707267

931167 Focaris, Honeycomb filter 118 mm

€ 4.95



5-year guarantee


Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



CERES ON/OFF

- particularly energy efficient
- high-quality light image
- can be customised with a wide range of accessories

|                         |              |                     |            |
|-------------------------|--------------|---------------------|------------|
| Housing                 | Aluminium    | Rotation Angle      | 355 Degree |
| Surface                 | Matt         | Swivelling Angle    | 90 Degree  |
| Rated Input Voltage     | 198-264 V/AC | CRI (Ra)            | 90         |
| Power Supply Unit incl. | Yes          | IK Protection Class | IK04       |
| Light Beam Angle        | 36 Degree    |                     |            |



707284

| Article       | Housing Color | Colour Temperature | Luminous Flux | Height | Ø      | Power  | Price   |
|---------------|---------------|--------------------|---------------|--------|--------|--------|---------|
| <b>707284</b> | White         | 3000 K             | 2500 lm       | 60 mm  | 90 mm  | 19.0 W | € 59.95 |
| <b>707285</b> | Black         | 3000 K             | 2500 lm       | 60 mm  | 90 mm  | 19.0 W | € 59.95 |
| <b>707292</b> | White         | 3000 K             | 4400 lm       | 69 mm  | 118 mm | 31.0 W | € 75.95 |
| <b>707293</b> | Black         | 3000 K             | 4400 lm       | 69 mm  | 118 mm | 31.0 W | € 75.95 |
| <b>707286</b> | White         | 4000 K             | 2600 lm       | 60 mm  | 90 mm  | 19.0 W | € 59.95 |
| <b>707287</b> | Black         | 4000 K             | 2600 lm       | 60 mm  | 90 mm  | 19.0 W | € 59.95 |
| <b>707294</b> | White         | 4000 K             | 4600 lm       | 69 mm  | 118 mm | 31.0 W | € 75.95 |
| <b>707295</b> | Black         | 4000 K             | 4600 lm       | 69 mm  | 118 mm | 31.0 W | € 75.95 |



Accessories for **707284, 707285, 707286, 707287**

|               |                                      |         |
|---------------|--------------------------------------|---------|
| <b>931174</b> | Lens 24 degrees for Ceres 90         | € 7.95  |
| <b>931175</b> | Lens 60 degrees for Ceres 90         | € 7.95  |
| <b>931176</b> | Honeycomb filter for Ceres 90, black | € 3.95  |
| <b>931177</b> | Cross for Ceres 90, black            | € 7.95  |
| <b>931178</b> | Wall Washer for Ceres 90, black      | € 9.95  |
| <b>931179</b> | Barndoor for Ceres 90, black         | € 25.95 |

Accessories for **707292, 707293, 707294, 707295**

|               |                                       |         |
|---------------|---------------------------------------|---------|
| <b>931186</b> | Lens 24 degrees for Ceres 118         | € 7.95  |
| <b>931187</b> | Lens 60 degrees for Ceres 118         | € 7.95  |
| <b>931188</b> | Honeycomb filter for Ceres 118, black | € 3.95  |
| <b>931189</b> | Cross for Ceres 118, black            | € 7.95  |
| <b>931190</b> | Wall Washer for Ceres 118, black      | € 9.95  |
| <b>931191</b> | Barndoor for Ceres 118, black         | € 29.95 |






## CERES DALI

- particularly energy efficient
- high-quality light image
- can be customised with a wide range of accessories

|                         |              |                     |                                |
|-------------------------|--------------|---------------------|--------------------------------|
| Housing                 | Aluminium    | Swivelling Angle    | 90 Degree                      |
| Surface                 | Matt         | Control             | DALI 2 / DT6, Intelli Push-Dim |
| Rated Input Voltage     | 198-264 V/AC | CRI (Ra)            | 90                             |
| Power Supply Unit incl. | Yes          | IK Protection Class | IK04                           |
| Light Beam Angle        | 36 Degree    |                     |                                |
| Rotation Angle          | 355 Degree   |                     |                                |



707296

| Article       | Housing Color | Colour Temperature | Luminous Flux | Height | Ø      | Power  | Price    |
|---------------|---------------|--------------------|---------------|--------|--------|--------|----------|
| <b>707296</b> | White         | 3000 K             | 2500 lm       | 60 mm  | 90 mm  | 19.0 W | € 91.95  |
| <b>707297</b> | Black         | 3000 K             | 2500 lm       | 60 mm  | 90 mm  | 19.0 W | € 91.95  |
| <b>707304</b> | White         | 3000 K             | 4400 lm       | 69 mm  | 118 mm | 31.0 W | € 107.95 |
| <b>707305</b> | Black         | 3000 K             | 4400 lm       | 69 mm  | 118 mm | 31.0 W | € 107.95 |
| <b>707298</b> | White         | 4000 K             | 2600 lm       | 60 mm  | 90 mm  | 19.0 W | € 91.95  |
| <b>707299</b> | Black         | 4000 K             | 2600 lm       | 60 mm  | 90 mm  | 19.0 W | € 91.95  |
| <b>707306</b> | White         | 4000 K             | 4600 lm       | 69 mm  | 118 mm | 31.0 W | € 107.95 |
| <b>707307</b> | Black         | 4000 K             | 4600 lm       | 69 mm  | 118 mm | 31.0 W | € 107.95 |



### Accessories for **707296, 707297, 707298, 707299**

|               |                                      |         |
|---------------|--------------------------------------|---------|
| <b>931174</b> | Lens 24 degrees for Ceres 90         | € 7.95  |
| <b>931175</b> | Lens 60 degrees for Ceres 90         | € 7.95  |
| <b>931176</b> | Honeycomb filter for Ceres 90, black | € 3.95  |
| <b>931177</b> | Cross for Ceres 90, black            | € 7.95  |
| <b>931178</b> | Wall Washer for Ceres 90, black      | € 9.95  |
| <b>931179</b> | Barndoor for Ceres 90, black         | € 25.95 |

### Accessories for **707304, 707305, 707306, 707307**

|               |                                       |         |
|---------------|---------------------------------------|---------|
| <b>931186</b> | Lens 24 degrees for Ceres 118         | € 7.95  |
| <b>931187</b> | Lens 60 degrees for Ceres 118         | € 7.95  |
| <b>931188</b> | Honeycomb filter for Ceres 118, black | € 3.95  |
| <b>931189</b> | Cross for Ceres 118, black            | € 7.95  |
| <b>931190</b> | Wall Washer for Ceres 118, black      | € 9.95  |
| <b>931191</b> | Barndoor for Ceres 118, black         | € 29.95 |






PANEL TRACK LIGHT

- Ideal for homogeneous basic lighting
- Can be rotated and swivelled
- High luminous flux

Application Area

Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

|         |           |                         |              |
|---------|-----------|-------------------------|--------------|
| Housing | Aluminium | Rated Input Voltage     | 110-240 V/AC |
| Length  | 300 mm    | Power Supply Unit incl. | Yes          |
| Width   | 110 mm    | Light Beam Angle        | 110 Degree   |
| Height  | 8.5 mm    | Swivelling Angle        | 90 Degree    |
| Power   | 20 W      | CRI (Ra)                | 80           |



707134

| Article | Housing Color | Colour Temperature | Luminous Flux | Price   |
|---------|---------------|--------------------|---------------|---------|
| 707134  | White         | 3000 K             | 2000 lm       | € 91.95 |
| 707135  | Black         | 3000 K             | 2000 lm       | € 91.95 |
| 707136  | White         | 4000 K             | 2200 lm       | € 87.95 |
| 707137  | Black         | 4000 K             | 2200 lm       | € 87.95 |





LINEAR 60


- low height
- homogeneous illumination



Application Area


Shop / Retail / Sales area, Home / Living, Trade fair construction / shop fitting, Hotel / catering

|         |           |                         |              |
|---------|-----------|-------------------------|--------------|
| Housing | Aluminium | Power                   | 18 W         |
| Surface | Matt      | Rated Input Voltage     | 200-240 V/AC |
| Length  | 687 mm    | Power Supply Unit incl. | Yes          |
| Width   | 32 mm     | Light Beam Angle        | 110 Degree   |
| Height  | 62 mm     | CRI (Ra)                | 80           |



707147

| Article | Housing Color | Colour Temperature | Luminous Flux | Price    |
|---------|---------------|--------------------|---------------|----------|
| 707148  | Black         | WW 3000 K          | 1950 lm       | € 114.95 |
| 707147  | White         | WW 3000 K          | 2100 lm       | € 114.95 |
| 707150  | Black         | NW 4000 K          | 2100 lm       | € 114.95 |
| 707149  | White         | NW 4000 K          | 2300 lm       | € 114.95 |




LINEAR 100

- low height
- homogeneous illumination

Application Area


Shop / Retail / Sales area, Home / Living, Trade fair construction / shop fitting, Hotel / catering

|         |           |                         |              |
|---------|-----------|-------------------------|--------------|
| Housing | Aluminium | Power                   | 28 W         |
| Surface | Matt      | Rated Input Voltage     | 200-240 V/AC |
| Length  | 1087 mm   | Power Supply Unit incl. | Yes          |
| Width   | 32 mm     | Light Beam Angle        | 110 Degree   |
| Height  | 62 mm     | CRI (Ra)                | 80           |



707151

| Article | Housing Color | Colour Temperature | Luminous Flux | Price    |
|---------|---------------|--------------------|---------------|----------|
| 707152  | Black         | WW 3000 K          | 3100 lm       | € 147.95 |
| 707151  | White         | WW 3000 K          | 3200 lm       | € 147.95 |
| 707154  | Black         | NW 4000 K          | 3200 lm       | € 147.95 |
| 707153  | White         | NW 4000 K          | 3400 lm       | € 147.95 |







## LINEAR PRO SOFT

LINEAR PRO 3-circuit track luminaires are the ideal solution for illuminating retail shelving, aisles in supermarkets and many other applications.

The LINEAR PRO is available as a 3-circuit track luminaire in four versions: FOLD, TILT, SOFT and OFFICE. Each version offers specific advantages for lighting design and enables precise illumination of products and other objects. While the SOFT version features an extra-wide fixed beam angle of 120°, the LINEAR PRO TILT and LINEAR PRO FOLD can be flexibly adjusted to suit the respective sales areas.


LINEAR PRO SOFT



LINEAR PRO TILT



LINEAR PRO FOLD

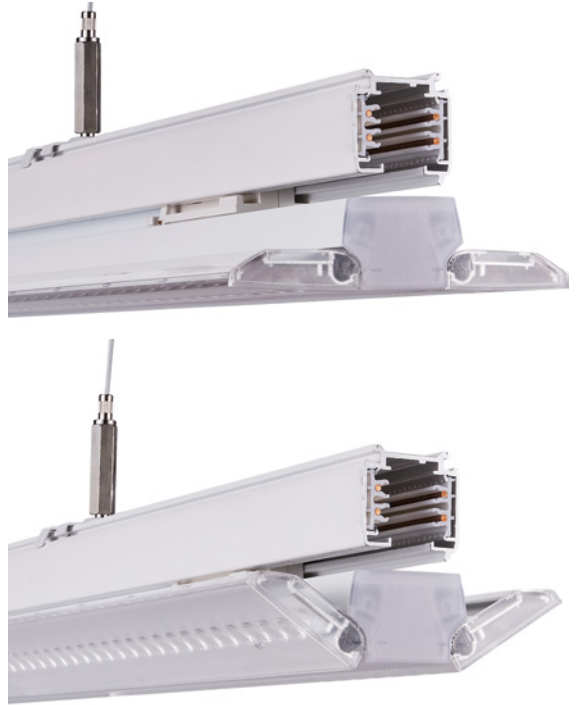

### TILT or FOLD?

The LINEAR PRO TILT can either illuminate straight downwards or be individually tilted sideways by up to 30°. In contrast, the LINEAR PRO FOLD features a three-part design with two LED wings complemented by a diffuse light line in the centre.

This makes the LINEAR PRO FOLD particularly suitable for the uniform illumination of complete aisles with shelving on both sides, while the LINEAR PRO TILT can be flexibly directed towards individual shelving units.

For optimum retail lighting, the SOFT, TILT and FOLD series can ideally be combined with additional spotlight modules. These are particularly suitable for highlighting promotional displays and shelf end caps.

### 3 ADVANTAGES

#### ADJUSTABLE POWER


The power of the LINEAR PRO 3-circuit track lights can be adjusted in four stages. The luminaires are also DC-capable and can be integrated into emergency power systems.

#### BEG SUBSIDY

The LINEAR PRO luminaires fulfil the requirements of the BEG subsidy for efficient LED luminaires and are subsidised by the Federal Ministry for Economic Affairs and Climate Protection with 15%.

#### SEAMLESSLY COMBINABLE

The 1500 mm versions of the LINEAR PRO have a sliding track adapter and are each available in a 50% mirrored A/B version to allow for seamless side-by-side installation, even across track connectors.

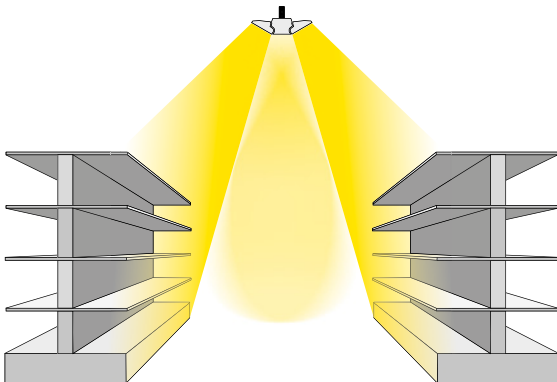




### LINEAR PRO SOFT DALI

- Eligible for BEG German federal funding for energy-efficient buildings
- Emergency power capable [198-264 V/DC EOFI: 15 %]
- Long service life of 60,000 hours [L80B50]
- Particularly energy efficient

#### Application Area

Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

|                  |                        |                         |              |
|------------------|------------------------|-------------------------|--------------|
| Housing          | Aluminium              | Rated Input Voltage     | 198-264 V/AC |
| Length           | 602 mm                 | Power Supply Unit incl. | Yes          |
| Width            | 61.1 mm                | Light Beam Angle        | 120 Degree   |
| Height           | 58 mm                  | Control                 | DALI 2 / DT6 |
| Power Selectable | 14 W, 16 W, 18 W, 20 W | CRI (Ra)                | 90           |
|                  |                        | IK Protection Class     | IK03         |



707219

| Article | Housing Color | Colour Temperature | Luminous Flux | Price    |
|---------|---------------|--------------------|---------------|----------|
| 707220  | Black         | ww 3000 K          | 2800 lm       | € 114.95 |
| 707219  | White         | ww 3000 K          | 2850 lm       | € 114.95 |
| 707222  | Black         | nw 4000 K          | 2850 lm       | € 114.95 |
| 707221  | White         | nw 4000 K          | 2900 lm       | € 114.95 |



#### Lighting design

Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.




LINEAR PRO SOFT DALI CCT

- Eligible for German BEG federal funding
- Can run on emergency power
- Long service life of 60,000 hours (L80B50)
- Particularly energy efficient

Application Area

Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealers-hip, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

|                    |                        |                         |              |
|--------------------|------------------------|-------------------------|--------------|
| Housing            | Aluminium              | Rated Input Voltage     | 198-264 V/AC |
| Colour Temperature | 3000/3500/4000 K       | Power Supply Unit incl. | Yes          |
| Length             | 1196 mm                | Light Beam Angle        | 120 Degree   |
| Width              | 61.1 mm                | Control                 | DALI 2 / DT6 |
| Height             | 58 mm                  | CRI (Ra)                | 90           |
| Power Selectable   | 28 W, 32 W, 36 W, 40 W | IK Protection Class     | IK03         |



707223


| Article | Housing Color |    | Luminous Flux     | Price    |
|---------|---------------|----|-------------------|----------|
| 707224  | Black         | NW | 4800/5000/4900 lm | € 147.95 |
| 707223  | White         | NW | 4900/5100/5000 lm | € 147.95 |



**5-year guarantee**  
Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.





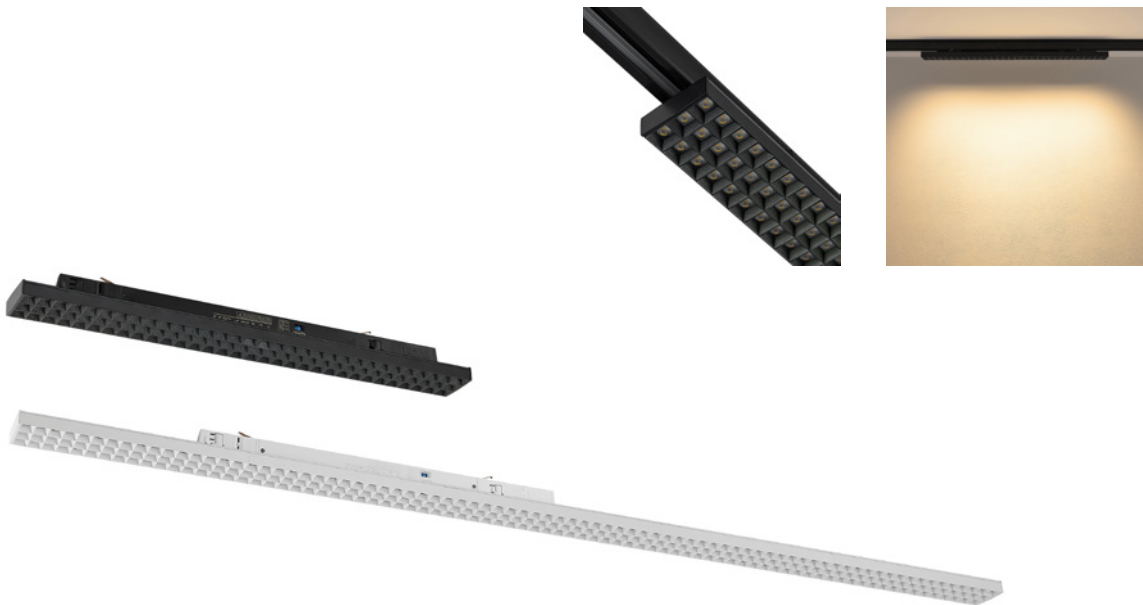


LINEAR PRO OFFICE DALI

- Suitable for VDU workstations (in accordance with EN 12464-1 BAP65 [L65 = 3000cd/m²])
- BEG eligible
- Seamless baying
- Emergency current capable [198-264 V/DC EOFI: 100%]
- Output adjustable in 4 levels

Application Area

Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre, Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Safety lighting / emergency lighting

|                         |              |                     |                                |
|-------------------------|--------------|---------------------|--------------------------------|
| Housing                 | Steel        | Light Beam Angle    | 60 Degree                      |
| Width                   | 62 mm        | Control             | DALI 2 / DT6, Intelli Push-Dim |
| Height                  | 58 mm        | CRI (Ra)            | 90                             |
| Rated Input Voltage     | 220-240 V/AC | IK Protection Class | IK03                           |
| Power Supply Unit incl. | Yes          |                     |                                |



707335

| Article | Housing Color | Colour Temperature | Luminous Flux | Length  | Power Selectable                  | Price    |
|---------|---------------|--------------------|---------------|---------|-----------------------------------|----------|
| 707329  | Black         | WW 3000 K          | 3600 lm       | 600 mm  | 24.0 W / 22.0 W / 20.0 W / 18.0 W | € 151.95 |
| 707328  | White         | WW 3000 K          | 3850 lm       | 600 mm  | 24.0 W / 22.0 W / 20.0 W / 18.0 W | € 151.95 |
| 707333  | Black         | WW 3000 K          | 8750 lm       | 1493 mm | 60.0 W / 55.0 W / 50.0 W / 45.0 W | € 183.95 |
| 707332  | White         | WW 3000 K          | 9300 lm       | 1493 mm | 60.0 W / 55.0 W / 50.0 W / 45.0 W | € 183.95 |
| 707331  | Black         | NW 4000 K          | 3600 lm       | 600 mm  | 24.0 W / 22.0 W / 20.0 W / 18.0 W | € 151.95 |
| 707330  | White         | NW 4000 K          | 3850 lm       | 600 mm  | 24.0 W / 22.0 W / 20.0 W / 18.0 W | € 151.95 |
| 707335  | Black         | NW 4000 K          | 8750 lm       | 1493 mm | 60.0 W / 55.0 W / 50.0 W / 45.0 W | € 183.95 |
| 707334  | White         | NW 4000 K          | 9300 lm       | 1493 mm | 60.0 W / 55.0 W / 50.0 W / 45.0 W | € 183.95 |






LINEAR PRO TILT

- Eligible for BEG German federal funding for energy-efficient buildings
- Emergency power capable [198-264 V/DC EOFI: 100 %]
- Can be locked shining downwards
- Can be swivelled up to 30° to each side
- Long service life of 60,000 hours [L80B50]
- Particularly energy efficient
- Output adjustable in three stages

Application Area

Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

|                         |              |                     |           |
|-------------------------|--------------|---------------------|-----------|
| Housing                 | Steel        | Light Beam Angle    | 60 Degree |
| Width                   | 60 mm        | Swivelling Angle    | 60 Degree |
| Height                  | 54 mm        | CRI (Ra)            | 90        |
| Rated Input Voltage     | 198-264 V/AC | IK Protection Class | IK03      |
| Power Supply Unit incl. | Yes          |                     |           |



707141

| Article | Housing Color | Colour Temperature | Luminous Flux | Length  | Power Selectable                  | Price    |
|---------|---------------|--------------------|---------------|---------|-----------------------------------|----------|
| 707195  | White         | 3000 K             | 3200 lm       | 600 mm  | 14.0 W / 16.0 W / 18.0 W / 20.0 W | € 122.95 |
| 707196  | Black         | 3000 K             | 3200 lm       | 600 mm  | 14.0 W / 16.0 W / 18.0 W / 20.0 W | € 122.95 |
| 707197  | White         | 3000 K             | 8000 lm       | 1493 mm | 35.0 W / 40.0 W / 45.0 W / 50.0 W | € 151.95 |
| 707198  | Black         | 3000 K             | 8000 lm       | 1493 mm | 35.0 W / 40.0 W / 45.0 W / 50.0 W | € 151.95 |
| 707141  | White         | 4000 K             | 3200 lm       | 600 mm  | 14.0 W / 16.0 W / 18.0 W / 20.0 W | € 122.95 |
| 707142  | Black         | 4000 K             | 3200 lm       | 600 mm  | 14.0 W / 16.0 W / 18.0 W / 20.0 W | € 122.95 |
| 707143  | White         | 4000 K             | 8000 lm       | 1493 mm | 35.0 W / 40.0 W / 45.0 W / 50.0 W | € 151.95 |
| 707144  | Black         | 4000 K             | 8000 lm       | 1493 mm | 35.0 W / 40.0 W / 45.0 W / 50.0 W | € 151.95 |








LINEAR PRO TILT DALI

- Eligible for BEG German federal funding for energy-efficient buildings
- Emergency power capable [198-264 V/DC EOFI: 15 %]
- Can be locked shining downwards
- Can be swivelled up to 30° to each side
- Long service life of 60,000 hours [L80B50]
- Particularly energy efficient

Application Area

Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

|                  |                        |                         |              |
|------------------|------------------------|-------------------------|--------------|
| Housing          | Steel                  | Rated Input Voltage     | 198-264 V/AC |
| Luminous Flux    | 8000 lm                | Power Supply Unit incl. | Yes          |
| Length           | 1493 mm                | Light Beam Angle        | 60 Degree    |
| Width            | 60 mm                  | Swivelling Angle        | 60 Degree    |
| Height           | 54 mm                  | Control                 | DALI 2 / DT6 |
| Power Selectable | 50 W, 45 W, 40 W, 35 W | CRI (Ra)                | 90           |
|                  |                        | IK Protection Class     | IK03         |



| Article | Housing Color | Colour Temperature | Price    |
|---------|---------------|--------------------|----------|
| 707199  | White         | 3000 K             | € 175.95 |
| 707200  | Black         | 3000 K             | € 175.95 |
| 707145  | White         | 4000 K             | € 175.95 |
| 707146  | Black         | 4000 K             | € 175.95 |






LINEAR PRO FOLD

- Eligible for BEG German federal funding for energy-efficient buildings
- Emergency power capable [198-264 V/DC EOFI: 100 %]
- Long service life of 60,000 hours [L80B50]
- Can be swivelled up to 30° to each side
- Particularly energy efficient
- Output adjustable in four steps

Application Area

Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

|                         |              |                     |           |
|-------------------------|--------------|---------------------|-----------|
| Housing                 | Aluminium    | Light Beam Angle    | 30 Degree |
| Width                   | 120 mm       | Light Beam Angle 2  | 90 Degree |
| Height                  | 68 mm        | CRI (Ra)            | 90        |
| Rated Input Voltage     | 198-264 V/AC | IK Protection Class | IK03      |
| Power Supply Unit incl. | Yes          |                     |           |



707189

| Article | Housing Color | Colour Temperature | Luminous Flux | Length  | Power Selectable                  | Price    |
|---------|---------------|--------------------|---------------|---------|-----------------------------------|----------|
| 707205  | White         | 3000 K             | 2900 lm       | 600 mm  | 14.0 W / 16.0 W / 18.0 W / 20.0 W | € 139.95 |
| 707206  | Black         | 3000 K             | 2900 lm       | 600 mm  | 14.0 W / 16.0 W / 18.0 W / 20.0 W | € 139.95 |
| 707207  | White         | 3000 K             | 7250 lm       | 1493 mm | 35.0 W / 40.0 W / 45.0 W / 50.0 W | € 167.95 |
| 707208  | Black         | 3000 K             | 7250 lm       | 1493 mm | 35.0 W / 40.0 W / 45.0 W / 50.0 W | € 167.95 |
| 707189  | White         | 4000 K             | 2900 lm       | 600 mm  | 14.0 W / 16.0 W / 18.0 W / 20.0 W | € 139.95 |
| 707190  | Black         | 4000 K             | 2900 lm       | 600 mm  | 14.0 W / 16.0 W / 18.0 W / 20.0 W | € 139.95 |
| 707191  | White         | 4000 K             | 7250 lm       | 1493 mm | 35.0 W / 40.0 W / 45.0 W / 50.0 W | € 167.95 |
| 707192  | Black         | 4000 K             | 7250 lm       | 1493 mm | 35.0 W / 40.0 W / 45.0 W / 50.0 W | € 167.95 |






LINEAR PRO FOLD DALI

- Eligible for BEG German federal funding for energy-efficient buildings
- Emergency power capable [198-264 V/DC EOFI: 15 %]
- Long service life of 60,000 hours [L80B50]
- Particularly energy efficient

Application Area

Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

|                     |                        |                         |              |
|---------------------|------------------------|-------------------------|--------------|
| Housing             | Aluminium              | Power Supply Unit incl. | Yes          |
| Length              | 1493 mm                | Light Beam Angle        | 30 Degree    |
| Width               | 120 mm                 | Light Beam Angle 2      | 90 Degree    |
| Height              | 68 mm                  | Control                 | DALI 2 / DT6 |
| Power Selectable    | 50 W, 45 W, 40 W, 35 W | CRI (Ra)                | 90           |
| Rated Input Voltage | 198-264 V/AC           | IK Protection Class     | IK03         |



707193

| Article | Housing Color | Colour Temperature | Luminous Flux | Price    |
|---------|---------------|--------------------|---------------|----------|
| 707210  | Black         | 3000 K             | 7000 lm       | € 191.95 |
| 707209  | White         | 3000 K             | 7250 lm       | € 191.95 |
| 707194  | Black         | 4000 K             | 7000 lm       | € 191.95 |
| 707193  | White         | 4000 K             | 7250 lm       | € 191.95 |







CAN

- customisable with extensive accessories
- customised lighting solution thanks to replaceable light source
- combinable with the extensive product family of the CAN series

|                 |               |                     |                                    |
|-----------------|---------------|---------------------|------------------------------------|
| Housing         | Aluminium     | Rated Input Voltage | 220-240 V/AC                       |
| Ø               | 60 mm         | Control             | Dimmable via optional light source |
| Pendulum Length | 1500 mm       |                     |                                    |
| Max. Power      | 1x max. 7.5 W |                     |                                    |

| Article | Housing Color                                                                             | Height | Price   |
|---------|-------------------------------------------------------------------------------------------|--------|---------|
| 707251  |  White | 150 mm | € 55.95 |
| 707252  |  Black | 150 mm | € 55.95 |
| 707255  |  White | 350 mm | € 67.95 |
| 707256  |  Black | 350 mm | € 67.95 |



Accessories

|        |                                                                  |                                                                                     |        |
|--------|------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|
| 930301 | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | € 3.95 |
| 930302 | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | € 3.95 |
| 930303 | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | € 3.95 |
| 930307 | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | € 6.95 |
| 930308 | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | € 6.95 |
| 930309 | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | € 6.95 |
| 930310 | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | € 6.95 |
| 930366 | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | € 3.95 |
| 931065 | Acrylic attachment for Can                                       |  | € 3.95 |







CAN

- customised lighting solution thanks to replaceable light source
- can be combined with the product family of the CAN series

Application Area

Home / Living, Reception / Communication, Hotel / catering, Trade fair construction / shop fitting

|            |               |                     |                                    |
|------------|---------------|---------------------|------------------------------------|
| Housing    | Aluminium     | Rated Input Voltage | 220-240 V/AC                       |
| Height     | 134 mm        | Control             | Dimmable via optional light source |
| Ø          | 60 mm         | Swivelling Angle    | 90 Degree                          |
| Max. Power | 1x max. 7.5 W |                     |                                    |

| Article | Housing Color                                                                              | Price   |
|---------|--------------------------------------------------------------------------------------------|---------|
| 707079  |  White  | € 39.95 |
| 707080  |  Silver | € 39.95 |
| 707081  |  Black  | € 39.95 |

 GU10













Accessories

|        |                                                                  |                                                                                     |        |
|--------|------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|
| 930301 | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | € 3.95 |
| 930302 | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | € 3.95 |
| 930303 | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | € 3.95 |
| 930307 | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | € 6.95 |
| 930308 | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | € 6.95 |
| 930309 | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | € 6.95 |
| 930310 | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | € 6.95 |
| 930366 | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | € 3.95 |
| 931065 | Acrylic attachment for Can                                       |  | € 3.95 |







CAN BASE MIX'N MATCH 1/3

- customised lighting solution thanks to replaceable light source
- can be customised with cylinder housing in 6 different colours
- can be combined with the extensive product family of the CAN series

|                     |               |                  |                                    |
|---------------------|---------------|------------------|------------------------------------|
| Housing             | Aluminium     | Control          | Dimmable via optional light source |
| Height              | 91 mm         | Rotation Angle   | 350 Degree                         |
| Ø                   | 76 mm         | Swivelling Angle | 90 Degree                          |
| Max. Power          | 1x max. 7.5 W |                  |                                    |
| Rated Input Voltage | 220-240 V/AC  |                  |                                    |

| Article | Housing Color                                                                            | Price   |
|---------|------------------------------------------------------------------------------------------|---------|
| 707246  |  White  | € 33.95 |
| 707247  |  Black  | € 33.95 |
| 707248  |  Silver | € 33.95 |





CYLINDER HOOUSING FOR CAN MIX'N MATCH 2/3

Housing                      Aluminium                      Ø                      60 mm  
Height                      98 mm

| Article | Housing Color                                                                                | Price   |
|---------|----------------------------------------------------------------------------------------------|---------|
| 931053  |  White      | € 6.45  |
| 931054  |  Black      | € 6.45  |
| 931055  |  Bronze     | € 14.95 |
| 931056  |  Brass      | € 14.95 |
| 931057  |  Black grey | € 14.95 |
| 931058  |  Rosé       | € 14.95 |

IP20



REFLECTOR RING FOR CAN MIX'N MATCH 3/3

Housing                      Plastic                      Ø                      57 mm  
Height                      28 mm

| Article | Housing Color                                                                              | Price  |
|---------|--------------------------------------------------------------------------------------------|--------|
| 930301  |  White  | € 3.95 |
| 930302  |  Black  | € 3.95 |
| 930303  |  Gold   | € 3.95 |
| 930366  |  Silver | € 3.95 |

IP20



## HORUS

If you're looking for a slim, powerful and flexible three-phase spotlight, look no further than the Horus. The slimline housing and matt surface finish combined with the powerful chip for all wattages make the Horus a true jack-of-all-trades.




## HORUS

- low glare value
- can be rotated and swivelled

### Application Area

Shop / Retail / Sales area, Office / conference, Office / conference

|                         |              |                  |            |
|-------------------------|--------------|------------------|------------|
| Housing                 | Plastic      | Light Beam Angle | 40 Degree  |
| Surface                 | Matt         | Swivelling Angle | 350 Degree |
| Rated Input Voltage     | 220-240 V/AC | CRI (Ra)         | 80         |
| Power Supply Unit incl. | Yes          |                  |            |



707094

| Article | Housing Color | Colour Temperature | Luminous Flux | Height | Ø     | Power  | EEI | Price   |
|---------|---------------|--------------------|---------------|--------|-------|--------|-----|---------|
| 707094  | Black         | WW 3000 K          | 625 lm        | 125 mm | 60 mm | 7.0 W  | A E | € 55.95 |
| 707095  | White         | WW 3000 K          | 625 lm        | 125 mm | 60 mm | 7.0 W  | A E | € 55.95 |
| 707098  | Black         | WW 3000 K          | 915 lm        | 140 mm | 70 mm | 10.0 W | A E | € 63.95 |
| 707099  | White         | WW 3000 K          | 915 lm        | 140 mm | 70 mm | 10.0 W | A E | € 63.95 |
| 707102  | Black         | WW 3000 K          | 1705 lm       | 185 mm | 80 mm | 20.0 W | A F | € 71.95 |
| 707103  | White         | WW 3000 K          | 1705 lm       | 185 mm | 80 mm | 20.0 W | A F | € 71.95 |
| 707106  | Black         | WW 3000 K          | 2525 lm       | 210 mm | 90 mm | 30.0 W | A F | € 87.95 |
| 707107  | White         | WW 3000 K          | 2525 lm       | 210 mm | 90 mm | 30.0 W | A F | € 87.95 |
| 707096  | Black         | NW 4000 K          | 635 lm        | 125 mm | 60 mm | 7.0 W  | A E | € 55.95 |
| 707097  | White         | NW 4000 K          | 635 lm        | 125 mm | 60 mm | 7.0 W  | A E | € 55.95 |
| 707100  | Black         | NW 4000 K          | 1030 lm       | 140 mm | 70 mm | 10.0 W | A E | € 63.95 |
| 707101  | White         | NW 4000 K          | 1030 lm       | 140 mm | 70 mm | 10.0 W | A E | € 63.95 |
| 707104  | Black         | NW 4000 K          | 1785 lm       | 185 mm | 80 mm | 20.0 W | A F | € 71.95 |
| 707105  | White         | NW 4000 K          | 1785 lm       | 185 mm | 80 mm | 20.0 W | A F | € 71.95 |
| 707108  | Black         | NW 4000 K          | 2605 lm       | 210 mm | 90 mm | 30.0 W | A F | € 87.95 |
| 707109  | White         | NW 4000 K          | 2605 lm       | 210 mm | 90 mm | 30.0 W | A F | € 87.95 |










UNI 2

- „Glow“ effect on reflector ring
- Can be rotated and swivelled
- Can be customised with a comprehensive range of accessories

Application Area


Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Colour Temperature  | 3000 K       | Light Beam Angle        | 36 Degree                                    |
| Height              | 167 mm       | Swivelling Angle        | 90 Degree                                    |
| Ø                   | 100 mm       | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Power               | 17 W         | CRI (Ra)                | 90                                           |
| Rated Input Voltage | 220-240 V/AC |                         |                                              |



707044

| Article | Housing Color |    | Luminous Flux | Price    |
|---------|---------------|----|---------------|----------|
| 707131  | Black         | WW | 1080 lm       | € 148.95 |
| 707044  | White         | WW | 1110 lm       | € 148.95 |



Accessories

|        |                                                                  |  |        |
|--------|------------------------------------------------------------------|--|--------|
| 930339 | Reflector ring black for Uni II series                           |  | € 8.95 |
| 930340 | Reflector ring gold for Uni II series                            |  | € 8.95 |
| 930341 | Reflector ring chrome for Uni II series                          |  | € 8.95 |
| 930335 | Rear black cover for Uni II series                               |  | € 2.45 |
| 930337 | Black heat sink cover for Uni II series                          |  | € 6.45 |
| 930306 | 48° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series      |  | € 6.95 |
| 930307 | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | € 6.95 |
| 930308 | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | € 6.95 |
| 930309 | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | € 6.95 |
| 930310 | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | € 6.95 |



page 54

page 55

page 56

page 59

page 122

page 125




NIHAL

- can be rotated and swivelled
- large tilt angle

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Length              | 135 mm       | Light Beam Angle        | 33 Degree                                    |
| Width               | 138 mm       | Swivelling Angle        | 180 Degree                                   |
| Height              | 188 mm       | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                   | 86 mm        | CRI (Ra)                | 90                                           |
| Rated Input Voltage | 220-240 V/AC |                         |                                              |



707040

| Article | Housing Color | Colour Temperature | Luminous Flux | Power  | Price    |
|---------|---------------|--------------------|---------------|--------|----------|
| 707056  | Silver        | 3000 K             | 2470 lm       | 33.0 W | € 183.95 |
| 707041  | Black         | 3000 K             | 2580 lm       | 33.0 W | € 183.95 |
| 707040  | White         | 3000 K             | 2880 lm       | 33.0 W | € 183.95 |
| 707043  | Black         | 4000 K             | 2660 lm       | 33.0 W | € 183.95 |
| 707057  | Silver        | 4000 K             | 2700 lm       | 33.0 W | € 183.95 |
| 707042  | White         | 4000 K             | 3100 lm       | 34.0 W | € 183.95 |



Accessories

|        |                                                   |
|--------|---------------------------------------------------|
| 930315 | Reflector ring white for Nihal series             |
| 930316 | Reflector ring black for Nihal series             |
| 930365 | Reflector ring silver for Nihal series            |
| 930317 | Reflector ring gold for Nihal series              |
| 930311 | Side cover white for Nihal series                 |
| 930312 | Side cover black for Nihal series                 |
| 930363 | Side cover silver for Nihal series                |
| 930313 | Side cover gold for Nihal series                  |
| 930314 | Side cover walnut wood look for Nihal series      |
| 930769 | Side cover natural oak wood look for Nihal series |
| 930318 | 15° reflector for Nihal series                    |
| 930320 | 50° reflector for Nihal series                    |
| 930321 | Honeycomb filter for Nihal series                 |
| 930322 | Spread lens for Nihal 37° series                  |
| 930323 | Softening lens for Nihal 37° series               |
| 930324 | Linear spread lens for Nihal 40°/80° series       |

|  |         |
|--|---------|
|  | € 3.95  |
|  | € 3.95  |
|  | € 3.95  |
|  | € 3.95  |
|  | € 4.95  |
|  | € 4.95  |
|  | € 4.45  |
|  | € 4.95  |
|  | € 6.45  |
|  | € 6.45  |
|  | € 13.95 |
|  | € 13.95 |
|  | € 8.95  |
|  | € 8.95  |
|  | € 8.95  |
|  | € 8.95  |






## NIHAL MINI

- Can be rotated and swivelled
- Large tilt angle

### Application Area


Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Length              | 94 mm        | Light Beam Angle        | 35 Degree                                    |
| Width               | 102 mm       | Swivelling Angle        | 180 Degree                                   |
| Height              | 139 mm       | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                   | 60 mm        | CRI (Ra)                | 90                                           |
| Power               | 15 W         |                         |                                              |
| Rated Input Voltage | 220-240 V/AC |                         |                                              |



707036

| Article       | Housing Color | Colour Temperature | Luminous Flux | Price           |
|---------------|---------------|--------------------|---------------|-----------------|
| <b>707037</b> | Black         | 3000 K             | 1080 lm       | <b>€ 141.95</b> |
| <b>707054</b> | Silver        | 3000 K             | 1100 lm       | <b>€ 141.95</b> |
| <b>707036</b> | White         | 3000 K             | 1240 lm       | <b>€ 141.95</b> |
| <b>707039</b> | Black         | 4000 K             | 1160 lm       | <b>€ 141.95</b> |
| <b>707055</b> | Silver        | 4000 K             | 1190 lm       | <b>€ 141.95</b> |
| <b>707038</b> | White         | 4000 K             | 1330 lm       | <b>€ 141.95</b> |



### Accessories

|               |                                                                  |  |               |
|---------------|------------------------------------------------------------------|--|---------------|
| <b>930301</b> | Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930302</b> | Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series  |  | <b>€ 3.95</b> |
| <b>930303</b> | Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series   |  | <b>€ 3.95</b> |
| <b>930297</b> | Side cover white for Nihal Mini series                           |  | <b>€ 3.25</b> |
| <b>930298</b> | Side cover black for Nihal Mini series                           |  | <b>€ 3.25</b> |
| <b>930364</b> | Side cover silver for Nihal Mini series                          |  | <b>€ 2.95</b> |
| <b>930299</b> | Side cover gold for Nihal Mini series                            |  | <b>€ 3.25</b> |
| <b>930300</b> | Side cover walnut wood look for Nihal Mini series                |  | <b>€ 4.95</b> |
| <b>930768</b> | Side cover natural oak wood look for Nihal Mini series           |  | <b>€ 4.75</b> |
| <b>930306</b> | 48° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series      |  | <b>€ 6.95</b> |
| <b>930307</b> | Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series   |  | <b>€ 6.95</b> |
| <b>930308</b> | Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series        |  | <b>€ 6.95</b> |
| <b>930309</b> | Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series     |  | <b>€ 6.95</b> |
| <b>930310</b> | Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series |  | <b>€ 6.95</b> |
| <b>930366</b> | Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series |  | <b>€ 3.95</b> |
| <b>930767</b> | 12° lens for Nihal Mini series                                   |  | <b>€ 8.95</b> |



### **RF-SMART EVENTUS THREE-PHASE SPOT RGB+CCT**

The RF-SMART EVENTUS 3-PHASE SPOT RGB+CCT is an intelligent LED spotlight for 3-phase track that combines coloured accent light and precise white light control in a single luminaire. With RGB+CCT technology, ZigBee 3.0, RF-SMART control and up to 16 million colours, it is ideal for modern lighting scenarios in commercial, hospitality and event areas.





## RF-SMART EVENTUS THREE-PHASE SPOT RGB+CCT

- rotatable and swivelling
- brightness and colour saturation dimmable
- RGB 3x 6W (max. 18W), CW/WW 2x 30W (max. 30W), max. total output 30W
- 16 million colours and colour temperature adjustable
- 18 automatic programmes pre-installed
- program and remote control synchronisation when operating multiple RF-smart components [repeater function]
- opt. controllable with RF-smart radio remote controls [2.4Ghz, range approx. 30 m]
- controllable with all Zigbee 3.0 compatible controllers / apps such as Amazon Echo [Alexa], Google Assistant, Tuya [corresponding gateway required, outdoor range up to 100 m]

|                    |                                     |                         |                      |
|--------------------|-------------------------------------|-------------------------|----------------------|
| Housing            | Plastic, Metal                      | Rated Input Voltage     | 100-240 V/AC         |
| Surface            | Powder-coated, Fine structure, Matt | Power Supply Unit incl. | Yes                  |
| Colour Temperature | 2700-6000 K                         | Light Beam Angle        | 36 Degree            |
| Luminous Flux      | 1800 lm                             | Rotation Angle          | 350 Degree           |
| Length             | 205 mm                              | Swivelling Angle        | 90 Degree            |
| Width              | 76 mm                               | Control                 | RF-Smart, ZigBee 3.0 |
| Height             | 246 mm                              | CRI (Ra)                | 90                   |
| Power              | 30 W                                | Light Direction         | Front                |

| Article | Housing Color |           | Price    |
|---------|---------------|-----------|----------|
| 843530  | White         | RGB WW CW | € 159.95 |
| 843531  | Black         | RGB WW CW | € 159.95 |



### Accessories

|        |                                                                             |  |         |
|--------|-----------------------------------------------------------------------------|--|---------|
| 843510 | RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20             |  | € 30.95 |
| 843511 | RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20             |  | € 30.95 |
| 843512 | RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT       |  | € 39.95 |
| 843525 | RF-smart, Standard Remote, black, 3 zones, Single/CCT/RGB/RGBW/RGB+CCT      |  | € 39.95 |
| 843513 | RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT   |  | € 55.95 |
| 843522 | RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT |  | € 59.95 |
| 843514 | RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT  |  | € 87.95 |
| 843527 | RF-smart, PIR motion detector, white, 120deg/7m, 3V                         |  | € 30.95 |
| 843529 | RF-smart, DMX-Gateway, 5V DC, 16 Zonen Single/CCT/RGB/W+CCT                 |  | € 47.95 |

## LUCEA

The LUCEA series includes pendant, ceiling and track luminaires and impresses with its timeless design and flexible customisation options.



## LUCEA-VARIETY

### surface-mounted lights

The LUCEA surface-mounted luminaires are available as pendant luminaires, as swivelling and tilting ceiling luminaires with a base and as fixed spotlights.



### 1-phase luminaires

The pendant luminaires with a particularly soft textile cable and the spotlights for use on single-circuit track systems are primarily aimed at private users looking for a slim and versatile solution for the home.




### 3-phase luminaires

The LUCEA luminaires for 3-phase 230V track systems are available as ceiling and pendant versions and, thanks to the CCT dip switch, are particularly suitable for commercial use in bars, restaurants or offices.



## FLEXIBLE COLOUR TEMPERATURE


The colour temperature has a decisive influence on the lighting effect in the room. For this reason, the LUCEA series is available in different colour temperatures, depending on the model and intended use. With an Ra value >90, the LUCEA luminaires also guarantee true-to-life colour rendering of walls, ceilings and objects. Using the LUCEA ceiling light as an example, you can see in the illustrations below how the light colour and lighting mood change depending on the model version - from warm white to neutral white and as a flexible dim-to-warm version.

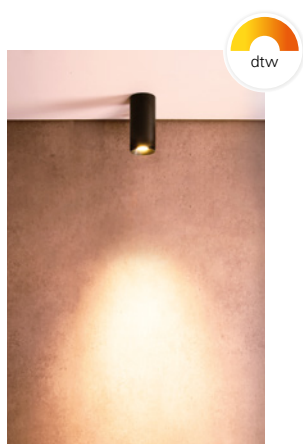

### dim-to-warm


#### [1,800K - 2.700K]

In the dim-to-warm version, the colour temperature adjusts automatically when dimming [the lower the light intensity, the warmer the colour temperature].

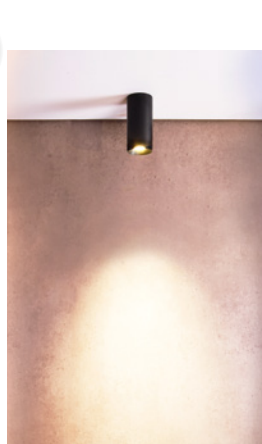


### 2,700 K

For private users: the lights with extra warm white 2,700K.

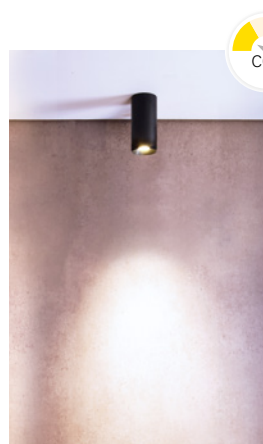

### 3,000 K

For commercial applications: The surface-mounted and 3-phase luminaires offer a CCT dip switch to switch between 3,000K [warm white] and 4,000K [neutral white].

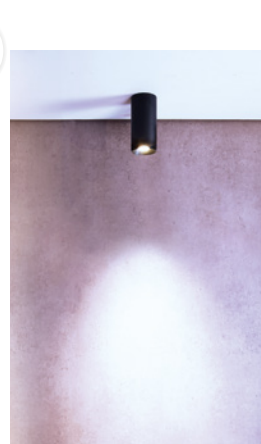


### 4,000 K



In addition to the CCT versions, the 3-phase spotlights with 40W are also available as a pure 4,000K [neutral white] version.

## FLEXIBLE BEAM ANGLE


Wide, soft light or a precise, focussed spot – with the LUCEA series you have the choice, even retrospectively. In addition to the standard beam angle of 36°, the luminaires can be narrowed or widened in all versions (surface-mounted, pendant, track) using optionally available lenses. You are even more flexible with the optional, colour-matching barn door cover. With its four wings, the light emission can be adapted to different room and object geometries. The illustrations below show how the light emission of the LUCEA changes through the use of different lenses and the barn door.





**24°**  
narrow beam angle with optional 24° lens



**36°**  
standard beam angle with 36° lens [standard]



**60°**  
wide beam angle with optional 60° lens

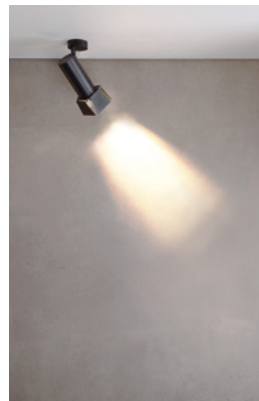

### door panels

individual limitation of the beam angle with the wings of the barn door panel






LUCEA DALI

- emergency current capable [176-280V/DC EOFI: 100%]
- incl. black reflector ring

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

|                                  |              |                         |                        |
|----------------------------------|--------------|-------------------------|------------------------|
| Housing                          | Aluminium    | EOFI                    | 100 %                  |
| Colour Temperature               | 2700 K       | Power Supply Unit incl. | Yes                    |
| Luminous Flux                    | 1300 lm      | Pendulum Length         | 1600 mm                |
| Length                           | 65 mm        | Light Beam Angle        | 36 Degree              |
| Width                            | 65 mm        | Control                 | DALI 2 / DT6, Push-Dim |
| Height                           | 157 mm       | CRI (Ra)                | 90                     |
| Power                            | 10 W         | IK Protection Class     | IK03                   |
| Rated Input Voltage              | 200-240 V/AC |                         |                        |
| Voltage range emergency lighting | 176-280 V/DC |                         |                        |



707244

| Article | Housing Color | Price    |
|---------|---------------|----------|
| 707244  | White         | € 119.95 |
| 707245  | Black         | € 119.95 |



Accessories

|        |                                     |        |
|--------|-------------------------------------|--------|
| 930679 | Lens 24° for Lucea 6/10             | € 7.95 |
| 930756 | Reflector ring for Lucea 6/10 white | € 3.95 |
| 930757 | Reflector ring for Lucea 6/10 black | € 3.95 |
| 930758 | Reflector ring for Lucea 6/10 gold  | € 3.95 |






## LUCEA CCT DALI

- emergency current capable [176-280V/DC EOFI: 100%]
- light colour adjustable in two stages
- incl. black reflector ring

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

|                                  |              |                     |                        |
|----------------------------------|--------------|---------------------|------------------------|
| Housing                          | Aluminium    | Pendulum Length     | 1600 mm                |
| Colour Temperature               | 3000/4000 K  | Light Beam Angle    | 36 Degree              |
| Rated Input Voltage              | 200-240 V/AC | Control             | DALI 2 / DT6, Push-Dim |
| Voltage range emergency lighting | 176-280 V/DC | CRI (Ra)            | 90                     |
| EOFI                             | 100 %        | IK Protection Class | IK03                   |
| Power Supply Unit incl.          | Yes          |                     |                        |



707234

| Article       | Housing Color |  | Luminous Flux | Length | Width | Height | Power  | Price           |
|---------------|---------------|--|---------------|--------|-------|--------|--------|-----------------|
| <b>707234</b> | White         |  | 930/1000 lm   | 65 mm  | 65 mm | 157 mm | 11.0 W | <b>€ 123.95</b> |
| <b>707235</b> | Black         |  | 930/1000 lm   | 65 mm  | 65 mm | 157 mm | 11.0 W | <b>€ 123.95</b> |
| <b>707238</b> | White         |  | 1930/2000 lm  | 85 mm  | 85 mm | 178 mm | 20.0 W | <b>€ 159.95</b> |
| <b>707239</b> | Black         |  | 1930/2000 lm  | 85 mm  | 85 mm | 178 mm | 20.0 W | <b>€ 159.95</b> |



### Accessories for 707234, 707235

|               |                                     |  |               |
|---------------|-------------------------------------|--|---------------|
| <b>930679</b> | Lens 24° for Lucea 6/10             |  | <b>€ 7.95</b> |
| <b>930756</b> | Reflector ring for Lucea 6/10 white |  | <b>€ 3.95</b> |
| <b>930757</b> | Reflector ring for Lucea 6/10 black |  | <b>€ 3.95</b> |
| <b>930758</b> | Reflector ring for Lucea 6/10 gold  |  | <b>€ 3.95</b> |

### Accessories for 707238, 707239

|               |                                      |  |               |
|---------------|--------------------------------------|--|---------------|
| <b>930680</b> | Lens 24° for Lucea 15/20             |  | <b>€ 9.95</b> |
| <b>930681</b> | Lens 60° for Lucea 15/20             |  | <b>€ 9.95</b> |
| <b>930759</b> | Reflector ring for Lucea 15/20 white |  | <b>€ 4.75</b> |
| <b>930760</b> | Reflector ring for Lucea 15/20 black |  | <b>€ 4.75</b> |
| <b>930761</b> | Reflector ring for Lucea 15/20 gold  |  | <b>€ 4.75</b> |




LUCEA CCT

- Light colour adjustable in two stages
- Incl. black reflector ring

**Application Area**  
 Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

|                         |              |                     |                                              |
|-------------------------|--------------|---------------------|----------------------------------------------|
| Housing                 | Aluminium    | Light Beam Angle    | 36 Degree                                    |
| Colour Temperature      | 3000/4000 K  | Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Rated Input Voltage     | 220-240 V/AC | CRI (Ra)            | 90                                           |
| Power Supply Unit incl. | Yes          | IK Protection Class | IK03                                         |
| Pendulum Length         | 1800 mm      |                     |                                              |



707124

| Article | Housing Color | Luminous Flux | Height | Ø     | Power  | Price    |
|---------|---------------|---------------|--------|-------|--------|----------|
| 707124  | White         | 930/1000 lm   | 157 mm | 65 mm | 10.0 W | € 119.95 |
| 707125  | Black         | 930/1000 lm   | 157 mm | 65 mm | 10.0 W | € 119.95 |
| 707128  | White         | 1930/2000 lm  | 178 mm | 85 mm | 20.0 W | € 151.95 |
| 707129  | Black         | 1930/2000 lm  | 178 mm | 85 mm | 20.0 W | € 151.95 |



Accessories for 707124, 707125

|        |                                     |  |        |
|--------|-------------------------------------|--|--------|
| 930679 | Lens 24° for Lucea 6/10             |  | € 7.95 |
| 930756 | Reflector ring for Lucea 6/10 white |  | € 3.95 |
| 930757 | Reflector ring for Lucea 6/10 black |  | € 3.95 |
| 930758 | Reflector ring for Lucea 6/10 gold  |  | € 3.95 |

Accessories for 707128, 707129

|        |                                      |  |        |
|--------|--------------------------------------|--|--------|
| 930680 | Lens 24° for Lucea 15/20             |  | € 9.95 |
| 930681 | Lens 60° for Lucea 15/20             |  | € 9.95 |
| 930759 | Reflector ring for Lucea 15/20 white |  | € 4.75 |
| 930760 | Reflector ring for Lucea 15/20 black |  | € 4.75 |
| 930761 | Reflector ring for Lucea 15/20 gold  |  | € 4.75 |






## LUCEA DTW

- high colour rendering
- Dim-to-warm 1,800K-2,700K
- incl. black reflector ring

### Application Area

Home / Living, Reception / Communication, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Colour Temperature  | 1800-2700 K  | Pendulum Length         | 1800 mm                                      |
| Luminous Flux       | 750 lm       | Light Beam Angle        | 36 Degree                                    |
| Height              | 157 mm       | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                   | 65 mm        | CRI (Ra)                | 90                                           |
| Power               | 10 W         | IK Protection Class     | IK03                                         |
| Rated Input Voltage | 200-240 V/AC |                         |                                              |



707217

| Article       | Housing Color | Price    |
|---------------|---------------|----------|
| <b>707217</b> | White         | € 108.95 |
| <b>707218</b> | Black         | € 108.95 |



### Accessories

|               |                                     |        |
|---------------|-------------------------------------|--------|
| <b>930756</b> | Reflector ring for Lucea 6/10 white | € 3.95 |
| <b>930757</b> | Reflector ring for Lucea 6/10 black | € 3.95 |
| <b>930758</b> | Reflector ring for Lucea 6/10 gold  | € 3.95 |



### 5-year guarantee

Benefit from the maximum quality promise:

All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.




LUCEA DALI

- emergency current capable [176-280V/DC EOFI: 100%]
- incl. black reflector ring
- can be customised with a wide range of accessories

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

|                         |              |                     |                                |
|-------------------------|--------------|---------------------|--------------------------------|
| Housing                 | Aluminium    | Swivelling Angle    | 90 Degree                      |
| Length                  | 113 mm       | Control             | DALI 2 / DT6, Intelli Push-Dim |
| Rated Input Voltage     | 200-240 V/AC | CRI (Ra)            | 90                             |
| Power Supply Unit incl. | Yes          | IK Protection Class | IK03                           |
| Light Beam Angle        | 36 Degree    |                     |                                |
| Rotation Angle          | 350 Degree   |                     |                                |



707240

| Article       | Housing Color | Colour Temperature | Luminous Flux | Width  | Height | Power  | Price    |
|---------------|---------------|--------------------|---------------|--------|--------|--------|----------|
| <b>707240</b> | White         | 2700 K             | 1950 lm       | 85 mm  | 269 mm | 15.0 W | € 127.95 |
| <b>707241</b> | Black         | 2700 K             | 1950 lm       | 85 mm  | 269 mm | 15.0 W | € 127.95 |
| <b>707242</b> | White         | 4000 K             | 4480 lm       | 100 mm | 315 mm | 40.0 W | € 171.95 |
| <b>707243</b> | Black         | 4000 K             | 4480 lm       | 100 mm | 315 mm | 40.0 W | € 171.95 |



Accessories for **707240, 707241**

|               |                                      |  |         |
|---------------|--------------------------------------|--|---------|
| <b>930680</b> | Lens 24° for Lucea 15/20             |  | € 9.95  |
| <b>930681</b> | Lens 60° for Lucea 15/20             |  | € 9.95  |
| <b>930754</b> | Door panel for Lucea 15/20 white     |  | € 18.95 |
| <b>930755</b> | Door panel for Lucea 15/20 black     |  | € 18.95 |
| <b>930759</b> | Reflector ring for Lucea 15/20 white |  | € 4.75  |
| <b>930760</b> | Reflector ring for Lucea 15/20 black |  | € 4.75  |
| <b>930761</b> | Reflector ring for Lucea 15/20 gold  |  | € 4.75  |

Accessories for **707242, 707243**

|               |                                      |  |         |
|---------------|--------------------------------------|--|---------|
| <b>930677</b> | Door panel for Lucea 30/40 white     |  | € 19.95 |
| <b>930678</b> | Door panel for Lucea 30/40 black     |  | € 19.95 |
| <b>930682</b> | Lens 24° for Lucea 30/40             |  | € 12.95 |
| <b>930684</b> | Lens 60° for Lucea 30/40             |  | € 12.95 |
| <b>930762</b> | Reflector ring for Lucea 30/40 white |  | € 5.45  |
| <b>930763</b> | Reflector ring for Lucea 30/40 black |  | € 5.45  |
| <b>930764</b> | Reflector ring for Lucea 30/40 gold  |  | € 5.45  |




LUCEA CCT DALI

- emergency current capable [176-280V/DC EOFI: 100%]
- light colour adjustable in 2 shades
- incl. black reflector ring
- can be customised with a wide range of accessories

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

|                     |              |                         |                                |
|---------------------|--------------|-------------------------|--------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                            |
| Colour Temperature  | 3000/4000 K  | Light Beam Angle        | 36 Degree                      |
| Luminous Flux       | 2700/2900 lm | Rotation Angle          | 350 Degree                     |
| Length              | 113 mm       | Swivelling Angle        | 90 Degree                      |
| Width               | 100 mm       | Control                 | DALI 2 / DT6, Intelli Push-Dim |
| Height              | 302 mm       | CRI (Ra)                | 90                             |
| Power               | 33 W         | IK Protection Class     | IK03                           |
| Rated Input Voltage | 200-240 V/AC |                         |                                |



707232

| Article | Housing Color |    | Price    |
|---------|---------------|----|----------|
| 707232  | White         | NW | € 171.95 |
| 707233  | Black         | NW | € 171.95 |



Accessories

|        |                                      |  |         |
|--------|--------------------------------------|--|---------|
| 930677 | Door panel for Lucea 30/40 white     |  | € 19.95 |
| 930678 | Door panel for Lucea 30/40 black     |  | € 19.95 |
| 930682 | Lens 24° for Lucea 30/40             |  | € 12.95 |
| 930684 | Lens 60° for Lucea 30/40             |  | € 12.95 |
| 930762 | Reflector ring for Lucea 30/40 white |  | € 5.45  |
| 930763 | Reflector ring for Lucea 30/40 black |  | € 5.45  |
| 930764 | Reflector ring for Lucea 30/40 gold  |  | € 5.45  |




LUCEA CCT

- Incl. black reflector ring
- Can be customised with a comprehensive range of accessories
- Light colour adjustable in two stages

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

|                         |              |                     |                                              |
|-------------------------|--------------|---------------------|----------------------------------------------|
| Housing                 | Aluminium    | Swivelling Angle    | 90 Degree                                    |
| Colour Temperature      | 3000/4000 K  | Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Rated Input Voltage     | 220-240 V/AC | CRI (Ra)            | 90                                           |
| Power Supply Unit incl. | Yes          | IK Protection Class | IK03                                         |
| Light Beam Angle        | 36 Degree    |                     |                                              |
| Rotation Angle          | 350 Degree   |                     |                                              |



707116

| Article       | Housing Color |       | Luminous Flux | Height | Ø      | Power  | Price    |
|---------------|---------------|-------|---------------|--------|--------|--------|----------|
| <b>707116</b> | White         | WW NW | 930/1000 lm   | 249 mm | 65 mm  | 10.0 W | € 111.95 |
| <b>707117</b> | Black         | WW NW | 930/1000 lm   | 249 mm | 65 mm  | 10.0 W | € 111.95 |
| <b>707118</b> | White         | WW NW | 1460/1500 lm  | 269 mm | 85 mm  | 15.0 W | € 127.95 |
| <b>707119</b> | Black         | WW NW | 1460/1500 lm  | 269 mm | 85 mm  | 15.0 W | € 127.95 |
| <b>707120</b> | White         | WW NW | 1930/2000 lm  | 269 mm | 85 mm  | 20.0 W | € 143.95 |
| <b>707121</b> | Black         | WW NW | 1930/2000 lm  | 269 mm | 85 mm  | 20.0 W | € 143.95 |
| <b>707122</b> | White         | WW NW | 2700/2900 lm  | 302 mm | 100 mm | 30.0 W | € 159.95 |
| <b>707123</b> | Black         | WW NW | 2700/2900 lm  | 302 mm | 100 mm | 30.0 W | € 159.95 |



**Technical data sheet**

New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.



Accessories for **707116, 707117**

- 930679** Lens 24° for Lucea 6/10  
**930752** Door panel for Lucea 6/10 white  
**930753** Door panel for Lucea 6/10 black  
**930756** Reflector ring for Lucea 6/10 white  
**930757** Reflector ring for Lucea 6/10 black  
**930758** Reflector ring for Lucea 6/10 gold

|                                                                                   |         |
|-----------------------------------------------------------------------------------|---------|
|  | € 7.95  |
|  | € 17.95 |
|  | € 17.95 |
|  | € 3.95  |
|  | € 3.95  |
|  | € 3.95  |

Accessories for **707118, 707119, 707120, 707121**

- 930680** Lens 24° for Lucea 15/20  
**930681** Lens 60° for Lucea 15/20  
**930754** Door panel for Lucea 15/20 white  
**930755** Door panel for Lucea 15/20 black  
**930759** Reflector ring for Lucea 15/20 white  
**930760** Reflector ring for Lucea 15/20 black  
**930761** Reflector ring for Lucea 15/20 gold

|                                                                                   |         |
|-----------------------------------------------------------------------------------|---------|
|  | € 9.95  |
|  | € 9.95  |
|  | € 18.95 |
|  | € 18.95 |
|  | € 4.75  |
|  | € 4.75  |
|  | € 4.75  |

Accessories for **707122, 707123**

- 930677** Door panel for Lucea 30/40 white  
**930678** Door panel for Lucea 30/40 black  
**930682** Lens 24° for Lucea 30/40  
**930684** Lens 60° for Lucea 30/40  
**930762** Reflector ring for Lucea 30/40 white

|                                                                                   |         |
|-----------------------------------------------------------------------------------|---------|
|  | € 19.95 |
|  | € 19.95 |
|  | € 12.95 |
|  | € 12.95 |
|  | € 5.45  |



page 26



page 60



page 62



page 296



page 400






LUCEA

- Incl. black reflector ring
- Can be customised with a comprehensive range of accessories

**Application Area**  
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

|                         |              |                     |                                              |
|-------------------------|--------------|---------------------|----------------------------------------------|
| Housing                 | Aluminium    | Light Beam Angle    | 36 Degree                                    |
| Colour Temperature      | 4000 K       | Rotation Angle      | 350 Degree                                   |
| Luminous Flux           | 4480 lm      | Swivelling Angle    | 90 Degree                                    |
| Height                  | 211 mm       | Control             | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                       | 100 mm       | CRI (Ra)            | 90                                           |
| Power                   | 40 W         | IK Protection Class | IK03                                         |
| Rated Input Voltage     | 200-240 V/AC |                     |                                              |
| Power Supply Unit incl. | Yes          |                     |                                              |



707183

| Article | Housing Color | Price    |
|---------|---------------|----------|
| 707183  | White         | € 159.95 |
| 707184  | Black         | € 159.95 |



Accessories

|        |                                      |         |
|--------|--------------------------------------|---------|
| 930682 | Lens 24° for Lucea 30                | € 12.95 |
| 930684 | Lens 60° for Lucea 30                | € 12.95 |
| 930677 | Door panel for Lucea 30/40 white     | € 19.95 |
| 930678 | Door panel for Lucea 30/40 black     | € 19.95 |
| 930762 | Reflector ring for Lucea 30/40 white | € 5.45  |
| 930763 | Reflector ring for Lucea 30/40 black | € 5.45  |
| 930764 | Reflector ring for Lucea 30/40 gold  | € 5.45  |




LUCEA DTW

- Dim-to-warm 1,800K - 2,700K
- incl. black reflector ring
- Can be customised with a wide range of accessories

Application Area

Home / Living, Reception / Communication, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Colour Temperature  | 1800-2700 K  | Light Beam Angle        | 36 Degree                                    |
| Luminous Flux       | 750 lm       | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Height              | 249 mm       | CRI (Ra)                | 90                                           |
| Ø                   | 65 mm        | IK Protection Class     | IK03                                         |
| Power               | 10 W         |                         |                                              |
| Rated Input Voltage | 200-240 V/AC |                         |                                              |



707213

| Article | Housing Color |    | Price   |
|---------|---------------|----|---------|
| 707213  | White         | WW | € 87.95 |
| 707214  | Black         | WW | € 87.95 |



Accessories

|        |                                     |  |         |
|--------|-------------------------------------|--|---------|
| 930752 | Door panel for Lucea 6/10 white     |  | € 17.95 |
| 930753 | Door panel for Lucea 6/10 black     |  | € 17.95 |
| 930756 | Reflector ring for Lucea 6/10 white |  | € 3.95  |
| 930757 | Reflector ring for Lucea 6/10 black |  | € 3.95  |
| 930758 | Reflector ring for Lucea 6/10 gold  |  | € 3.95  |



page 26

page 60

page 62

page 400




SLIM

- Extra-soft fabric cable
- Glare-free due to low UGR value [ $<19$ ]
- Suspended mounting up to 1,800 mm
- Slim design at just 39 mm in diameter

Application Area

Home / Living, Reception / Communication, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Colour Temperature  | 2700 K       | Pendulum Length         | 1500 mm                                      |
| Luminous Flux       | 500 lm       | Light Beam Angle        | 24 Degree                                    |
| Height              | 300 mm       | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Ø                   | 39 mm        | CRI (Ra)                | 90                                           |
| Power               | 5 W          |                         |                                              |
| Rated Input Voltage | 220-240 V/AC |                         |                                              |



707162

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 707161  | Black         | € 74.95 |
| 707162  | White         | € 74.95 |



Accessories

|        |                                              |  |        |
|--------|----------------------------------------------|--|--------|
| 930744 | Reflector ring white for Slim series         |  | € 3.95 |
| 930745 | Reflector ring black for Slim series         |  | € 3.95 |
| 930746 | Reflector ring gold-coloured for Slim series |  | € 4.75 |
| 930747 | 24° lens for Slim series                     |  | € 3.95 |
| 930749 | 60° lens for Slim series                     |  | € 3.95 |
| 930748 | 36° lens for Slim series                     |  | € 3.95 |






SLIM

- glare-free, thanks to low UGR value [ $<19$ ]
- slim design with a diameter of only 39 mm
- incl. silver-coloured reflector ring

Application Area

Home / Living, Reception / Communication, Hotel / catering

|                     |              |                         |                                              |
|---------------------|--------------|-------------------------|----------------------------------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                                          |
| Colour Temperature  | 2700 K       | Light Beam Angle        | 36 Degree                                    |
| Luminous Flux       | 500 lm       | Rotation Angle          | 330 Degree                                   |
| Height              | 213 mm       | Swivelling Angle        | 60 Degree                                    |
| Ø                   | 39 mm        | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Power               | 5 W          | CRI (Ra)                | 90                                           |
| Rated Input Voltage | 220-240 V/AC |                         |                                              |



707203

| Article | Housing Color |    | Price   |
|---------|---------------|----|---------|
| 707203  | White         | WW | € 65.95 |
| 707204  | Black         | WW | € 65.95 |



Accessories

|        |                                              |  |        |
|--------|----------------------------------------------|--|--------|
| 930744 | Reflector ring white for Slim series         |  | € 3.95 |
| 930745 | Reflector ring black for Slim series         |  | € 3.95 |
| 930746 | Reflector ring gold-coloured for Slim series |  | € 4.75 |
| 930747 | 24° lens for Slim series                     |  | € 3.95 |
| 930748 | 36° lens for Slim series                     |  | € 3.95 |
| 930749 | 60° lens for Slim series                     |  | € 3.95 |







414 battery lights

## **BATTERY LIGHTS**





battery and solar lights



page 414



page 416





## CANIS SET

Discover our portable cordless LED lamps from the CANIS series. With a 3.5 W output and 270 lm of brightness, our lamps provide a particularly wide and pleasant light distribution. And the infinitely variable dimming function allows you to set the perfect illumination using the practical touch sensor. Choose from two light colour levels to create the perfect atmosphere. And the best part? One battery charge is enough for more than eight hours of lighting. You can charge up to six lamps at the same time with the optional charging dock, so you always have enough lights to hand. Choose from eight colours, including trendy pastel tones, to reflect your personal style.

Note: Includes USB charging base





## CANIS SET


- Pleasant and wide light distribution
- More than eight hours of light after charging
- Infinitely dimmable via touch sensor
- Light colour adjustable in two stages
- Charge up to six cordless lamps using the stackable charging dock [optional]
- Includes USB charging base

### Application Area

Garden / Terrace / Balcony / Walkways, Reception / Communication, Home / Living, Hotel / catering

|                    |             |                     |            |
|--------------------|-------------|---------------------|------------|
| Housing            | Aluminium   | Ø                   | 112 mm     |
| Surface            | Matt        | Power               | 3.5 W      |
| Colour Temperature | 2200/3000 K | Rated Input Voltage | 3.7 V/DC   |
| Luminous Flux      | 270 lm      | Light Beam Angle    | 100 Degree |
| Height             | 370 mm      | CRI (Ra)            | 80         |

| Article | Housing Color                                                                                  |                                                                                     | Price   |
|---------|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 620194  |  Sand       |  | € 87.95 |
| 620195  |  Green      |  | € 87.95 |
| 620196  |  Terracotta |  | € 87.95 |
| 620197  |  Blue       |  | € 87.95 |
| 620198  |  Rust       |  | € 87.95 |
| 620199  |  White      |  | € 87.95 |
| 620200  |  Black      |  | € 87.95 |
| 620201  |  Dark grey  |  | € 87.95 |



### Accessories

- 930716** 6-way charging station incl. power supply for Canis light
- 930887** USB-A plug-in power supply 5 V DC, 1,000 mA, black



€ 159.95

€ 6.95





## CANIS MINI SET

Discover our portable cordless LED lamps from the CANIS series. With a 2.3 W output and 110 lm of brightness, our lamps provide a particularly wide and pleasant light distribution. And the infinitely variable dimming function allows you to set the perfect illumination using the practical touch sensor. Choose from two light colour levels to create the perfect atmosphere. And the best part? One battery charge is enough for more than eight hours of lighting. You can charge up to 15 lamps at the same time with the optional charging station, so you always have enough lights to hand. Choose from eight colours, including trendy pastel tones, to reflect your personal style.

Note: Includes USB charging base





## CANIS MINI SET


- Pleasant and wide light distribution
- More than eight hours of light after charging
- Infinitely dimmable using touch sensor
- Light colour adjustable in two stages
- Charge up to 15 cordless lamps using the stackable charging dock [optional]
- Includes USB charging base

### Application Area

Garden / Terrace / Balcony / Walkways, Reception / Communication, Home / Living, Hotel / catering

|                    |             |                     |            |
|--------------------|-------------|---------------------|------------|
| Housing            | Aluminium   | Ø                   | 76 mm      |
| Surface            | Matt        | Power               | 2.3 W      |
| Colour Temperature | 2200/3000 K | Rated Input Voltage | 3.7 V/DC   |
| Luminous Flux      | 110 lm      | Light Beam Angle    | 100 Degree |
| Height             | 208 mm      | CRI (Ra)            | 80         |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 620202  | Sand          | € 79.95 |
| 620203  | Green         | € 79.95 |
| 620204  | Terracotta    | € 79.95 |
| 620205  | Blue          | € 79.95 |
| 620206  | Rust          | € 79.95 |
| 620207  | White         | € 79.95 |
| 620208  | Black         | € 79.95 |
| 620209  | Dark grey     | € 79.95 |



### Accessories

- 930734** 15-way charging station incl. power supply unit for Canis Mini light
- 930887** USB-A plug-in power supply 5 V DC, 1,000 mA, black



€ 239.95


€ 6.95






## OUTDOOR LIGHTS

- 422 bollard lights
- 442 surface mounted wall lights
- 484 ceiling and wall lights
- 488 built in wall lights
- 494 spherical lamps
- 498 energy distributor
- 508 surface mounted / ground spike lights
- 520 wall washer
- 524 ground recessed lights
- 540 floodlight
- 544 display lights



bollard lights



page 422



page 424



page 427



page 428



page 430



page 432



page 434



page 436




page 438





## FACADO 2 ROUND

Our FACADO series bollard lights feature IP65 degree of protection for excellent weather resistance. Choose between an opal diffuser or a transparent diffuser with smoked glass to suit your requirements. The series is available in two different sizes (650 mm/1,000 mm) and features an E27 socket for replaceable lamps. The newly designed lamp head provides significantly improved illumination. The FACADO light is made of high-quality, die-cast aluminium and is available in dark grey or rust and in square or round designs. The IP67 connection box features a double M20 cable gland suitable for e.g. buried cables in sizes 3x1.5 mm<sup>2</sup>, 5x1.5 mm<sup>2</sup> or 3x2.5 mm<sup>2</sup>.





FACADO 2 ROUND

- IP65 weather resistance
- IP67 connection box suitable for e.g. buried cables 3x1.5 mm²/5x1.5 mm²/3x2.5 mm²
- Newly designed lamp head for improved illumination
- Available with an opal diffuser or a transparent diffuser with smoked glass
- Ideal for e.g. ST64 bulbs and A60/70 bulbs

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

|            |                          |                     |                                    |
|------------|--------------------------|---------------------|------------------------------------|
| Housing    | Aluminium, Polycarbonate | Rated Input Voltage | 220-240 V/AC                       |
| Surface    | Matt                     | Control             | Dimmable via optional light source |
| Ø          | 108 mm                   | IK Protection Class | IK05                               |
| Max. Power | 1x max. 20 W             |                     |                                    |

| Article | Housing Color                                                                                 | Height  | Colour of Light Output | Price    |
|---------|-----------------------------------------------------------------------------------------------|---------|------------------------|----------|
| 730499  |  Dark grey | 650 mm  | Smoke-coloured         | € 119.95 |
| 730501  |  Rust      | 650 mm  | Smoke-coloured         | € 119.95 |
| 730500  |  Dark grey | 650 mm  | White                  | € 119.95 |
| 730502  |  Rust      | 650 mm  | White                  | € 119.95 |
| 730503  |  Dark grey | 1000 mm | Smoke-coloured         | € 159.95 |
| 730505  |  Rust      | 1000 mm | Smoke-coloured         | € 159.95 |
| 730504  |  Dark grey | 1000 mm | White                  | € 159.95 |
| 730506  |  Rust      | 1000 mm | White                  | € 159.95 |



Accessories

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68



€ 1.75



FACADO 2 SQUARE

Our FACADO series bollard lights feature IP65 degree of protection for excellent weather resistance. Choose between an opal diffuser or a transparent diffuser with smoked glass to suit your requirements. The series is available in two different sizes (650 mm/1,000 mm) and features an E27 socket for replaceable lamps. The newly designed lamp head provides even better illumination. The FACADO light is made from high-quality die-cast aluminium and available in dark grey and in square or rounded designs.

The IP67 connection box features a double M20 cable gland suitable for buried cables in sizes 3 × 1.5 mm², 5 × 1.5 mm² or 3 × 2.5 mm², and more.







FACADO 2 SQUARE

- IP65 weather resistance
- IP67 connection box suitable for e.g. buried cables 3x1.5 mm²/5x1.5 mm²/3x2.5 mm²
- Newly designed lamp head for improved illumination
- Available with an opal diffuser or a transparent diffuser with smoked glass
- Ideal for e.g. ST64 bulbs and A60/70 bulbs

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

|         |                          |                     |                                    |
|---------|--------------------------|---------------------|------------------------------------|
| Housing | Aluminium, Polycarbonate | Max. Power          | 1x max. 20 W                       |
| Surface | Matt                     | Rated Input Voltage | 220-240 V/AC                       |
| Length  | 108 mm                   | Control             | Dimmable via optional light source |
| Width   | 108 mm                   | IK Protection Class | IK05                               |

| Article | Housing Color | Height  | Colour of Light Output | Price    |
|---------|---------------|---------|------------------------|----------|
| 730496  | Dark grey     | 650 mm  | Smoke-coloured         | € 119.95 |
| 730495  | Dark grey     | 650 mm  | White                  | € 119.95 |
| 730497  | Dark grey     | 1000 mm | Smoke-coloured         | € 159.95 |
| 730498  | Dark grey     | 1000 mm | White                  | € 159.95 |



Accessories

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68



€ 1.75






## FARO – POWERFUL, ROBUST AND EFFICIENT

FARO features a specially developed optical system that provides exceptionally wide and uniform light distribution. This minimizes shadows directly beneath the luminaire and allows large areas to be illuminated efficiently with fewer fixtures. Its robust, impact-resistant and seawater-resistant construction makes FARO the ideal solution for parks, coastal areas and other demanding environments. An optional ground spike enables flexible installation wherever permanent cabling or concrete foundations are not possible or desired. The highly shielded optical system directs more than 98% of the light downward, reducing light pollution while ensuring highly efficient area illumination.



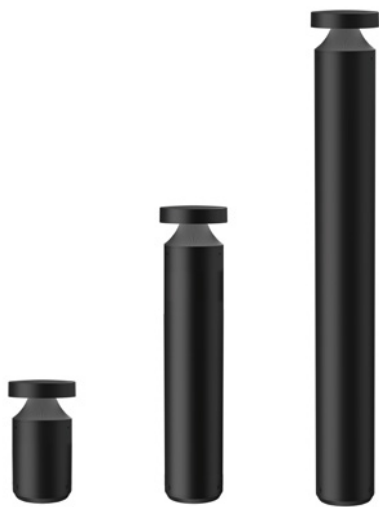


FARO ON/OFF

- Glare-free, downward-directed light [>98 %]
- Lens optics for wide homogeneous illumination with a diameter of up to 6 / 8 / 12 m
- IP68 connection box with through-wiring
- Particularly high-quality and solid construction
- Dirt-repellent powder coating in DB703
- Suitable for emergency lighting [180–264 V/DC EOFI: 100%]
- Seawater-resistant


Application Area

Garden / Terrace / Balcony / Walkways, Park / public outdoor area, Object lighting / architecture

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Power                   | 12 W         |
| Colour Temperature | 3000 K    | Rated Input Voltage     | 180-264 V/AC |
| Luminous Flux      | 570 lm    | Power Supply Unit incl. | Yes          |
| Ø                  | 100 mm    | CRI (Ra)                | 80           |
| Base Height        | 60 mm     | IK Protection Class     | IK10         |
| Base Ø             | 90 mm     |                         |              |



| Article | Housing Color | 730519 | Height  | Price    |
|---------|---------------|--------|---------|----------|
| 730519  | Dark grey WW  |        | 330 mm  | € 219.95 |
| 730520  | Dark grey WW  |        | 600 mm  | € 239.95 |
| 730521  | Dark grey WW  |        | 1000 mm | € 279.95 |

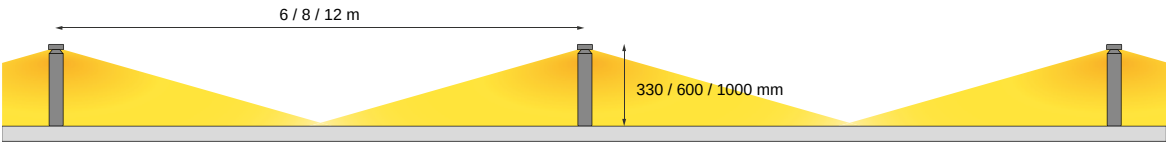

Accessories

- 931192 Concrete anchor for Faro 100mm series
- 931193 Ground spike for Faro 100mm series
- 931099 Cable gland PG/M25 incl. locknut + sealing ring, IP68



- € 15.95
- € 21.95
- € 2.25



## FARO DALI

The solid FARO bollard lights made from die-cast aluminium are available in the sizes 25, 60 and 100 cm. Their design [more than 98 % of light directed downwards] and lens optics allow glare-free light distribution and a particularly large light beam of up to 10 metres in diameter. All variants are also DALI2 DT6 compatible. The FARO models can be equipped with an optional screening shade to illuminate surfaces on one side only. The IP68 connection box with possible feed-through wiring and the dirt-repellent powder coating in DB703 make the FARO bollard lights a long-lasting and high-quality choice for your outdoor lighting.






FARO DALI

- Glare-free, light directed downwards [>98 %]
- Lens optics for wide homogeneous illumination with up to 5 / 8 / 12 m diameter
- Optional screening shade for darkening on one side
- IP68 connection box with feed-through wiring
- Particularly high-quality and solid construction
- Dirt-repellent powder coating in DB703
- Emergency power capable [180-264 V/DC EOFI: 100 %]
- Seawater-resistant


**Application Area**  
Garden / Terrace / Balcony / Walkways, Park / public outdoor area, Object lighting / architecture

|                     |              |                         |              |
|---------------------|--------------|-------------------------|--------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes          |
| Colour Temperature  | 3000 K       | Light Beam Angle        | 360 Degree   |
| Luminous Flux       | 1030 lm      | Light Beam Angle 2      | 180 Degree   |
| Ø                   | 180 mm       | Control                 | DALI 2 / DT6 |
| Power               | 24 W         | CRI (Ra)                | 80           |
| Rated Input Voltage | 180-264 V/AC | IK Protection Class     | IK10         |



730492

| Article | Housing Color |    | Height  | Price    |
|---------|---------------|----|---------|----------|
| 730492  | Dark grey     | WW | 250 mm  | € 351.95 |
| 730493  | Dark grey     | WW | 600 mm  | € 407.95 |
| 730494  | Dark grey     | WW | 1000 mm | € 471.95 |

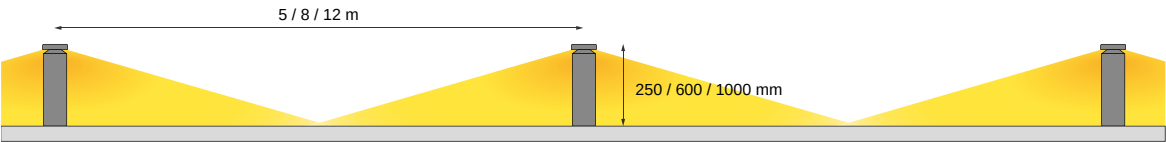

- Accessories
- 930731** Concrete anchor for Faro 180mm series
  - 930776** Screening shade 180 degrees for Faro 180mm series
  - 931099** Cable gland PG/M25 incl. locknut + sealing ring, IP68

- € 19.95
- € 7.95
- € 2.25





LERNA

LERNA series bollard lights offer a number of advantages. The ability to adjust the light colour in 2 stages (3,000 K/4,000 K) allows you to choose the colour temperature that sets the perfect ambience. The downward orientation of the lighting also fully guarantees efficient illumination without creating light pollution. LERNA series bollard lights are available in two different sizes (600 mm and 1,000 mm). With a power rating of 7.4 W and up to 256 lm, the light itself is incredibly bright.






LERNA

- Light colour adjustable in two stages
- Light directed fully downwards to prevent light pollution

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

|                    |             |                         |              |
|--------------------|-------------|-------------------------|--------------|
| Housing            | Aluminium   | Rated Input Voltage     | 200-240 V/AC |
| Colour Temperature | 3000/4000 K | Power Supply Unit incl. | Yes          |
| Luminous Flux      | 237/256 lm  | Light Beam Angle        | 50 Degree    |
| Length             | 120 mm      | Light Beam Angle 2      | 100 Degree   |
| Width              | 100 mm      | CRI (Ra)                | 80           |
| Power              | 7.4 W       | IK Protection Class     | IK06         |



733072

| Article | Housing Color |           | Height  | Price    |
|---------|---------------|-----------|---------|----------|
| 733073  |               | Dark grey | 600 mm  | € 167.95 |
| 733072  |               | Dark grey | 1000 mm | € 207.95 |



Accessories

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68



€ 1.75



Lighting design


Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.






CATA

The CATA series impresses not only as a modern path light, but also as a standalone lighting and design feature when creating outdoor spaces. The LEDs not only ensure full-surface illumination of paths and entrance areas but also inevitably draw attention to the striking frame construction. Available in three sizes, the CATA IV models can also be combined really well.








CATA

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

|                    |           |                         |                     |
|--------------------|-----------|-------------------------|---------------------|
| Housing            | Aluminium | Base Height             | 20 mm               |
| Colour Temperature | 3000 K    | Power                   | 4 W                 |
| Luminous Flux      | 350 lm    | Rated Input Voltage     | 100-240 V/AC        |
| Length             | 151 mm    | Power Supply Unit incl. | Yes                 |
| Width              | 61 mm     | Light Beam Angle        | 120 Degree          |
| Base Length        | 145 mm    | Primary Connection End  | Connection box IP65 |
| Base Width         | 55 mm     | CRI (Ra)                | 80                  |



733040

| Article | Housing Color |  | Height  | Price    |
|---------|---------------|--|---------|----------|
| 733040  | Dark grey     |  | 500 mm  | € 159.95 |
| 733041  | Dark grey     |  | 700 mm  | € 175.95 |
| 733042  | Dark grey     |  | 1000 mm | € 191.95 |



**5-year guarantee**  
Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



## CHERTAN

With its extraordinary mix of materials consisting of die-cast aluminium housing and base made of weather-resistant, fibreglass-reinforced concrete, the CHERTAN outdoor standing light certainly stands apart from other models just on looks alone. With its pleasantly warm white light and light emission angle of 120°, the outdoor light is perfectly suited for decorative use in entrance areas, on paths or in the garden.

Note: As concrete is a natural product, every surface is unique and forms a distinct patina over time, depending on local conditions. It is therefore normal in wet conditions for a blotchy surface to form that disappears again when dried, yet produces an individual patina over the long-term.






CHERTAN

·Fibreglass-reinforced and weather-resistant concrete base

Application Area

Garden / Terrace / Balcony / Walkways, Hotel / catering

|                    |           |                         |                     |
|--------------------|-----------|-------------------------|---------------------|
| Housing            | Aluminium | Power                   | 13 W                |
| Colour Temperature | 3000 K    | Rated Input Voltage     | 100-240 V/AC        |
| Length             | 170 mm    | Power Supply Unit incl. | Yes                 |
| Width              | 72 mm     | Light Beam Angle        | 120 Degree          |
| Base Length        | 160 mm    | Primary Connection End  | Connection box IP54 |
| Base Width         | 30 mm     | CRI (Ra)                | 90                  |
| Base Height        | 40 mm     |                         |                     |



733043

| Article | Housing Color                                                                                 | Luminous Flux | Height  | Price    |
|---------|-----------------------------------------------------------------------------------------------|---------------|---------|----------|
| 733043  | Dark grey  | 480 lm        | 450 mm  | € 159.95 |
| 733044  | Dark grey  | 530 lm        | 600 mm  | € 175.95 |
| 733045  | Dark grey  | 640 lm        | 1000 mm | € 191.95 |



Onlineshop

You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.





## ORTIS

The Ortis LED bollard light cuts an excellent figure anywhere with its dark grey aluminium housing and, thanks to its IP54 certification, is suitable for flexible outdoor use in gardens, entrances and as path lighting. In addition, the Ortis has an internal slatted insert in the lamp head, which ensures a pleasant dimmed light that is directed downwards (warm white, 3,000 K).






ORTIS

·Light directed downwards, dimmed by the slatted insert

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

|                    |           |                         |                |
|--------------------|-----------|-------------------------|----------------|
| Housing            | Aluminium | Rated Input Voltage     | 220-240 V/AC   |
| Colour Temperature | 3000 K    | Power Supply Unit incl. | Yes            |
| Luminous Flux      | 510 lm    | Light Beam Angle        | 360 Degree     |
| Height             | 1000 mm   | Primary Connection End  | Connection box |
| Ø                  | 120 mm    | CRI (Ra)                | 80             |
| Power              | 15.9 W    | IK Protection Class     | IK05           |



733004

| Article | Housing Color |    | Price    |
|---------|---------------|----|----------|
| 733004  | Dark grey     | WW | € 175.95 |



Technical data sheet

New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.





TUCANAE

With its slim, unfussy housing design, the TUCANAE is a modern outdoor light that can be integrated almost anywhere. The 100-cm-high bollard light emits its warm white light diagonally downwards onto paths and other surfaces and, in the MOTION variant, has an integrated twilight switch with adjustable brightness threshold and operating time.






TUCANAE

- Powerful and energy saving
- Uniform illumination
- Adjustable brightness threshold and operating time [733068]

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

|                    |           |                         |                |
|--------------------|-----------|-------------------------|----------------|
| Housing            | Aluminium | Base Height             | 10 mm          |
| Colour Temperature | 3000 K    | Power                   | 18 W           |
| Luminous Flux      | 2150 lm   | Rated Input Voltage     | 110-240 V/AC   |
| Length             | 206 mm    | Power Supply Unit incl. | Yes            |
| Width              | 180 mm    | Light Beam Angle        | 120 Degree     |
| Height             | 1000 mm   | Primary Connection End  | Connection box |
| Base Length        | 120 mm    | CRI (Ra)                | 80             |
| Base Width         | 180 mm    |                         |                |



733068

| Article | Housing Color | IP Protection Type | Motion Detector | Type of Motion Detector | Price    |
|---------|---------------|--------------------|-----------------|-------------------------|----------|
| 733068  | Dark grey     | IP 54              | Yes             | Infrared                | € 234.95 |
| 733069  | Dark grey     | IP 65              | No              |                         | € 207.95 |



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.



# surface mounted wall lights



■ ■ □  
page 444



■ ■ □  
page 445



■ ■ □  
page 446



■ ■ □  
page 447



■ ■ □  
page 448



■ ■ □  
page 449



■ ■ □  
page 450



■ ■ □  
page 451



■ ■ □  
page 452



■ ■ □  
page 453



■ ■ □  
page 454



■ ■ □  
page 455



■ ■ ■  
page 456



■ ■ ■  
page 457



■  
page 458



■  
page 459



■ ■  
page 460



■  
page 461



■ ■ ■ ■  
page 462



■ ■ ■ ■  
page 463



■ ■ ■  
page 464



■ ■ ■  
page 464



■  
page 465



■  
page 465



■ ■  
page 466



■ ■  
page 467



■  
page 468



■  
page 471



■  
page 472



■  
page 472



■  
page 474



■  
page 476



■  
page 477



■  
page 478





■ ■  
page 480

## SHORELINE

The SHORELINE PRO series comprises high-quality surface-mounted wall luminaires for outdoor applications and offers maximum design flexibility for modern façade and architectural lighting. With more than a dozen versions in round or square designs, available as downlight or up/down versions, as well as selected models with replaceable GU10 light sources, the series covers a wide range of applications – from residential and commercial buildings to hotels and hospitality projects.



All luminaires are made from robust die-cast aluminium, are sea-water-resistant, and feature IP65 protection and IK08 impact resistance. The integrated technology allows the colour temperature [3,000 K / 4,000 K] to be switched directly on the luminaire, while the high-quality optics ensure precise and uniform light distribution.



These luminaires have been developed for use in coastal regions and can withstand the increased salt and humidity in the environment - ideal for outdoor areas near the sea.



The integrated CCT function enables flexible selection of the light colour between warm white and neutral white light. This allows the lighting to be optimised for different applications and environments.

### SIMPLE INSTALLATION



The SHORELINE PRO series has been specifically designed for quick and safe installation and impresses with several well thought-out mounting details:

- separable mounting plate with plug-in connection for easy pre-assembly
- angled fixing screws ensure better accessibility during screw connection
- through-wiring for series mounting
- optionally available spacers enable elegant and clean surface mounting - even on uneven surfaces



### ACCESSORIES FOR SHORELINE PRO

- reflector inserts: 24°, 30°, 36°, 60° [depending on model]
- covers: Slot: very narrow beam for accent lighting on the façade  
Triangle: narrow beam for accent lighting and additional light in the walkway area
- spacers: for clean surface mounting on uneven surfaces







SHORELINE PRO ROUND

- continuous wiring possible
- seawater-resistant
- easy and quick installation
- separable mounting plate with plug-in connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|             |           |                        |                                    |
|-------------|-----------|------------------------|------------------------------------|
| Housing     | Aluminium | Max. Power             | 1x max. 7.5 W                      |
| Height      | 140 mm    | Rated Input Voltage    | 220-240 V/AC                       |
| Ø           | 68 mm     | Control                | Dimmable via optional light source |
| Base Length | 43 mm     | IK Protection Class    | IK08                               |
| Base Width  | 55 mm     | Colour of Light Output | Clear                              |
| Base Height | 130 mm    |                        |                                    |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 731211  | Light grey    | € 71.95 |
| 731212  | Dark grey     | € 71.95 |
| 731213  | White         | € 71.95 |



Accessories

|        |                                             |  |        |
|--------|---------------------------------------------|--|--------|
| 930874 | Spacer for ShoreLine Pro series, light grey |  | € 4.95 |
| 930877 | Spacer for ShoreLine Pro series, dark grey  |  | € 4.95 |
| 930880 | Spacer for ShoreLine Pro series, white      |  | € 4.95 |



SHORELINE PRO ROUND UP+DOWN

- continuous wiring possible
- seawater-resistant
- easy and quick installation
- separable mounting plate with plug-in connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|             |           |                        |                                    |
|-------------|-----------|------------------------|------------------------------------|
| Housing     | Aluminium | Max. Power             | 2x max. 75 W                       |
| Height      | 158 mm    | Rated Input Voltage    | 220-240 V/AC                       |
| Ø           | 68 mm     | Control                | Dimmable via optional light source |
| Base Length | 43 mm     | IK Protection Class    | IK08                               |
| Base Width  | 55 mm     | Colour of Light Output | Clear                              |
| Base Height | 130 mm    |                        |                                    |


| Article | Housing Color                                                                                  | Price   |
|---------|------------------------------------------------------------------------------------------------|---------|
| 731214  |  Light grey | € 79.95 |
| 731215  |  Dark grey  | € 79.95 |
| 731216  |  White      | € 79.95 |



Accessories

|        |                                             |      |        |
|--------|---------------------------------------------|------|--------|
| 930874 | Spacer for ShoreLine Pro series, light grey | ---- | € 4.95 |
| 930877 | Spacer for ShoreLine Pro series, dark grey  | ---- | € 4.95 |
| 930880 | Spacer for ShoreLine Pro series, white      | ---- | € 4.95 |






SHORELINE PRO ROUND 68

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |             |                         |                      |
|--------------------|-------------|-------------------------|----------------------|
| Housing            | Aluminium   | Power                   | 6 W                  |
| Colour Temperature | 3000/4000 K | Rated Input Voltage     | 220-240 V/AC         |
| Luminous Flux      | 480/550 lm  | Power Supply Unit incl. | Yes                  |
| Height             | 150 mm      | Light Beam Angle        | 30 Degree            |
| Ø                  | 68 mm       | Control                 | Trailing-edge dimmer |
| Base Length        | 43 mm       | CRI (Ra)                | 90                   |
| Base Width         | 55 mm       | IK Protection Class     | IK08                 |
| Base Height        | 130 mm      |                         |                      |



731217

| Article | Housing Color | Price    |
|---------|---------------|----------|
| 731217  | Light grey    | € 135.95 |
| 731218  | Dark grey     | € 135.95 |
| 731219  | White         | € 135.95 |



Accessories

|        |                                                            |        |
|--------|------------------------------------------------------------|--------|
| 930980 | Cover, 68/70, line, ShoreLine Pro Series, dark grey        | € 6.45 |
| 930981 | Cover, 68/70, triangular, ShoreLine Pro Series, dark grey  | € 6.45 |
| 930878 | Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome | € 6.45 |
| 930879 | Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome | € 6.45 |
| 930874 | Spacer for ShoreLine Pro series, light grey                | € 4.95 |
| 930877 | Spacer for ShoreLine Pro series, dark grey                 | € 4.95 |
| 930880 | Spacer for ShoreLine Pro series, white                     | € 4.95 |






## SHORELINE PRO ROUND UP+DOWN 68

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

### Application Area


Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |             |                         |                      |
|--------------------|-------------|-------------------------|----------------------|
| Housing            | Aluminium   | Power                   | 7.5 W                |
| Colour Temperature | 3000/4000 K | Rated Input Voltage     | 220-240 V/AC         |
| Luminous Flux      | 700/780 lm  | Power Supply Unit incl. | Yes                  |
| Height             | 186 mm      | Light Beam Angle        | 30 Degree            |
| Ø                  | 68 mm       | Control                 | Trailing-edge dimmer |
| Base Length        | 43 mm       | CRI (Ra)                | 90                   |
| Base Width         | 55 mm       | IK Protection Class     | IK08                 |
| Base Height        | 130 mm      |                         |                      |




731220

| Article       | Housing Color | Price    |
|---------------|---------------|----------|
| <b>731220</b> | Light grey    | € 159.95 |
| <b>731221</b> | Dark grey     | € 159.95 |
| <b>731222</b> | White         | € 159.95 |



### Accessories

|               |                                                            |        |
|---------------|------------------------------------------------------------|--------|
| <b>930980</b> | Cover, 68/70, line, ShoreLine Pro Series, dark grey        | € 6.45 |
| <b>930981</b> | Cover, 68/70, triangular, ShoreLine Pro Series, dark grey  | € 6.45 |
| <b>930878</b> | Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome | € 6.45 |
| <b>930879</b> | Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome | € 6.45 |
| <b>930874</b> | Spacer for ShoreLine Pro series, light grey                | € 4.95 |
| <b>930877</b> | Spacer for ShoreLine Pro series, dark grey                 | € 4.95 |
| <b>930880</b> | Spacer for ShoreLine Pro series, white                     | € 4.95 |




SHORELINE PRO ROUND 100

- light colour adjustable in 2 stages
- through-wiring possible
- seawater-resistant
- easy and quick installation
- separable mounting plate with plug-in connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |             |                         |                                              |
|--------------------|-------------|-------------------------|----------------------------------------------|
| Housing            | Aluminium   | Power                   | 12 W                                         |
| Colour Temperature | 3000/4000 K | Rated Input Voltage     | 220-240 V/AC                                 |
| Luminous Flux      | 900/1000 lm | Power Supply Unit incl. | Yes                                          |
| Height             | 163 mm      | Light Beam Angle        | 36 Degree                                    |
| Ø                  | 100 mm      | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Base Length        | 40 mm       | CRI (Ra)                | 92                                           |
| Base Width         | 80 mm       | IK Protection Class     | IK08                                         |
| Base Height        | 130 mm      |                         |                                              |



731196

| Article | Housing Color | Price    |
|---------|---------------|----------|
| 731196  | Light grey    | € 151.95 |
| 731197  | Dark grey     | € 151.95 |
| 731198  | White         | € 151.95 |



Accessories

|        |                                                          |         |
|--------|----------------------------------------------------------|---------|
| 930867 | Cover, 100, line, ShoreLine Pro Series, dark grey        | € 7.95  |
| 930868 | Cover, 100, triangular, ShoreLine Pro Series, dark grey  | € 7.95  |
| 930875 | Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome | € 11.95 |
| 930876 | Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome | € 11.95 |
| 930874 | Spacer for ShoreLine Pro series, light grey              | € 4.95  |
| 930877 | Spacer for ShoreLine Pro series, dark grey               | € 4.95  |
| 930880 | Spacer for ShoreLine Pro series, white                   | € 4.95  |




## SHORELINE PRO ROUND UP+DOWN 100

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

### Application Area


Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |              |                         |                      |
|--------------------|--------------|-------------------------|----------------------|
| Housing            | Aluminium    | Power                   | 20 W                 |
| Colour Temperature | 3000/4000 K  | Rated Input Voltage     | 220-240 V/AC         |
| Luminous Flux      | 1700/1900 lm | Power Supply Unit incl. | Yes                  |
| Height             | 238 mm       | Light Beam Angle        | 36 Degree            |
| Ø                  | 100 mm       | Control                 | Trailing-edge dimmer |
| Base Length        | 40 mm        | CRI (Ra)                | 92                   |
| Base Width         | 80 mm        | IK Protection Class     | IK08                 |
| Base Height        | 130 mm       |                         |                      |



731193

| Article       | Housing Color | Price    |
|---------------|---------------|----------|
| <b>731193</b> | Light grey    | € 207.95 |
| <b>731194</b> | Dark grey     | € 207.95 |
| <b>731195</b> | White         | € 207.95 |




### Accessories

|               |                                                          |         |
|---------------|----------------------------------------------------------|---------|
| <b>930867</b> | Cover, 100, line, ShoreLine Pro Series, dark grey        | € 7.95  |
| <b>930868</b> | Cover, 100, triangular, ShoreLine Pro Series, dark grey  | € 7.95  |
| <b>930875</b> | Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome | € 11.95 |
| <b>930876</b> | Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome | € 11.95 |
| <b>930874</b> | Spacer for ShoreLine Pro series, light grey              | € 4.95  |
| <b>930877</b> | Spacer for ShoreLine Pro series, dark grey               | € 4.95  |
| <b>930880</b> | Spacer for ShoreLine Pro series, white                   | € 4.95  |




SHORELINE PRO ROUND 140

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors



**Application Area**  
 Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |             |                         |                                           |
|--------------------|-------------|-------------------------|-------------------------------------------|
| Housing            | Aluminium   | Rated Input Voltage     | 220-240 V/AC                              |
| Colour Temperature | 3000/4000 K | Power Supply Unit incl. | Yes                                       |
| Height             | 218 mm      | Light Beam Angle        | 36 Degree                                 |
| Ø                  | 140 mm      | Control                 | Leading-edge dimmer, Trailing-edge dimmer |
| Base Length        | 40 mm       | CRI (Ra)                | 92                                        |
| Base Width         | 80 mm       | IK Protection Class     | IK08                                      |
| Base Height        | 130 mm      |                         |                                           |



731169

| Article | Housing Color | Luminous Flux | Power  | Price    |
|---------|---------------|---------------|--------|----------|
| 731169  | Light grey    | 2000/2200 lm  | 20.0 W | € 207.95 |
| 731170  | Dark grey     | 2000/2200 lm  | 20.0 W | € 207.95 |
| 731171  | White         | 2000/2200 lm  | 20.0 W | € 207.95 |
| 731172  | Light grey    | 3100/3400 lm  | 33.0 W | € 239.95 |
| 731173  | Dark grey     | 3100/3400 lm  | 33.0 W | € 239.95 |
| 731174  | White         | 3100/3400 lm  | 33.0 W | € 239.95 |



Accessories

|        |                                                          |  |         |
|--------|----------------------------------------------------------|--|---------|
| 930869 | Cover, 140, line, ShoreLine Pro Series, dark grey        |  | € 9.95  |
| 930870 | Cover, 140, triangular, ShoreLine Pro Series, dark grey  |  | € 9.95  |
| 930871 | Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome |  | € 13.95 |
| 930872 | Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome |  | € 13.95 |
| 930873 | Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome |  | € 13.95 |
| 930874 | Spacer for ShoreLine Pro series, light grey              |  | € 4.95  |
| 930877 | Spacer for ShoreLine Pro series, dark grey               |  | € 4.95  |
| 930880 | Spacer for ShoreLine Pro series, white                   |  | € 4.95  |



## SHORELINE PRO ROUND UP+DOWN 140


- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors



### Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |             |                         |                                              |
|--------------------|-------------|-------------------------|----------------------------------------------|
| Housing            | Aluminium   | Rated Input Voltage     | 220-240 V/AC                                 |
| Colour Temperature | 3000/4000 K | Power Supply Unit incl. | Yes                                          |
| Height             | 332 mm      | Light Beam Angle        | 36 Degree                                    |
| Ø                  | 140 mm      | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Base Length        | 40 mm       | CRI (Ra)                | 92                                           |
| Base Width         | 80 mm       | IK Protection Class     | IK08                                         |
| Base Height        | 130 mm      |                         |                                              |




731175

| Article       | Housing Color | Luminous Flux | Power  | Price    |
|---------------|---------------|---------------|--------|----------|
| <b>731175</b> | Light grey    | 3100/3400 lm  | 31.0 W | € 287.95 |
| <b>731176</b> | Dark grey     | 3100/3400 lm  | 31.0 W | € 287.95 |
| <b>731177</b> | White         | 3100/3400 lm  | 31.0 W | € 287.95 |
| <b>731178</b> | Light grey    | 5100/5600 lm  | 54.0 W | € 367.95 |
| <b>731179</b> | Dark grey     | 5100/5600 lm  | 54.0 W | € 367.95 |
| <b>731180</b> | White         | 5100/5600 lm  | 54.0 W | € 367.95 |



### Accessories

|               |                                                          |         |
|---------------|----------------------------------------------------------|---------|
| <b>930869</b> | Cover, 140, line, ShoreLine Pro Series, dark grey        | € 9.95  |
| <b>930870</b> | Cover, 140, triangular, ShoreLine Pro Series, dark grey  | € 9.95  |
| <b>930871</b> | Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome | € 13.95 |
| <b>930872</b> | Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome | € 13.95 |
| <b>930873</b> | Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome | € 13.95 |
| <b>930874</b> | Spacer for ShoreLine Pro series, light grey              | € 4.95  |
| <b>930877</b> | Spacer for ShoreLine Pro series, dark grey               | € 4.95  |
| <b>930880</b> | Spacer for ShoreLine Pro series, white                   | € 4.95  |




SHORELINE PRO SQUARE 70

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |             |                         |                      |
|--------------------|-------------|-------------------------|----------------------|
| Housing            | Aluminium   | Base Height             | 130 mm               |
| Colour Temperature | 3000/4000 K | Power                   | 6 W                  |
| Luminous Flux      | 480/550 lm  | Rated Input Voltage     | 220-240 V/AC         |
| Length             | 70 mm       | Power Supply Unit incl. | Yes                  |
| Width              | 70 mm       | Light Beam Angle        | 30 Degree            |
| Height             | 150 mm      | Control                 | Trailing-edge dimmer |
| Base Length        | 43 mm       | CRI (Ra)                | 90                   |
| Base Width         | 55 mm       | IK Protection Class     | IK08                 |




731205

| Article | Housing Color | Price    |
|---------|---------------|----------|
| 731205  | Light grey    | € 143.95 |
| 731206  | Dark grey     | € 143.95 |
| 731207  | White         | € 143.95 |



Accessories

|        |                                                            |        |
|--------|------------------------------------------------------------|--------|
| 930980 | Cover, 68/70, line, ShoreLine Pro Series, dark grey        | € 6.45 |
| 930981 | Cover, 68/70, triangular, ShoreLine Pro Series, dark grey  | € 6.45 |
| 930878 | Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome | € 6.45 |
| 930879 | Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome | € 6.45 |
| 930874 | Spacer for ShoreLine Pro series, light grey                | € 4.95 |
| 930877 | Spacer for ShoreLine Pro series, dark grey                 | € 4.95 |
| 930880 | Spacer for ShoreLine Pro series, white                     | € 4.95 |




## SHORELINE PRO SQUARE UP+DOWN 70

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

### Application Area


Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |             |                         |                      |
|--------------------|-------------|-------------------------|----------------------|
| Housing            | Aluminium   | Base Height             | 130 mm               |
| Colour Temperature | 3000/4000 K | Power                   | 7.5 W                |
| Luminous Flux      | 700/780 lm  | Rated Input Voltage     | 220-240 V/AC         |
| Length             | 70 mm       | Power Supply Unit incl. | Yes                  |
| Width              | 70 mm       | Light Beam Angle        | 30 Degree            |
| Height             | 186 mm      | Control                 | Trailing-edge dimmer |
| Base Length        | 43 mm       | CRI (Ra)                | 90                   |
| Base Width         | 55 mm       | IK Protection Class     | IK08                 |



731208



| Article       | Housing Color | Price    |
|---------------|---------------|----------|
| <b>731208</b> | Light grey    | € 167.95 |
| <b>731209</b> | Dark grey     | € 167.95 |
| <b>731210</b> | White         | € 167.95 |



### Accessories

|               |                                                            |        |
|---------------|------------------------------------------------------------|--------|
| <b>930980</b> | Cover, 68/70, line, ShoreLine Pro Series, dark grey        | € 6.45 |
| <b>930981</b> | Cover, 68/70, triangular, ShoreLine Pro Series, dark grey  | € 6.45 |
| <b>930878</b> | Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome | € 6.45 |
| <b>930879</b> | Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome | € 6.45 |
| <b>930874</b> | Spacer for ShoreLine Pro series, light grey                | € 4.95 |
| <b>930877</b> | Spacer for ShoreLine Pro series, dark grey                 | € 4.95 |
| <b>930880</b> | Spacer for ShoreLine Pro series, white                     | € 4.95 |






SHORELINE PRO SQUARE 100

- Light colour adjustable in 2 stages
- through-wiring possible
- Seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |             |                         |                                              |
|--------------------|-------------|-------------------------|----------------------------------------------|
| Housing            | Aluminium   | Power                   | 12 W                                         |
| Colour Temperature | 3000/4000 K | Rated Input Voltage     | 220-240 V/AC                                 |
| Luminous Flux      | 900/1000 lm | Power Supply Unit incl. | Yes                                          |
| Length             | 100 mm      | Light Beam Angle        | 36 Degree                                    |
| Width              | 100 mm      | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Height             | 163 mm      | CRI (Ra)                | 90                                           |
| Base Length        | 40 mm       | IK Protection Class     | IK08                                         |
| Base Width         | 80 mm       |                         |                                              |
| Base Height        | 130 mm      |                         |                                              |




| Article | Housing Color | Price    |
|---------|---------------|----------|
| 731202  | Light grey    | € 151.95 |
| 731203  | Dark grey     | € 151.95 |
| 731204  | White         | € 151.95 |



Accessories

|        |                                                          |         |
|--------|----------------------------------------------------------|---------|
| 930867 | Cover, 100, line, ShoreLine Pro Series, dark grey        | € 7.95  |
| 930868 | Cover, 100, triangular, ShoreLine Pro Series, dark grey  | € 7.95  |
| 930875 | Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome | € 11.95 |
| 930876 | Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome | € 11.95 |
| 930874 | Spacer for ShoreLine Pro series, light grey              | € 4.95  |
| 930877 | Spacer for ShoreLine Pro series, dark grey               | € 4.95  |
| 930880 | Spacer for ShoreLine Pro series, white                   | € 4.95  |




## SHORELINE PRO SQUARE UP+DOWN 100

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

### Application Area


Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |              |                         |                      |
|--------------------|--------------|-------------------------|----------------------|
| Housing            | Aluminium    | Base Height             | 130 mm               |
| Colour Temperature | 3000/4000 K  | Power                   | 21 W                 |
| Luminous Flux      | 1800/2000 lm | Rated Input Voltage     | 220-240 V/AC         |
| Length             | 100 mm       | Power Supply Unit incl. | Yes                  |
| Width              | 100 mm       | Light Beam Angle        | 36 Degree            |
| Height             | 238 mm       | Control                 | Trailing-edge dimmer |
| Base Length        | 40 mm        | CRI (Ra)                | 92                   |
| Base Width         | 80 mm        | IK Protection Class     | IK08                 |



731199

| Article       | Housing Color | Price    |
|---------------|---------------|----------|
| <b>731199</b> | Light grey    | € 207.95 |
| <b>731200</b> | Dark grey     | € 207.95 |
| <b>731201</b> | White         | € 207.95 |





### Accessories

|               |                                                          |         |
|---------------|----------------------------------------------------------|---------|
| <b>930867</b> | Cover, 100, line, ShoreLine Pro Series, dark grey        | € 7.95  |
| <b>930868</b> | Cover, 100, triangular, ShoreLine Pro Series, dark grey  | € 7.95  |
| <b>930875</b> | Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome | € 11.95 |
| <b>930876</b> | Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome | € 11.95 |
| <b>930874</b> | Spacer for ShoreLine Pro series, light grey              | € 4.95  |
| <b>930877</b> | Spacer for ShoreLine Pro series, dark grey               | € 4.95  |
| <b>930880</b> | Spacer for ShoreLine Pro series, white                   | € 4.95  |



SHORELINE PRO SQUARE 140


- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors



Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |             |                         |                                              |
|--------------------|-------------|-------------------------|----------------------------------------------|
| Housing            | Aluminium   | Rated Input Voltage     | 220-240 V/AC                                 |
| Colour Temperature | 3000/4000 K | Power Supply Unit incl. | Yes                                          |
| Length             | 140 mm      | Light Beam Angle        | 36 Degree                                    |
| Width              | 140 mm      | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Height             | 218 mm      | CRI (Ra)                | 90                                           |
| Base Length        | 44,5 mm     | IK Protection Class     | IK08                                         |
| Base Width         | 80 mm       |                         |                                              |
| Base Height        | 130 mm      |                         |                                              |




731181

| Article | Housing Color |            | Luminous Flux | Power  | Price    |
|---------|---------------|------------|---------------|--------|----------|
| 731181  |               | Light grey | 2000/2300 lm  | 20.5 W | € 215.95 |
| 731182  |               | Dark grey  | 2000/2300 lm  | 20.5 W | € 215.95 |
| 731183  |               | White      | 2000/2300 lm  | 20.5 W | € 215.95 |
| 731184  |               | Light grey | 3100/3400 lm  | 33.0 W | € 239.95 |
| 731185  |               | Dark grey  | 3100/3400 lm  | 33.0 W | € 239.95 |
| 731186  |               | White      | 3100/3400 lm  | 33.0 W | € 239.95 |




Accessories

|        |                                                          |  |         |
|--------|----------------------------------------------------------|--|---------|
| 930869 | Cover, 140, line, ShoreLine Pro Series, dark grey        |  | € 9.95  |
| 930870 | Cover, 140, triangular, ShoreLine Pro Series, dark grey  |  | € 9.95  |
| 930871 | Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome |  | € 13.95 |
| 930872 | Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome |  | € 13.95 |
| 930873 | Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome |  | € 13.95 |
| 930874 | Spacer for ShoreLine Pro series, light grey              |  | € 4.95  |
| 930877 | Spacer for ShoreLine Pro series, dark grey               |  | € 4.95  |
| 930880 | Spacer for ShoreLine Pro series, white                   |  | € 4.95  |



## SHORELINE PRO SQUARE UP+DOWN 140


- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors



### Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |             |                         |                                              |
|--------------------|-------------|-------------------------|----------------------------------------------|
| Housing            | Aluminium   | Rated Input Voltage     | 220-240 V/AC                                 |
| Colour Temperature | 3000/4000 K | Power Supply Unit incl. | Yes                                          |
| Length             | 140 mm      | Light Beam Angle        | 36 Degree                                    |
| Width              | 140 mm      | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Height             | 332 mm      | CRI (Ra)                | 90                                           |
| Base Length        | 44.5 mm     | IK Protection Class     | IK08                                         |
| Base Width         | 80 mm       |                         |                                              |
| Base Height        | 130 mm      |                         |                                              |



731187

| Article       | Housing Color | Luminous Flux | Power  | Price    |
|---------------|---------------|---------------|--------|----------|
| <b>731187</b> | Light grey    | 3200/3400 lm  | 31.5 W | € 295.95 |
| <b>731188</b> | Dark grey     | 3200/3400 lm  | 31.5 W | € 295.95 |
| <b>731189</b> | White         | 3200/3400 lm  | 31.5 W | € 295.95 |
| <b>731190</b> | Light grey    | 5400/5800 lm  | 55.0 W | € 367.95 |
| <b>731191</b> | Dark grey     | 5400/5800 lm  | 55.0 W | € 367.95 |
| <b>731192</b> | White         | 5400/5800 lm  | 55.0 W | € 367.95 |



### Accessories

|               |                                                          |         |
|---------------|----------------------------------------------------------|---------|
| <b>930869</b> | Cover, 140, line, ShoreLine Pro Series, dark grey        | € 9.95  |
| <b>930870</b> | Cover, 140, triangular, ShoreLine Pro Series, dark grey  | € 9.95  |
| <b>930871</b> | Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome | € 13.95 |
| <b>930872</b> | Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome | € 13.95 |
| <b>930873</b> | Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome | € 13.95 |
| <b>930874</b> | Spacer for ShoreLine Pro series, light grey              | € 4.95  |
| <b>930877</b> | Spacer for ShoreLine Pro series, dark grey               | € 4.95  |
| <b>930880</b> | Spacer for ShoreLine Pro series, white                   | € 4.95  |




ORTIS

downward-directed light, dimmed by the louvre insert

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Base Width              | 77 mm        |
| Colour Temperature | 3000 K    | Base Height             | 67 mm        |
| Luminous Flux      | 510 lm    | Power                   | 15.9 W       |
| Length             | 260 mm    | Rated Input Voltage     | 220-240 V/AC |
| Width              | 120 mm    | Power Supply Unit incl. | Yes          |
| Height             | 181 mm    | Light Beam Angle        | 360 Degree   |
| Ø                  | 120 mm    | CRI (Ra)                | 80           |
| Base Length        | 100 mm    |                         |              |



731031

| Article | Housing Color | Price    |
|---------|---------------|----------|
| 731031  | Dark grey     | € 159.95 |

IP54

1 CH

A  
↑  
G

G






TUCANAE

- Modern minimalist design
- Powerful and energy saving
- Uniform illumination
- Adjustable brightness threshold and operating time [model-dependent]

Application Area


Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering


|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Base Width              | 135 mm       |
| Colour Temperature | 3000 K    | Base Height             | 15 mm        |
| Luminous Flux      | 2150 lm   | Power                   | 18 W         |
| Length             | 140 mm    | Rated Input Voltage     | 110-240 V/AC |
| Width              | 172 mm    | Power Supply Unit incl. | Yes          |
| Height             | 219 mm    | Light Beam Angle        | 110 Degree   |
| Base Length        | 125 mm    | CRI (Ra)                | 80           |



731133

| Article | Housing Color | IP Protection Type | Motion Detector | Price    |
|---------|---------------|--------------------|-----------------|----------|
| 731133  | Dark grey     | IP 54              | Yes             | € 158.95 |
| 731144  | Dark grey     | IP 65              | No              | € 148.95 |



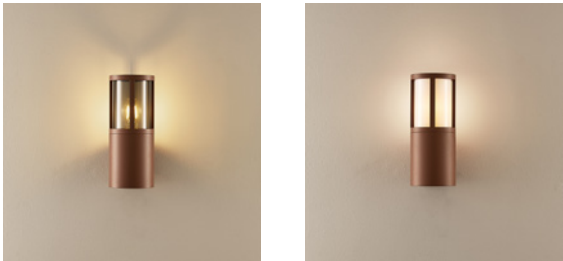

FACADO 2 ROUND

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- Quick and secure installation
- IP65 weather resistance
- Newly designed lamp head for improved illumination

Application Area

Garden /Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

|             |                          |                     |                                    |
|-------------|--------------------------|---------------------|------------------------------------|
| Housing     | Aluminium, Polycarbonate | Base Height         | 104 mm                             |
| Surface     | Matt                     | Max. Power          | 1x max. 20 W                       |
| Height      | 262 mm                   | Rated Input Voltage | 220-240 V/AC                       |
| Ø           | 108 mm                   | Control             | Dimmable via optional light source |
| Base Length | 46 mm                    | IK Protection Class | IK05                               |
| Base Width  | 64 mm                    |                     |                                    |

| Article | Housing Color                                                                                 | Colour of Light Output | Price   |
|---------|-----------------------------------------------------------------------------------------------|------------------------|---------|
| 731153  |  Dark grey | Smoke-coloured         | € 99.95 |
| 731155  |  Rust      | Smoke-coloured         | € 99.95 |
| 731154  |  Dark grey | White                  | € 99.95 |
| 731156  |  Rust      | White                  | € 99.95 |







FACADO 2 SQUARE

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- Quick and secure installation
- IP65 weather resistance
- Newly designed lamp head for improved illumination

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

|         |                          |                     |                                    |
|---------|--------------------------|---------------------|------------------------------------|
| Housing | Aluminium, Polycarbonate | Max. Power          | 1x max. 20 W                       |
| Surface | Matt                     | Rated Input Voltage | 220-240 V/AC                       |
| Length  | 148 mm                   | Control             | Dimmable via optional light source |
| Width   | 108 mm                   | IK Protection Class | IK05                               |
| Height  | 261.5 mm                 |                     |                                    |

| Article | Housing Color | Colour of Light Output | Price   |
|---------|---------------|------------------------|---------|
| 731151  | Dark grey     | Smoke-coloured         | € 99.95 |
| 731157  | Dark grey     | White                  | € 99.95 |





ACHERNAR

·Exchangeable lamp GU10 [retrofit]

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

|             |           |                     |                                    |
|-------------|-----------|---------------------|------------------------------------|
| Housing     | Aluminium | Base Height         | 58 mm                              |
| Height      | 108 mm    | Max. Power          | 1x max. 50 W                       |
| Ø           | 63 mm     | Rated Input Voltage | 220-240 V/AC                       |
| Base Length | 15 mm     | Control             | Dimmable via optional light source |
| Base Width  | 49 mm     |                     |                                    |

| Article | Housing Color                                                                                  | Price   |
|---------|------------------------------------------------------------------------------------------------|---------|
| 731228  |  White      | € 28.95 |
| 731229  |  Light grey | € 28.95 |
| 731230  |  Dark grey  | € 28.95 |
| 731130  |  Black      | € 28.95 |





ACHERNAR UP & DOWN

·Exchangeable lamp GU10 [retrofit]


Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

|             |           |                     |                                    |
|-------------|-----------|---------------------|------------------------------------|
| Housing     | Aluminium | Base Height         | 58 mm                              |
| Height      | 158 mm    | Max. Power          | 2x max. 35 W                       |
| Ø           | 63 mm     | Rated Input Voltage | 220-240 V/AC                       |
| Base Length | 15 mm     | Control             | Dimmable via optional light source |
| Base Width  | 49 mm     |                     |                                    |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 731131  | Black         | € 34.95 |
| 731231  | White         | € 35.95 |
| 731232  | Light grey    | € 35.95 |
| 731233  | Dark grey     | € 35.95 |






CUBODO 2

**Application Area**  
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Power                   | 8.5 W        |
| Colour Temperature | 3000 K    | Rated Input Voltage     | 220-240 V/AC |
| Luminous Flux      | 600 lm    | Power Supply Unit incl. | Yes          |
| Length             | 108 mm    | Light Beam Angle        | 19 Degree    |
| Width              | 108 mm    | CRI (Ra)                | 80           |
| Height             | 115 mm    | IK Protection Class     | IK04         |



731026


| Article | Housing Color | Price    |
|---------|---------------|----------|
| 731024  | Dark grey     | € 127.95 |
| 731025  | Light grey    | € 127.95 |
| 731026  | White         | € 127.95 |



CUBODO 2 UP & DOWN

**Application Area**  
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering


|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Rated Input Voltage     | 220-240 V/AC |
| Colour Temperature | 3000 K    | Power Supply Unit incl. | Yes          |
| Luminous Flux      | 1300 lm   | Light Beam Angle        | 19 Degree    |
| Length             | 108 mm    | Light Beam Angle 2      | 19 Degree    |
| Width              | 108 mm    | CRI (Ra)                | 80           |
| Height             | 115 mm    | IK Protection Class     | IK04         |
| Power              | 16 W      |                         |              |



731015

| Article | Housing Color | Price    |
|---------|---------------|----------|
| 731015  | Dark grey     | € 143.95 |
| 731019  | Light grey    | € 143.95 |
| 731020  | White         | € 143.95 |






## CUBODO 2 MINI

### Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Base Width              | 65 mm        |
| Colour Temperature | 3000 K    | Base Height             | 20 mm        |
| Luminous Flux      | 220 lm    | Power                   | 5 W          |
| Length             | 90 mm     | Rated Input Voltage     | 220-240 V/AC |
| Width              | 68 mm     | Power Supply Unit incl. | Yes          |
| Height             | 70 mm     | Light Beam Angle        | 46 Degree    |
| Base Length        | 65 mm     | CRI (Ra)                | 77           |



731029

| Article       | Housing Color                                                                               | Price          |
|---------------|---------------------------------------------------------------------------------------------|----------------|
| <b>731029</b> | Dark grey  | <b>€ 95.95</b> |




## CUBODO 2 MINI UP & DOWN

### Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Base Width              | 65 mm        |
| Colour Temperature | 3000 K    | Base Height             | 20 mm        |
| Luminous Flux      | 440 lm    | Power                   | 9.9 W        |
| Length             | 90 mm     | Rated Input Voltage     | 220-240 V/AC |
| Width              | 68 mm     | Power Supply Unit incl. | Yes          |
| Height             | 108 mm    | Light Beam Angle        | 46 Degree    |
| Base Length        | 65 mm     | CRI (Ra)                | 77           |



731030

| Article       | Housing Color                                                                                 | Price           |
|---------------|-----------------------------------------------------------------------------------------------|-----------------|
| <b>731030</b> | Dark grey  | <b>€ 119.95</b> |





CAN IP65

The CAN IP65 surface-mounted wall light is a robust and versatile solution for outdoor areas. Available as a classic wall light and as an up/down variant with light emission on both sides, it is ideal for demanding environments. The IP65 certification guarantees protection against dust and water. The widely used GU10 base enables quick and simple replacement of the lamp. Push terminals for rigid and flexible conductors facilitate simple installation. The CAN outdoor light is part of a versatile series and is also available as a pendant, ceiling, wall and reading light.





## CAN IP65



- Replaceable lamp to offer an individual lighting solution
- Can be combined with the comprehensive product family of the CAN series

### Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

|             |           |                     |                                    |
|-------------|-----------|---------------------|------------------------------------|
| Housing     | Aluminium | Base Height         | 87 mm                              |
| Height      | 108 mm    | Max. Power          | 1x max. 7.5 W                      |
| Ø           | 80 mm     | Rated Input Voltage | 220-240 V/AC                       |
| Base Length | 26 mm     | Control             | Dimmable via optional light source |
| Base Width  | 65 mm     |                     |                                    |

| Article       | Housing Color                                                                           | Price          |
|---------------|-----------------------------------------------------------------------------------------|----------------|
| <b>731223</b> |  White | <b>€ 47.95</b> |
| <b>731224</b> |  Black | <b>€ 47.95</b> |



## CAN UP & DOWN IP65


- Replaceable lamp to offer an individual lighting solution
- Can be combined with the comprehensive product family of the CAN series

### Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

|             |           |                     |                                    |
|-------------|-----------|---------------------|------------------------------------|
| Housing     | Aluminium | Base Height         | 166 mm                             |
| Height      | 212 mm    | Max. Power          | 2x max. 7.5 W                      |
| Ø           | 80 mm     | Rated Input Voltage | 220-240 V/AC                       |
| Base Length | 26 mm     | Control             | Dimmable via optional light source |
| Base Width  | 65 mm     |                     |                                    |

| Article       | Housing Color                                                                             | Price          |
|---------------|-------------------------------------------------------------------------------------------|----------------|
| <b>731225</b> |  White | <b>€ 71.95</b> |
| <b>731226</b> |  Black | <b>€ 71.95</b> |







## JABBAH

The square JABBAH features integrated warm white COB LEDs and projects a 75° asymmetrical cone of light onto walls with a total luminous flux of 1,850 lumens. In addition, the double-sided JABBAH can be dimmed to 60% luminous flux via a DIP switch whenever a more subtle lighting effect is desired.






## JABBAH

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- Quick and secure installation
- Incl. wall spacer for surface-mounted cable entry
- Power adjustable in 2 stages (model-dependent)

### Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Power Selectable        | 13 W, 25 W   |
| Colour Temperature | 3000 K    | Rated Input Voltage     | 220-240 V/AC |
| Luminous Flux      | 1850 lm   | Power Supply Unit incl. | Yes          |
| Length             | 150 mm    | Light Beam Angle        | 75 Degree    |
| Width              | 150 mm    | CRI (Ra)                | 80           |
| Height             | 150 mm    |                         |              |



731127

| Article       | Housing Color |  | Price           |
|---------------|---------------|--|-----------------|
| <b>731127</b> | Dark grey     |  | <b>€ 279.95</b> |




### 5-year guarantee

Benefit from the maximum quality promise:

All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.





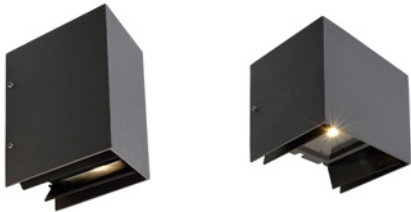


ARCTURUS

- Continuously adjustable light emission angle 0-90°
- Uplight and downlight separately adjustable
- Ideal for customised lighting accents

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering


|                     |              |                         |           |
|---------------------|--------------|-------------------------|-----------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes       |
| Colour Temperature  | 3000 K       | Light Beam Angle        | 90 Degree |
| Power               | 6 W          | CRI (Ra)                | 80        |
| Rated Input Voltage | 220-240 V/AC |                         |           |



731099

| Article | Housing Color |    | Luminous Flux | Length | Width  | Height | Base Length | Price   |
|---------|---------------|----|---------------|--------|--------|--------|-------------|---------|
| 731099  | Dark grey     | WW | 200 lm        | 110 mm | 79 mm  | 172 mm | 68 mm       | € 87.95 |
| 731100  | Dark grey     | WW | 208 lm        | 105 mm | 140 mm | 145 mm | 75 mm       | € 87.95 |




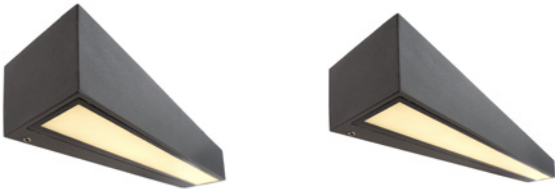

LINEAR


**Application Area**  
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Base Height             | 15 mm        |
| Colour Temperature | 3000 K    | Rated Input Voltage     | 220-240 V/AC |
| Width              | 60 mm     | Power Supply Unit incl. | Yes          |
| Height             | 60 mm     | Light Beam Angle        | 100 Degree   |
| Base Width         | 53 mm     | CRI (Ra)                | 80           |



731135


| Article | Housing Color |     | Luminous Flux | Length | Base Length | Power  | EEL | Price    |
|---------|---------------|-----|---------------|--------|-------------|--------|-----|----------|
| 731135  | Dark grey     | www | 600 lm        | 250 mm | 242 mm      | 8.0 W  | G   | € 119.95 |
| 731134  | Dark grey     | www | 1230 lm       | 500 mm | 493 mm      | 14.0 W | F   | € 155.95 |

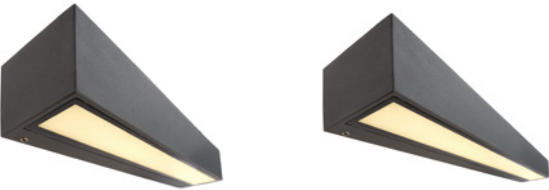

LINEAR UP & DOWN

**Application Area**  
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Base Height             | 15 mm        |
| Colour Temperature | 3000 K    | Rated Input Voltage     | 220-240 V/AC |
| Width              | 60 mm     | Power Supply Unit incl. | Yes          |
| Height             | 60 mm     | Light Beam Angle        | 100 Degree   |
| Base Width         | 53 mm     | CRI (Ra)                | 80           |



731129

| Article | Housing Color |     | Luminous Flux | Length | Base Length | Power  | Price    |
|---------|---------------|-----|---------------|--------|-------------|--------|----------|
| 731136  | Dark grey     | www | 1155 lm       | 250 mm | 242 mm      | 14.0 W | € 147.95 |
| 731129  | Dark grey     | www | 1760 lm       | 500 mm | 493 mm      | 20.0 W | € 171.95 |










## RILONGO

The RILONGO surface-mounted wall light impresses with its modern, simple design and stylishly sets the scene for facades, entrance areas and patios. The light emission on both sides creates effective lighting accents on the wall, providing both orientation and a pleasant atmosphere.

Made from robust die-cast aluminium and equipped with an IP54 protection rating, the light is ideal for permanent outdoor use. The E27 socket allows a free choice of light source up to max. 15 W and therefore offers flexible options for light colour and lighting mood.







## RILONGO

### Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

|            |              |                        |                                    |
|------------|--------------|------------------------|------------------------------------|
| Housing    | Aluminium    | Rated Input Voltage    | 220-240 V/AC                       |
| Length     | 103 mm       | Control                | Dimmable via optional light source |
| Width      | 250 mm       | IK Protection Class    | IK05                               |
| Height     | 110 mm       | Colour of Light Output | White                              |
| Max. Power | 1x max. 15 W |                        |                                    |

| Article | Housing Color | light emission                | Price   |
|---------|---------------|-------------------------------|---------|
| 730330  | Dark grey     | top / bottom                  | € 63.95 |
| 731060  | Dark grey     | top / bottom / front [grille] | € 63.95 |
| 731227  | Dark grey     | top / bottom / front          | € 63.95 |



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.



## ALKES

The ALKES series is not a traditional wall-mounted light, but, with its SMD-LED panel, has floodlight similarities. The highlight: the upper housing part is tilted forwards 45° from the façade to direct the warm white light in a targeted manner onto the surface to be illuminated. In addition, the ALKES also looks great when switched off with its modern design and rounded edges.




## ALKES

- high luminous efficacy
- homogeneous light distribution

### Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

|                     |              |                         |            |
|---------------------|--------------|-------------------------|------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes        |
| Colour Temperature  | 3000 K       | Light Beam Angle        | 110 Degree |
| Rated Input Voltage | 220-240 V/AC | CRI (Ra)                | 80         |



731138

| Article       | Housing Color |    | Luminous Flux | Length | Width  | Height | Power  | Price           |
|---------------|---------------|----|---------------|--------|--------|--------|--------|-----------------|
| <b>731138</b> | Dark grey     | WW | 920 lm        | 200 mm | 126 mm | 184 mm | 21.0 W | <b>€ 83.95</b>  |
| <b>731140</b> | Dark grey     | WW | 1720 lm       | 297 mm | 165 mm | 240 mm | 36.0 W | <b>€ 140.95</b> |




## ALKES MOTION

- high luminous efficacy
- homogeneous light distribution

### Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

|                         |              |                  |            |
|-------------------------|--------------|------------------|------------|
| Housing                 | Aluminium    | Light Beam Angle | 110 Degree |
| Colour Temperature      | 3000 K       | CRI (Ra)         | 80         |
| Rated Input Voltage     | 220-240 V/AC | Motion Detector  | Yes        |
| Power Supply Unit incl. | Yes          |                  |            |



731139


| Article       | Housing Color |    | Luminous Flux | Length | Width  | Height | Power  | Price           |
|---------------|---------------|----|---------------|--------|--------|--------|--------|-----------------|
| <b>731139</b> | Dark grey     | WW | 735 lm        | 200 mm | 126 mm | 184 mm | 21.0 W | <b>€ 99.95</b>  |
| <b>731141</b> | Dark grey     | WW | 1720 lm       | 297 mm | 165 mm | 240 mm | 36.0 W | <b>€ 156.95</b> |





### **GRUMIUM SQUARE CCT**

Modular, compact, impactful - the GRUMIUM wall-mounted light can be installed on patios, building walls or in entrances to living spaces and, due to its optional covers in different designs, provides a flexible universal solution for many areas of application. The permanently installed and energy-saving LEDs delivering max. 10 watts are encompassed by a diffuser made of milky plastic and produce a pleasant warm-white light with a luminous flux of 730 lm. The Grumium outdoor light with die-cast aluminium housing comes in an angular and rounded design and has degree of protection IP54.




## GRUMIUM SQUARE CCT

· light colour adjustable in 2 stages

### Application Area


Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

|                    |             |                         |              |
|--------------------|-------------|-------------------------|--------------|
| Housing            | Aluminium   | Base Width              | 15 mm        |
| Colour Temperature | 3000/4000 K | Base Height             | 195 mm       |
| Length             | 100 mm      | Power                   | 10 W         |
| Width              | 70 mm       | Rated Input Voltage     | 220-240 V/AC |
| Height             | 200 mm      | Power Supply Unit incl. | Yes          |
| Base Length        | 95 mm       | CRI (Ra)                | 80           |



620123

| Article       | Housing Color |       | Luminous Flux | Shape cover        | Price          |
|---------------|---------------|-------|---------------|--------------------|----------------|
| <b>620124</b> | Dark grey     | WW NW | 205 lm        | lines diagonal     | <b>€ 91.95</b> |
| <b>620125</b> | Dark grey     | WW NW | 280 lm        | lines horizontally | <b>€ 91.95</b> |
| <b>620126</b> | Dark grey     | WW NW | 300 lm        | lines vertical     | <b>€ 91.95</b> |
| <b>620127</b> | Dark grey     | WW NW | 440 lm        | upside/below       | <b>€ 91.95</b> |
| <b>620123</b> | Dark grey     | WW NW | 450 lm        | borders            | <b>€ 91.95</b> |
| <b>731126</b> | Dark grey     | WW NW | 530 lm        | without            | <b>€ 63.95</b> |




### 5-year guarantee

Benefit from the maximum quality promise:

All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



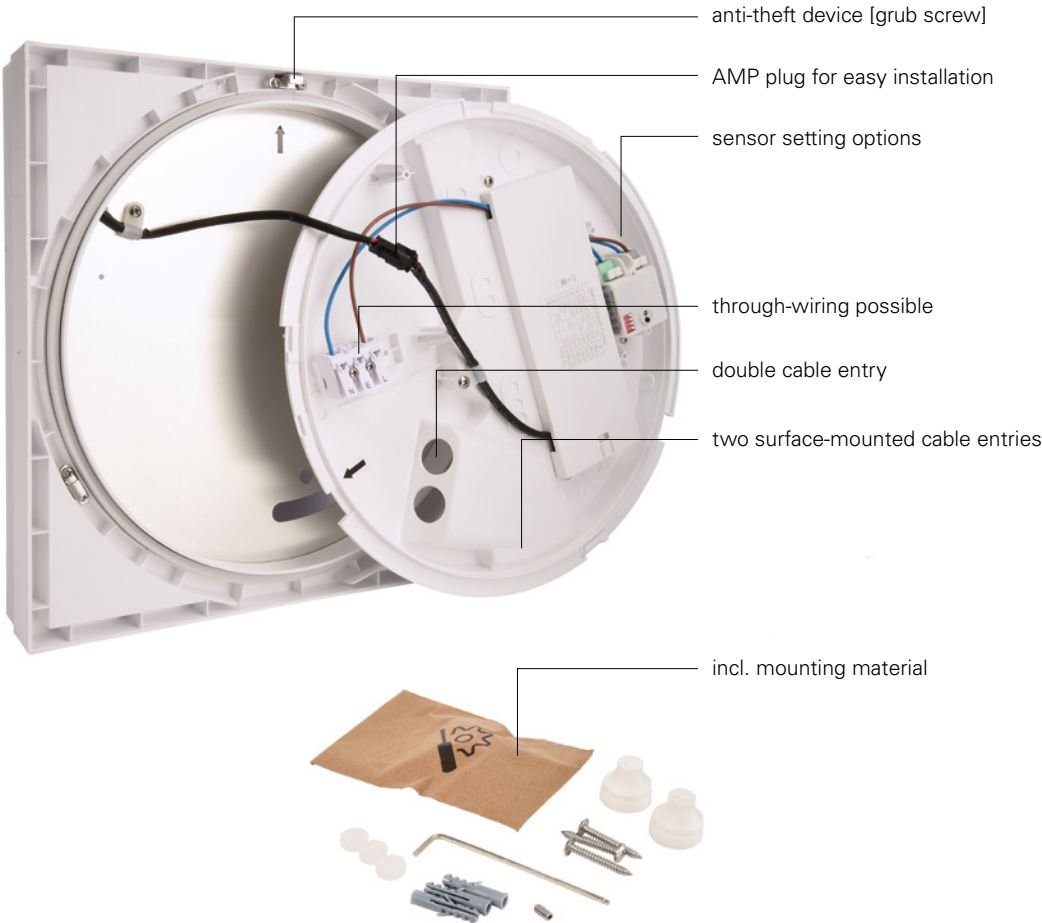

CASA

The CASA house number light has space for up to four digits and/or letters each 10 cm high, ensuring house numbers can be easily read. With a configurable twilight switch, the wall light automatically adjusts to the ambient brightness. The light colour can also be adjusted in two stages (3,000 K/4,000 K).

Multiple cable entries and the option of feed-through wiring mean that installation is simple and flexible. Anti-theft protection also prevents unauthorised removal.

Note: Stickers for numbers/letters are optionally available






CASA

- Space for four digits and letters each 10 cm high
- Adjustable daylight sensor
- Adjustable light colour 3,000/4,000 K
- Multiple cable entries incl. feed-through wiring
- Easy and quick mounting with anti-theft protection
- Set of number/letter stickers optionally available


Application Area

Reception / Communication, Garden / Terrace / Balcony / Walkways, Garage / carport / car park

|                    |             |                         |              |
|--------------------|-------------|-------------------------|--------------|
| Surface            | Matt        | Power                   | 3 W          |
| Colour Temperature | 3000/4000 K | Rated Input Voltage     | 200-240 V/AC |
| Length             | 275 mm      | Power Supply Unit incl. | Yes          |
| Width              | 275 mm      | Light Beam Angle        | 120 Degree   |
| Height             | 64 mm       | CRI (Ra)                | 80           |
| Base Height        | 14 mm       | Light Direction         | Front        |
| Base Ø             | 245 mm      | IK Protection Class     | IK08         |



| Article | Housing Color                                                                                                                                                                 | Luminous Flux Housing         | Price   |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|---------|
| 731159  | Black   | 250/260 lm PP - Polypropylene | € 87.95 |
| 731158  | White   | 270/280 lm Polycarbonate      | € 87.95 |



Accessories


- 930807 Numbers set 0-9 for Casa
- 930808 Letters set A-F for Casa



€ 8.95

€ 5.45






page 484



page 485

# ceiling and wall lights







MOB

|            |             |                     |                                    |
|------------|-------------|---------------------|------------------------------------|
| Housing    | Aluminium   | Rated Input Voltage | 220-240 V/AC                       |
| Height     | 92 mm       | Control             | Dimmable via optional light source |
| Ø          | 108 mm      |                     |                                    |
| Max. Power | 1x max. 9 W |                     |                                    |

| Article | Housing Color                                                                               | Price   |
|---------|---------------------------------------------------------------------------------------------|---------|
| 730408  |  Dark grey | € 57.95 |



Accessories

|        |                                           |                                                                                   |         |
|--------|-------------------------------------------|-----------------------------------------------------------------------------------|---------|
| 180195 | LED, GX53, 230 V/AC, 4,000 K, 120 degrees |  | € 17.95 |
| 180196 | LED, GX53, 230 V/AC, 3,000 K, 120 degrees |  | € 17.95 |






MENSÆ

- Corridor function
- Adjustable motion detector [hold time / detection area]
- Daylight sensor

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Rated Input Voltage     | 100-240 V/AC |
| Colour Temperature | 3000 K    | Power Supply Unit incl. | Yes          |
| Height             | 54 mm     | CRI (Ra)                | 80           |
| Base Height        | 28.5 mm   | Motion Detector         | Yes          |
| Base Ø             | 170 mm    | IK Protection Class     | IK08         |
| Power              | 16 W      |                         |              |




348071


| Article | Housing Color |    | Luminous Flux | Length | Width  | Ø      | Light Beam Angle | Price    |
|---------|---------------|----|---------------|--------|--------|--------|------------------|----------|
| 348071  | ■ Dark grey   | ww | 1400 lm       | 300 mm | 300 mm |        | 115 Degree       | € 199.95 |
| 348072  | ■ Dark grey   | ww | 1500 lm       |        |        | 300 mm | 110 Degree       | € 199.95 |



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.



built in wall lights



page 488



page 489



page 490



page 490





LIGHT BASE 2

|                    |           |                         |              |
|--------------------|-----------|-------------------------|--------------|
| Housing            | Aluminium | Rated Input Voltage     | 220-240 V/AC |
| Colour Temperature | 3000 K    | Power Supply Unit incl. | Yes          |
| Luminous Flux      | 55 lm     | Installation Depth      | 70 mm        |
| Length             | 96 mm     | Cut Out Length          | 95 mm        |
| Width              | 96 mm     | Cutout L x W            | 95 x 95 mm   |
| Height             | 77 mm     | Cut Out Width           | 95 mm        |
| Power              | 1.3 W     | CRI (Ra)                | 80           |

| Article | Housing Color                                                                                                                                                            | Price   |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 763025  |  Grey  | € 79.95 |







LIGHT BASE II COB OUTDOOR

Housing                      Aluminium                      Width                      100 mm  
Length                      100 mm


| Article | Housing Color                                                                                  | light output | Height | Price   |
|---------|------------------------------------------------------------------------------------------------|--------------|--------|---------|
| 930419  |  White      | stripe       | 8 mm   | € 16.95 |
| 930414  |  Light grey | stripe       | 8 mm   | € 15.95 |
| 930420  |  Black      | stripe       | 8 mm   | € 15.95 |
| 930416  |  White      | step         | 24 mm  | € 15.95 |
| 930417  |  Light grey | step         | 24 mm  | € 15.95 |
| 930418  |  Black      | step         | 24 mm  | € 15.95 |
| 930421  |  White      | linear       | 24 mm  | € 16.95 |
| 930422  |  Light grey | linear       | 24 mm  | € 15.95 |
| 930415  |  Black      | linear       | 24 mm  | € 15.95 |
| 930413  |  White      | round        | 24 mm  | € 16.95 |
| 930423  |  Light grey | round        | 24 mm  | € 15.95 |
| 930424  |  Black      | round        | 24 mm  | € 15.95 |



LIGHT BASE 3

|                     |              |
|---------------------|--------------|
| Housing             | Aluminium    |
| Colour Temperature  | 3000 K       |
| Luminous Flux       | 88 lm        |
| Length              | 245 mm       |
| Width               | 85 mm        |
| Height              | 78 mm        |
| Power               | 4.3 W        |
| Rated Input Voltage | 220-240 V/AC |


|                         |             |
|-------------------------|-------------|
| Power Supply Unit incl. | Yes         |
| Installation Depth      | 78 mm       |
| Light Beam Angle        | 115 Degree  |
| Cut Out Length          | 245 mm      |
| Cutout L x W            | 245 x 85 mm |
| Cut Out Width           | 85 mm       |
| CRI (Ra)                | 90          |



930461

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 763026  | Black         | € 95.95 |




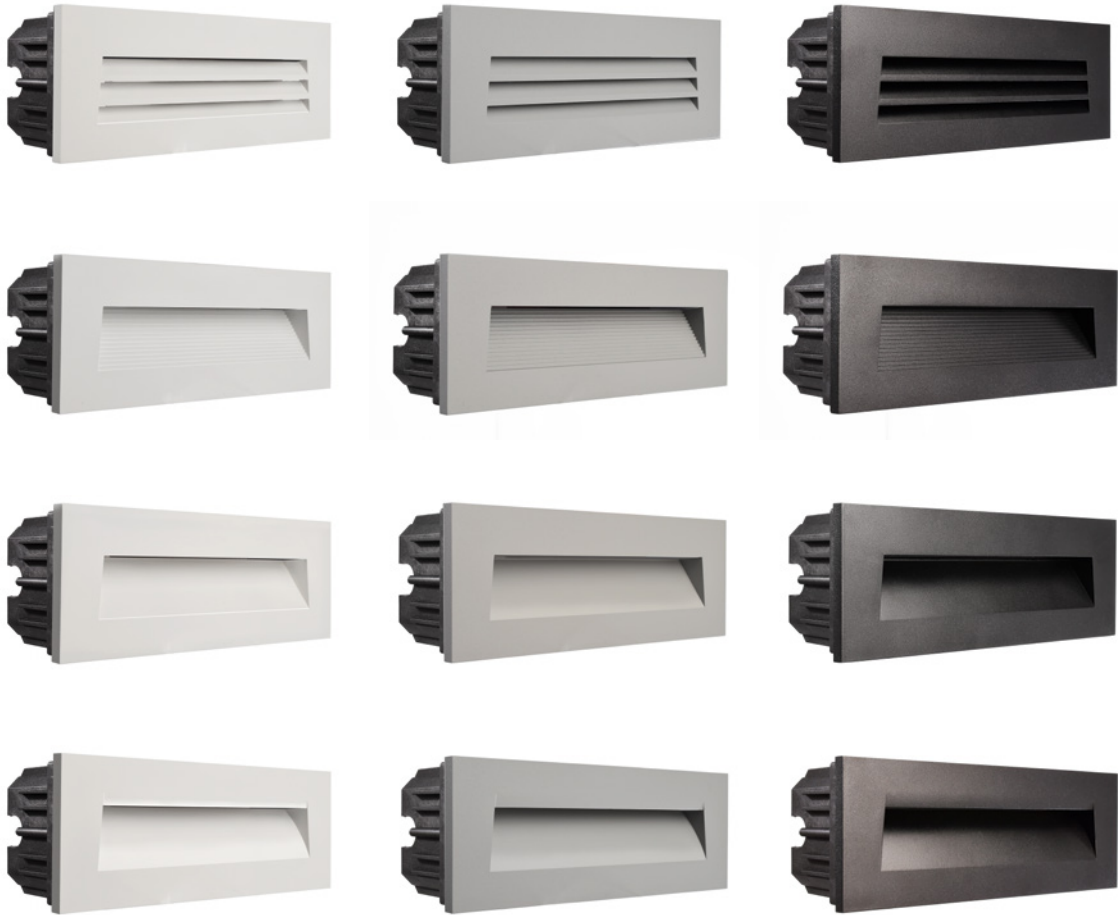

LIGHT BASE III OUTDOOR


Housing                      Aluminium                      Width                      90 mm  
Length                      250 mm

| Article | Housing Color                                                                                  | light output | Height | Price   |
|---------|------------------------------------------------------------------------------------------------|--------------|--------|---------|
| 930470  |  White      | stripe       | 9 mm   | € 47.95 |
| 930471  |  Grey       | stripe       | 9 mm   | € 47.95 |
| 930472  |  Black      | stripe       | 9 mm   | € 47.95 |
| 930461  |  White      | step         | 24 mm  | € 47.95 |
| 930468  |  Light grey | step         | 24 mm  | € 47.95 |
| 930469  |  Black      | step         | 24 mm  | € 47.95 |
| 930473  |  White      | angled       | 24 mm  | € 47.95 |
| 930474  |  Light grey | angled       | 24 mm  | € 47.95 |
| 930475  |  Black      | angled       | 24 mm  | € 47.95 |
| 930476  |  White      | rounded      | 24 mm  | € 47.95 |
| 930477  |  Light grey | rounded      | 24 mm  | € 47.95 |
| 930478  |  Black      | rounded      | 24 mm  | € 47.95 |



page 494

# spherical lamps









## DORADUS

Light in its most beautiful form - the sphere is and remains one of the most striking of shapes. With the opportunity to illuminate it from within, what could be better. The spherical light looks great both indoors and outdoors. Using a dimmable LED lamp with RGB or colour change function achieves the optimal effect. Be mesmerised with cosy red, calming green and deep blue. With a warm white lamp too, the light emanating from this spherical light is something rather special.



DORADUS

- Spherical housing with IP65 protection
- Resistant to sea water
- Ready to use with 3 m connecting cable
- Incl. ground spike

Application Area

Garden / Terrace / Balcony / Walkways, Hotel / catering

|                      |              |                         |                                    |
|----------------------|--------------|-------------------------|------------------------------------|
| Housing              | Polyethylene | Primary Connection End  | Power plug IP44                    |
| Max. Power           | 1x max. 23 W | Control                 | Dimmable via optional light source |
| Rated Input Voltage  | 220-240 V/AC | IP Protection Type Plug | IP 44                              |
| Primary Cable Length | 3 m          |                         |                                    |

| Article | Housing Color                  | Height | Ø      | Price    |
|---------|--------------------------------|--------|--------|----------|
| 836011  | <input type="checkbox"/> White | 230 mm | 250 mm | € 111.95 |
| 836930  | <input type="checkbox"/> White | 350 mm | 380 mm | € 135.95 |
| 836014  | <input type="checkbox"/> White | 420 mm | 450 mm | € 159.95 |
| 836931  | <input type="checkbox"/> White | 530 mm | 560 mm | € 255.95 |




Accessories

|        |                                                                             |  |         |
|--------|-----------------------------------------------------------------------------|--|---------|
| 843533 | RF-smart, E27, Zigbee, 6 W, RGB+2700-6500 K, 220 Grad                       |  | € 37.95 |
| 843510 | RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20             |  | € 30.95 |
| 843511 | RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20             |  | € 30.95 |
| 843512 | RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT       |  | € 39.95 |
| 843513 | RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT   |  | € 55.95 |
| 843514 | RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT  |  | € 87.95 |
| 843522 | RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT |  | € 59.95 |


Accessories for 836931

|        |                                                        |  |         |
|--------|--------------------------------------------------------|--|---------|
| 843534 | RF-smart, E27, Zigbee, 12 W, RGB+2700-6500 K, 220 Grad |  | € 51.95 |
|--------|--------------------------------------------------------|--|---------|





energy distributor



page 498



page 502



page 500



page 504





**ARAWAN**

Sometimes it's about more than just light. With our multiple socket tower, available with or without light, another gap in our range is filled. Design your garden even more flexibly, in proven DEKO-LIGHT quality of course and at a price that won't break the bank.





ARAWAN

- Safe power distribution outdoors
- Total load max. 3,680 W
- Outlets and lights can be switched on separately
- Connection box with IP67 and accessories including in scope of delivery
- Feed-through wiring possible

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

|                     |           |                        |                     |
|---------------------|-----------|------------------------|---------------------|
| Housing             | Aluminium | Rated Input Voltage    | 220-240 V/AC        |
| Ø                   | 100 mm    | Primary Connection End | Connection box IP67 |
| Connected Load max. | 3680 W    |                        |                     |

| Article | Housing Color                                                                                 | Colour Temperature                                                                         | Luminous Flux | Height | Power | Power Supply incl. | EEI                                                                                   | Price    |
|---------|-----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------|--------|-------|--------------------|---------------------------------------------------------------------------------------|----------|
| 733055  |  Dark grey |                                                                                            |               | 400 mm |       |                    |                                                                                       | € 95.95  |
| 733054  |  Dark grey |  3000 K | 150 lm        | 478 mm | 4.8 W | Yes                |  | € 135.95 |



Accessories

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68




€ 1.75



PUKA MANA

A garden is pure nature and yet needs power in several different places. With the PUKA MANA, you can flexibly access power to operate lawnmowers and other gardening tools or simply to charge your e-bike or smartphone. The multiple socket tower has two socket outlets and can be installed particularly easily using our multi-outdoor cable connectors. The sophisticated cable routing ensures a clean visual design.





PUKA MANA

- Door can be completely closed when angled plugs are plugged in
- Total load: max. 3,680 W
- Easy to install thanks to IP68 cable connector
- Light can be switched on separately [only art. no. 733067]

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

|         |           |                        |                     |
|---------|-----------|------------------------|---------------------|
| Housing | Aluminium | Connected Load max.    | 3680 W              |
| Length  | 100 mm    | Rated Input Voltage    | 220-240 V/AC        |
| Width   | 100 mm    | Primary Connection End | Connection box IP67 |

| Article | Housing Color                                                                                 | Height | Socket / Base | Max. Power     | IK Protection Class | Price    |
|---------|-----------------------------------------------------------------------------------------------|--------|---------------|----------------|---------------------|----------|
| 733066  |  Dark grey | 420 mm |               |                | IK10                | € 135.95 |
| 733067  |  Dark grey | 620 mm | E27           | 1x max. 13.0 W |                     | € 199.95 |



Accessories

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68

 € 1.75

Accessories for 733066

931073 Cover for Multiple socket tower Puka Mana 420 mm

 € 7.95






## FACADO SOCKET

FACADO series standing lights have been proving quite the hit for some time on paved paths in gardens. Now, the classically elegant outdoor lights are becoming that much more versatile: The FACADO SOCKET contains two electrical outlet points, serving as a practical power distributor in gardens, on patios or on paths. The lamps can also be changed thanks to the E27 base and adapted to the desired lighting atmosphere. The FACADO SOCKET is available in two heights [65 and 100 cm].







FACADO SOCKET

- Total load: max. 3,680 W
- Outlets and light can be switched on separately
- Feed-through wiring possible
- Replaceable lamp [E27]

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

|         |           |                     |              |
|---------|-----------|---------------------|--------------|
| Housing | Aluminium | Max. Power          | 1x max. 20 W |
| Width   | 108 mm    | Connected Load max. | 3680 W       |
| Height  | 108 mm    | Rated Input Voltage | 220-240 V/AC |

| Article | Housing Color                                                                                 | Length  | Price    |
|---------|-----------------------------------------------------------------------------------------------|---------|----------|
| 733064  |  Dark grey | 650 mm  | € 159.95 |
| 733065  |  Dark grey | 1000 mm | € 175.95 |



Accessories

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68



€ 1.75



## LERNA

LERNA series power distributors offer a number of advantages. With two sockets and a total load of 3,680 W, they allow you to connect various devices while providing reliable lighting. Light and sockets can be switched separately (separate L+N). The socket cover latches open for additional convenience. The ability to adjust the light colour in two stages (3,000 K/4,000 K) allows you to choose the colour temperature that sets the perfect ambience. The downward orientation of the lighting also fully guarantees efficient illumination without creating light pollution. LERNA series bollard lights are available in two different sizes (600 mm and 1,000 mm). With a output of 7,4 W and 256 lm, the light itself is incredibly bright.






LERNA

- Socket cover latches open
- Total socket output: 3,680 W
- Light colour adjustable in two stages
- Light and socket can be switched separately (separate L+N)
- Light directed fully downwards to prevent light pollution

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

|                     |             |                         |              |
|---------------------|-------------|-------------------------|--------------|
| Housing             | Aluminium   | Rated Input Voltage     | 200-240 V/AC |
| Colour Temperature  | 3000/4000 K | Power Supply Unit incl. | Yes          |
| Luminous Flux       | 237/256 lm  | Light Beam Angle        | 50 Degree    |
| Length              | 120 mm      | Light Beam Angle 2      | 100 Degree   |
| Width               | 100 mm      | CRI (Ra)                | 80           |
| Power               | 7.4 W       | IK Protection Class     | IK06         |
| Connected Load max. | 3680 W      |                         |              |



733071

| Article | Housing Color |  | Height  | Price    |
|---------|---------------|--|---------|----------|
| 733071  | Dark grey     |  | 600 mm  | € 215.95 |
| 733070  | Dark grey     |  | 1000 mm | € 247.95 |



Accessories

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68



€ 1.75



page 508



page 511



page 512



page 513



page 514



page 515



page 516

surface mounted / ground spike







### DEKO-LIGHT RF-SMART SPOTLIGHT RGB+CCT RF + ZIGBEE

The RF-Smart SPOT spotlight with ground spike offers dimmable brightness and colour saturation, 16 million colours and adjustable colour temperatures. This spotlight has eight pre-installed automatic colour programs and the ability to synchronise with other RF-Smart components, offering maximum flexibility. Can be controlled using RF-smart wireless remote controls (2.4 GHz, range approx. 30 m, not in scope of delivery) as well as all Zigbee 3.0 compatible controllers and apps such as Amazon Echo (Alexa), Google Assistant and Tuya (appropriate gateway required). The very narrow beam angle makes it ideal for column lighting and similar applications.






## DEKO-LIGHT RF-SMART SPOTLIGHT RGB+CCT RF + ZIGBEE

- Adjustable brightness and colour saturation
- 843539: RGB 3 x 3 W [max. 9 W], CW / WW 2 x 9 W [max. 9 W], max. total output 9 W
- 843521: RGB 3 x 10 W [max. 25 W], CW / WW 2 x 25 W [max. 25 W], max. total output 25 W
- 16 million available colours and adjustable colour temperature
- 18 automatic programmes pre-installed
- Program and remote control synchronisation when operating multiple RF smart components (repeater function)
- Can be controlled with RF smart wireless remote controls (2.4 GHz, range approx. 30 m, not included in the scope of delivery)
- Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo (Alexa), Google Assistant, Tuya (relevant gateway required, outdoor range up to 100 m)
- Very narrow light emission angle, perfect for column lighting or similar

### Application Area

Object lighting / architecture, Garage / carport / car park

|                         |                    |                         |                      |
|-------------------------|--------------------|-------------------------|----------------------|
| Housing                 | Aluminium, Plastic | Control                 | RF-Smart, ZigBee 3.0 |
| Colour Temperature      | 2700-6500 K        | Primary Cable Length    | 1.5 m                |
| Rated Input Voltage     | 100-240 V/AC       | CRI (Ra)                | 80                   |
| Power Supply Unit incl. | Yes                | Light Direction         | Front                |
| Light Beam Angle        | 15 Degree          | IP Protection Type Plug | IP 44                |
| Swivelling Angle        | 355 Degree         |                         |                      |



843521

| Article | Housing Color | Luminous Flux | Length | Width  | Height | Power  | Price    |
|---------|---------------|---------------|--------|--------|--------|--------|----------|
| 843539  | Anthracite    | 900 lm        | 72 mm  | 131 mm | 135 mm | 9.0 W  | € 111.95 |
| 843521  | Anthracite    | 2200 lm       | 65 mm  | 170 mm | 180 mm | 25.0 W | € 191.95 |



### Accessories for 843521

|        |                                                                             |         |
|--------|-----------------------------------------------------------------------------|---------|
| 843510 | RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20             | € 30.95 |
| 843511 | RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20             | € 30.95 |
| 843512 | RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT       | € 39.95 |
| 843513 | RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT   | € 55.95 |
| 843514 | RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT  | € 87.95 |
| 843522 | RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT | € 59.95 |
| 930659 | Wall bracket/display arm, metal, black, length: 800 mm                      | € 47.95 |







DEKO-LIGHT, RF-SMART WIDE-SPOT, RGB+CCT RF + ZIGBEE

- Brightness and colour saturation are dimmable
- RGB 3 x 3 W (max. 9 W), CW / WW 2 x 12 W (max. 12 W), max. total power 12 W
- 16 million colours and adjustable colour temperature
- 18 pre-installed automatic programmes
- Programme and remote control synchronisation when operating multiple RF-Smart components (repeater function)
- Controllable with RF-Smart wireless remote controls (not included)
- Controllable via all Zigbee 3.0-compatible controllers / apps (gateway required)
- Wide-spot, ideal for even and wide-area lighting

|                     |                    |                         |                      |
|---------------------|--------------------|-------------------------|----------------------|
| Housing             | Aluminium, Plastic | Power Supply Unit incl. | Yes                  |
| Colour Temperature  | 2700-6500 K        | Light Beam Angle        | 60 Degree            |
| Luminous Flux       | 1100 lm            | Swivelling Angle        | 355 Degree           |
| Length              | 70 mm              | Control                 | RF-Smart, ZigBee 3.0 |
| Width               | 80 mm              | Primary Cable Length    | 1 m                  |
| Height              | 170 mm             | CRI (Ra)                | 80                   |
| Power               | 12 W               | Light Direction         | Front                |
| Rated Input Voltage | 100-240 V/AC       | IP Protection Type Plug | IP 44                |

| Article | Housing Color | Colour Temperature    | Price    |
|---------|---------------|-----------------------|----------|
| 843540  | Anthracite    | RGB WW CW 2700-6500 K | € 135.95 |



**5-year guarantee**  
Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



SPIKY

- Replaceable GU10 lamp (retrofit)
- Incl. 2 m connecting cable with IP44 plug
- Incl. ground spike
- Incl. Glare-reducing cover (art. no. 732161 only)

**Application Area**  
 Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

|                        |                    |                         |                                    |
|------------------------|--------------------|-------------------------|------------------------------------|
| Housing                | Aluminium, Plastic | Control                 | Dimmable via optional light source |
| Surface                | Matt               | Swivelling Angle        | 180 Degree                         |
| Max. Power             | 1x max. 35 W       | IP Protection Type Plug | IP 44                              |
| Rated Input Voltage    | 220-240 V/AC       |                         |                                    |
| Primary Connection End | Power plug         |                         |                                    |

| Article       | Housing Color                                                                                 | Height | Ø      | Primary Cable Length | Price          |
|---------------|-----------------------------------------------------------------------------------------------|--------|--------|----------------------|----------------|
| <b>732161</b> |  Black     | 345 mm | 100 mm | 2.5 m                | <b>€ 27.95</b> |
| <b>732160</b> |  Dark grey | 420 mm | 60 mm  | 2 m                  | <b>€ 31.95</b> |



Accessories


|               |                                                                             |                                                                                     |                |
|---------------|-----------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------|
| <b>843532</b> | RF-smart, GU10, Zigbee, 4 W, RGB+2700-6500 K, 25 Degree                     |  | <b>€ 37.95</b> |
| <b>843510</b> | RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20             |  | <b>€ 30.95</b> |
| <b>843511</b> | RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20             |  | <b>€ 30.95</b> |
| <b>843512</b> | RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT       |  | <b>€ 39.95</b> |
| <b>843513</b> | RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT   |  | <b>€ 55.95</b> |
| <b>843522</b> | RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT |  | <b>€ 59.95</b> |
| <b>843514</b> | RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT  |  | <b>€ 87.95</b> |



KEID

**Application Area**  
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

|                     |              |                         |                     |
|---------------------|--------------|-------------------------|---------------------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes                 |
| Colour Temperature  | 3000 K       | Light Beam Angle        | 45 Degree           |
| Length              | 120 mm       | Swivelling Angle        | 180 Degree          |
| Height              | 457 mm       | Primary Cable Length    | 0.5 m               |
| Ø                   | 75 mm        | Primary Connection End  | Connection box IP65 |
| Rated Input Voltage | 220-240 V/AC | CRI (Ra)                | 80                  |



732094

| Article | Housing Color |    | Luminous Flux | Power  | Price    |
|---------|---------------|----|---------------|--------|----------|
| 732094  | Dark grey     | WW | 800 lm        | 10.3 W | € 111.95 |
| 732095  | Dark grey     | WW | 1350 lm       | 21.5 W | € 119.95 |








COLT 8 W COB + 8 W RGBW

- Replaceable reflectors
- Including clear/frosted glass pane
- Including honeycomb filter
- Feed-through wiring possible

Application Area  
Object lighting / architecture, Garage / carport / car park, Reception / Communication

|                    |           |                  |            |
|--------------------|-----------|------------------|------------|
| Housing            | Aluminium | Base Height      | 50 mm      |
| Colour Temperature | 3000 K    | Swivelling Angle | 180 Degree |



732108

| Article | Housing Color |        | Luminous Flux | Height | Ø     | Base Ø | Power | Price    |
|---------|---------------|--------|---------------|--------|-------|--------|-------|----------|
| 732127  | Dark grey     | RGB WW | 340 lm        | 66 mm  | 78 mm | 96 mm  | 8.6 W | € 239.95 |
| 732108  | Dark grey     | WW     | 470 lm        | 65 mm  | 77 mm | 95 mm  | 7.0 W | € 159.95 |



- Accessories
- 930441 Surface-mounted housing for Colt 8 W series, black
  - 930426 Ground spike for Colt series 4/8 W, M5, black



- Accessories for 732108
- 930431 12° reflector for Colt 8 W series
  - 930432 22° reflector for Colt 8 W series
  - 930587 Connecting cable with 230 V power plug



- Accessories for 732127
- 862122 FLAT, CV, UT 24 V/50 W
  - 862230 OCTO, CV, Mini 24 V/12 W
  - 872083 IP, CV, V6-40-24






COLT 15 W COB + 16 W RGBW

- Replaceable reflectors
- Including clear/frosted glass pane
- Including honeycomb filter
- Feed-through wiring possible

Application Area


Object lighting / architecture, Garage / carport / car park, Reception / Communication

|                    |           |                  |            |
|--------------------|-----------|------------------|------------|
| Housing            | Aluminium | Base Height      | 56 mm      |
| Colour Temperature | 3000 K    | Base Ø           | 120 mm     |
| Height             | 88 mm     | Swivelling Angle | 180 Degree |
| Ø                  | 111 mm    |                  |            |



732109

| Article | Housing Color |  | Luminous Flux | Power  | Rated Input Voltage | Rated Input Voltage | Power Supply incl. | Price    |
|---------|---------------|--|---------------|--------|---------------------|---------------------|--------------------|----------|
| 732128  | Dark grey     |  | 780 lm        | 16.0 W | 24 V/DC             |                     | No                 | € 359.95 |
| 732109  | Dark grey     |  | 1090 lm       | 14.0 W |                     | 220-240 V/AC        | Yes                | € 199.95 |



Accessories

|        |                                                           |  |         |
|--------|-----------------------------------------------------------|--|---------|
| 930442 | Surface-mounted housing for Colt 15/30 W series, black    |  | € 55.95 |
| 930427 | Ground spike for Colt series 15/25/30/36/65 W, M10, black |  | € 9.95  |

Accessories for 732109

|        |                                        |  |         |
|--------|----------------------------------------|--|---------|
| 930434 | 12° reflector for Colt 15 W series     |  | € 8.95  |
| 930435 | 22° reflector for Colt 15 W series     |  | € 9.95  |
| 930587 | Connecting cable with 230 V power plug |  | € 15.95 |

Accessories for 732128

|        |                                               |  |         |
|--------|-----------------------------------------------|--|---------|
| 862122 | FLAT, CV, UT 24 V/50 W                        |  | € 41.95 |
| 862164 | BASIC, CV, Q8H-24-75 W                        |  | € 59.95 |
| 872083 | IP, CV, V6-40-24                              |  | € 59.95 |
| 872085 | IP, CV, V6-75-24                              |  | € 75.95 |
| 930426 | Ground spike for Colt series 4/8 W, M5, black |  | € 7.95  |






COLT 30 W COB + 25 W RGBW

- Replaceable reflectors
- Including clear/frosted glass pane
- Including honeycomb filter
- Feed-through wiring possible


**Application Area**  
Object lighting / architecture, Garage / carport / car park, Reception / Communication

|                    |           |                  |            |
|--------------------|-----------|------------------|------------|
| Housing            | Aluminium | Base Height      | 56 mm      |
| Colour Temperature | 3000 K    | Base Ø           | 120 mm     |
| Height             | 112 mm    | Swivelling Angle | 180 Degree |
| Ø                  | 131 mm    |                  |            |



732110

| Article | Housing Color |        | Luminous Flux | Power  | Rated Input Voltage | Rated Input Voltage | Power Supply incl. | Price    |
|---------|---------------|--------|---------------|--------|---------------------|---------------------|--------------------|----------|
| 732129  | Dark grey     | RGB WW | 1140 lm       | 25.0 W | 24 V/DC             |                     | No                 | € 399.95 |
| 732110  | Dark grey     | WW     | 2320 lm       | 29.0 W |                     | 220-240 V/AC        | Yes                | € 231.95 |



Accessories

|        |                                                           |  |         |
|--------|-----------------------------------------------------------|--|---------|
| 930442 | Surface-mounted housing for Colt 15/30 W series, black    |  | € 55.95 |
| 930427 | Ground spike for Colt series 15/25/30/36/65 W, M10, black |  | € 9.95  |


Accessories for 732110

|        |                                        |  |         |
|--------|----------------------------------------|--|---------|
| 930437 | 12° reflector for Colt 30 W series     |  | € 9.95  |
| 930438 | 22° reflector for Colt 30 W series     |  | € 9.95  |
| 930587 | Connecting cable with 230 V power plug |  | € 15.95 |

Accessories for 732129

|        |                        |  |         |
|--------|------------------------|--|---------|
| 862163 | BASIC, CV, Q8H-24-40 W |  | € 37.95 |
| 862164 | BASIC, CV, Q8H-24-75 W |  | € 59.95 |
| 872083 | IP, CV, V6-40-24       |  | € 59.95 |
| 872085 | IP, CV, V6-75-24       |  | € 75.95 |
| 872094 | IP, CV, V6-100-24      |  | € 91.95 |





wall washer



page 520



page 521






WALLWASHER CAPH 24 V

- Including 0.5 m connecting cable with WEIPU plug
- Including 0.5 m connecting cable with WEIPU plug

Application Area

Garden / Terrace / Balcony / Walkways, Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Advertising lighting

|                     |           |                         |                                  |
|---------------------|-----------|-------------------------|----------------------------------|
| Housing             | Aluminium | Power Supply Unit incl. | No                               |
| Colour Temperature  | 3000 K    | Control                 | Dimmable via optional controller |
| Length              | 1000 mm   | Primary Cable Length    | 0.5 m                            |
| Width               | 53.36 mm  | Primary Connection End  | WEIPU plug 5-pole                |
| Height              | 81.07 mm  | CRI (Ra)                | 80                               |
| Power               | 60 W      |                         |                                  |
| Rated Input Voltage | 24 V/DC   |                         |                                  |



732071

| Article | Housing Color |        | Luminous Flux | Light Beam Angle | Light Beam Angle 2 | Light Distribution | Price    |
|---------|---------------|--------|---------------|------------------|--------------------|--------------------|----------|
| 732072  | Dark grey     | RGB WW | 2480 lm       | 40 Degree        | 15 Degree          | Asymmetric         | € 332.95 |
| 732071  | Dark grey     | RGB WW | 2800 lm       | 25 Degree        |                    | Symmetric          | € 332.95 |



Accessories

- 862164 BASIC, CV, Q8H-24-75 W
- 872085 IP, CV, V6-75-24
- 843502 RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20

|  |         |
|--|---------|
|  | € 59.95 |
|  | € 75.95 |
|  | € 79.95 |



**Onlineshop**  
You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.




WALLWASHER CAPH 230V

·Including 2 m connecting cable with IP44 shaped plug

Application Area

Garden / Terrace / Balcony / Walkways, Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Advertising lighting

|                    |           |                         |                 |
|--------------------|-----------|-------------------------|-----------------|
| Housing            | Aluminium | Rated Input Voltage     | 220-240 V/AC    |
| Colour Temperature | 3000 K    | Power Supply Unit incl. | Yes             |
| Length             | 1000 mm   | Primary Cable Length    | 2 m             |
| Width              | 53.36 mm  | Primary Connection End  | Power plug IP44 |
| Height             | 81.07 mm  | CRI (Ra)                | 80              |
| Power              | 38 W      | IP Protection Type Plug | IP 44           |



732080

| Article | Housing Color |    | Luminous Flux | Light Beam Angle | Light Beam Angle 2 | Light Distribution | Price    |
|---------|---------------|----|---------------|------------------|--------------------|--------------------|----------|
| 732080  | Dark grey     | WW | 2580 lm       | 40 Degree        | 15 Degree          | Asymetric          | € 332.95 |
| 732079  | Dark grey     | WW | 3000 lm       | 25 Degree        |                    | Symmetric          | € 332.95 |



**Technical data sheet**  
New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.



ground recessed lights



page 524




page 524



page 525



page 526



page 526



page 528



page 529



page 530



page 531



page 532



page 533



page 534



□  
page 535



□  
page 537



□  
page 537



ATON

**Application Area**  
Garden / Terrace / Balcony / Walkways

|                     |              |           |                                    |
|---------------------|--------------|-----------|------------------------------------|
| Height              | 111 mm       | Cut Out Ø | 70 mm                              |
| Installation Depth  | 148 mm       | Control   | Dimmable via optional light source |
| Max. Power          | 1x max. 7 W  |           |                                    |
| Rated Input Voltage | 220-240 V/AC |           |                                    |

| Article | Housing Color | Housing                     | Length | Width | Ø     | IK Protection Class | Price   |
|---------|---------------|-----------------------------|--------|-------|-------|---------------------|---------|
| 730474  | Silver        | Stainless steel             |        |       | 97 mm | IK08                | € 45.95 |
| 730475  | Silver        | Stainless steel / Aluminium | 97 mm  | 97 mm |       |                     | € 45.95 |



PAVO

· Swivelling insert

**Application Area**  
Garden / Terrace / Balcony / Walkways

|                    |                            |                     |                                    |
|--------------------|----------------------------|---------------------|------------------------------------|
| Housing            | Stainless steel, Aluminium | Rated Input Voltage | 220-240 V/AC                       |
| Height             | 156 mm                     | Cut Out Ø           | 100 mm                             |
| Installation Depth | 193 mm                     | Control             | Dimmable via optional light source |
| Max. Power         | 1x max. 9 W                | Swivelling Angle    | 25 Degree                          |

| Article | Housing Color | Length | Width  | Ø      | Price   |
|---------|---------------|--------|--------|--------|---------|
| 730478  | Silver        |        |        | 160 mm | € 91.95 |
| 730479  | Silver        | 160 mm | 160 mm |        | € 91.95 |






PEACOCK

·Including 0.5 m connecting cable with protected connection socket

Application Area

Garden / Terrace / Balcony / Walkways

|                     |                            |                         |                     |
|---------------------|----------------------------|-------------------------|---------------------|
| Housing             | Stainless steel, Aluminium | Power Supply Unit incl. | Yes                 |
| Colour Temperature  | 3000 K                     | Installation Depth      | 48 mm               |
| Luminous Flux       | 150 lm                     | Light Beam Angle        | 30 Degree           |
| Height              | 43 mm                      | Cut Out Ø               | 44 mm               |
| Ø                   | 58 mm                      | CRI (Ra)                | 80                  |
| Power               | 2 W                        | Primary Connection End  | Connection box IP67 |
| Rated Input Voltage | 220-240 V/AC               | IK Protection Class     | IK08                |
|                     |                            | Light Distribution      | Symmetric           |



730459

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 730459  | Silver        | € 91.95 |






FLAT 230V 20 DEGREE

•Including 0.5 m connecting cable

**Application Area**  
Garden / Terrace / Balcony / Walkways

|                         |                            |                        |                |
|-------------------------|----------------------------|------------------------|----------------|
| Housing                 | Stainless steel, Aluminium | Light Beam Angle       | 20 Degree      |
| Colour Temperature      | 3000 K                     | CRI (Ra)               | 80             |
| Rated Input Voltage     | 220-240 V/AC               | Primary Cable Length   | 0.5 m          |
| Power Supply Unit incl. | Yes                        | Primary Connection End | Connection box |
|                         |                            | Light Distribution     | Symmetric      |



100111

| Article | Housing Color |  | Luminous Flux | Height | Ø      | Power  | Installation Depth | Price    |
|---------|---------------|--|---------------|--------|--------|--------|--------------------|----------|
| 100111  | Silver        |  | 400 lm        | 44 mm  | 116 mm | 5.8 W  | 44 mm              | € 155.95 |
| 100114  | Silver        |  | 860 lm        | 42 mm  | 173 mm | 12.2 W | 42 mm              | € 223.95 |



FLAT 230V 120 DEGREE

**Application Area**  
Garden / Terrace / Balcony / Walkways

|                     |                            |                         |                |
|---------------------|----------------------------|-------------------------|----------------|
| Housing             | Stainless steel, Aluminium | Power Supply Unit incl. | Yes            |
| Colour Temperature  | 3000 K                     | Installation Depth      | 43 mm          |
| Luminous Flux       | 40 lm                      | Light Beam Angle        | 120 Degree     |
| Height              | 42 mm                      | Cut Out Ø               | 100 mm         |
| Ø                   | 116 mm                     | CRI (Ra)                | 65             |
| Power               | 1.3 W                      | Primary Cable Length    | 0.5 m          |
| Rated Input Voltage | 220-240 V/AC               | Primary Connection End  | Connection box |
|                     |                            | Light Distribution      | Symmetric      |

| Article | Housing Color |  | Price    |
|---------|---------------|--|----------|
| 730336  | Silver        |  | € 123.95 |













HELIOS

•Incl. four heavy-duty anchors

**Application Area**  
 Garden / Terrace / Balcony / Walkways, Object lighting / architecture, Park / public outdoor area, Stairs / steps, Hotel / catering

|                     |              |                         |           |
|---------------------|--------------|-------------------------|-----------|
| Housing             | Aluminium    | Power Supply Unit incl. | Yes       |
| Colour Temperature  | 3000 K       | Light Beam Angle        | 90 Degree |
| Height              | 54 mm        | CRI (Ra)                | 80        |
| Ø                   | 210 mm       | IK Protection Class     | IK10      |
| Rated Input Voltage | 220-240 V/AC |                         |           |

| Article | Housing Color                                                                       |                                                                                               | Luminous Flux | Power | Price   |
|---------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|---------------|-------|---------|
| 732143  |  | Dark grey  | 60 lm         | 4.0 W | € 95.95 |
| 732049  |  | Dark grey  | 120 lm        | 4.0 W | € 95.95 |
| 732050  |  | Dark grey  | 180 lm        | 6.0 W | € 95.95 |

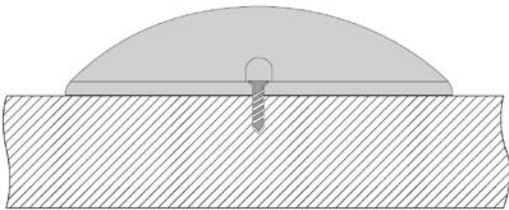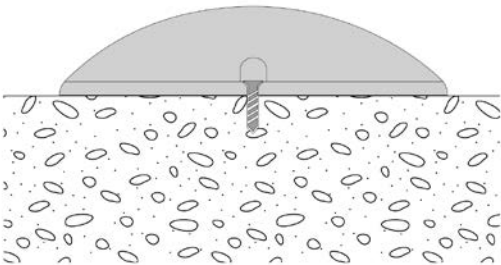




SOFT FLEX

- Adjustable light emission angle
- Including 1 m connecting cable
- Including honeycomb filter

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

|                         |                            |                        |                |
|-------------------------|----------------------------|------------------------|----------------|
| Housing                 | Stainless steel, Aluminium | Swivelling Angle       | 60 Degree      |
| Colour Temperature      | 3000 K                     | CRI (Ra)               | 80             |
| Rated Input Voltage     | 220-240 V/AC               | Primary Cable Length   | 1 m            |
| Power Supply Unit incl. | Yes                        | Primary Connection End | Connection box |
| Installation Depth      | 220 mm                     | Light Distribution     | Symmetric      |



730266

| Article | Housing Color |  | Luminous Flux | Height | Ø      | Power  | Light Beam Angle | Price    |
|---------|---------------|--|---------------|--------|--------|--------|------------------|----------|
| 730267  | Silver        |  | 480 lm        | 128 mm | 173 mm | 9.3 W  | 15 Degree        | € 287.95 |
| 730266  | Silver        |  | 770 lm        | 190 mm | 250 mm | 18.4 W | 25 Degree        | € 479.95 |






CANUM 24V SYMMETRICAL

**Application Area**  
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

|                         |                            |                        |                                  |
|-------------------------|----------------------------|------------------------|----------------------------------|
| Housing                 | Stainless steel, Aluminium | Installation Depth     | 150 mm                           |
| Colour Temperature      | 3000 K                     | Light Beam Angle       | 45 Degree                        |
| Luminous Flux           | 370 lm                     | Cut Out Ø              | 102 mm                           |
| Height                  | 102 mm                     | Control                | Dimmable via optional controller |
| Ø                       | 116 mm                     | CRI (Ra)               | 80                               |
| Power                   | 5.8 W                      | Primary Cable Length   | 2 m                              |
| Rated Input Voltage     | 24 V/DC                    | Primary Connection End | WEIPU plug 2-pole                |
| Power Supply Unit incl. | No                         | Light Distribution     | Symmetric                        |



| Article | Housing Color | Price    |
|---------|---------------|----------|
| 100133  | Silver        | € 156.95 |



|             |                                                                          |
|-------------|--------------------------------------------------------------------------|
| Accessories |                                                                          |
| 862230      | OCTO, CV, Mini 24 V/12 W                                                 |
| 872083      | IP, CV, V6-40-24                                                         |
| 843501      | RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control |

|  |         |
|--|---------|
|  | € 17.95 |
|  | € 59.95 |
|  | € 79.95 |






CANUM 24V ASYMMETRICAL

- Including 0.5 m connecting cable with WEIPU plug
- Asymmetrical

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

|                         |                            |                        |                                  |
|-------------------------|----------------------------|------------------------|----------------------------------|
| Housing                 | Stainless steel, Aluminium | Light Beam Angle       | 45 Degree                        |
| Colour Temperature      | 3000 K                     | Light Beam Angle 2     | 35 Degree                        |
| Luminous Flux           | 800 lm                     | Cut Out Ø              | 157 mm                           |
| Height                  | 111 mm                     | Control                | Dimmable via optional controller |
| Ø                       | 173 mm                     | CRI (Ra)               | 80                               |
| Power                   | 14 W                       | Primary Cable Length   | 0.5 m                            |
| Rated Input Voltage     | 24 V/DC                    | Primary Connection End | WEIPU plug 2-pole                |
| Power Supply Unit incl. | No                         | Light Distribution     | Asymetric                        |
| Installation Depth      | 153 mm                     |                        |                                  |



730296

| Article | Housing Color | Price    |
|---------|---------------|----------|
| 730296  | Silver        | € 215.95 |



Accessories

- 872083 IP, CV, V6-40-24
- 843501 RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control

|  |         |
|--|---------|
|  | € 59.95 |
|  | € 79.95 |








CANUM RGB 24V SYMMETRICAL

**Application Area**  
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

|                         |                            |                        |                                  |
|-------------------------|----------------------------|------------------------|----------------------------------|
| Housing                 | Stainless steel, Aluminium | Installation Depth     | 150 mm                           |
| Luminous Flux           | 370 lm                     | Light Beam Angle       | 30 Degree                        |
| Height                  | 102 mm                     | Cut Out Ø              | 102 mm                           |
| Ø                       | 116 mm                     | Control                | Dimmable via optional controller |
| Power                   | 7.4 W                      | Primary Cable Length   | 0.5 m                            |
| Rated Input Voltage     | 24 V/DC                    | Primary Connection End | WEIPU plug 4-pole                |
| Power Supply Unit incl. | No                         | Light Distribution     | Symmetric                        |



730276

| Article | Housing Color | Price    |
|---------|---------------|----------|
| 730276  | Silver        | € 175.95 |



- Accessories
- 872083 IP, CV, V6-40-24
  - 843502 RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20






CANUM RGB 24V ASYMMETRICAL

·Including 0.5 m connecting cable with WEIPU plug

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

|                         |                            |                        |                                  |
|-------------------------|----------------------------|------------------------|----------------------------------|
| Housing                 | Stainless steel, Aluminium | Light Beam Angle       | 50 Degree                        |
| Luminous Flux           | 650 lm                     | Light Beam Angle 2     | 35 Degree                        |
| Height                  | 111 mm                     | Cut Out Ø              | 157 mm                           |
| Ø                       | 173 mm                     | Control                | Dimmable via optional controller |
| Power                   | 16.9 W                     | Primary Cable Length   | 0.5 m                            |
| Rated Input Voltage     | 24 V/DC                    | Primary Connection End | WEIPU plug 4-pole                |
| Power Supply Unit incl. | No                         | IK Protection Class    | IK07                             |
| Installation Depth      | 153 mm                     | Light Distribution     | Asymetric                        |



730454

| Article | Housing Color | Price    |
|---------|---------------|----------|
| 730454  | Silver        | € 287.95 |



Accessories

|        |                                                                   |
|--------|-------------------------------------------------------------------|
| 872083 | IP, CV, V6-40-24                                                  |
| 843502 | RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20 |

|  |         |
|--|---------|
|  | € 59.95 |
|  | € 79.95 |








CANUM 230V SYMMETRICAL

•Including connecting cable

**Application Area**  
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

|                     |                            |                         |                |
|---------------------|----------------------------|-------------------------|----------------|
| Housing             | Stainless steel, Aluminium | Power Supply Unit incl. | Yes            |
| Colour Temperature  | 3000 K                     | Installation Depth      | 150 mm         |
| Luminous Flux       | 280 lm                     | Light Beam Angle        | 30 Degree      |
| Height              | 102 mm                     | Cut Out Ø               | 102 mm         |
| Ø                   | 116 mm                     | CRI (Ra)                | 80             |
| Power               | 4.1 W                      | Primary Cable Length    | 0.5 m          |
| Rated Input Voltage | 220-240 V/AC               | Primary Connection End  | Connection box |
|                     |                            | Light Distribution      | Symmetric      |



| Article | Housing Color                                                                              | Price                                                                                        |
|---------|--------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| 730255  |  Silver |  € 143.95 |



**5-year guarantee**  
Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.




CANUM 230V ASYMMETRICAL

- Asymmetrical
- Including 0.5 m connecting cable

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

|                         |                            |                        |                |
|-------------------------|----------------------------|------------------------|----------------|
| Housing                 | Stainless steel, Aluminium | Installation Depth     | 153 mm         |
| Colour Temperature      | 3000 K                     | Light Beam Angle       | 45 Degree      |
| Luminous Flux           | 700 lm                     | Light Beam Angle 2     | 35 Degree      |
| Height                  | 111 mm                     | Cut Out Ø              | 157 mm         |
| Ø                       | 173 mm                     | CRI (Ra)               | 80             |
| Power                   | 11.9 W                     | Primary Cable Length   | 0.5 m          |
| Rated Input Voltage     | 220-240 V/AC               | Primary Connection End | Connection box |
| Power Supply Unit incl. | Yes                        | IK Protection Class    | IK09           |
|                         |                            | Light Distribution     | Asymetric      |



| Article | Housing Color | Price    |
|---------|---------------|----------|
| 730289  | Silver        | € 215.95 |



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.






## LINE

·Incl. connecting cable

### Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

|                         |                            |                        |                |
|-------------------------|----------------------------|------------------------|----------------|
| Housing                 | Stainless steel, Aluminium | Light Beam Angle       | 20 Degree      |
| Colour Temperature      | 3000 K                     | Cut Out Width          | 68 mm          |
| Width                   | 68 mm                      | CRI (Ra)               | 80             |
| Height                  | 31.5 mm                    | Primary Cable Length   | 0.5 m          |
| Rated Input Voltage     | 220-240 V/AC               | Primary Connection End | Connection box |
| Power Supply Unit incl. | Yes                        | IK Protection Class    | IK07           |
| Installation Depth      | 80 mm                      | Light Distribution     | Symmetric      |



730432

| Article       | Housing Color |  | Luminous Flux | Length  | Power  | Cut Out Length | Cutout L x W | Price           |
|---------------|---------------|--|---------------|---------|--------|----------------|--------------|-----------------|
| <b>730434</b> | Silver        |  | 1100 lm       | 549 mm  | 18.0 W | 527 mm         | 527 x 68 mm  | <b>€ 319.95</b> |
| <b>730432</b> | Silver        |  | 2300 lm       | 1025 mm | 36.0 W | 1007 mm        | 1007 x 68 mm | <b>€ 509.95</b> |




## LINE ASYMMETRICAL

### Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

|                         |                            |                        |                |
|-------------------------|----------------------------|------------------------|----------------|
| Housing                 | Stainless steel, Aluminium | Installation Depth     | 90 mm          |
| Colour Temperature      | 3000 K                     | Light Beam Angle       | 45 Degree      |
| Width                   | 63 mm                      | Light Beam Angle 2     | 35 Degree      |
| Height                  | 65 mm                      | Cut Out Width          | 58 mm          |
| Rated Input Voltage     | 220-240 V/AC               | CRI (Ra)               | 80             |
| Power Supply Unit incl. | Yes                        | Primary Connection End | Connection box |
|                         |                            | Light Distribution     | Asymetric      |



730262

| Article       | Housing Color |  | Luminous Flux | Length | Power  | Cut Out Length | Cutout L x W | Price           |
|---------------|---------------|--|---------------|--------|--------|----------------|--------------|-----------------|
| <b>730292</b> | Silver        |  | 340 lm        | 195 mm | 5.5 W  | 180 mm         | 180 x 58 mm  | <b>€ 148.95</b> |
| <b>730262</b> | Silver        |  | 730 lm        | 328 mm | 11.9 W | 313 mm         | 313 x 58 mm  | <b>€ 207.95</b> |





page 540



page 541

# floodlight








DEKO-LIGHT RF-SMART FLOODLIGHT RGB+CCT RF + ZIGBEE

- Adjustable brightness and colour saturation
- 16 million available colours and adjustable colour temperature
- 18 automatic programmes pre-installed
- Program and remote control synchronisation when operating multiple RF smart components (repeater function)
- Can be controlled with RF smart wireless remote controls (2.4 GHz, range approx. 30 m, not included in the scope of delivery)
- Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo (Alexa), Google Assistant, Tuya (relevant gateway required, outdoor range up to 100 m)

Application Area

Object lighting / architecture, Garage / carport / car park

|                         |                    |                         |                      |
|-------------------------|--------------------|-------------------------|----------------------|
| Housing                 | Aluminium, Plastic | Control                 | RF-Smart, ZigBee 3.0 |
| Colour Temperature      | 2700-6500 K        | Primary Cable Length    | 1.5 m                |
| Rated Input Voltage     | 100-240 V/AC       | CRI (Ra)                | 80                   |
| Power Supply Unit incl. | Yes                | Light Direction         | Front                |
| Light Beam Angle        | 160 Degree         | IP Protection Type Plug | IP 44                |
| Swivelling Angle        | 345 Degree         |                         |                      |



843518

| Article | Housing Color |           | Luminous Flux | Length | Width  | Height | Power   | Price    |
|---------|---------------|-----------|---------------|--------|--------|--------|---------|----------|
| 843518  | Anthracite    | RGB WW CW | 3300 lm       | 40 mm  | 167 mm | 227 mm | 30.0 W  | € 199.95 |
| 843519  | Anthracite    | RGB WW CW | 4800 lm       | 48 mm  | 220 mm | 311 mm | 50.0 W  | € 279.95 |
| 843520  | Anthracite    | RGB WW CW | 10000 lm      | 60 mm  | 295 mm | 403 mm | 100.0 W | € 439.95 |



Accessories

- 843510 RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20
- 843511 RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20
- 843512 RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT
- 843513 RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT
- 843522 RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT
- 843514 RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT
- 930659 Wall bracket/display arm, metal, black, length: 800 mm






ATIK

- IEC62662 - Protection against mechanical effects (IK Code)
- EN60598-2-24 - Lights for use in explosive gas and dust atmosphere (D designation)
- Including 2 m connecting cable with IP44 plug

Application Area

Garage / carport / car park, Industry / production / high-bay warehouse


|                         |            |                         |                 |
|-------------------------|------------|-------------------------|-----------------|
| Housing                 | Aluminium  | Swivelling Angle        | 180 Degree      |
| Colour Temperature      | 4000 K     | Primary Cable Length    | 2 m             |
| Length                  | 319 mm     | Primary Connection End  | Power plug IP44 |
| Width                   | 90 mm      | CRI (Ra)                | 80              |
| Height                  | 411 mm     | IP Protection Type Plug | IP 44           |
| Power Supply Unit incl. | Yes        | IK Protection Class     | IK08            |
| Light Beam Angle        | 110 Degree |                         |                 |




732102

| Article | Housing Color |  | Luminous Flux | Power   | Rated Input Voltage | EEL | Price    |
|---------|---------------|--|---------------|---------|---------------------|-----|----------|
| 732096  |               |  | 21350 lm      | 152.0 W | 220-240 V/AC        |     | € 351.95 |
| 732097  |               |  | 28450 lm      | 202.0 W | 220-240 V/AC        |     | € 443.95 |
| 732098  |               |  | 31800 lm      | 242.0 W | 220-240 V/AC        |     | € 499.95 |
| 732102  |               |  | 39900 lm      | 302.0 W | 100-240 V/AC        |     | € 559.95 |





display lights



page 544





## ATIS

When it comes to illuminating signs, façades, billboards or images, display lights are the perfect choice. They are easy to install, exceptionally efficient and suit almost any environment thanks to their timeless design. With corresponding IP protection, they can also be used outdoors, purposefully providing an additional lighting source in such environments.




ATIS

·rotatable and swivelling lamp head

**Application Area**  
Object lighting / architecture, Advertising lighting

|                    |           |                         |                                              |
|--------------------|-----------|-------------------------|----------------------------------------------|
| Housing            | Aluminium | Rated Input Voltage     | 220-240 V/AC                                 |
| Colour Temperature | 3000 K    | Power Supply Unit incl. | Yes                                          |
| Luminous Flux      | 1150 lm   | Light Beam Angle        | 100 Degree                                   |
| Length             | 526 mm    | Swivelling Angle        | 90 Degree                                    |
| Width              | 144 mm    | Control                 | Leading-edge dimmer,<br>Trailing-edge dimmer |
| Base Length        | 95 mm     | CRI (Ra)                | 80                                           |
| Base Height        | 40 mm     |                         |                                              |
| Power              | 15 W      |                         |                                              |



688020

| Article | Housing Color | Price    |
|---------|---------------|----------|
| 688020  | White         | € 183.95 |
| 688021  | Black         | € 183.95 |




**Onlineshop**  
You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.






## **SYSTEM LAUTARO**

- 548 Overview ring lights
- 550 pendant lights
- 558 surface mounted ceiling lights



# System Lautaro



  
page 554



  
page 556



  
page 555



  
page 557



  
page 558





## LAUTARO

LAUTARO is a new luminaire series which, despite its enormous configuration options, has one thing in common: it is round or ring-shaped and has a surrounding LED ring. But that is where the similarities end. All other product features can be selected, which is why LAUTARO is suitable for a wide range of commercial [and private] applications, including cafés, hotel lobbies, schools, stores and much more.



Is your desired variant not included in the standard range? Then simply configure your customised LAUTARO using our online configurator.



**Note:** Please note that the LAUTARO series are project items that are not available from stock. The delivery time is approx. 6 weeks.



#### PLEASANT LIGHT ALL ROUND - YOUR BENEFITS AT A GLANCE:

- BEG-eligible [for approx. 50% of models]
- DALI dimmable thanks to integrated power supply unit
- emergency current capable
- through-wiring for simple series connection
- tool-free connection with spring terminals
- easy to install and maintain thanks to durable, easily replaceable components
- invisible screw connection for a clean appearance

#### 1,080 VARIANTS AS STANDARD - SPECIAL DESIGNS ON REQUEST MODULAR SYSTEM FOR MAXIMUM DESIGN FREEDOM:

- three profile sizes: 60×44 / 80×55 / 100×80 mm
- three colours: RAL 9005 [black] / RAL 9006 [silver] / RAL 9016 [white]
- four diameters: 600 / 900 / 1,200 / 1,500 mm
- three light colors: 2,700 K / 3,000 K / 4,000 K
- surface-mounted luminaires for direct light
- pendant luminaires for direct or direct-indirect light [separately switchable and dimmable]
- custom-made products on request - e.g. individual sizes or RAL of your choice





## 1,080 GOOD REASONS

The LAUTARO surface-mounted and pendant light offers so many variants. But don't worry: the configuration is very simple! LAUTARO is a new luminaire series which, despite its enormous configuration options, has one thing in common: it is round or ring-shaped and has a uniform, all-round light emission. But that's where the similarities end. All other product features can be selected, making LAUTARO ideal for a wide range of commercial [and private] applications, including reception areas, restaurants, atriums, open-plan offices and much more.

### DALI for all

All LAUTARO variants are equipped with an integrated DALI power supply unit and are dimmable. The power supply units are suitable for emergency power and facilitate installation thanks to integrated loop-in/loop-out technology.

All information on the LAUTARO series can be found from page 588.



Is your desired variant not included in the standard range? Then simply configure your customised LAUTARO using our online configurator.



## 6 STEPS TO A CUSTOMISED LAUTARO

### 1. SELECT THE PRODUCT VARIANT

The LAUTARO is available as a surface-mounted or pendant luminaire - the latter with two types of suspension and direct or direct/indirect lighting.

### 2. SELECT THE PROFILE

There is a choice of three different profiles [height x width in mm]: 60x44, 80x55 and 100x80.

### 3. SELECT THE DIAMETER

In order to use the LAUTARO in different room sizes and applications, it is available in four diameters: 600, 900, 1,200 and 1,500 mm.

### 4. SELECT THE HOUSING COLOUR


Black, grey, white - each in matt with a powder-coated surface. Individual RAL colours are available on special request.

### 5. SELECT THE DIFFUSER

In addition to the opal diffuser, a microprismatic version is also available for use in workplaces with particularly low glare [UGR<19].

### 6. SELECT THE COLOUR TEMPERATURE

2,700K, 3,000K or 4,000K - incandescent lamp, warm white or neutral white. With these three colour temperatures, you can cover most lighting requirements.

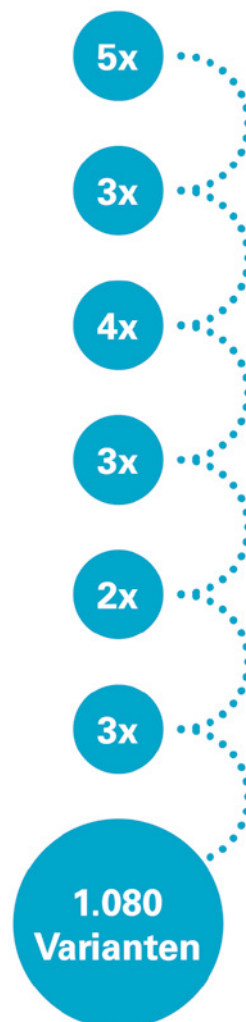



LAUTARO 900/60 DOWN, SUSPENSION CENTRE

- DALI dimmable with integrated power supply
- continuous wiring possible
- tool-free connection with plug-in terminals
- easy to install / maintain
- long-lasting, easily replaceable components
- invisible screw connections
- customised designs available on request


Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

|                     |                  |                         |                        |
|---------------------|------------------|-------------------------|------------------------|
| Housing             | Aluminium, Steel | Power Supply Unit incl. | Yes                    |
| Power               | 60 W             | Light Beam Angle        | 90 Degree              |
| Rated Input Voltage | 198-264 V/AC     | Control                 | DALI 2 / DT6, Push-Dim |
| Tread depth         | 60 mm            | CRI (Ra)                | 90                     |
| Ø                   | 900 mm           | IK Protection Class     | IK05                   |
| Pendulum Length     | 3000 mm          |                         |                        |

| Article | Housing Color                                                                                  | Colour Temperature                                                                         | Gloss level lens | Luminous Flux | Price    |
|---------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|------------------|---------------|----------|
| 950216  |  Light grey |  2700 K | opal             | 6600 lm       | € 951.95 |
| 950217  |  Black      |  2700 K | opal             | 6600 lm       | € 951.95 |
| 950218  |  White      |  2700 K | opal             | 6600 lm       | € 951.95 |
| 950225  |  Light grey |  2700 K | microprismatic   | 7000 lm       | € 975.95 |
| 950226  |  Black      |  2700 K | microprismatic   | 7000 lm       | € 975.95 |
| 950227  |  White      |  2700 K | microprismatic   | 7000 lm       | € 975.95 |
| 950219  |  Light grey |  3000 K | opal             | 7000 lm       | € 951.95 |
| 950220  |  Black      |  3000 K | opal             | 7000 lm       | € 951.95 |
| 950221  |  White      |  3000 K | opal             | 7000 lm       | € 951.95 |
| 950228  |  Light grey |  3000 K | microprismatic   | 7500 lm       | € 975.95 |
| 950229  |  Black      |  3000 K | microprismatic   | 7500 lm       | € 975.95 |
| 950230  |  White      |  3000 K | microprismatic   | 7500 lm       | € 975.95 |
| 950222  |  Light grey |  4000 K | opal             | 7200 lm       | € 951.95 |
| 950223  |  Black      |  4000 K | opal             | 7200 lm       | € 951.95 |
| 950224  |  White      |  4000 K | opal             | 7200 lm       | € 951.95 |
| 950231  |  Light grey |  4000 K | microprismatic   | 8100 lm       | € 975.95 |
| 950232  |  Black      |  4000 K | microprismatic   | 8100 lm       | € 975.95 |
| 950233  |  White      |  4000 K | microprismatic   | 8100 lm       | € 975.95 |





## LAUTARO 900/60 DOWN, SUSPENSION PARALLEL

- DALI dimmable with integrated power supply
- continuous wiring possible
- tool-free connection with plug-in terminals
- easy to install / maintain
- long-lasting, easily replaceable components
- invisible screw connections
- customised designs available on request

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

|                     |                  |                         |                        |
|---------------------|------------------|-------------------------|------------------------|
| Housing             | Aluminium, Steel | Power Supply Unit incl. | Yes                    |
| Power               | 60 W             | Light Beam Angle        | 90 Degree              |
| Rated Input Voltage | 198-264 V/AC     | Control                 | DALI 2 / DT6, Push-Dim |
| Tread depth         | 60 mm            | CRI (Ra)                | 90                     |
| Ø                   | 900 mm           | IK Protection Class     | IK05                   |
| Pendulum Length     | 3000 mm          |                         |                        |

| Article | Housing Color | Colour Temperature | Gloss level lens | Luminous Flux | Price    |
|---------|---------------|--------------------|------------------|---------------|----------|
| 950234  | Light grey    | 2700 K             | opal             | 6600 lm       | € 951.95 |
| 950235  | Black         | 2700 K             | opal             | 6600 lm       | € 951.95 |
| 950236  | White         | 2700 K             | opal             | 6600 lm       | € 951.95 |
| 950243  | Light grey    | 2700 K             | microprismatic   | 7000 lm       | € 975.95 |
| 950244  | Black         | 2700 K             | microprismatic   | 7000 lm       | € 975.95 |
| 950245  | White         | 2700 K             | microprismatic   | 7000 lm       | € 975.95 |
| 950237  | Light grey    | 3000 K             | opal             | 7000 lm       | € 951.95 |
| 950238  | Black         | 3000 K             | opal             | 7000 lm       | € 951.95 |
| 950239  | White         | 3000 K             | opal             | 7000 lm       | € 951.95 |
| 950246  | Light grey    | 3000 K             | microprismatic   | 7500 lm       | € 975.95 |
| 950247  | Black         | 3000 K             | microprismatic   | 7500 lm       | € 975.95 |
| 950248  | White         | 3000 K             | microprismatic   | 7500 lm       | € 975.95 |
| 950240  | Light grey    | 4000 K             | opal             | 7200 lm       | € 951.95 |
| 950241  | Black         | 4000 K             | opal             | 7200 lm       | € 951.95 |
| 950242  | White         | 4000 K             | opal             | 7200 lm       | € 951.95 |
| 950249  | Light grey    | 4000 K             | microprismatic   | 8100 lm       | € 975.95 |
| 950250  | Black         | 4000 K             | microprismatic   | 8100 lm       | € 975.95 |
| 950251  | White         | 4000 K             | microprismatic   | 8100 lm       | € 975.95 |





LAUTARO 900/60 UP/DOWN, SUSPENSION CENTRE

- DALI dimmable with integrated power supply
- continuous wiring possible
- tool-free connection with plug-in terminals
- easy to install / maintain
- long-lasting, easily replaceable components
- invisible screw connections
- customised designs available on request


Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

|                         |                  |                     |                        |
|-------------------------|------------------|---------------------|------------------------|
| Housing                 | Aluminium, Steel | Light Beam Angle    | 90 Degree              |
| Rated Input Voltage     | 198-264 V/AC     | Control             | DALI 2 / DT6, Push-Dim |
| Tread depth             | 60 mm            | CRI (Ra)            | 90                     |
| Ø                       | 900 mm           | IK Protection Class | IK05                   |
| Pendulum Length         | 3000 mm          |                     |                        |
| Power Supply Unit incl. | Yes              |                     |                        |

| Article | Housing Color | Colour Temperature | Gloss level lens | Luminous Flux | Power  | Price     |
|---------|---------------|--------------------|------------------|---------------|--------|-----------|
| 950252  | Light grey    | 2700 K             | opal             | 9200 lm       | 89.0 W | € 1282.95 |
| 950253  | Black         | 2700 K             | opal             | 9200 lm       | 89.0 W | € 1282.95 |
| 950254  | White         | 2700 K             | opal             | 9200 lm       | 89.0 W | € 1282.95 |
| 950261  | Light grey    | 2700 K             | microprismatic   | 10000 lm      | 89.0 W | € 1267.95 |
| 950262  | Black         | 2700 K             | microprismatic   | 10000 lm      | 89.0 W | € 1267.95 |
| 950263  | White         | 2700 K             | microprismatic   | 10000 lm      | 89.0 W | € 1267.95 |
| 950257  | White         | 3000 K             | opal             | 9900 lm       | 85.0 W | € 1282.95 |
| 950255  | Light grey    | 3000 K             | opal             | 9900 lm       | 89.0 W | € 1282.95 |
| 950256  | Black         | 3000 K             | opal             | 9900 lm       | 89.0 W | € 1282.95 |
| 950264  | Light grey    | 3000 K             | microprismatic   | 10500 lm      | 89.0 W | € 1267.95 |
| 950265  | Black         | 3000 K             | microprismatic   | 10500 lm      | 89.0 W | € 1267.95 |
| 950266  | White         | 3000 K             | microprismatic   | 10500 lm      | 89.0 W | € 1267.95 |
| 950258  | Light grey    | 4000 K             | opal             | 10000 lm      | 89.0 W | € 1282.95 |
| 950259  | Black         | 4000 K             | opal             | 10000 lm      | 89.0 W | € 1282.95 |
| 950260  | White         | 4000 K             | opal             | 10000 lm      | 89.0 W | € 1282.95 |
| 950267  | Light grey    | 4000 K             | microprismatic   | 11500 lm      | 89.0 W | € 1267.95 |
| 950268  | Black         | 4000 K             | microprismatic   | 11500 lm      | 89.0 W | € 1267.95 |
| 950269  | White         | 4000 K             | microprismatic   | 11500 lm      | 89.0 W | € 1267.95 |





## LAUTARO 900/60 UP/DOWN, SUSPENSION PARALLEL

- DALI dimmable with integrated power supply
- continuous wiring possible
- tool-free connection with plug-in terminals
- easy to install / maintain
- long-lasting, easily replaceable components
- invisible screw connections
- customised designs available on request

### Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

|                     |                  |                         |                        |
|---------------------|------------------|-------------------------|------------------------|
| Housing             | Aluminium, Steel | Power Supply Unit incl. | Yes                    |
| Power               | 89 W             | Light Beam Angle        | 90 Degree              |
| Rated Input Voltage | 198-264 V/AC     | Control                 | DALI 2 / DT6, Push-Dim |
| Tread depth         | 60 mm            | CRI (Ra)                | 90                     |
| Ø                   | 900 mm           | IK Protection Class     | IK05                   |
| Pendulum Length     | 3000 mm          |                         |                        |

| Article | Housing Color | Colour Temperature | Gloss level lens | Luminous Flux | Price     |
|---------|---------------|--------------------|------------------|---------------|-----------|
| 950270  | Light grey    | WW 2700 K          | opal             | 9200 lm       | € 1282.95 |
| 950271  | Black         | WW 2700 K          | opal             | 9200 lm       | € 1282.95 |
| 950272  | White         | WW 2700 K          | opal             | 9200 lm       | € 1282.95 |
| 950279  | Light grey    | WW 2700 K          | microprismatic   | 10000 lm      | € 1267.95 |
| 950280  | Black         | WW 2700 K          | microprismatic   | 10000 lm      | € 1267.95 |
| 950281  | White         | WW 2700 K          | microprismatic   | 10000 lm      | € 1267.95 |
| 950273  | Light grey    | WW 3000 K          | opal             | 9900 lm       | € 1282.95 |
| 950274  | Black         | WW 3000 K          | opal             | 9900 lm       | € 1282.95 |
| 950275  | White         | WW 3000 K          | opal             | 9900 lm       | € 1282.95 |
| 950282  | Light grey    | WW 3000 K          | microprismatic   | 10500 lm      | € 1267.95 |
| 950283  | Black         | WW 3000 K          | microprismatic   | 10500 lm      | € 1267.95 |
| 950284  | White         | WW 3000 K          | microprismatic   | 10500 lm      | € 1267.95 |
| 950276  | Light grey    | NW 4000 K          | opal             | 10000 lm      | € 1282.95 |
| 950277  | Black         | NW 4000 K          | opal             | 10000 lm      | € 1282.95 |
| 950278  | White         | NW 4000 K          | opal             | 10000 lm      | € 1282.95 |
| 950285  | Light grey    | NW 4000 K          | microprismatic   | 11500 lm      | € 1267.95 |
| 950286  | Black         | NW 4000 K          | microprismatic   | 11500 lm      | € 1267.95 |
| 950287  | White         | NW 4000 K          | microprismatic   | 11500 lm      | € 1267.95 |







LAUTARO 900/60

- DALI-dimmable with integrated power supply unit
- Through-wiring possible
- Tool-free connection with plug-in terminals
- Easy to install and maintain
- Durable, easily replaceable components
- Concealed screw connections
- Customised designs available on request

Application Area

Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

|                         |                  |                     |                        |
|-------------------------|------------------|---------------------|------------------------|
| Housing                 | Aluminium, Steel | Light Beam Angle    | 90 Degree              |
| Tread depth             | 60 mm            | Control             | DALI 2 / DT6, Push-Dim |
| Ø                       | 900 mm           | CRI (Ra)            | 90                     |
| Power                   | 60 W             | IK Protection Class | IK05                   |
| Rated Input Voltage     | 198-264 V/AC     |                     |                        |
| Power Supply Unit incl. | Yes              |                     |                        |

| Article | Housing Color | Colour Temperature | Gloss level lens | Luminous Flux | Price    |
|---------|---------------|--------------------|------------------|---------------|----------|
| 950918  | Light grey    | 2700 K             | opal             | 6600 lm       | € 799.95 |
| 950919  | Black         | 2700 K             | opal             | 6600 lm       | € 799.95 |
| 950920  | White         | 2700 K             | opal             | 6600 lm       | € 799.95 |
| 950927  | Light grey    | 2700 K             | microprismatic   | 7000 lm       | € 883.95 |
| 950928  | Black         | 2700 K             | microprismatic   | 7000 lm       | € 883.95 |
| 950929  | White         | 2700 K             | microprismatic   | 7000 lm       | € 883.95 |
| 950921  | Light grey    | 3000 K             | opal             | 7000 lm       | € 799.95 |
| 950922  | Black         | 3000 K             | opal             | 7000 lm       | € 799.95 |
| 950923  | White         | 3000 K             | opal             | 7000 lm       | € 799.95 |
| 950930  | Light grey    | 3000 K             | microprismatic   | 7500 lm       | € 883.95 |
| 950931  | Black         | 3000 K             | microprismatic   | 7500 lm       | € 883.95 |
| 950932  | White         | 3000 K             | microprismatic   | 7500 lm       | € 883.95 |
| 950924  | Light grey    | 4000 K             | opal             | 7200 lm       | € 799.95 |
| 950925  | Black         | 4000 K             | opal             | 7200 lm       | € 799.95 |
| 950926  | White         | 4000 K             | opal             | 7200 lm       | € 799.95 |
| 950933  | Light grey    | 4000 K             | microprismatic   | 8100 lm       | € 883.95 |
| 950934  | Black         | 4000 K             | microprismatic   | 8100 lm       | € 883.95 |
| 950935  | White         | 4000 K             | microprismatic   | 8100 lm       | € 883.95 |










## **SYSTEM PLANO**

- 562 Overview PLANO luminaire system
- 564 luminaire system
- 580 Overview PLANO profiles
- 582 profile system



# PLANO luminaire system

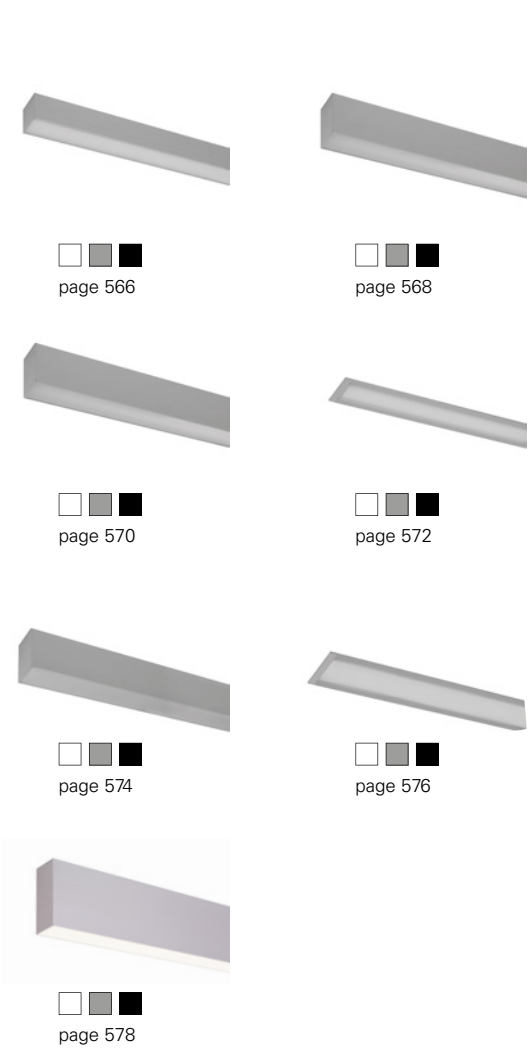






## PLANO LUMINAIRE SYSTEM

Whether as a recessed version, surface-mounted ceiling luminaire or pendant luminaire as well as for wall mounting: the PLANO series is more than just another combination of profile and LED strip and is produced entirely in Europe.


The linear lighting solutions are based on four different profiles and can be configured individually. Thus, there are hardly any limits to the possible applications - whether in the office, in schools, in private living areas, in stores, showrooms and many more.

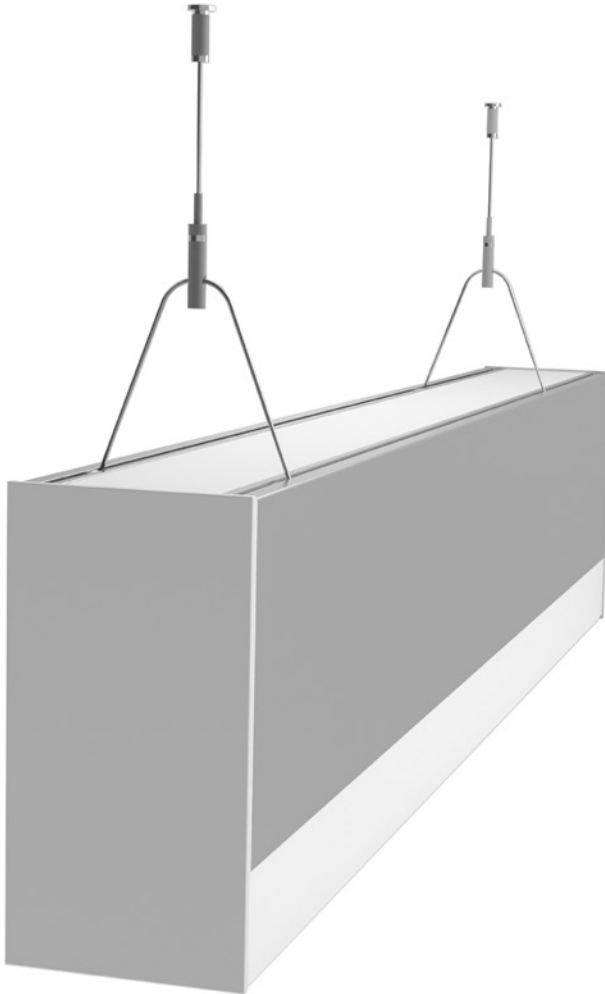

## INDIVIDUAL SOLUTION

A PLANO profile luminaire always has the same design - and yet it is individual. Inside sits a profile with LED illumination in 2,700, 3,000 or 4,000 K. The surrounding luminaire body is made of extruded aluminum and has an anodized or powder-coated surface. You can individually determine the length, equipment as well as the

basic shape of the body, because the PLANO series is an individual lighting solution.

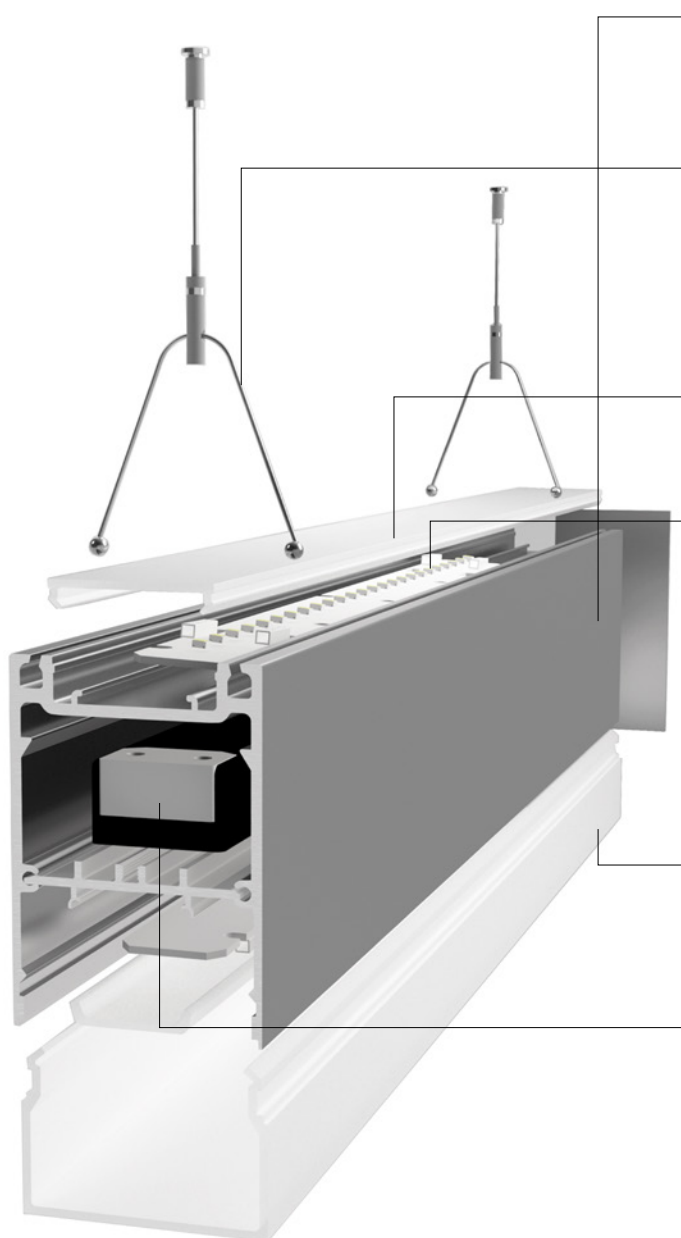

### PROFIL

- colour
- length
- basic shape

### ASSEMBLY

- installation
- built-in
- ceiling
- pendant
- wall

### RADIATION DIRECTION

- up
- up / down

### COLOUR TEMPERATURE


- 2700 K
- 3000 K
- 4000 K

### COVER

- opal
- opal U
- microprismatic

### CONTROL

- switchable
- DALI
- phase angle / section
- Casambi

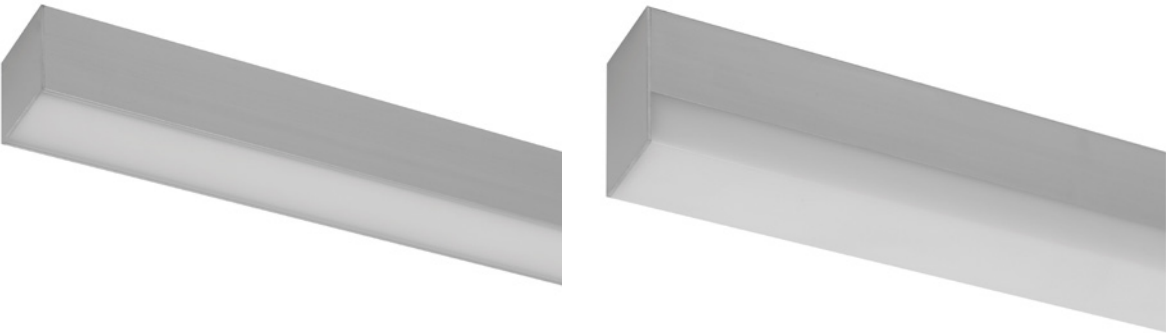

PLANO DS  
LUMINAIRE SYSTEM


- aluminium die casting
- direct light

| assembly          |          |                |                  | cover |        |                | length     | radiation dir. |         | colour     | colour temperature |        |        | control    |      |                     |         |
|-------------------|----------|----------------|------------------|-------|--------|----------------|------------|----------------|---------|------------|--------------------|--------|--------|------------|------|---------------------|---------|
| ceiling structure | pendulum | wall structure | ceiling mounting | opal  | opal U | microprismatic | individual | down           | up+down | individual | 2700 K             | 3000 K | 4000 K | switchable | DALI | phase angle/section | Casambi |
| x                 | x        |                |                  | x     | x      | x              | x          | x              |         | x          | x                  | x      | x      | x          | x    | x                   | x       |

LED

Ra>90

IP20

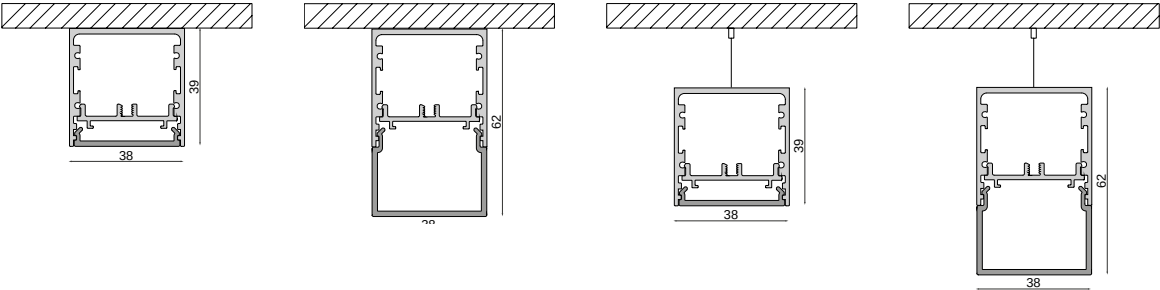


CONFIGURATION EXAMPLE

- DS surface-mounted luminaire | 2400 mm | black
- 74 W
- 3000 K | 6827 lm
- EVG | DALI
- incl. U-cover opal
- incl. end caps

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.



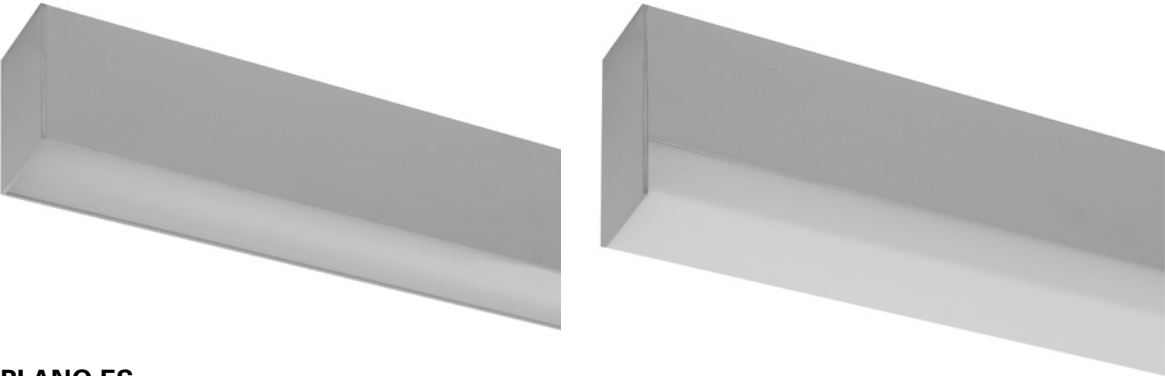

PLANO ES  
LUMINAIRE SYSTEM


- aluminium die casting
- direct light

| assembly          |          |                |                  | cover |        |                | length     | radiation dir. |         | colour     | colour temperature |        |        | control    |      |                     |         |
|-------------------|----------|----------------|------------------|-------|--------|----------------|------------|----------------|---------|------------|--------------------|--------|--------|------------|------|---------------------|---------|
| ceiling structure | pendulum | wall structure | ceiling mounting | opal  | opal U | microprismatic | individual | down           | up+down | individual | 2700 K             | 3000 K | 4000 K | switchable | DALI | phase angle/section | Casambi |
| x                 | x        |                |                  | x     | x      | x              | x          | x              | x       | x          | x                  | x      | x      | x          | x    | x                   | x       |

LED

Ra>90

IP20

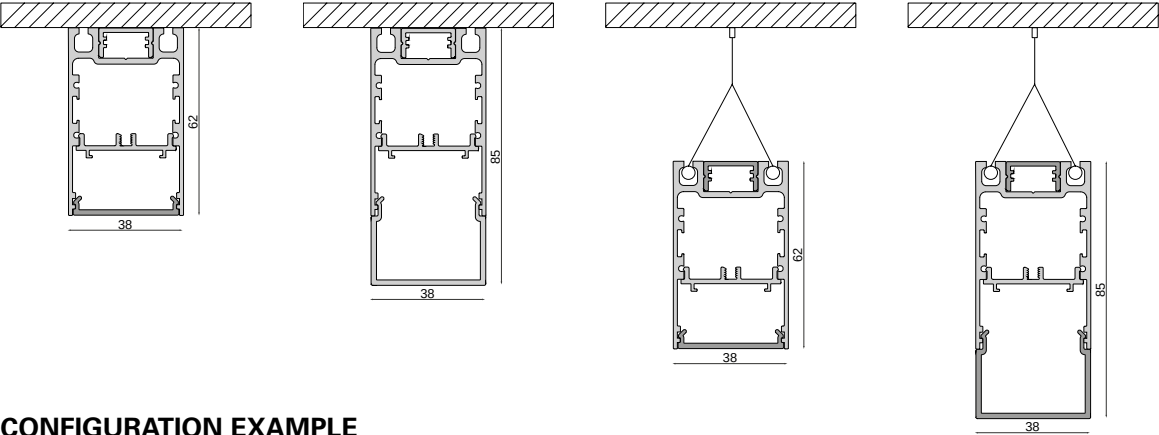

CONFIGURATION EXAMPLE

- ES surface-mounted luminaire | 2400 mm | black
- 74 W
- 3000 K | 5425 lm
- EVG | DALI
- incl. U-cover flat opal
- incl. end caps


price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.







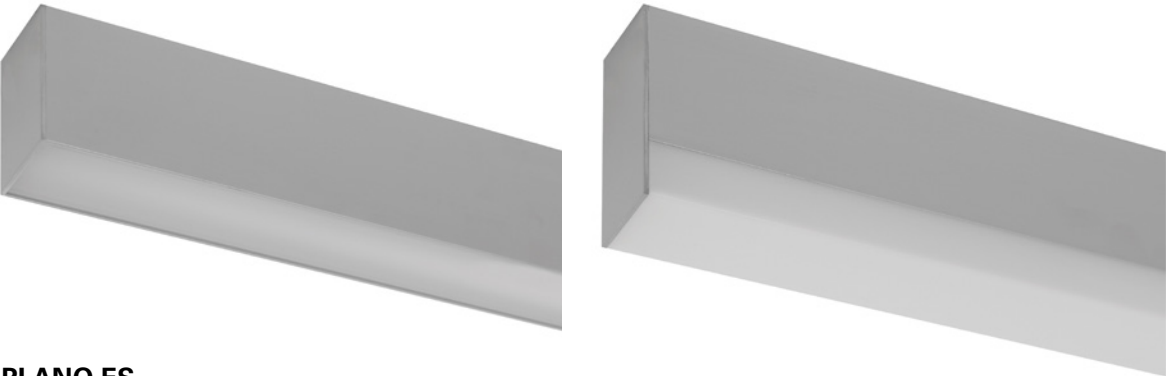

PLANO ES  
LUMINAIRE SYSTEM


- aluminium die casting
- direct light

| assembly          |          |                |                  | cover |        |                | length     | radiation dir. |         | colour     | colour temperature |        |        | control    |      |                     |         |
|-------------------|----------|----------------|------------------|-------|--------|----------------|------------|----------------|---------|------------|--------------------|--------|--------|------------|------|---------------------|---------|
| ceiling structure | pendulum | wall structure | ceiling mounting | opal  | opal U | microprismatic | individual | down           | up+down | individual | 2700 K             | 3000 K | 4000 K | switchable | DALI | phase angle/section | Casambi |
|                   |          | x              |                  | x     | x      | x              | x          | x              | x       | x          | x                  | x      | x      | x          | x    | x                   | x       |

LED

Ra>90

IP20





CONFIGURATION EXAMPLE

- ES wall-mounted luminaire | 2400 mm | black
- 97 W
- 3000 K | 7201 lm
- EVG | DALI
- incl. U-cover flat opal
- incl. end caps and wall bracket

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

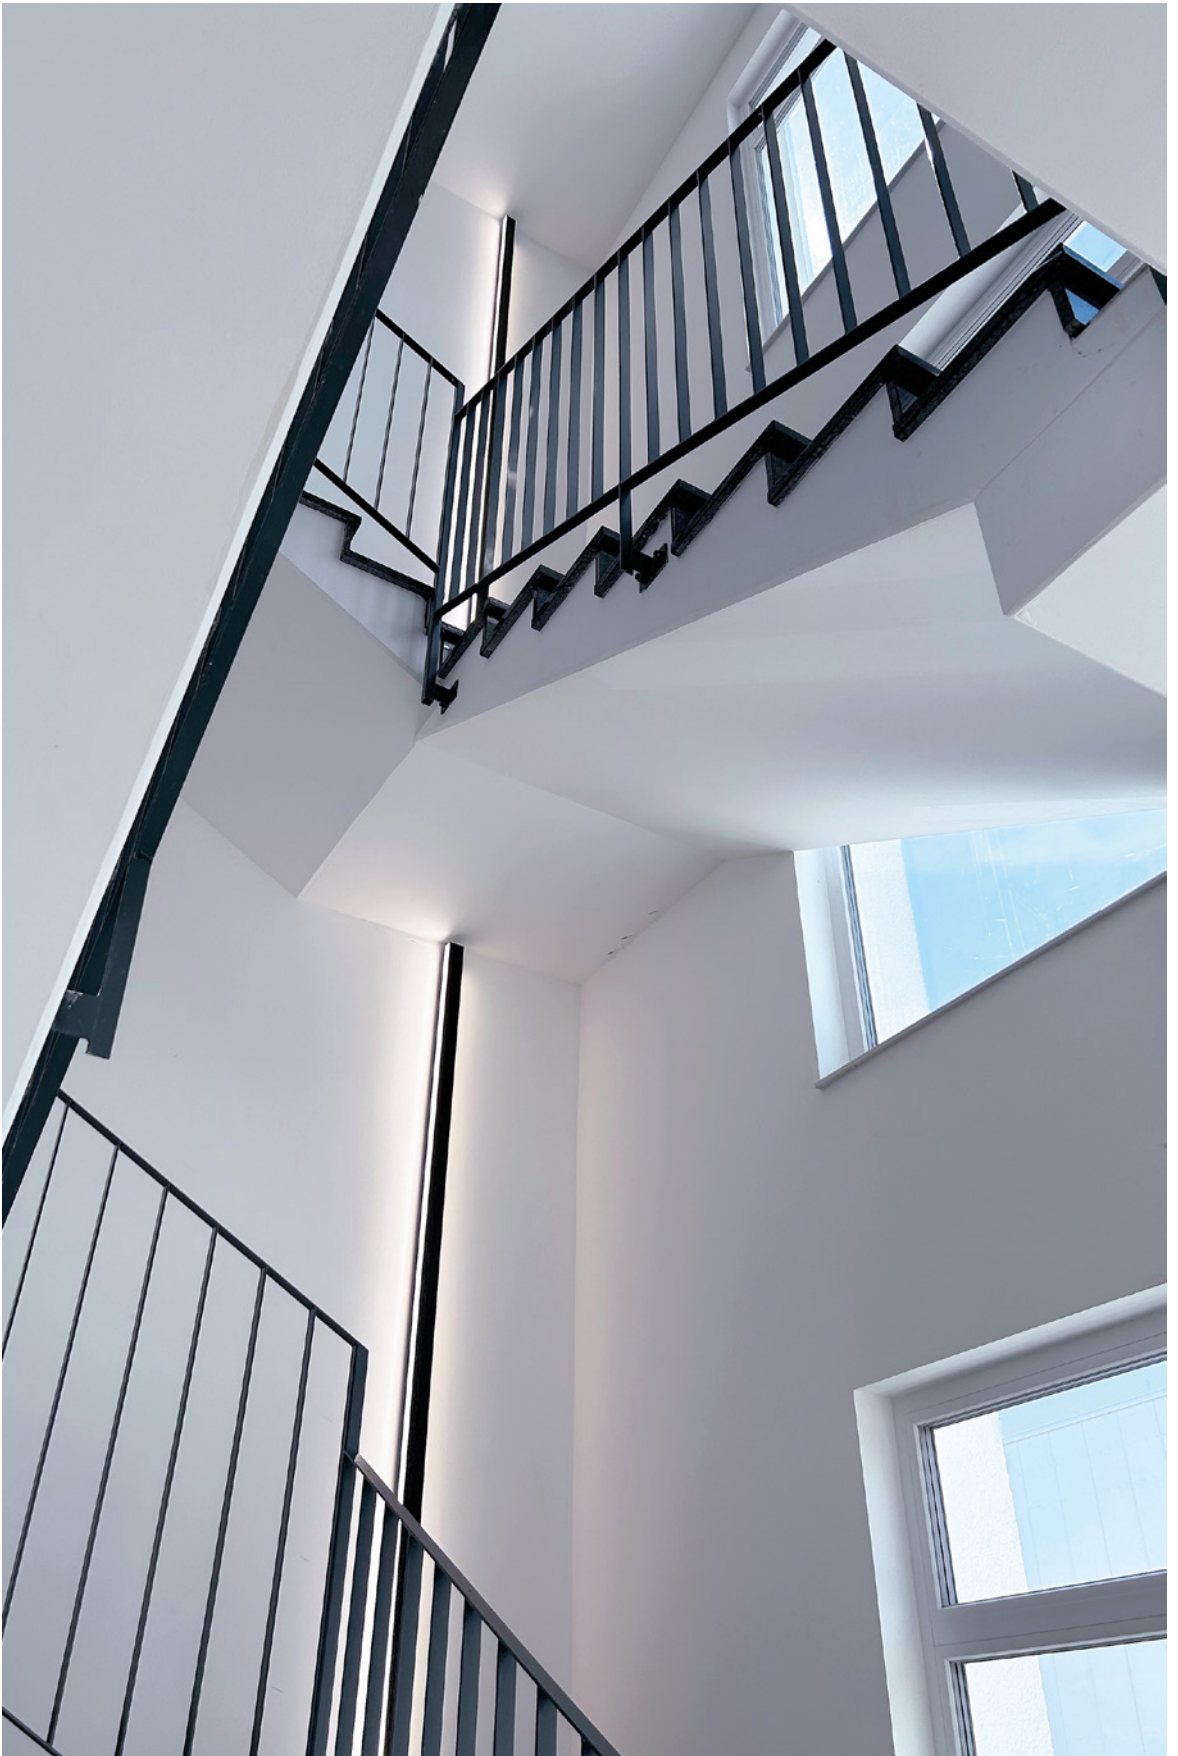

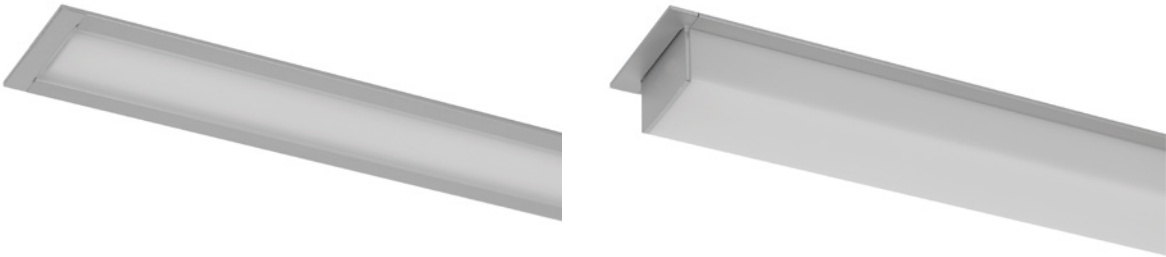

**PLANO ES RECESSED LUMINAIRE SYSTEM**


- aluminium die casting
- direct light

| assembly          |          |                |                  | cover |        |                | length     | radiation dir. |         | colour     | colour temperature |        |        | control    |      |                     |         |
|-------------------|----------|----------------|------------------|-------|--------|----------------|------------|----------------|---------|------------|--------------------|--------|--------|------------|------|---------------------|---------|
| ceiling structure | pendulum | wall structure | ceiling mounting | opal  | opal U | microprismatic | individual | down           | up+down | individual | 2700 K             | 3000 K | 4000 K | switchable | DALI | phase angle/section | Casambi |
|                   |          |                | x                | x     | x      | x              | x          | x              |         | x          | x                  | x      | x      | x          | x    | x                   | x       |

LED

Ra>90

IP20



**CONFIGURATION EXAMPLE**


- ES recessed ceiling luminaire | 2400 mm | black
- 97 W
- 3000 K | 7201 lm
- EVG | DALI
- incl. U-cover flat opal
- incl. end caps and mounting bracket

**price on demand**

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.





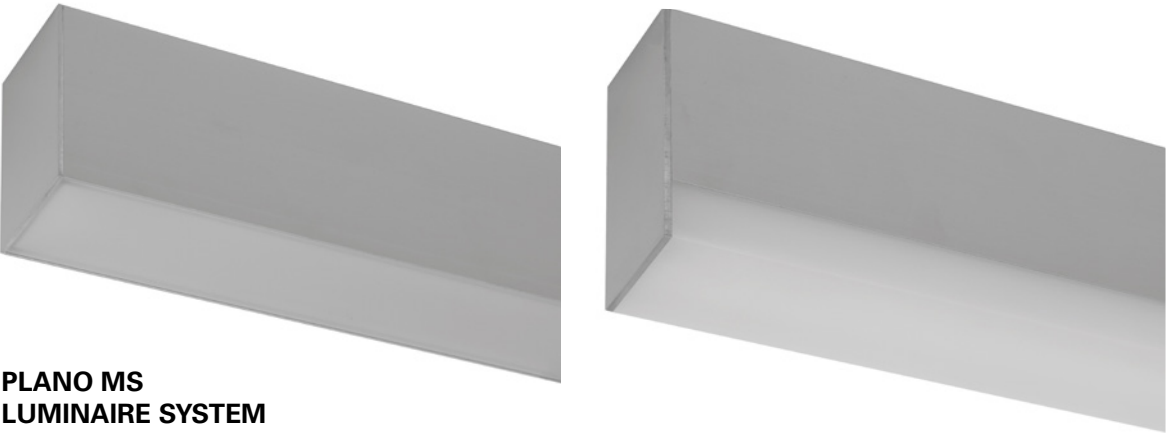

PLANO MS  
LUMINAIRE SYSTEM


- aluminium die casting
- direct light

| assembly          |          |                |                  | cover |        |                | length     | radiation dir. |         | colour     | colour temperature |        |        | control    |      |                     |         |
|-------------------|----------|----------------|------------------|-------|--------|----------------|------------|----------------|---------|------------|--------------------|--------|--------|------------|------|---------------------|---------|
| ceiling structure | pendulum | wall structure | ceiling mounting | opal  | opal U | microprismatic | individual | down           | up+down | individual | 2700 K             | 3000 K | 4000 K | switchable | DALI | phase angle/section | Casambi |
| x                 | x        |                |                  | x     | x      | x              | x          | x              | x       | x          | x                  | x      | x      | x          | x    | x                   | x       |

LED

Ra>90

IP20

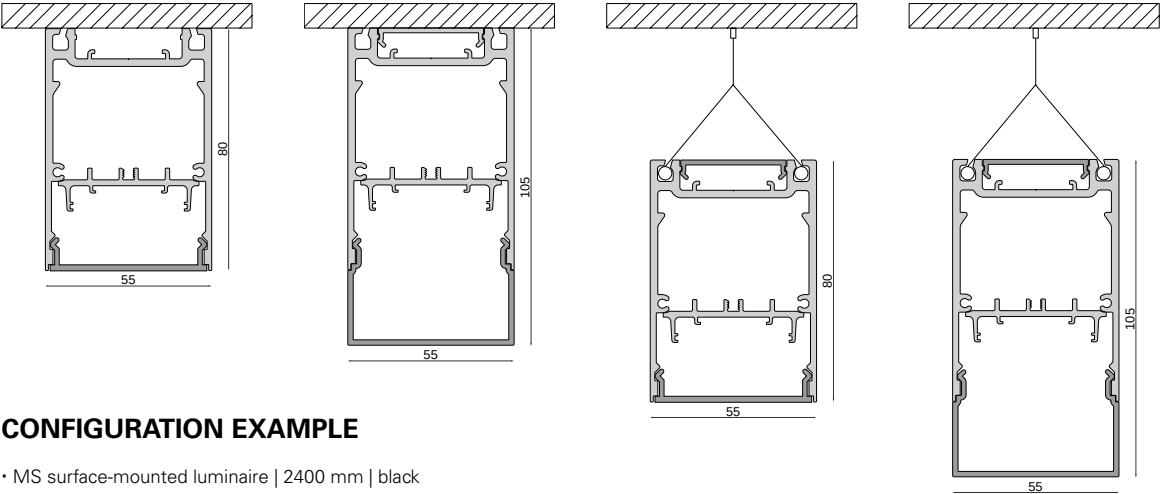

CONFIGURATION EXAMPLE

- MS surface-mounted luminaire | 2400 mm | black
- 74 W
- 3000 K | 6990 lm
- EVG | DALI
- incl. U-cover opal
- incl. end caps


price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.







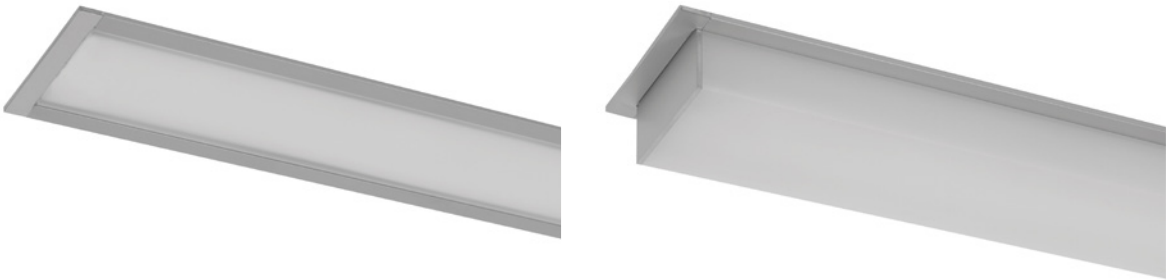

PLANO MS RECESSED LUMINAIRE SYSTEM


- aluminium die casting
- direct light

| assembly          |          |                |                  | cover |        |                | length     | radiation dir. |         | colour     | colour temperature |        |        | control    |      |                     |         |
|-------------------|----------|----------------|------------------|-------|--------|----------------|------------|----------------|---------|------------|--------------------|--------|--------|------------|------|---------------------|---------|
| ceiling structure | pendulum | wall structure | ceiling mounting | opal  | opal U | microprismatic | individual | down           | up+down | individual | 2700 K             | 3000 K | 4000 K | switchable | DALI | phase angle/section | Casambi |
|                   |          |                | x                | x     | x      | x              | x          | x              |         | x          | x                  | x      | x      | x          | x    | x                   | x       |

LED

Ra>90

IP20

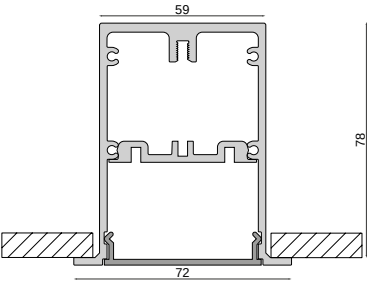

CONFIGURATION EXAMPLE

- MS recessed ceiling luminaire | 2400 mm | black
- 74 W
- 3000 K | 6990 lm
- EVG | DALI
- incl. U-cover opal
- incl. end caps and mounting bracket

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.





**PLANO BSH  
LUMINAIRE SYSTEM**


- aluminium die casting
- direct light

| assembly          |          |                |                  | cover |        |                | length     | radiation dir. |         | colour     | colour temperature |        |        | control    |      |                     |         |
|-------------------|----------|----------------|------------------|-------|--------|----------------|------------|----------------|---------|------------|--------------------|--------|--------|------------|------|---------------------|---------|
| ceiling structure | pendulum | wall structure | ceiling mounting | opal  | opal U | microprismatic | individual | down           | up+down | individual | 2700 K             | 3000 K | 4000 K | switchable | DALI | phase angle/section | Casambi |
|                   |          | x              |                  | x     | x      | x              | x          | x              | x       | x          | x                  | x      | x      | x          | x    | x                   | x       |

LED

Ra>90

IP20

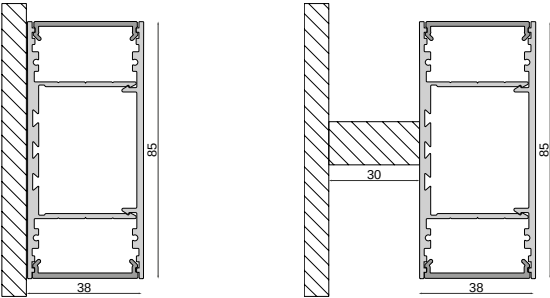



**CONFIGURATION EXAMPLE**

- BSH wall-mounted luminaire | 2400 mm | black
- 174 W,
- 3000 K | 10822 lm
- EVG | DALI
- incl. U-cover opal
- incl. end caps

**price on demand**

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.






□ ■ □  
page 582




□ ■ □  
page 583



□ ■ □  
page 584

# PLANO profiles









PROFILE PLANO ES

- universal light profile
- Uplight for LED strips up to 15 mm wide
- Downlight for LED strips up to 22 mm wide
- incl. LED carrier

| Housing |                                                                                             | Aluminium |         |          |
|---------|---------------------------------------------------------------------------------------------|-----------|---------|----------|
| Article | Housing Color                                                                               | Surface   | Length  | Price    |
| 970574  |  Black     |           | 2000 mm | € 103.95 |
| 970576  |  White     |           | 2000 mm | € 151.95 |
| 970575  |  Black     |           | 2500 mm | € 127.95 |
| 970577  |  White     |           | 2500 mm | € 191.95 |
| 970572  |  Aluminium | Anodised  | 2000 mm | € 103.95 |
| 970573  |  Aluminium | Anodised  | 2500 mm | € 127.95 |

Accessories

|        |                                                  |                                                                                     |         |
|--------|--------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 988111 | Plano ES opal indirect cover, 2 m                |    | € 19.95 |
| 988112 | Plano ES opal indirect cover, 2.5 m              |  | € 23.95 |
| 988201 | PLANO ES longitudinal connector                  |  | € 7.95  |
| 988204 | PLANO ES corner connector                        |  | € 14.95 |
| 988206 | PLANO aluminium wall bracket                     |  | € 39.95 |
| 988095 | PLANO ES and MS - cable suspension set, in pairs |  | € 71.95 |

Accessories for 970572, 970573

|        |                                                        |                                                                                     |          |
|--------|--------------------------------------------------------|-------------------------------------------------------------------------------------|----------|
| 988092 | PLANO ES end cap surface-mounted, aluminium anodised   |  | € 19.95  |
| 988114 | PLANO ES end cap high surface-mounted, black           |  | € 19.95  |
| 988207 | Plano ES and MS anodised aluminium uplight dummy cover |  | € 111.95 |

Accessories for 970572, 970574, 970576

|        |                                                            |                                                                                     |         |
|--------|------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 988086 | PLANO ES and BSH and MS flat opal uplight cover, 2 m       |  | € 31.95 |
| 988088 | PLANO ES and BSH high opal cover, 2 m                      |  | € 67.95 |
| 988090 | PLANO ES and BSH and MS flat microprism uplight cover, 2 m |  | € 55.95 |

Accessories for 970573, 970575, 970577



|        |                                                              |                                                                                     |         |
|--------|--------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 988087 | PLANO ES and BSH and MS flat opal uplight cover, 2.5 m       |  | € 39.95 |
| 988089 | PLANO ES and BSH high opal cover, 2.5 m                      |  | € 83.95 |
| 988091 | PLANO ES and BSH and MS flat microprism uplight cover, 2.5 m |  | € 67.95 |

Accessories for 970574, 970575

|        |                                                                               |                                                                                     |         |
|--------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 988093 | PLANO ES end cap surface-mounted, black                                       |  | € 19.95 |
| 988115 | PLANO glued laminated timber end cap high surface-mounted, aluminium anodised |  | € 31.95 |
| 988208 | Plano ES and MS black uplight dummy cover                                     |  | € 79.95 |

Accessories for 970576, 970577

|        |                                           |                                                                                     |         |
|--------|-------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 988094 | PLANO ES end cap surface-mounted, white   |  | € 23.95 |
| 988209 | Plano ES and MS white uplight dummy cover |  | € 79.95 |

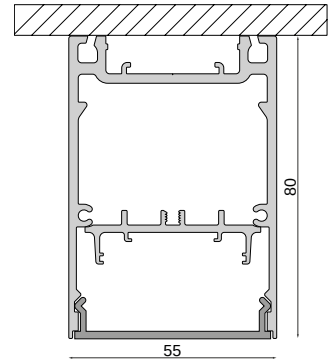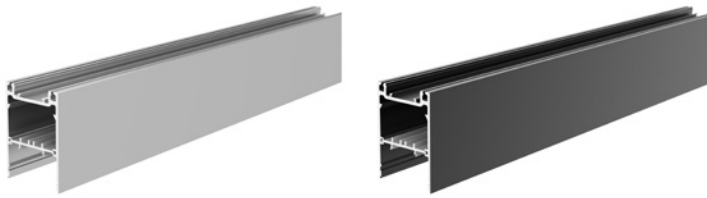

## PROFILE PLANO MS

- universal light profile
- Uplight for LED strips up to 24 mm wide
- Downlight for LED strips up to 24 mm wide
- incl. LED carrier

Housing

Aluminium

| Article       | Housing Color                                                                               | Surface  | Length  | Price           |
|---------------|---------------------------------------------------------------------------------------------|----------|---------|-----------------|
| <b>970580</b> |  Black     |          | 2000 mm | <b>€ 219.95</b> |
| <b>970582</b> |  White     |          | 2000 mm | <b>€ 271.95</b> |
| <b>970581</b> |  Black     |          | 2500 mm | <b>€ 271.95</b> |
| <b>970583</b> |  White     |          | 2500 mm | <b>€ 335.95</b> |
| <b>970578</b> |  Aluminium | Anodised | 2000 mm | <b>€ 219.95</b> |
| <b>970579</b> |  Aluminium | Anodised | 2500 mm | <b>€ 271.95</b> |

### Accessories

|               |                                                           |                                                                                     |                |
|---------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------|----------------|
| <b>988109</b> | PLANO MS end cap high surface-mounted, aluminium anodised |    | <b>€ 19.95</b> |
| <b>988110</b> | PLANO MS end cap high surface-mounted, black              |   | <b>€ 19.95</b> |
| <b>988200</b> | PLANO MS longitudinal connector                           |  | <b>€ 7.95</b>  |
| <b>988203</b> | PLANO MS corner connector                                 |  | <b>€ 14.95</b> |
| <b>988206</b> | PLANO aluminium wall bracket                              |  | <b>€ 39.95</b> |

### Accessories for 970578, 970579

|               |                                                        |                                                                                     |                 |
|---------------|--------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|
| <b>988102</b> | PLANO MS end cap surface-mounted, aluminium anodised   |  | <b>€ 19.95</b>  |
| <b>988207</b> | Plano ES and MS anodised aluminium uplight dummy cover |  | <b>€ 111.95</b> |
| <b>988210</b> | Plano MS anodised aluminium downlight dummy cover      |  | <b>€ 71.95</b>  |

### Accessories for 970578, 970580, 970582

|               |                                                            |                                                                                     |                |
|---------------|------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------|
| <b>988086</b> | PLANO ES and BSH and MS flat opal uplight cover, 2 m       |  | <b>€ 31.95</b> |
| <b>988090</b> | PLANO ES and BSH and MS flat microprism uplight cover, 2 m |  | <b>€ 55.95</b> |
| <b>988096</b> | PLANO MS flat opal downlight cover, 2 m                    |  | <b>€ 39.95</b> |
| <b>988098</b> | PLANO MS high opal downlight cover, 2 m                    |  | <b>€ 79.95</b> |
| <b>988100</b> | PLANO MS flat microprism downlight cover, 2 m              |  | <b>€ 55.95</b> |

### Accessories for 970579, 970581, 970583



|               |                                                              |                                                                                     |                |
|---------------|--------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------|
| <b>988087</b> | PLANO ES and BSH and MS flat opal uplight cover, 2.5 m       |  | <b>€ 39.95</b> |
| <b>988091</b> | PLANO ES and BSH and MS flat microprism uplight cover, 2.5 m |  | <b>€ 67.95</b> |
| <b>988097</b> | PLANO MS flat opal downlight cover, 2.5 m                    |  | <b>€ 51.95</b> |
| <b>988099</b> | PLANO MS high opal downlight cover, 2.5 m                    |  | <b>€ 99.95</b> |
| <b>988101</b> | PLANO MS flat microprism downlight cover, 2.5 m              |  | <b>€ 67.95</b> |

### Accessories for 970580, 970581

|               |                                           |                                                                                     |                 |
|---------------|-------------------------------------------|-------------------------------------------------------------------------------------|-----------------|
| <b>988103</b> | PLANO MS end cap surface-mounted, black   |  | <b>€ 23.95</b>  |
| <b>988208</b> | Plano ES and MS black uplight dummy cover |  | <b>€ 79.95</b>  |
| <b>988211</b> | Plano MS black downlight dummy cover      |  | <b>€ 111.95</b> |

### Accessories for 970582, 970583

|               |                                                  |                                                                                     |                 |
|---------------|--------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|
| <b>988095</b> | PLANO ES and MS - cable suspension set, in pairs |  | <b>€ 71.95</b>  |
| <b>988104</b> | PLANO MS end cap surface-mounted, white          |  | <b>€ 23.95</b>  |
| <b>988209</b> | Plano ES and MS white uplight dummy cover        |  | <b>€ 79.95</b>  |
| <b>988212</b> | Plano MS white downlight dummy cover             |  | <b>€ 111.95</b> |

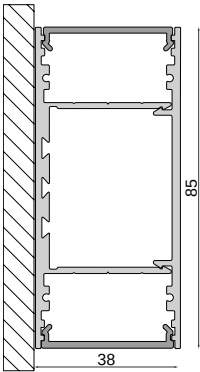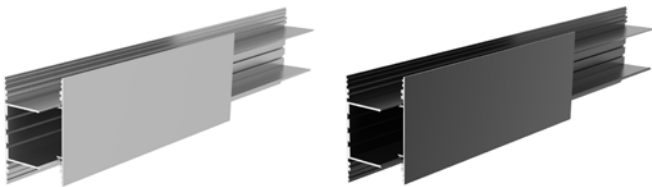

PROFILE PLANO BSH

- universal light profile
- Uplight for LED strips up to 31 mm wide
- Downlight for LED strips up to 31 mm wide
- incl. LED carrier

Housing                      Aluminium

| Article | Housing Color                                                                               | Surface  | Length  | Price    |
|---------|---------------------------------------------------------------------------------------------|----------|---------|----------|
| 970586  |  Black     |          | 2000 mm | € 159.95 |
| 970588  |  White     |          | 2000 mm | € 159.95 |
| 970587  |  Black     |          | 2500 mm | € 199.95 |
| 970589  |  White     |          | 2500 mm | € 199.95 |
| 970584  |  Aluminium | Anodised | 2000 mm | € 111.95 |
| 970585  |  Aluminium | Anodised | 2500 mm | € 135.95 |

Accessories

|        |                                                  |                                                                                     |         |
|--------|--------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 988202 | PLANO BSH longitudinal connector                 |    | € 7.95  |
| 988205 | PLANO BSH corner connector                       |   | € 14.95 |
| 988206 | PLANO aluminium wall bracket                     |  | € 39.95 |
| 988095 | PLANO ES and MS - cable suspension set, in pairs |  | € 71.95 |

Accessories for 970584, 970585

|        |                                                                               |                                                                                     |         |
|--------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 988106 | PLANO glued laminated timber end cap surface-mounted, aluminium anodised      |  | € 19.95 |
| 988115 | PLANO glued laminated timber end cap high surface-mounted, aluminium anodised |  | € 31.95 |

Accessories for 970584, 970586, 970588

|        |                                                            |                                                                                     |         |
|--------|------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 988086 | PLANO ES and BSH and MS flat opal uplight cover, 2 m       |  | € 31.95 |
| 988088 | PLANO ES and BSH high opal cover, 2 m                      |  | € 67.95 |
| 988090 | PLANO ES and BSH and MS flat microprism uplight cover, 2 m |  | € 55.95 |

Accessories for 970585, 970587, 970589

|        |                                                              |                                                                                     |         |
|--------|--------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 988087 | PLANO ES and BSH and MS flat opal uplight cover, 2.5 m       |  | € 39.95 |
| 988089 | PLANO ES and BSH high opal cover, 2.5 m                      |  | € 83.95 |
| 988091 | PLANO ES and BSH and MS flat microprism uplight cover, 2.5 m |  | € 67.95 |

Accessories for 970586, 970587


|        |                                                                  |                                                                                     |         |
|--------|------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 988107 | PLANO glued laminated timber end cap surface-mounted, black      |  | € 23.95 |
| 988116 | PLANO glued laminated timber end cap high surface-mounted, black |  | € 31.95 |

Accessories for 970588, 970589

|        |                                                             |  |         |
|--------|-------------------------------------------------------------|--|---------|
| 988108 | PLANO glued laminated timber end cap surface-mounted, white |  | € 23.95 |
|--------|-------------------------------------------------------------|--|---------|



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.

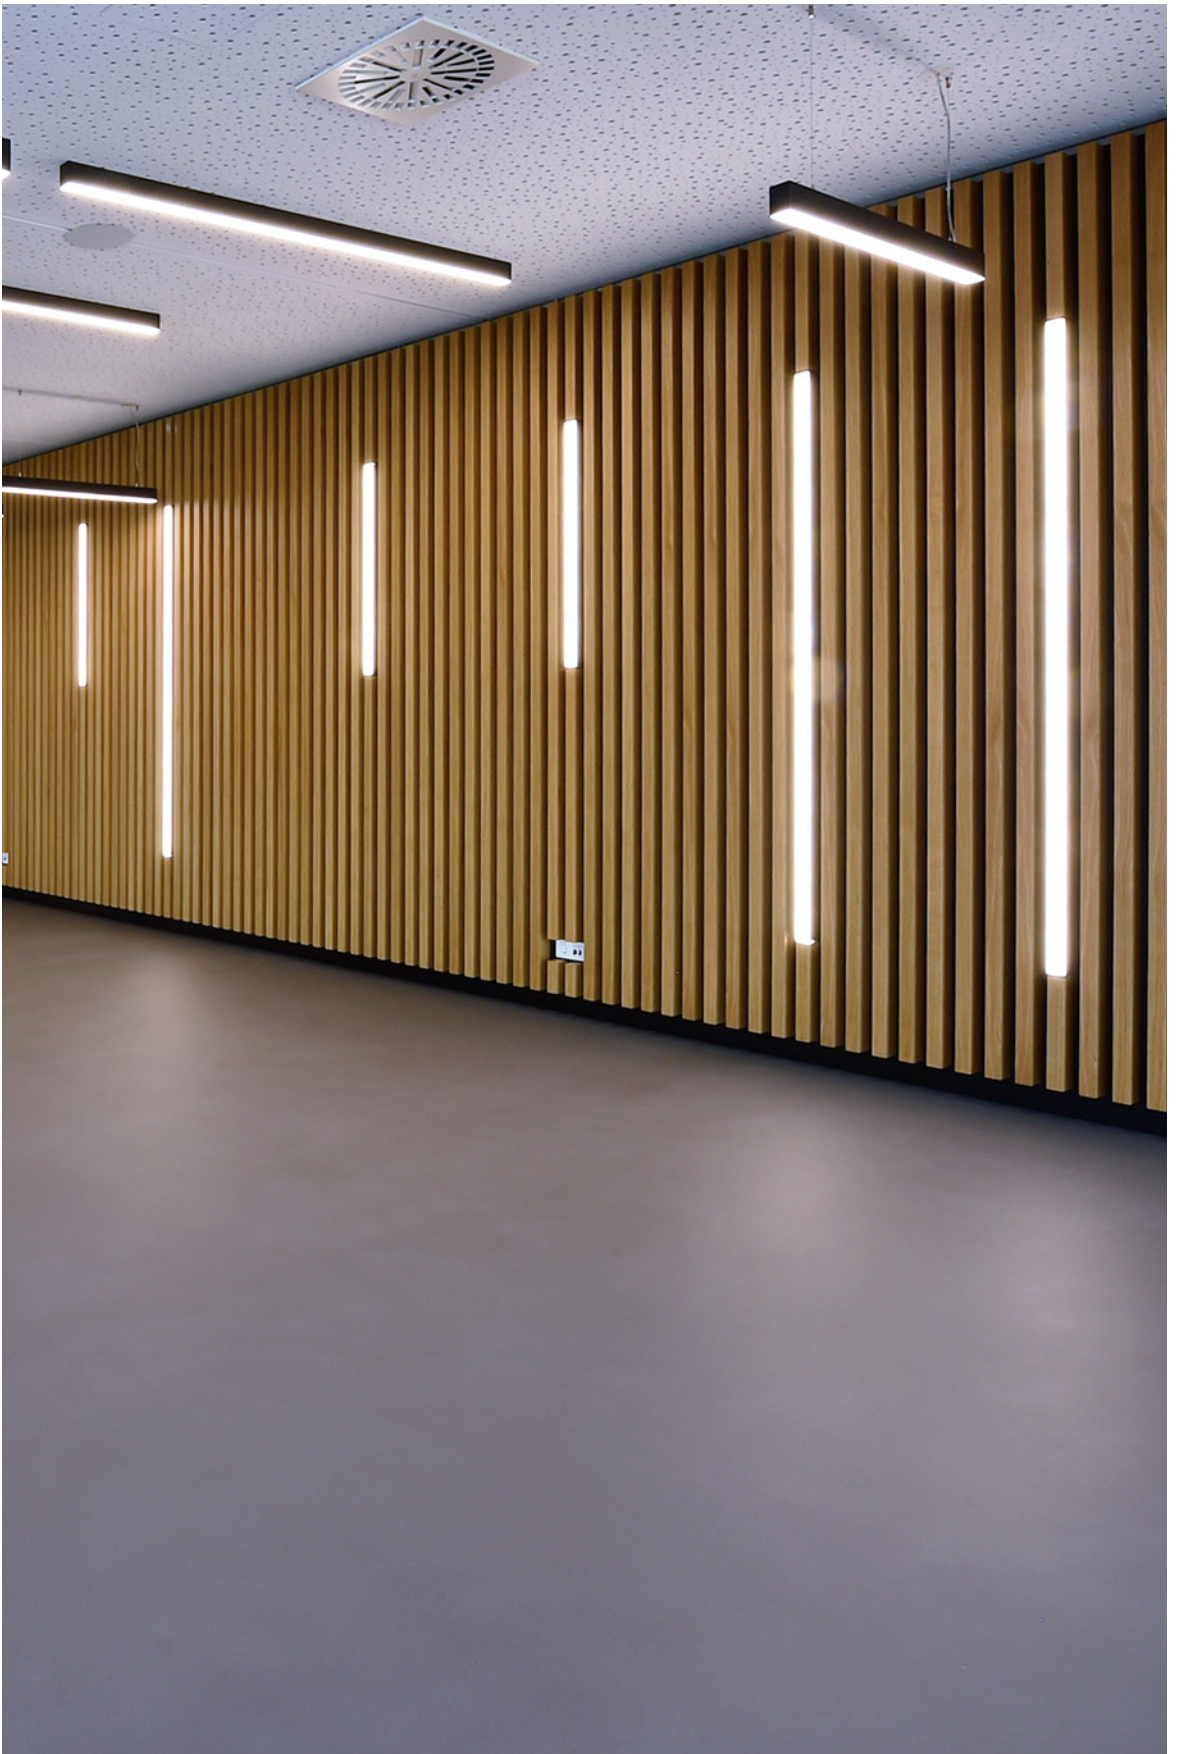





## SYSTEM COMBO

- 590 concrete profile
  - 596 built-in profile
  - 600 facade profile
  - 604 insulation profile
  - 606 click profile
- 





page 594



page 595



page 598



page 599



page 602



page 603



page 605



page 605



page 608



page 609



page 610


# COMBO profiles



**COMBO PROFILE SYSTEM – INSTALLATION-FRIENDLY PROFILE-IN-PROFILE SOLUTION**

Facades, gardens, living spaces: The patented COMBO PROFILE SYSTEM lends every architectural design a distinctive character. The linear system solution can be integrated into all common building materials. The profile system not only creates perfect light lines in exposed concrete, concrete, brick, stone, plasterboard, thermal insulation, wood, or facade panels — the installation profiles CON-CRETE, DRYWALL, FACADE, and INSULATION can also be quickly and cleanly installed by bricklayers, drywall or facade builders.

Equally important as the appearance is the fact that the lighting solutions can be easily integrated into the building structure even under challenging installation conditions. The lighting insert profile is simply clipped into the installation profiles after construction is completed.

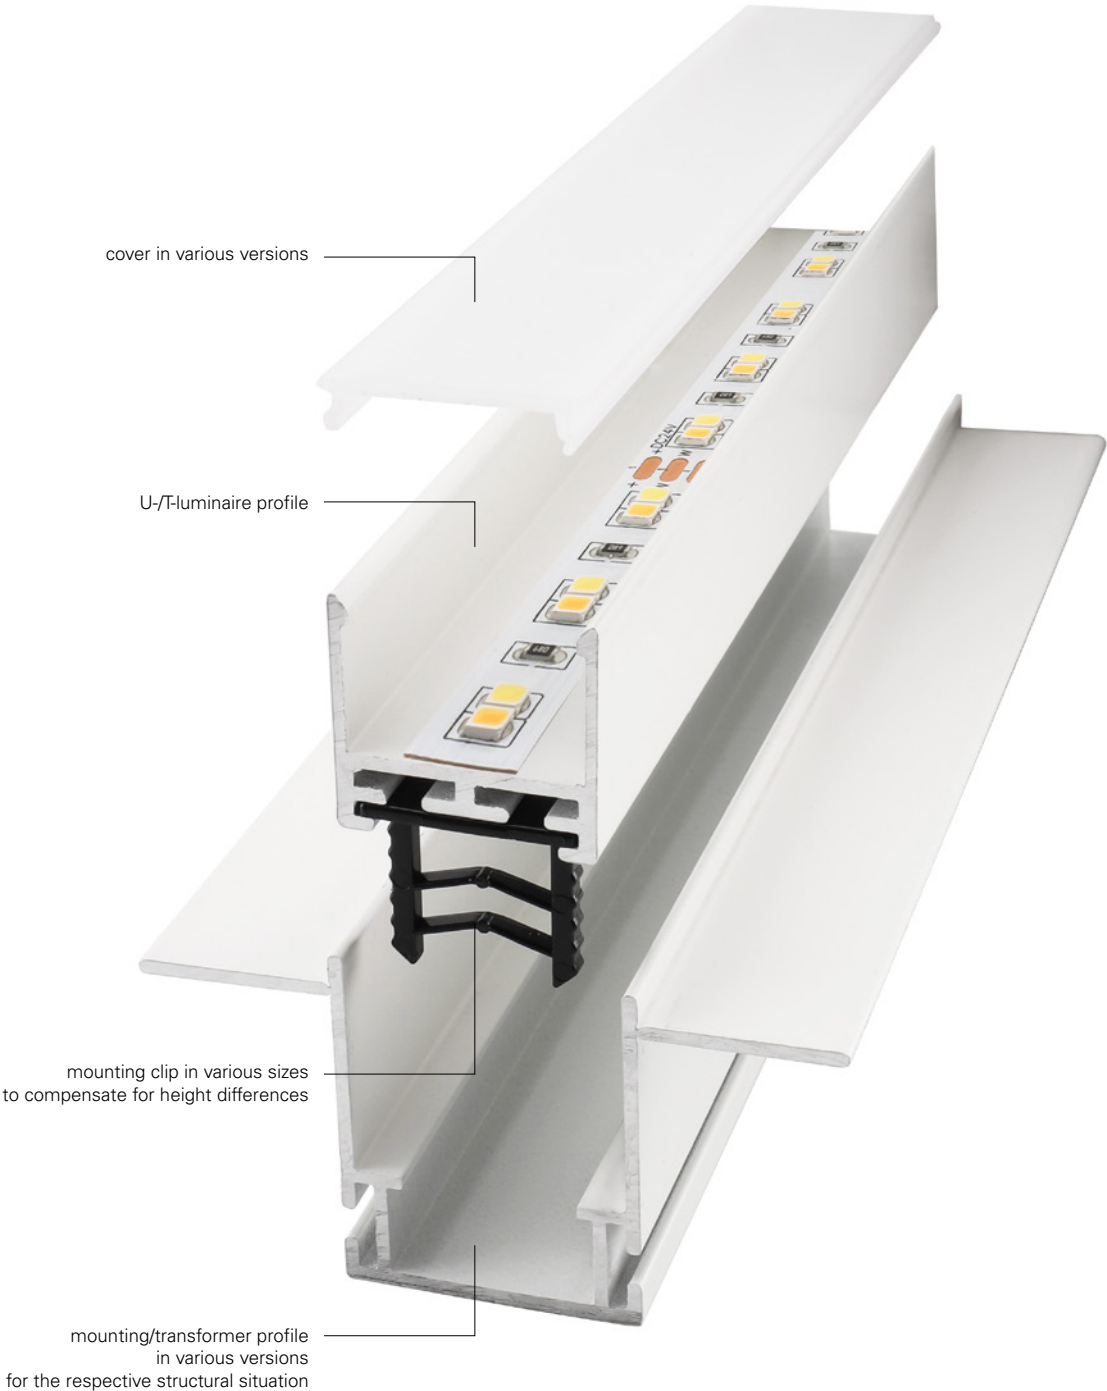




## MOUNTING / TRANSFORMER PROFILE CONCRETE


The mounting profile is installed during formwork construction and provides sufficient space for the luminaire profile as well as additional cabling. Optional plaster trim makes all work around the light line easier.

The transformer profile is used to house power supplies, allowing them to be concealed behind the luminaire in the case of long light lines or different circuit configurations.

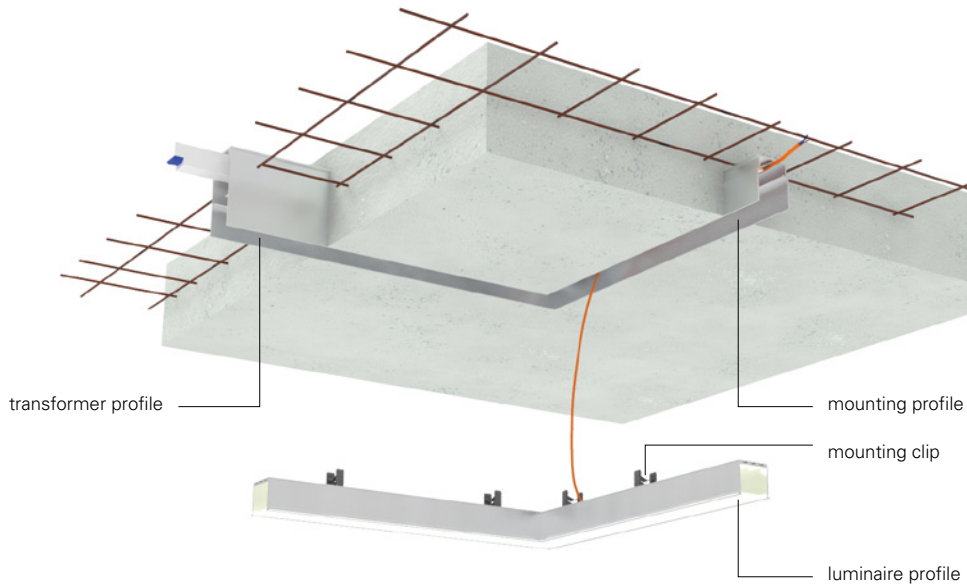


## INSTALLATION INSTRUCTIONS CONCRETE




### 1. Planning of mounting / transformer profile

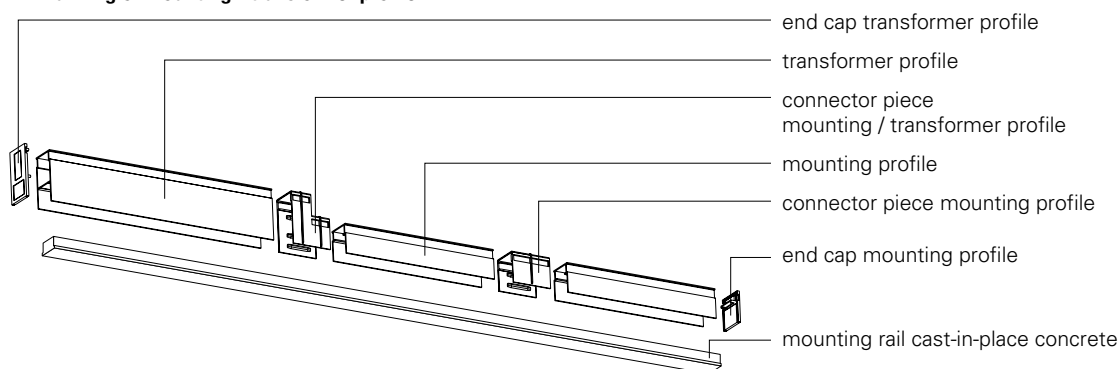



### 2. Installation, finishing work

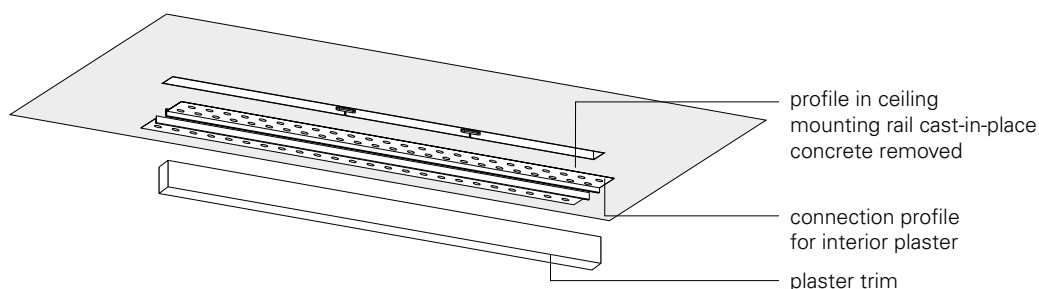

### 3. Installation of luminaire profile and power supply

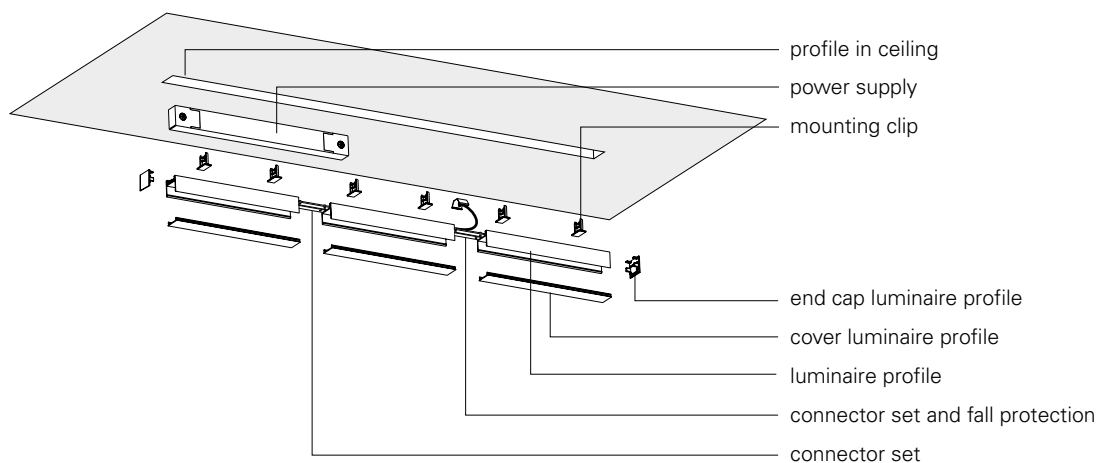



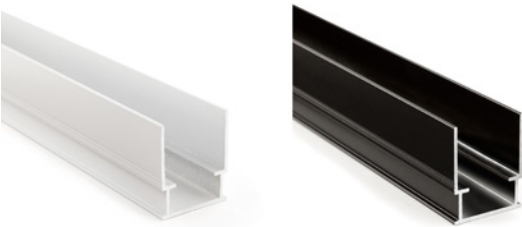

PROFILE, SERIES COMBO, CONCRETE, MOUNTING PROFILE

Housing                      Aluminium



| Article | Housing Color                                                                            | Length  | Price    |
|---------|------------------------------------------------------------------------------------------|---------|----------|
| 970800  |  Black  | 2000 mm | € 91.95  |
| 970801  |  White  | 2000 mm | € 91.95  |
| 970802  |  Black  | 3000 mm | € 114.95 |
| 970803  |  White | 3000 mm | € 114.95 |

Accessories

|        |                                                                          |                                                                                     |         |
|--------|--------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| 988180 | Combo plaster moulding - flush, polystyrene 24x29x1000, white            |  | € 6.95  |
| 988179 | Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white     |  | € 6.95  |
| 988167 | Combo concrete mounting bar wood, 1 m                                    |  | € 12.95 |
| 988168 | Combo concrete mounting bar wood, 2 m                                    |  | € 25.95 |
| 970811 | Combo connection profile for indoor plastering, natural aluminium, 2.5 m |  | € 62.95 |
| 970812 | Combo connection profile for indoor plastering, white, 2.5 m             |  | € 91.95 |
| 970810 | Combo connection profile for indoor plastering, black, 2.5 m             |  | € 91.95 |
| 970814 | Combo connection profile for filling jobs, natural aluminium, 2 m        |  | € 10.95 |
| 970818 | Combo connection profile for filling jobs, white, 2 m                    |  | € 22.95 |
| 970816 | Combo connection profile for filling jobs, black, 2 m                    |  | € 22.95 |
| 988133 | Combo concrete end cap 2 pcs. mounting profile with edge covering, white |  | € 4.95  |
| 988132 | Combo concrete end cap 2 pcs. mounting profile with edge covering, black |  | € 4.95  |
| 988165 | Combo concrete connecting piece mounting profile, white                  |  | € 4.95  |
| 988164 | Combo concrete connecting piece mounting profile, black                  |  | € 4.95  |
| 988161 | Plano concrete connector and guard rail for concrete recessed profile    |  | € 17.95 |



**Power supply units**  
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.



PROFILE, SERIES COMBO, CONCRETE, TRANSFORMER PROFILE

Housing Aluminium

| Article | Housing Color                                                                             | Length  | Price    |
|---------|-------------------------------------------------------------------------------------------|---------|----------|
| 970804  |  Black   | 1000 mm | € 68.95  |
| 970805  |  White   | 1000 mm | € 68.95  |
| 970806  |  Black   | 2000 mm | € 137.95 |
| 970807  |  White  | 2000 mm | € 137.95 |
| 970808  |  Black | 3000 mm | € 206.95 |
| 970809  |  White | 3000 mm | € 206.95 |

Accessories

|        |                                                                               |                                                                                       |         |
|--------|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------|
| 988180 | Combo plaster moulding - flush, polystyrene 24x29x1000, white                 |  | € 6.95  |
| 988179 | Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white          |  | € 6.95  |
| 988167 | Combo concrete mounting bar wood, 1 m                                         |  | € 12.95 |
| 988168 | Combo concrete mounting bar wood, 2 m                                         |  | € 25.95 |
| 970811 | Combo connection profile for indoor plastering, natural aluminium, 2.5 m      |  | € 62.95 |
| 970812 | Combo connection profile for indoor plastering, white, 2.5 m                  |  | € 91.95 |
| 970810 | Combo connection profile for indoor plastering, black, 2.5 m                  |  | € 91.95 |
| 970814 | Combo connection profile for filling jobs, natural aluminium, 2 m             |  | € 10.95 |
| 970818 | Combo connection profile for filling jobs, white, 2 m                         |  | € 22.95 |
| 970816 | Combo connection profile for filling jobs, black, 2 m                         |  | € 22.95 |
| 988135 | Combo concrete end cap 2 pcs. transformer profile with edge covering, white   |  | € 4.95  |
| 988134 | Combo concrete end cap 2 pcs. transformer profile with edge covering, black   |  | € 4.95  |
| 988163 | Combo concrete connecting piece mounting profile - transformer profile, white |  | € 4.95  |
| 988162 | Combo concrete connecting piece mounting profile - transformer profile, black |  | € 4.95  |




**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.

## MOUNTING & TRANSFORMER PROFILE DRYWALL


The mounting profile can be neatly integrated on site and provides sufficient space for concealed cable routing – perfect for preparing light lines in drywall, plastered brick, thermal insulation, wood, fiberboard, etc. The luminaire profile is simply clipped in at the end.

For direct wall connection, the mounting flanges feature a predetermined breaking point for a clean separation. The transformer profile is used to house power supplies, allowing them to be concealed behind the luminaire in the case of long light lines or different circuit configurations.

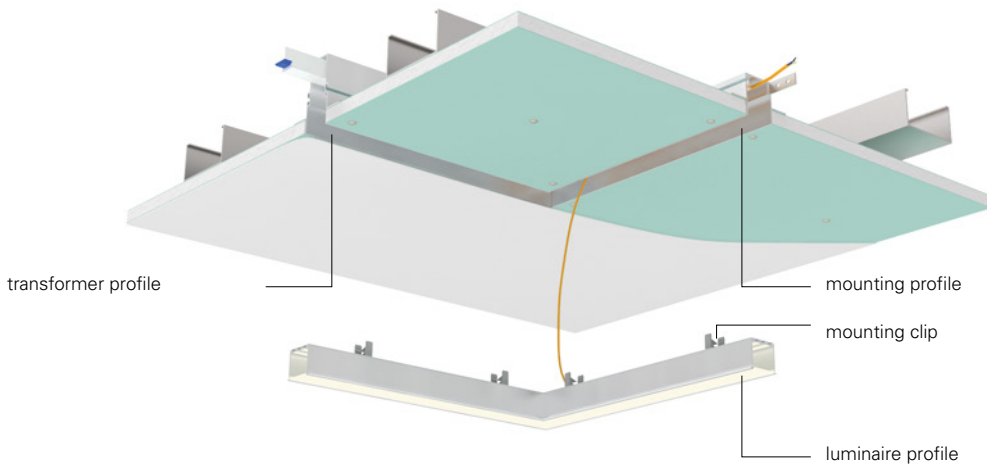


## INSTALLATION INSTRUCTIONS BRICK, PLASTERBOARD, WOOD




### 1. Planning of mounting / transformer profile

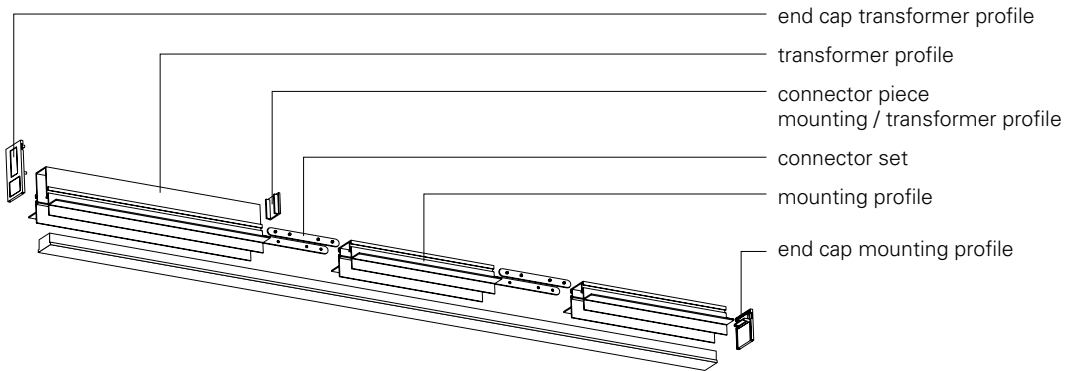

### 2. Installation, finishing work

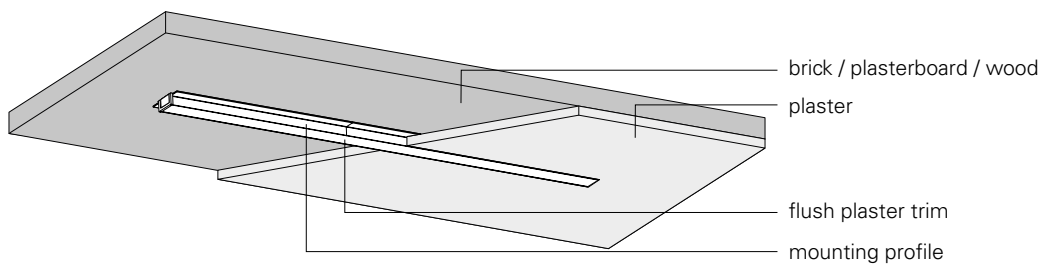

### 3. Installation of luminaire profile and power supply

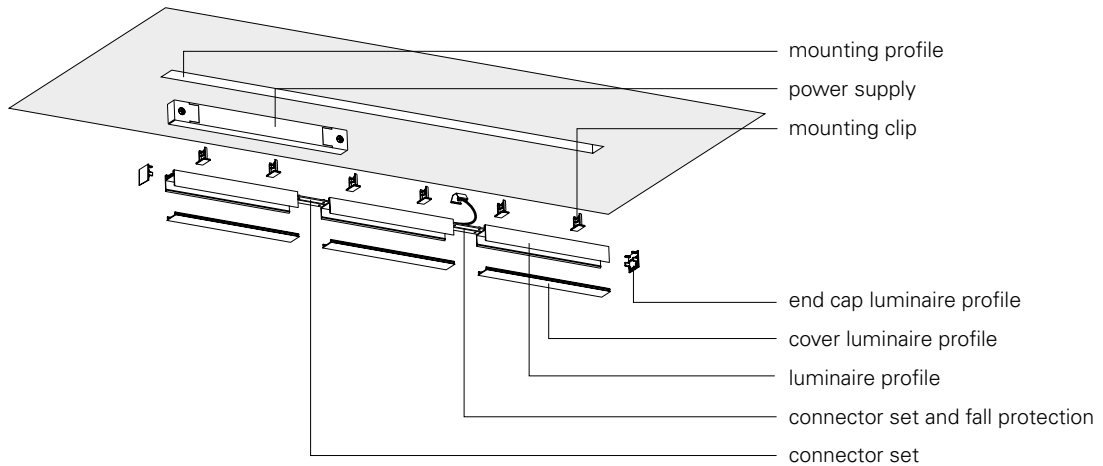



PROFILE, SERIES COMBO, BUILT-IN, MOUNTING PROFILE

Housing
 Aluminium

| Article | Housing Color                                                                                 | Length  | Price    |
|---------|-----------------------------------------------------------------------------------------------|---------|----------|
| 970820  |  Aluminium   | 1000 mm | € 31.95  |
| 970821  |  Black       | 1000 mm | € 43.95  |
| 970822  |  White       | 1000 mm | € 43.95  |
| 970823  |  Aluminium   | 2000 mm | € 64.95  |
| 970824  |  Black       | 2000 mm | € 86.95  |
| 970825  |  White      | 2000 mm | € 86.95  |
| 970826  |  Aluminium | 3000 mm | € 96.95  |
| 970827  |  Black     | 3000 mm | € 130.95 |
| 970828  |  White     | 3000 mm | € 130.95 |


Accessories

|        |                                                                                     |                                                                                       |         |
|--------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------|
| 988180 | Combo plaster moulding - flush, polystyrene 24x29x1000, white                       |  | € 6.95  |
| 988179 | Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white                |  | € 6.95  |
| 970814 | Combo connection profile for filling jobs, natural aluminium, 2 m                   |  | € 10.95 |
| 970818 | Combo connection profile for filling jobs, white, 2 m                               |  | € 22.95 |
| 970816 | Combo connection profile for filling jobs, black, 2 m                               |  | € 22.95 |
| 988174 | Combo connector and fall protection                                                 |  | € 17.95 |
| 988177 | Combo connector set 2 pcs. 0/0, natural aluminium                                   |  | € 9.95  |
| 988178 | Combo connector set 2 pcs. 0/90, natural aluminium                                  |  | € 9.95  |
| 988175 | Combo connector set 2 pcs. 90/0, natural aluminium                                  |  | € 24.95 |
| 988137 | Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, white |  | € 4.95  |
| 988136 | Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, black |  | € 4.95  |



**Power supply units**

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.



## PROFILE, SERIES COMBO, BUILT-IN, TRANSFORMER PROFILE

Housing Aluminium

| Article       | Housing Color | Length  | Price           |
|---------------|---------------|---------|-----------------|
| <b>970833</b> | Aluminium     | 1000 mm | <b>€ 45.95</b>  |
| <b>970834</b> | Black         | 1000 mm | <b>€ 85.95</b>  |
| <b>970835</b> | White         | 1000 mm | <b>€ 85.95</b>  |
| <b>970836</b> | Aluminium     | 2000 mm | <b>€ 91.95</b>  |
| <b>970837</b> | Black         | 2000 mm | <b>€ 172.95</b> |
| <b>970838</b> | White         | 2000 mm | <b>€ 172.95</b> |
| <b>970839</b> | Aluminium     | 3000 mm | <b>€ 137.95</b> |
| <b>970840</b> | Black         | 3000 mm | <b>€ 218.95</b> |
| <b>970841</b> | White         | 3000 mm | <b>€ 218.95</b> |

### Accessories

|               |                                                                                                                |  |                |
|---------------|----------------------------------------------------------------------------------------------------------------|--|----------------|
| <b>988180</b> | Combo plaster moulding - flush, polystyrene 24x29x1000, white                                                  |  | <b>€ 6.95</b>  |
| <b>988179</b> | Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white                                           |  | <b>€ 6.95</b>  |
| <b>970814</b> | Combo connection profile for filling jobs, natural aluminium, 2 m                                              |  | <b>€ 10.95</b> |
| <b>970818</b> | Combo connection profile for filling jobs, white, 2 m                                                          |  | <b>€ 22.95</b> |
| <b>970816</b> | Combo connection profile for filling jobs, black, 2 m                                                          |  | <b>€ 22.95</b> |
| <b>988174</b> | Combo connector and fall protection                                                                            |  | <b>€ 17.95</b> |
| <b>988177</b> | Combo connector set 2 pcs. 0/0, natural aluminium                                                              |  | <b>€ 9.95</b>  |
| <b>988178</b> | Combo connector set 2 pcs. 0/90, natural aluminium                                                             |  | <b>€ 9.95</b>  |
| <b>988175</b> | Combo connector set 2 pcs. 90/0, natural aluminium                                                             |  | <b>€ 24.95</b> |
| <b>988141</b> | Combo built-in/facade/insulation end cap 2 pcs. transformer profile, white                                     |  | <b>€ 4.95</b>  |
| <b>988138</b> | Combo built-in/facade/insulation end cap 2 pcs. transformer profile, black                                     |  | <b>€ 4.95</b>  |
| <b>988140</b> | Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, white |  | <b>€ 4.95</b>  |
| <b>988139</b> | Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, black |  | <b>€ 4.95</b>  |



### 5-year guarantee

Benefit from the maximum quality promise:

All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.




MOUNTING / TRANSFORMER PROFILE  
FACADE

The 3 mm mounting profile enables lighting solutions in areas with low installation height, such as Trespa or aluminium facade panels. Installation takes place behind the facade panel; any height difference of more than 3 mm can be adjusted during installation of the light profiles using the mounting clips. In combination with a thermal insulation connection profile CT, the 3 mm mounting profile can also be subsequently inserted into the insulation before plastering work. Thanks to the thermal and mechanical separation from the luminaire profile, cracks along the light line are avoided.



By adding the 3 mm transformer profile, users can—beyond the applications of the 3 mm mounting profile—also integrate the corresponding power supplies into the light line. This allows for on-site replacement if needed. The mechanical separation between the light and transformer profiles ensures that damage, especially on plastered facades, is prevented.




INSTALLATION INSTRUCTIONS INSULATION AND FACADE PANELS

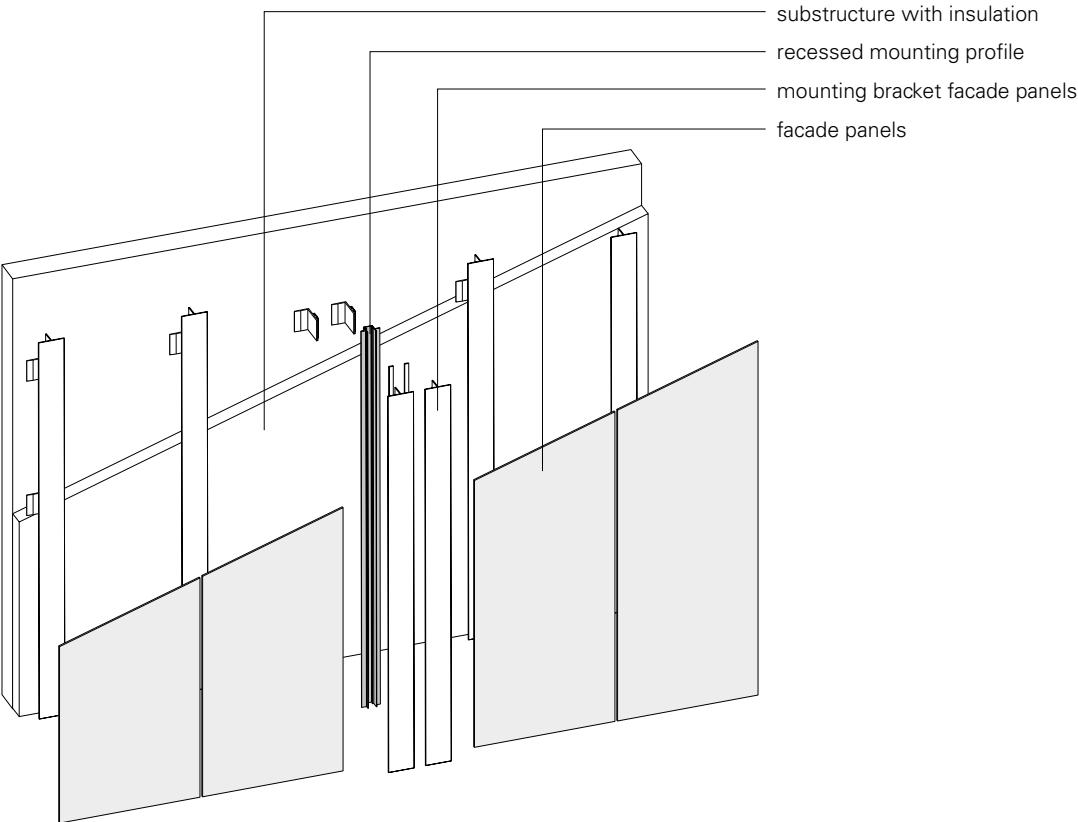

## INSTALLATION INSTRUCTIONS INSULATION AND PLASTER

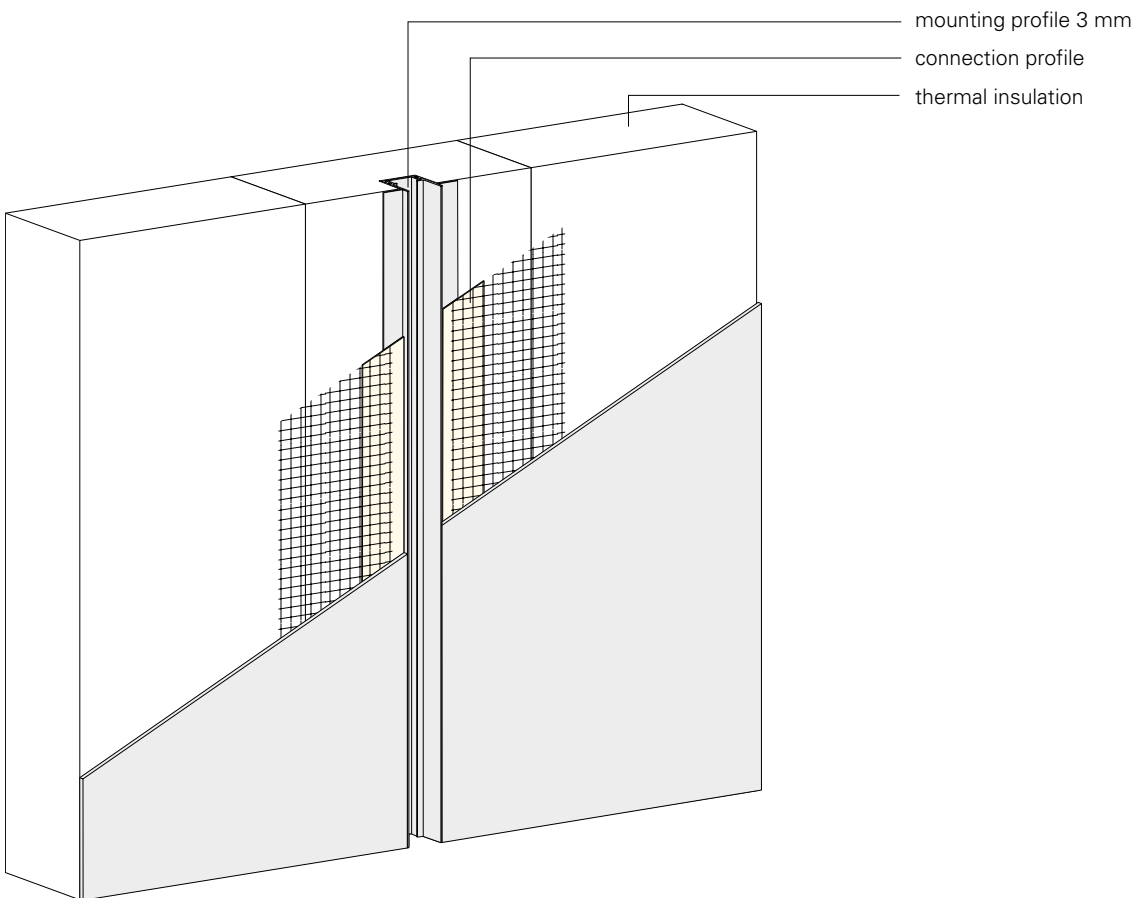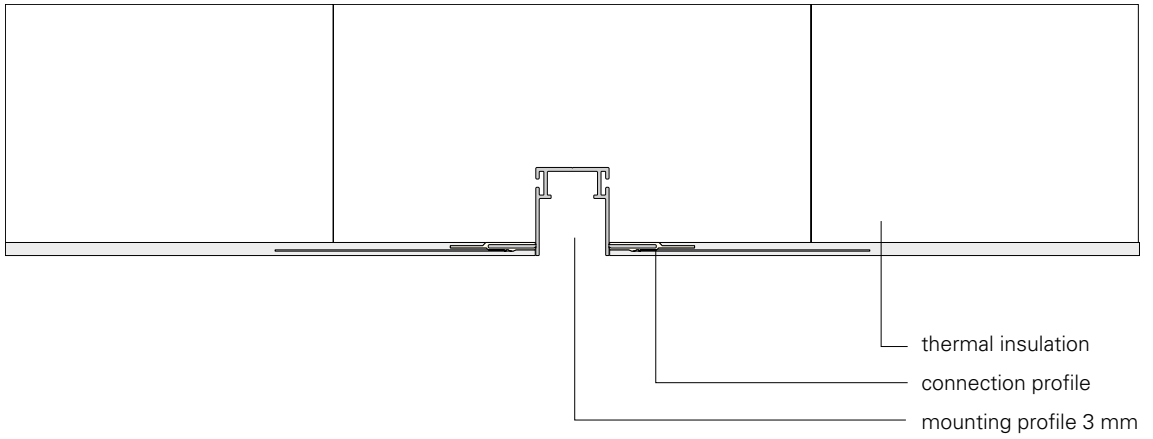



PROFILES, COMBO SERIES, FACADE, TRANSFORMER PROFILE

Housing
 Aluminium



| Article | Housing Color                                                                            | Length  | Price    |
|---------|------------------------------------------------------------------------------------------|---------|----------|
| 970869  |  Black  | 1000 mm | € 85.95  |
| 970870  |  White  | 1000 mm | € 85.95  |
| 970871  |  Black  | 2000 mm | € 172.95 |
| 970872  |  White | 2000 mm | € 172.95 |

Accessories

|        |                                                                                                                |                                                                                       |         |
|--------|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------|
| 970814 | Combo connection profile for filling jobs, natural aluminium, 2 m                                              |  | € 10.95 |
| 970816 | Combo connection profile for filling jobs, black, 2 m                                                          |  | € 22.95 |
| 970818 | Combo connection profile for filling jobs, white, 2 m                                                          |  | € 22.95 |
| 988136 | Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, black                            |  | € 4.95  |
| 988137 | Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, white                            |  | € 4.95  |
| 988138 | Combo built-in/facade/insulation end cap 2 pcs. transformer profile, black                                     |  | € 4.95  |
| 988139 | Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, black |  | € 4.95  |
| 988140 | Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, white |  | € 4.95  |
| 988141 | Combo built-in/facade/insulation end cap 2 pcs. transformer profile, white                                     |  | € 4.95  |
| 988169 | Combo connection profile with fabric for levelling work, 3mm, 2m, orange                                       |  | € 22.95 |
| 988175 | Combo connector set 2 pcs. 90/0, natural aluminium                                                             |  | € 24.95 |
| 988176 | Combo connector set of 2 with angle joint 0/20-160°, natural aluminium                                         |  | € 9.95  |
| 988177 | Combo connector set 2 pcs. 0/0, natural aluminium                                                              |  | € 9.95  |
| 988178 | Combo connector set 2 pcs. 0/90, natural aluminium                                                             |  | € 9.95  |
| 988179 | Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white                                           |  | € 6.95  |
| 988180 | Combo plaster moulding - flush, polystyrene 24x29x1000, white                                                  |  | € 6.95  |



**Power supply units**  
 You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

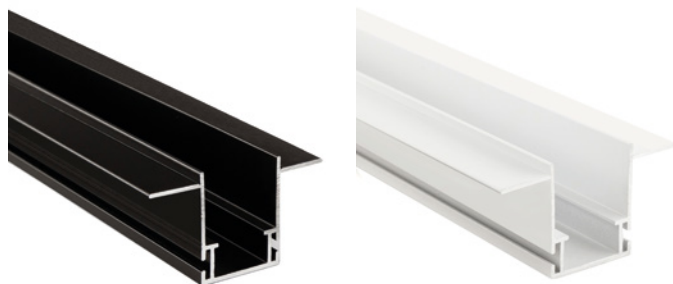

## PROFILES, COMBO SERIES, FAÇADE, MOUNTING PROFILE

Housing

Aluminium

| Article       | Housing Color | Length  | Price    |
|---------------|---------------|---------|----------|
| <b>970829</b> | Black         | 2000 mm | € 86.95  |
| <b>970830</b> | White         | 2000 mm | € 86.95  |
| <b>970831</b> | Black         | 3000 mm | € 130.95 |
| <b>970832</b> | White         | 3000 mm | € 130.95 |

### Accessories

|               |                                                                                                                |                                                                                       |         |
|---------------|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------|
| <b>970814</b> | Combo connection profile for filling jobs, natural aluminium, 2 m                                              |  | € 10.95 |
| <b>970816</b> | Combo connection profile for filling jobs, black, 2 m                                                          |  | € 22.95 |
| <b>970818</b> | Combo connection profile for filling jobs, white, 2 m                                                          |  | € 22.95 |
| <b>988136</b> | Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, black                            |  | € 4.95  |
| <b>988137</b> | Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, white                            |  | € 4.95  |
| <b>988138</b> | Combo built-in/facade/insulation end cap 2 pcs. transformer profile, black                                     |  | € 4.95  |
| <b>988139</b> | Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, black |  | € 4.95  |
| <b>988140</b> | Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, white |  | € 4.95  |
| <b>988141</b> | Combo built-in/facade/insulation end cap 2 pcs. transformer profile, white                                     |  | € 4.95  |
| <b>988169</b> | Combo connection profile with fabric for levelling work, 3mm, 2m, orange                                       |  | € 22.95 |
| <b>988175</b> | Combo connector set 2 pcs. 90/0, natural aluminium                                                             |  | € 24.95 |
| <b>988176</b> | Combo connector set of 2 with angle joint 0/20-160°, natural aluminium                                         |  | € 9.95  |
| <b>988177</b> | Combo connector set 2 pcs. 0/0, natural aluminium                                                              |  | € 9.95  |
| <b>988178</b> | Combo connector set 2 pcs. 0/90, natural aluminium                                                             |  | € 9.95  |
| <b>988179</b> | Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white                                           |  | € 6.95  |
| <b>988180</b> | Combo plaster moulding - flush, polystyrene 24x29x1000, white                                                  |  | € 6.95  |





### Technical data sheet

New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.

**MOUNTING / TRANSFORMER PROFILE  
INSULATION**

The mounting profile allows for easy installation of recessed profiles into thermal insulation and can be equipped with all profiles after the surface has been finished. The mounting profile allows for easy installation of recessed profiles into thermal insulation and can be equipped with all profiles after the surface has been finished.

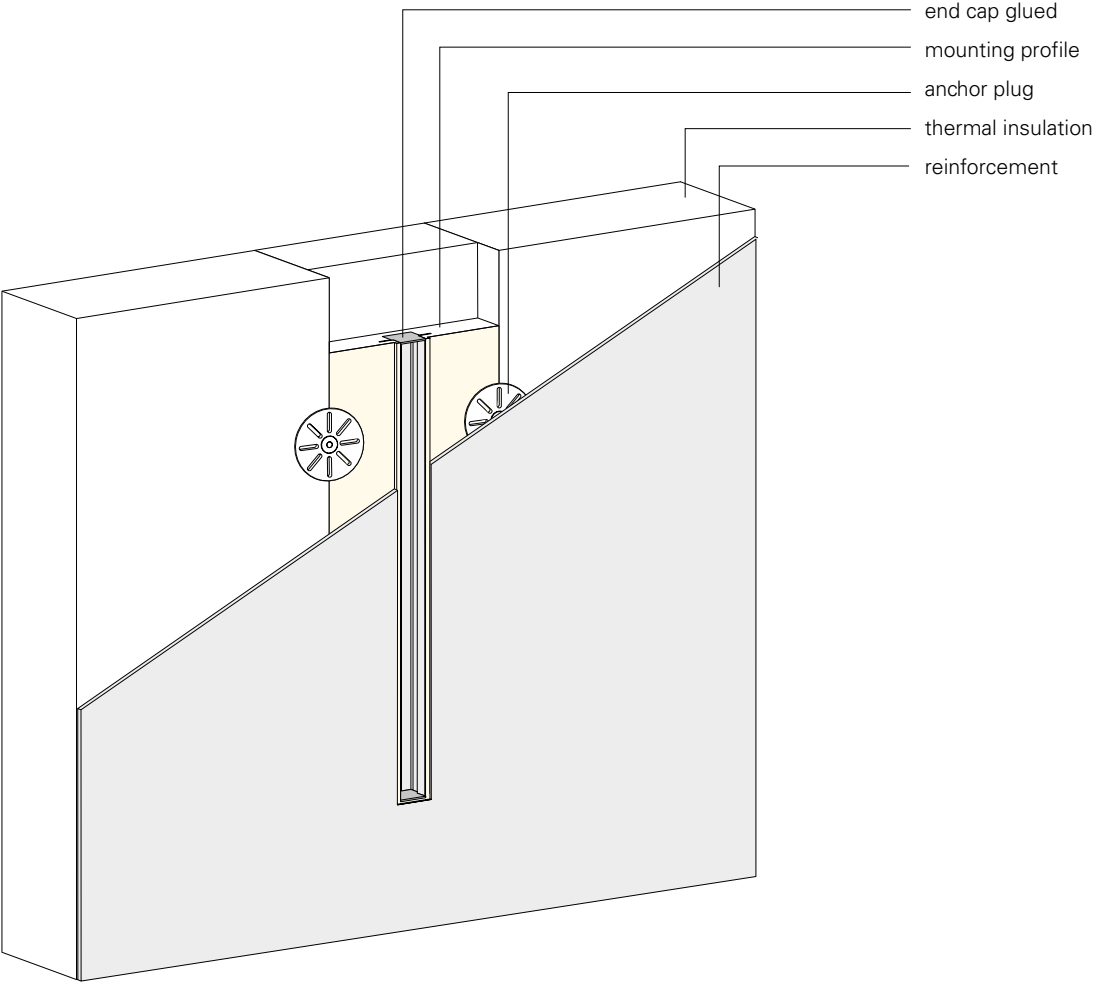

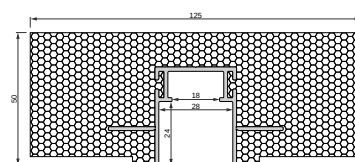


## PROFILES, COMBO SERIES, INSULATION, MOUNTING PROFILE

Housing EPS Length 2000 mm

| Article       | Housing Color | Price           |
|---------------|---------------|-----------------|
| <b>988170</b> | Black         | <b>€ 402.95</b> |
| <b>988171</b> | White         | <b>€ 402.95</b> |

### Accessories

|               |                                                                                     |                                                                                     |                |
|---------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------|
| <b>988180</b> | Combo plaster moulding - flush, polystyrene 24x29x1000, white                       |  | <b>€ 6.95</b>  |
| <b>988178</b> | Combo connector set 2 pcs. 0/90, natural aluminium                                  |  | <b>€ 9.95</b>  |
| <b>988175</b> | Combo connector set 2 pcs. 90/0, natural aluminium                                  |  | <b>€ 24.95</b> |
| <b>988177</b> | Combo connector set 2 pcs. 0/0, natural aluminium                                   |  | <b>€ 9.95</b>  |
| <b>988137</b> | Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, white |  | <b>€ 4.95</b>  |
| <b>988136</b> | Combo built-in/facade/insulation end cap 2 pcs. mounting profile without bar, black |  | <b>€ 4.95</b>  |

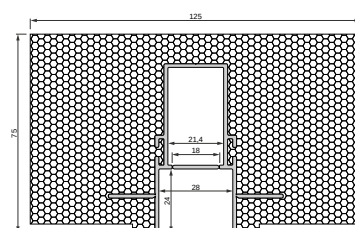

## PROFILES, COMBO SERIES, INSULATION, TRANSFORMER PROFILE

Housing EPS Length 1000 mm

| Article       | Housing Color | Price           |
|---------------|---------------|-----------------|
| <b>988172</b> | Black         | <b>€ 218.95</b> |
| <b>988173</b> | White         | <b>€ 218.95</b> |

### Accessories

|               |                                                                                                                |                                                                                       |                |
|---------------|----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------|
| <b>988180</b> | Combo plaster moulding - flush, polystyrene 24x29x1000, white                                                  |  | <b>€ 6.95</b>  |
| <b>988178</b> | Combo connector set 2 pcs. 0/90, natural aluminium                                                             |  | <b>€ 9.95</b>  |
| <b>988175</b> | Combo connector set 2 pcs. 90/0, natural aluminium                                                             |  | <b>€ 24.95</b> |
| <b>988177</b> | Combo connector set 2 pcs. 0/0, natural aluminium                                                              |  | <b>€ 9.95</b>  |
| <b>988141</b> | Combo built-in/facade/insulation end cap 2 pcs. transformer profile, white                                     |  | <b>€ 4.95</b>  |
| <b>988138</b> | Combo built-in/facade/insulation end cap 2 pcs. transformer profile, black                                     |  | <b>€ 4.95</b>  |
| <b>988140</b> | Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, white |  | <b>€ 4.95</b>  |
| <b>988139</b> | Combo built-in/facade/insulation end cap 2 pcs. connecting piece mounting profile - transformer profile, black |  | <b>€ 4.95</b>  |




## LUMINAIRE PROFILE

To complete your light lines within the various transformer and mounting profiles, the extensive range of accessories leaves nothing to be desired. Tools such as connectors with fall protection or cable holders significantly simplify installation. Depending on the nature of the transition to the mounting / transformer profile, you can cover it using the LT-0-20 or accentuate the resulting shadow gap with the LU-02-20. As a general rule, all luminaire profiles should be connected using connectors to prevent mechanical stress on the LED strips caused by differing expansion.



INSTALLATION INSTRUCTIONS LUMINAIRE PROFILE

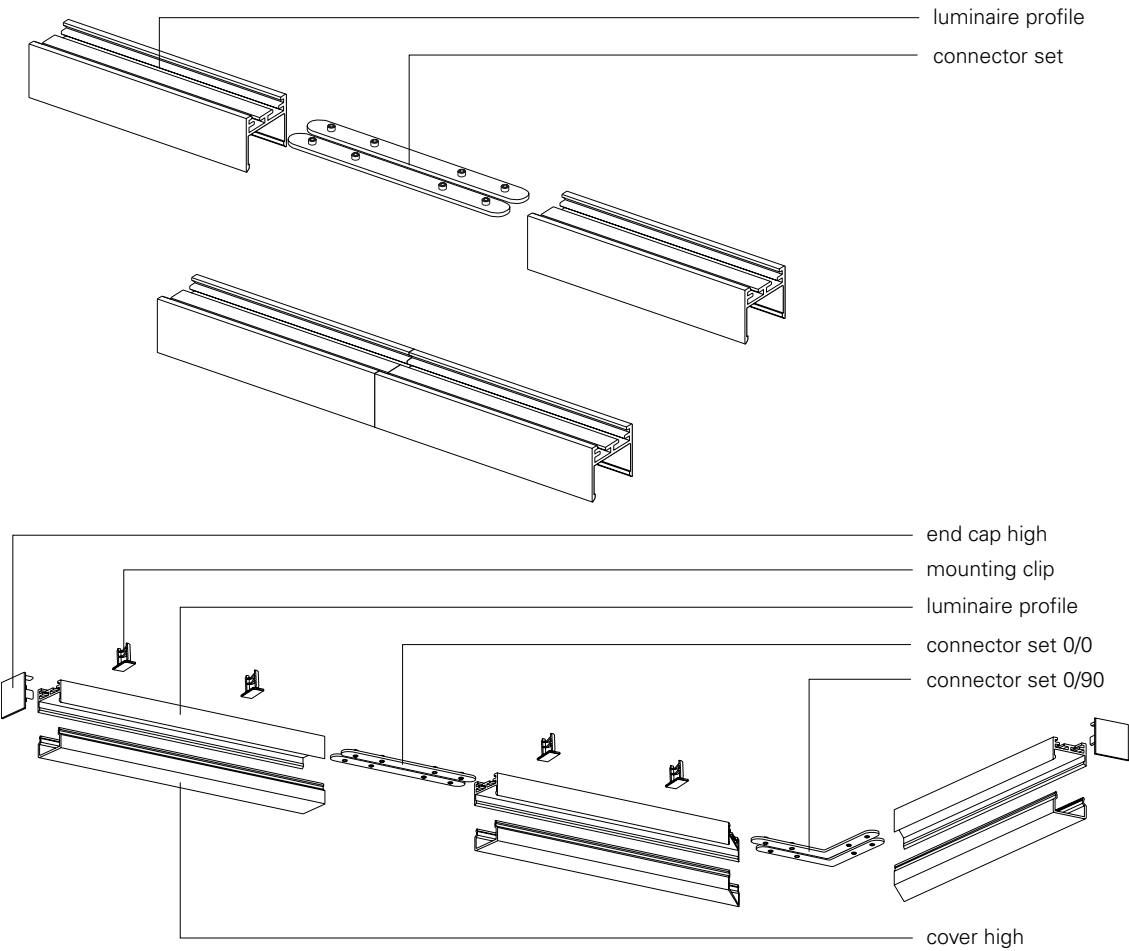



PROFILE, SERIES COMBO, CLICK U-PROFILE

| Housing |               | Aluminium |  |  | Length  | Price   |
|---------|---------------|-----------|--|--|---------|---------|
| Article | Housing Color | Surface   |  |  |         |         |
| 970848  | White         | Anodised  |  |  | 1000 mm | € 27.95 |
| 970842  | Silver        |           |  |  | 1000 mm | € 25.95 |
| 970845  | Black         |           |  |  | 1000 mm | € 27.95 |
| 970849  | White         | Anodised  |  |  | 2000 mm | € 54.95 |
| 970843  | Silver        |           |  |  | 2000 mm | € 49.95 |
| 970846  | Black         |           |  |  | 2000 mm | € 54.95 |
| 970850  | White         | Anodised  |  |  | 3000 mm | € 82.95 |
| 970844  | Silver        |           |  |  | 3000 mm | € 75.95 |
| 970847  | Black         |           |  |  | 3000 mm | € 82.95 |

| Accessories |                                                                     |  |  |         |
|-------------|---------------------------------------------------------------------|--|--|---------|
| 988126      | Combo cover, H-02-20, high, milky, 1 m                              |  |  | € 14.95 |
| 988127      | Combo cover, H-02-20, high, milky, 2 m                              |  |  | € 29.95 |
| 988128      | Combo cover, H-02-20, high, milky, 3 m                              |  |  | € 44.95 |
| 988122      | Combo cover, B-02-20, wide, milky, 1 m                              |  |  | € 11.95 |
| 988120      | Combo cover, B-02-20, wide, milky, 2 m                              |  |  | € 22.95 |
| 988121      | Combo cover, B-02-20, wide, milky, 3 m                              |  |  | € 33.95 |
| 988123      | Combo click cover V4-HL25 opal, 1 m                                 |  |  | € 9.95  |
| 988124      | Combo click cover V4-HL25 opal, 2 m                                 |  |  | € 17.95 |
| 988125      | Combo click cover V4-HL25 opal, 3 m                                 |  |  | € 27.95 |
| 988148      | Combo end cap 2 pcs. U-light profile, P-LU-02-20, grey              |  |  | € 6.45  |
| 988146      | Combo end cap 2 pcs. U-light profile, P-LU-02-20, white             |  |  | € 4.95  |
| 988145      | Combo end cap 2 pcs. U-light profile, P-LU-02-20, black             |  |  | € 4.95  |
| 988147      | Combo end cap 2 pcs. U-light profile, B-LU-02-20, white             |  |  | € 10.95 |
| 988142      | Combo end cap 2 pcs. U-light profile, H-LU-02-20, grey              |  |  | € 6.45  |
| 988144      | Combo end cap 2 pcs. U-light profile, H-LU-02-20, white             |  |  | € 6.45  |
| 988143      | Combo end cap 2 pcs. U-light profile, H-LU-02-20, black             |  |  | € 6.45  |
| 988184      | Combo set 10 pcs. Mounting clip, height-adjustable V1, 10mm, blue   |  |  | € 23.95 |
| 988185      | Combo set 10 pcs. Mounting clip, height-adjustable V2, 10mm, black  |  |  | € 23.95 |
| 988186      | Combo set 10 pcs. Mounting clip, height-adjustable V3, 10mm, yellow |  |  | € 23.95 |



**LED stripes**

Suitable LED strips can be found in the LED Strips chapter – available in various voltages and designs for indoor and outdoor applications.



## PROFILE, SERIES COMBO, CLICK T-PROFILE

Housing

Aluminium

| Article | Housing Color | Surface  | Length  | Price   |
|---------|---------------|----------|---------|---------|
| 970866  | White         | Anodised | 1000 mm | € 31.95 |
| 970860  | Silver        |          | 1000 mm | € 28.95 |
| 970863  | Black         |          | 1000 mm | € 31.95 |
| 970867  | White         | Anodised | 2000 mm | € 64.95 |
| 970861  | Silver        |          | 2000 mm | € 57.95 |
| 970864  | Black         |          | 2000 mm | € 64.95 |
| 970868  | White         | Anodised | 3000 mm | € 96.95 |
| 970862  | Silver        |          | 3000 mm | € 85.95 |
| 970865  | Black         |          | 3000 mm | € 96.95 |

### Accessories

|        |                                                                     |  |         |
|--------|---------------------------------------------------------------------|--|---------|
| 988122 | Combo cover, B-02-20, wide, milky, 1 m                              |  | € 11.95 |
| 988120 | Combo cover, B-02-20, wide, milky, 2 m                              |  | € 22.95 |
| 988121 | Combo cover, B-02-20, wide, milky, 3 m                              |  | € 33.95 |
| 988123 | Combo click cover V4-HL-25 opal, 1 m                                |  | € 9.95  |
| 988124 | Combo click cover V4-HL-25 opal, 2 m                                |  | € 17.95 |
| 988125 | Combo click cover V4-HL-25 opal, 3 m                                |  | € 27.95 |
| 988126 | Combo cover, H-02-20, high, milky, 1 m                              |  | € 14.95 |
| 988127 | Combo cover, H-02-20, high, milky, 2 m                              |  | € 29.95 |
| 988128 | Combo cover, H-02-20, high, milky, 3 m                              |  | € 44.95 |
| 988158 | Combo end cap 2 pcs. T-light profile, P-LT-02-20, grey              |  | € 6.45  |
| 988160 | Combo end cap 2 pcs. T-light profile, P-LT-02-20, white             |  | € 6.45  |
| 988159 | Combo end cap 2 pcs. T-light profile, P-LT-02-20, black             |  | € 6.45  |
| 988155 | Combo end cap 2 pcs. T-light profile, H-LT-02-20, grey              |  | € 6.45  |
| 988157 | Combo end cap 2 pcs. T-light profile, H-LT-02-20, white             |  | € 6.45  |
| 988156 | Combo end cap 2 pcs. T-light profile, H-LT-02-20, black             |  | € 6.45  |
| 988198 | Combo click/flat/hinge wing recessed mounting spring set (2 pieces) |  | € 3.25  |
| 988184 | Combo set 10 pcs. Mounting clip, height-adjustable V1, 10mm, blue   |  | € 23.95 |
| 988185 | Combo set 10 pcs. Mounting clip, height-adjustable V2, 10mm, black  |  | € 23.95 |
| 988186 | Combo set 10 pcs. Mounting clip, height-adjustable V3, 10mm, yellow |  | € 23.95 |



### LED stripes

Suitable LED strips can be found in the LED Strips chapter – available in various voltages and designs for indoor and outdoor applications.



PROFILE, SERIES COMBO, CLICK U-PROFILE FLAT

| Housing |               | Aluminium |         |         |  |
|---------|---------------|-----------|---------|---------|--|
| Article | Housing Color | Surface   | Length  | Price   |  |
| 970857  | White         | Anodised  | 1000 mm | € 27.95 |  |
| 970851  | Silver        |           | 1000 mm | € 25.95 |  |
| 970854  | Black         |           | 1000 mm | € 27.95 |  |
| 970858  | White         | Anodised  | 2000 mm | € 54.95 |  |
| 970852  | Silver        |           | 2000 mm | € 49.95 |  |
| 970855  | Black         |           | 2000 mm | € 54.95 |  |
| 970859  | White         | Anodised  | 3000 mm | € 82.95 |  |
| 970853  | Silver        |           | 3000 mm | € 75.95 |  |
| 970856  | Black         |           | 3000 mm | € 82.95 |  |

| Accessories |                                                                     |  |         |  |
|-------------|---------------------------------------------------------------------|--|---------|--|
| 988123      | Combo click cover V4-HL25 opal, 1 m                                 |  | € 9.95  |  |
| 988124      | Combo click cover V4-HL25 opal, 2 m                                 |  | € 17.95 |  |
| 988125      | Combo click cover V4-HL25 opal, 3 m                                 |  | € 27.95 |  |
| 988126      | Combo cover, H-02-20, high, milky, 1 m                              |  | € 14.95 |  |
| 988127      | Combo cover, H-02-20, high, milky, 2 m                              |  | € 29.95 |  |
| 988128      | Combo cover, H-02-20, high, milky, 3 m                              |  | € 44.95 |  |
| 988149      | Combo end cap, metallised, 1 pc., suitable for H-02-20 high cover   |  | € 6.95  |  |
| 988150      | Combo end cap, black, 1 pc., suitable for H-02-20 high cover        |  | € 3.45  |  |
| 988151      | Combo end cap, white, 1 pc., suitable for H-02-20 high cover        |  | € 3.45  |  |
| 988152      | Combo end cap, metallised, 1 pc., suitable for V4-HL25 opal cover   |  | € 6.95  |  |
| 988153      | Combo end cap, black, 1 pc., suitable for V4-HL25 opal cover        |  | € 3.45  |  |
| 988154      | Combo end cap, white, 1 pc., suitable for V4-HL25 opal cover        |  | € 3.45  |  |
| 988184      | Combo set 10 pcs. Mounting clip, height-adjustable V1, 10mm, blue   |  | € 23.95 |  |
| 988185      | Combo set 10 pcs. Mounting clip, height-adjustable V2, 10mm, black  |  | € 23.95 |  |
| 988186      | Combo set 10 pcs. Mounting clip, height-adjustable V3, 10mm, yellow |  | € 23.95 |  |



**LED stripes**  
 Suitable LED strips can be found in the LED Strips chapter – available in various voltages and designs for indoor and outdoor applications.







## ALUMINIUM PROFILES

- 614 linear light in 5 steps
- 618 assembly
- 620 homogeneous light image
- 622 U-profiles - flat + high - built-in / built-on
- 644 T-profiles - flat + high - built in
- 658 H- and groove-profiles
- 662 step/plinth/angle/corner-profiles - built-in/built-on
- 684 dry construction profiles
- 704 tile profiles
- 712 profiles for outdoor usw - walkable/trafficable

LINEAR LIGHT IN 5 STEPS

STEP BY STEP TO BECOMING A LINEAR LIGHT

PROFESSIONAL!

It has never been quicker and easier to put together an individually and perfectly coordinated linear light in max. 5 steps. Test how quickly and easily you can put your personal project into practice.

1

CHOOSE YOUR PROFILE

Whether for indoor or outdoor use, for wide or narrow LED stripes, whether the profile is to be should be low or high. Matching to this you can choose between different shapes and light transmittance of the covers.

2

CHOOSE THE RIGHT LED STRIPE

You can choose between strips for indoor or outdoor use, with one or more light colours, high-power strips for basic lighting or fewer lumens for ambient lighting. Various cut sizes and LED spacing also perfectly round off our range here.



3

SELECT THE REQUIRED POWER SUPPLY

In addition to the various protection classes for the respective place of use and voltages, you can choose from different designs and power classes. Our range is complemented by power supplies that can be dimmed directly or controlled via Dali, KNX or 1-10V.

4

**DO YOU NEED A CONTROLLER TO STEER?**

In this category, you can select the appropriate control controller or LED dimmer according to requirements and customer wishes. Whether control via radio, smartphone, DMX, Dali, etc. – almost no [control] wishes remain unfulfilled!



5

**ACCESSORIES, MOUNTING MATERIAL & CO**

In the last step, you will find everything that makes installation easier, faster and more comfortable and gives the linear desired light a perfect finish.



# aluminium profiles



   
page 624




   
page 660



  
page 664



  
page 668



  
page 670



    
page 672




   
page 674



  
page 676



  
page 678




   
page 686



   
page 688




   
page 690



 page 692



 page 694



 page 696



 page 698



 page 700



 page 702



  page 706



 page 714



 page 716



 page 718







### ASSEMBLY FOR PROFILES AND STRIPES

We provide our products individually made to measure on request.  
You will receive the prices on request.



#### 989100 – service package I – profile cut

profile is shortened to desired length, tolerance  $\pm 1$  mm | sawing loss 4 mm

#### 989105 – drill hole end cap / profile

hole for cable outlet in end cap or profile



#### 989200 – service package II – cover cut

cover is shortened to desired length, tolerance  $\pm 1$  mm | sawing loss 4 mm



#### 989300 – service package III – stripe cut

LED stripe is adapted to desired length, taking into account segment and maximum total length, including soldering of a cable lead of the desired length and open, tinned wire ends

**989305 – cable** – connecting cable / cores 1 channel

**989310 – cable** – connecting cable / cores 2 channel

**989315 – cable** – connecting cable / cores 3 + 4 channel

**989320 – cable** – mini cable / cores 1 - 4 channel

**989325 – cable** – connecting cable / cores 5 channel

#### 989301 – 2nd connecting cable

attachment of a 2nd connecting cable / cores for further connection with open tinned wire ends

#### 989302 – connecting cable

attaching / soldering a fixed connection line / cores between 2 stripe pieces

[max. 1m connection line / cores incl., a longer connection will be charged by the metre]

original length and max. total length of the strip to be operated may not be exceeded by sections be exceeded

#### 989350 – IP surcharge – sealing stripe

sealing a shortened IP stripe / gluing an end cap



#### 989400 – service package IV – complete assembly

bringing together and assembling all components into a finished luminaire  
incl. function test and cable flag

[for desired length, please add 2cm to the cut length of the LED stripe segment  
for connection space, length tolerance  $\pm 2$ mm]




HOMOGENEOUS LIGHT IMAGE

How to achieve a homogeneous light image

In combination with a milky 40% cover and a matching LED stripe, a homogeneous light image can be created. The distance [pixel pitch] between the LEDs and the cover is decisive.

The rule of thumb here is:

The distance between the LEDs should be smaller than the distance between the LEDs and the cover.

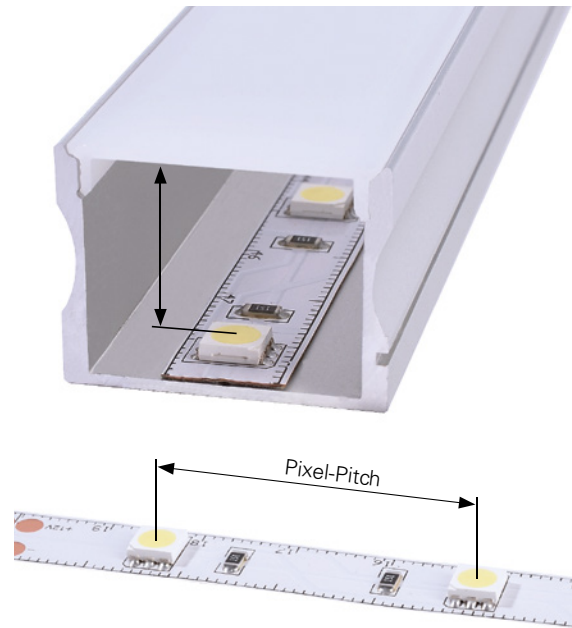

PROFILE DESCRIPTION

mounting type:

A = built-on  
E = built-in

Width of the series [10 profile] / of  
the matching LED stripe

AU - 01 - 10

basic form


series

TRANSLUCENCY / LIGHT TRANSMISSION

95% clear

75% mat

40% milky

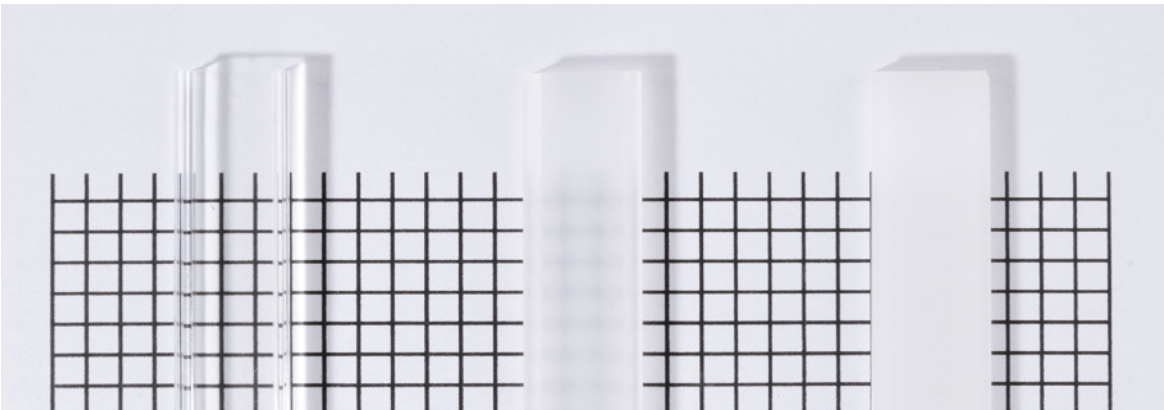


Presentation of various LED strips with different pixel pitches in combination with three levels of cover light transmission. This selection illustrates the visual differences between various LED strips when combined with different covers in the AU-01-10 aluminum profile with a profile height of 7 mm.


120 LED/m  
cutting option 50 mm / 6 LED



240 LED/m  
cutting option 25 mm / 6 LED

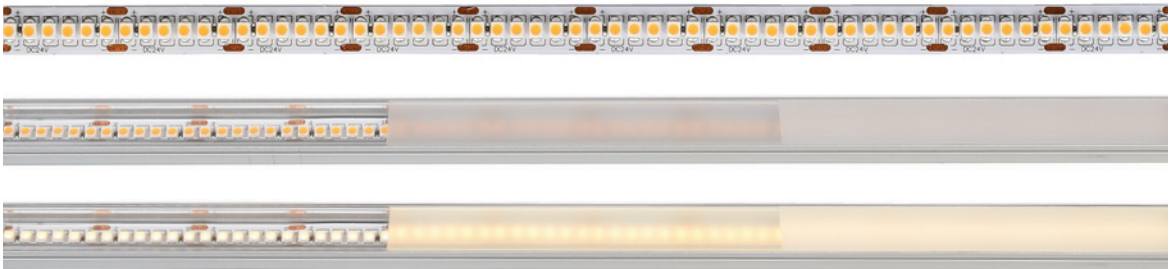

700LED/m  
cutting option 10 mm / 7 LED

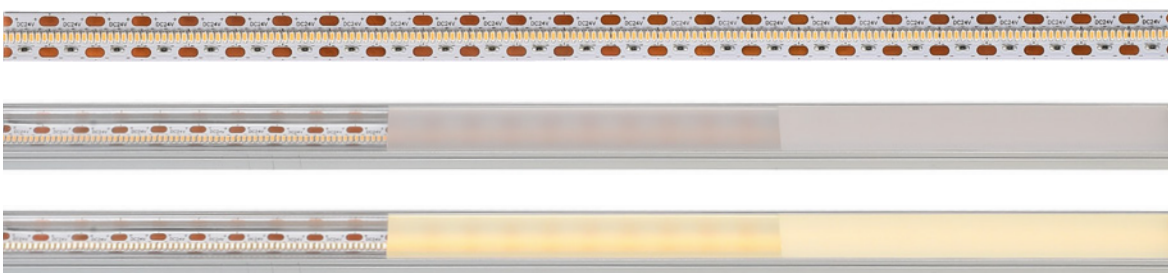

COB 480 LED/m  
cutting option 50 mm / 24 LED







With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg



#### U- AND T-PROFILES

The profiles of these series are available in various designs. Thanks to their universal profile shape, they can be used flexibly in almost all areas. Thanks to their profile construction, they are ideally suited for the cover cut edges.






**AU-01-05**

·for LED strips up to 5.7 mm wide

Housing                      Aluminium  
Length                      2000 mm

| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 970081  |  Silver | Matt / Anodised      | € 13.95 |
| 970085  |  White  | Matt / Powder-coated | € 12.95 |






**Cover** | PMMA - Polymethyl methacrylate

Clear Milky

2 m **983551** **983555** € 9.952 m **984055** € 9.952 m **984555** € 9.95**end caps set** | 2 pieces | Plastic | € 3.95

White Grey Black

**978660** **978661** **978662****979160** **979161** **979162****979660** **979661** **979662**




AU-02-05

·for LED strips up to 5.7 mm wide

Housing                      Aluminium  
 Length                      2000 mm

| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 970181  |  Silver | Matt / Anodised      | € 14.95 |
| 970183  |  Black  | Matt / Anodised      | € 14.95 |
| 970185  |  White  | Matt / Powder-coated | € 14.95 |



**Cover** | PMMA - Polymethyl methacrylate

Clear Milky

2 m **983551** **983555** € 9.952 m **984055** € 9.952 m **984555** € 9.95**end caps set** | 2 pieces | Plastic | € 3.95

White Grey Black

**978670** **978671** **978672****979170** **979171** **979172****979670** **979671**






AU-01-08

·for LED strips up to 9.3 mm wide

Housing                      Aluminium  
 Length                      2000 mm

| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 970001  |  Silver | Matt / Anodised      | € 18.95 |
| 970003  |  Black  | Matt / Anodised      | € 18.95 |
| 970005  |  White  | Matt / Powder-coated | € 18.95 |







**Cover** | PMMA - Polymethyl methacrylate

Clear      Matt      Milky

|     |                                                                                   |               |               |               |                |
|-----|-----------------------------------------------------------------------------------|---------------|---------------|---------------|----------------|
| 2 m |  | <b>983001</b> | <b>983003</b> | <b>983005</b> | <b>€ 13.95</b> |
| 2 m |  | <b>983501</b> | <b>983503</b> | <b>983505</b> | <b>€ 13.95</b> |
| 2 m |  |               | <b>984003</b> | <b>984005</b> | <b>€ 13.95</b> |
| 2 m |  |               | <b>984503</b> | <b>984505</b> | <b>€ 13.95</b> |

**end caps set** | 2 pieces | Plastic | € 3.95

White      Grey      Black

|                                                                                   |               |               |               |
|-----------------------------------------------------------------------------------|---------------|---------------|---------------|
|  | <b>978000</b> | <b>978001</b> | <b>978002</b> |
|  |               |               |               |
|  | <b>978500</b> | <b>978501</b> | <b>978502</b> |
|  | <b>979080</b> | <b>979081</b> | <b>979082</b> |
|                                                                                   | <b>979580</b> | <b>979581</b> | <b>979582</b> |

**930347** 3M double-sided adhesive tape 50,000x12x0.2 mm**€ 25.95****987002** Set of 2 retaining clips for AU-08**€ 3.45****987080** Universal holding clip mount (swivel) set of 2 pieces**€ 18.95**






AU-02-08

·for LED strips up to 9.3 mm wide

Housing                      Aluminium  
Length                      2000 mm

| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 970101  |  Silver | Matt / Anodised      | € 22.95 |
| 970103  |  Black  | Matt / Anodised      | € 22.95 |
| 970105  |  White  | Matt / Powder-coated | € 22.95 |



**Cover** | PMMA - Polymethyl methacrylate

Clear

Matt

Milky

2 m **983001** **983003** **983005** € 13.952 m **983501** **983503** **983505** € 13.952 m **984003** **984005** € 13.952 m **984503** **984505** € 13.95**end caps set** | 2 pieces | Plastic | € 3.95

White

Grey

Black

**978040** **978041** **978042****978540** **978541** **978542****979100** **979101** **979102****979600** **979601** **979602****930347** 3M double-sided adhesive tape 50,000x12x0.2 mm

€ 25.95

**987002** Set of 2 retaining clips for AU-08

€ 3.45

**987080** Universal holding clip mount (swivel) set of 2 pieces

€ 18.95






AU-01-10

·for LED strips up to 11.3 mm wide

Housing
 Aluminium

| Article | Housing Color                                                                            | Surface              | Length  | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|---------|
| 970021  |  Silver | Matt / Anodised      | 2000 mm | € 18.95 |
| 970023  |  Black  | Matt / Anodised      | 2000 mm | € 18.95 |
| 970028  |  Silver | Matt / Anodised      | 3000 mm | € 28.95 |
| 970025  |  White  | Matt / Powder-coated | 2000 mm | € 18.95 |








**Cover** | PMMA - Polymethyl methacrylate

Clear      Matt      Milky

|     |                                                                                   |               |               |                |
|-----|-----------------------------------------------------------------------------------|---------------|---------------|----------------|
|     |  |               |               |                |
| 2 m | <b>983011</b>                                                                     | <b>983013</b> | <b>983015</b> | <b>€ 13.95</b> |
| 3 m | <b>983016</b>                                                                     | <b>983017</b> | <b>983018</b> | <b>€ 20.95</b> |
|     |  |               |               |                |
| 2 m | <b>983511</b>                                                                     | <b>983513</b> | <b>983515</b> | <b>€ 13.95</b> |
| 3 m | <b>983516</b>                                                                     | <b>983517</b> | <b>983518</b> | <b>€ 20.95</b> |
|     |  |               |               |                |
| 2 m |                                                                                   | <b>984013</b> | <b>984015</b> | <b>€ 13.95</b> |
| 3 m |                                                                                   | <b>984017</b> | <b>984018</b> | <b>€ 20.95</b> |
|     |  |               |               |                |
| 2 m |                                                                                   | <b>984513</b> | <b>984515</b> | <b>€ 13.95</b> |
| 3 m |                                                                                   | <b>984517</b> | <b>984518</b> | <b>€ 20.95</b> |
|     |  |               |               |                |
| 2 m | <b>985011</b>                                                                     |               |               | <b>€ 13.95</b> |
| 3 m | <b>985016</b>                                                                     |               |               | <b>€ 20.95</b> |

**end caps set** | 2 pieces | Plastic | € 3.95

White      Grey      Black

**978010      978011      978012****978510      978511      978512****979000      979001      979002****979500      979501      979502****980000      980001      980002****930348**      3M double-sided adhesive tape 50,000x15x0.20 mm**€ 30.95****987004**      Set of 2 retaining clips for AU-10**€ 3.45****987080**      Universal holding clip mount (swivel) set of 2 pieces**€ 18.95****Lighting design**

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.




AU-02-10

·for LED strips up to 11.3 mm wide

Housing                      Aluminium

| Article | Housing Color                                                                            | Surface              | Length  | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|---------|
| 970121  |  Silver | Matt / Anodised      | 2000 mm | € 22.95 |
| 970123  |  Black  | Matt / Anodised      | 2000 mm | € 22.95 |
| 970128  |  Silver | Matt / Anodised      | 3000 mm | € 35.95 |
| 970125  |  White  | Matt / Powder-coated | 2000 mm | € 22.95 |



**Cover** | PMMA - Polymethyl methacrylate

Clear      Matt      Milky



|     |               |               |               |                |
|-----|---------------|---------------|---------------|----------------|
| 2 m | <b>983011</b> | <b>983013</b> | <b>983015</b> | <b>€ 13.95</b> |
| 3 m | <b>983016</b> | <b>983017</b> | <b>983018</b> | <b>€ 20.95</b> |



|     |               |               |               |                |
|-----|---------------|---------------|---------------|----------------|
| 2 m | <b>983511</b> | <b>983513</b> | <b>983515</b> | <b>€ 13.95</b> |
| 3 m | <b>983516</b> | <b>983517</b> | <b>983518</b> | <b>€ 20.95</b> |



|     |  |               |               |                |
|-----|--|---------------|---------------|----------------|
| 2 m |  | <b>984013</b> | <b>984015</b> | <b>€ 13.95</b> |
| 3 m |  | <b>984017</b> | <b>984018</b> | <b>€ 20.95</b> |



|     |  |               |               |                |
|-----|--|---------------|---------------|----------------|
| 2 m |  | <b>984513</b> | <b>984515</b> | <b>€ 13.95</b> |
| 3 m |  | <b>984517</b> | <b>984518</b> | <b>€ 20.95</b> |



|     |               |  |  |                |
|-----|---------------|--|--|----------------|
| 2 m | <b>985011</b> |  |  | <b>€ 13.95</b> |
| 3 m | <b>985016</b> |  |  | <b>€ 20.95</b> |

**end caps set** | 2 pieces | Plastic | € 3.95

White      Grey      Black



|               |               |               |
|---------------|---------------|---------------|
| <b>978050</b> | <b>978051</b> | <b>978052</b> |
|---------------|---------------|---------------|



|               |               |               |
|---------------|---------------|---------------|
| <b>978550</b> | <b>978551</b> | <b>978552</b> |
|---------------|---------------|---------------|



|               |               |               |
|---------------|---------------|---------------|
| <b>979020</b> | <b>979021</b> | <b>979022</b> |
|---------------|---------------|---------------|



|               |               |               |
|---------------|---------------|---------------|
| <b>979520</b> | <b>979521</b> | <b>979522</b> |
|---------------|---------------|---------------|



|               |               |               |
|---------------|---------------|---------------|
| <b>980010</b> | <b>980011</b> | <b>980012</b> |
|---------------|---------------|---------------|

**930348**    3M double-sided adhesive tape 50,000x15x0.20 mm**€ 30.95****987004**    Set of 2 retaining clips for AU-10**€ 3.45****987080**    Universal holding clip mount (swivel) set of 2 pieces**€ 18.95****Onlineshop**

You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.






AU-01-12

·for LED strips up to 13.3 mm wide

Housing
 Aluminium

| Article | Housing Color                                                                            | Surface              | Length  | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|---------|
| 970041  |  Silver | Matt / Anodised      | 2000 mm | € 22.95 |
| 970043  |  Black  | Matt / Anodised      | 2000 mm | € 22.95 |
| 970048  |  Silver | Matt / Anodised      | 3000 mm | € 33.95 |
| 970045  |  White  | Matt / Powder-coated | 2000 mm | € 22.95 |



**Cover** | PMMA - Polymethyl methacrylate

Clear      Matt      Milky



|     |               |               |               |                |
|-----|---------------|---------------|---------------|----------------|
| 1 m | <b>983020</b> | <b>983022</b> | <b>983024</b> | <b>€ 6.45</b>  |
| 2 m | <b>983021</b> | <b>983023</b> | <b>983025</b> | <b>€ 13.95</b> |
| 3 m | <b>983028</b> | <b>983027</b> | <b>983026</b> | <b>€ 20.95</b> |



|     |               |               |               |                |
|-----|---------------|---------------|---------------|----------------|
| 1 m | <b>983520</b> | <b>983522</b> | <b>983524</b> | <b>€ 6.45</b>  |
| 2 m | <b>983521</b> | <b>983523</b> | <b>983525</b> | <b>€ 13.95</b> |
| 3 m | <b>983527</b> |               | <b>983526</b> | <b>€ 20.95</b> |




|     |  |               |               |                |
|-----|--|---------------|---------------|----------------|
| 1 m |  | <b>984022</b> | <b>984024</b> | <b>€ 6.45</b>  |
| 2 m |  | <b>984023</b> | <b>984025</b> | <b>€ 13.95</b> |
| 3 m |  |               | <b>984026</b> | <b>€ 20.95</b> |




|     |  |               |               |                |
|-----|--|---------------|---------------|----------------|
| 1 m |  | <b>984522</b> | <b>984524</b> | <b>€ 6.45</b>  |
| 2 m |  | <b>984523</b> | <b>984525</b> | <b>€ 13.95</b> |
| 3 m |  |               | <b>984526</b> | <b>€ 20.95</b> |

**end caps set** | 2 pieces | Plastic | € 3.95


White      Grey      Black




|               |               |               |
|---------------|---------------|---------------|
| <b>978020</b> | <b>978021</b> | <b>978022</b> |
|---------------|---------------|---------------|



|               |               |               |
|---------------|---------------|---------------|
| <b>978520</b> | <b>978521</b> | <b>978522</b> |
|---------------|---------------|---------------|



|               |               |               |
|---------------|---------------|---------------|
| <b>979010</b> | <b>979011</b> | <b>979012</b> |
|---------------|---------------|---------------|



|               |               |               |
|---------------|---------------|---------------|
| <b>979510</b> | <b>979511</b> | <b>979512</b> |
|---------------|---------------|---------------|

**930348** 3M double-sided adhesive tape 50,000x15x0.20 mm**€ 30.95****987006** Set of 2 retaining clips for AU-12**€ 3.45****987080** Universal holding clip mount (swivel) set of 2 pieces**€ 18.95**




AU-02-12

·for LED strips up to 13.3 mm wide

Housing

Aluminium

| Article | Housing Color                                                                            | Surface              | Length  | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|---------|
| 970141  |  Silver | Matt / Anodised      | 2000 mm | € 25.95 |
| 970143  |  Black  | Matt / Anodised      | 2000 mm | € 25.95 |
| 970148  |  Silver | Matt / Anodised      | 3000 mm | € 35.95 |
| 970145  |  White  | Matt / Powder-coated | 2000 mm | € 25.95 |




**Cover** | PMMA - Polymethyl methacrylate

Clear      Matt      Milky

|     |                                                                                   |               |               |                |
|-----|-----------------------------------------------------------------------------------|---------------|---------------|----------------|
|     |  |               |               |                |
| 2 m | <b>983021</b>                                                                     | <b>983023</b> | <b>983025</b> | <b>€ 13.95</b> |
| 3 m | <b>983028</b>                                                                     | <b>983027</b> | <b>983026</b> | <b>€ 20.95</b> |
|     |  |               |               |                |
| 2 m | <b>983521</b>                                                                     | <b>983523</b> | <b>983525</b> | <b>€ 13.95</b> |
| 3 m | <b>983527</b>                                                                     |               | <b>983526</b> | <b>€ 20.95</b> |
|     |  |               |               |                |
| 2 m |                                                                                   | <b>984023</b> | <b>984025</b> | <b>€ 13.95</b> |
| 3 m |                                                                                   |               | <b>984026</b> | <b>€ 20.95</b> |
|     |  |               |               |                |
| 2 m |                                                                                   | <b>984523</b> | <b>984525</b> | <b>€ 13.95</b> |
| 3 m |                                                                                   |               | <b>984526</b> | <b>€ 20.95</b> |

**end caps set** | 2 pieces | Plastic | € 3.95

White      Grey      Black

**978060**      **978061**      **978062****978560**      **978561**      **978562****979030**      **979031**      **979032****979530**      **979531**      **979532****930348**      3M double-sided adhesive tape 50,000x15x0.20 mm**€ 30.95****987006**      Set of 2 retaining clips for AU-12**€ 3.45****987080**      Universal holding clip mount (swivel) set of 2 pieces**€ 18.95**




**AU-01-15**

·For LED strips up to 16.3 mm wide

Housing                      Aluminium

| Article       | Housing Color                                                                            | Surface              | Length  | Price          |
|---------------|------------------------------------------------------------------------------------------|----------------------|---------|----------------|
| <b>970061</b> |  Silver | Matt / Anodised      | 2000 mm | <b>€ 22.95</b> |
| <b>970063</b> |  Black  | Matt / Anodised      | 2000 mm | <b>€ 22.95</b> |
| <b>970068</b> |  Silver | Matt / Anodised      | 3000 mm | <b>€ 33.95</b> |
| <b>970065</b> |  White  | Matt / Powder-coated | 2000 mm | <b>€ 22.95</b> |





**Cover** | PMMA - Polymethyl methacrylate

Clear      Matt      Milky



|     |               |               |               |                |
|-----|---------------|---------------|---------------|----------------|
| 2 m | <b>983031</b> | <b>983033</b> | <b>983035</b> | <b>€ 15.95</b> |
| 3 m | <b>983038</b> | <b>983037</b> | <b>983036</b> | <b>€ 22.95</b> |



|     |               |               |               |                |
|-----|---------------|---------------|---------------|----------------|
| 2 m | <b>983531</b> | <b>983533</b> | <b>983535</b> | <b>€ 15.95</b> |
| 3 m |               | <b>983539</b> | <b>983536</b> | <b>€ 22.95</b> |




|     |  |               |               |                |
|-----|--|---------------|---------------|----------------|
| 2 m |  | <b>984033</b> | <b>984035</b> | <b>€ 15.95</b> |
| 3 m |  |               | <b>984036</b> | <b>€ 22.95</b> |




|     |  |               |               |                |
|-----|--|---------------|---------------|----------------|
| 2 m |  | <b>984533</b> | <b>984535</b> | <b>€ 15.95</b> |
|-----|--|---------------|---------------|----------------|

**end caps set** | 2 pieces | Plastic | € 3.95


White      Grey      Black




|               |               |               |
|---------------|---------------|---------------|
| <b>978030</b> | <b>978031</b> | <b>978032</b> |
|---------------|---------------|---------------|



|               |               |               |
|---------------|---------------|---------------|
| <b>978530</b> | <b>978531</b> | <b>978532</b> |
|---------------|---------------|---------------|



|               |               |               |
|---------------|---------------|---------------|
| <b>979090</b> | <b>979091</b> | <b>979092</b> |
|---------------|---------------|---------------|



|               |               |               |
|---------------|---------------|---------------|
| <b>979590</b> | <b>979591</b> | <b>979592</b> |
|---------------|---------------|---------------|

**930349**      3M double-sided adhesive tape 50,000x20x0.20 mm**€ 38.95****987008**      Set of 2 retaining clips for AU-15**€ 3.45****987080**      Universal holding clip mount (swivel) set of 2 pieces**€ 18.95**






**AU-02-15**

·For LED strips up to 16.3 mm wide

Housing                      Aluminium




| Article | Housing Color                                                                            | Surface              | Length  | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|---------|
| 970161  |  Silver | Matt / Anodised      | 2000 mm | € 25.95 |
| 970163  |  Black  | Matt / Anodised      | 2000 mm | € 25.95 |
| 970168  |  Silver | Matt / Anodised      | 3000 mm | € 35.95 |
| 970165  |  White  | Matt / Powder-coated | 2000 mm | € 25.95 |



Cover | PMMA - Polymethyl methacrylate

|     | Clear                                                                             | Matt   | Milky  |         |
|-----|-----------------------------------------------------------------------------------|--------|--------|---------|
|     |  |        |        |         |
| 2 m | 983031                                                                            | 983033 | 983035 | € 15.95 |
| 3 m | 983038                                                                            | 983037 | 983036 | € 22.95 |
|     |  |        |        |         |
| 2 m | 983531                                                                            | 983533 | 983535 | € 15.95 |
| 3 m |                                                                                   | 983539 | 983536 | € 22.95 |
|     |  |        |        |         |
| 2 m |                                                                                   | 984033 | 984035 | € 15.95 |
| 3 m |                                                                                   |        | 984036 | € 22.95 |
|     |  |        |        |         |
| 2 m |                                                                                   | 984533 | 984535 | € 15.95 |

end caps set | 2 pieces | Plastic | € 3.95

| White                                                                             | Grey   | Black  |
|-----------------------------------------------------------------------------------|--------|--------|
|  |        |        |
| 978070                                                                            | 978071 | 978072 |
|  |        |        |
| 978570                                                                            | 978571 | 978572 |
|  |        |        |
| 979110                                                                            | 979111 | 979112 |
|  |        |        |
| 979610                                                                            | 979611 | 979612 |

930349 3M double-sided adhesive tape 50,000x20x0.20 mm

987008 Set of 2 retaining clips for AU-15

987080 Universal holding clip mount (swivel) set of 2 pieces



€ 38.95



€ 3.45



€ 18.95






ET-01-08

·For LED strips up to 9.3 mm wide

Housing                      Aluminium  
Length                      2000 mm





| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 975001  |  Silver | Matt / Anodised      | € 21.95 |
| 975003  |  Black  | Matt / Anodised      | € 21.95 |
| 975005  |  White  | Matt / Powder-coated | € 21.95 |



Cover | PMMA - Polymethyl methacrylate

|     | Clear                                                                             | Matt   | Milky  |         |
|-----|-----------------------------------------------------------------------------------|--------|--------|---------|
|     |  |        |        |         |
| 1 m | 983000                                                                            | 983002 | 983004 | € 6.45  |
| 2 m | 983001                                                                            | 983003 | 983005 | € 13.95 |
|     |  |        |        |         |
| 1 m | 983500                                                                            | 983502 | 983504 | € 6.45  |
| 2 m | 983501                                                                            | 983503 | 983505 | € 13.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984002 | 984004 | € 6.45  |
| 2 m |                                                                                   | 984003 | 984005 | € 13.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984502 | 984504 | € 6.45  |
| 2 m |                                                                                   | 984503 | 984505 | € 13.95 |

end caps set | 2 pieces | Plastic | € 3.95

| White                                                                             | Grey   | Black  |
|-----------------------------------------------------------------------------------|--------|--------|
|  |        |        |
| 978080                                                                            | 978081 | 978082 |
|  |        |        |
| 978580                                                                            | 978581 | 978582 |
|  |        |        |
| 979120                                                                            | 979121 | 979122 |
|  |        |        |
| 979620                                                                            | 979621 | 979622 |

930347 3M double-sided adhesive tape 50,000x12x0.2 mm

 € 25.95

987002 Set of 2 retaining clips for AU-08

 € 3.45

987080 Universal holding clip mount (swivel) set of 2 pieces

 € 18.95






ET-02-08

·For LED strips up to 9.3 mm wide

Housing                      Aluminium  
Length                      2000 mm

| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 975101  |  Silver | Matt / Anodised      | € 25.95 |
| 975103  |  Black  | Matt / Anodised      | € 25.95 |
| 975105  |  White  | Matt / Powder-coated | € 25.95 |








Cover | PMMA - Polymethyl methacrylate

|     | Clear                                                                             | Matt   | Milky  |         |
|-----|-----------------------------------------------------------------------------------|--------|--------|---------|
|     |  |        |        |         |
| 1 m | 983000                                                                            | 983002 | 983004 | € 6.45  |
| 2 m | 983001                                                                            | 983003 | 983005 | € 13.95 |
|     |  |        |        |         |
| 1 m | 983500                                                                            | 983502 | 983504 | € 6.45  |
| 2 m | 983501                                                                            | 983503 | 983505 | € 13.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984002 | 984004 | € 6.45  |
| 2 m |                                                                                   | 984003 | 984005 | € 13.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984502 | 984504 | € 6.45  |
| 2 m |                                                                                   | 984503 | 984505 | € 13.95 |

end caps set | 2 pieces | Plastic | € 3.95

| White                                                                             | Grey   | Black  |
|-----------------------------------------------------------------------------------|--------|--------|
|  |        |        |
| 978120                                                                            | 978121 | 978122 |
|  |        |        |
| 978620                                                                            | 978621 | 978622 |
|  |        |        |
| 979140                                                                            | 979141 | 979142 |
|  |        |        |
|                                                                                   | 979641 |        |

930347 3M double-sided adhesive tape 50,000x12x0.2 mm

 € 25.95

987002 Set of 2 retaining clips for AU-08

 € 3.45

987080 Universal holding clip mount (swivel) set of 2 pieces

 € 18.95








**ET-01-10**

·For LED strips up to 11.3 mm wide

Housing                      Aluminium  
Length                      2000 mm

| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 975021  |  Silver | Matt / Anodised      | € 21.95 |
| 975023  |  Black  | Matt / Anodised      | € 21.95 |
| 975025  |  White  | Matt / Powder-coated | € 21.95 |



**Cover** | PMMA - Polymethyl methacrylate

Clear Matt Milky

|     |                                                                                   |               |               |                |
|-----|-----------------------------------------------------------------------------------|---------------|---------------|----------------|
|     |  |               |               |                |
| 1 m | <b>983010</b>                                                                     | <b>983012</b> | <b>983014</b> | <b>€ 6.45</b>  |
| 2 m | <b>983011</b>                                                                     | <b>983013</b> | <b>983015</b> | <b>€ 13.95</b> |

|     |                                                                                   |               |               |                |
|-----|-----------------------------------------------------------------------------------|---------------|---------------|----------------|
|     |  |               |               |                |
| 1 m | <b>983510</b>                                                                     | <b>983512</b> | <b>983514</b> | <b>€ 6.45</b>  |
| 2 m | <b>983511</b>                                                                     | <b>983513</b> | <b>983515</b> | <b>€ 13.95</b> |


|     |                                                                                   |               |               |                |
|-----|-----------------------------------------------------------------------------------|---------------|---------------|----------------|
|     |  |               |               |                |
| 1 m |                                                                                   | <b>984012</b> | <b>984014</b> | <b>€ 6.45</b>  |
| 2 m |                                                                                   | <b>984013</b> | <b>984015</b> | <b>€ 13.95</b> |


|     |                                                                                   |               |               |                |
|-----|-----------------------------------------------------------------------------------|---------------|---------------|----------------|
|     |  |               |               |                |
| 1 m |                                                                                   | <b>984512</b> | <b>984514</b> | <b>€ 6.45</b>  |
| 2 m |                                                                                   | <b>984513</b> | <b>984515</b> | <b>€ 13.95</b> |


|     |                                                                                   |  |  |                |
|-----|-----------------------------------------------------------------------------------|--|--|----------------|
|     |  |  |  |                |
| 1 m | <b>985010</b>                                                                     |  |  | <b>€ 6.45</b>  |
| 2 m | <b>985011</b>                                                                     |  |  | <b>€ 13.95</b> |


**end caps set** | 2 pieces | Plastic


White Grey Black

|               |                                                                                   |               |               |  |
|---------------|-----------------------------------------------------------------------------------|---------------|---------------|--|
|               |  |               |               |  |
| <b>978090</b> | <b>978091</b>                                                                     | <b>978092</b> | <b>€ 3.95</b> |  |

|               |                                                                                   |               |               |  |
|---------------|-----------------------------------------------------------------------------------|---------------|---------------|--|
|               |  |               |               |  |
| <b>978590</b> | <b>978591</b>                                                                     | <b>978592</b> | <b>€ 3.95</b> |  |

|               |                                                                                   |               |               |  |
|---------------|-----------------------------------------------------------------------------------|---------------|---------------|--|
|               |  |               |               |  |
| <b>979040</b> | <b>979041</b>                                                                     | <b>979042</b> | <b>€ 3.95</b> |  |

|               |                                                                                   |               |               |  |
|---------------|-----------------------------------------------------------------------------------|---------------|---------------|--|
|               |  |               |               |  |
| <b>979540</b> |                                                                                   | <b>979542</b> | <b>€ 3.95</b> |  |

|               |                                                                                   |               |               |  |
|---------------|-----------------------------------------------------------------------------------|---------------|---------------|--|
|               |  |               |               |  |
| <b>980040</b> | <b>980041</b>                                                                     | <b>980042</b> | <b>€ 3.95</b> |  |

**930348** 3M double-sided adhesive tape 50,000x15x0.20 mm**€ 30.95****987004** Set of 2 retaining clips for AU-10**€ 3.45****987080** Universal holding clip mount (swivel) set of 2 pieces**€ 18.95****Lighting design**

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.




ET-02-10

·For LED strips up to 11.3 mm wide

Housing                      Aluminium  
 Length                      2000 mm

| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 975121  |  Silver | Matt / Anodised      | € 25.95 |
| 975123  |  Black  | Matt / Anodised      | € 25.95 |
| 975125  |  White  | Matt / Powder-coated | € 25.95 |



**Cover** | PMMA - Polymethyl methacrylate

Clear Matt Milky



|     |               |               |               |                |
|-----|---------------|---------------|---------------|----------------|
| 1 m | <b>983010</b> | <b>983012</b> | <b>983014</b> | <b>€ 6.45</b>  |
| 2 m | <b>983011</b> | <b>983013</b> | <b>983015</b> | <b>€ 13.95</b> |



|     |               |               |               |                |
|-----|---------------|---------------|---------------|----------------|
| 1 m | <b>983510</b> | <b>983512</b> | <b>983514</b> | <b>€ 6.45</b>  |
| 2 m | <b>983511</b> | <b>983513</b> | <b>983515</b> | <b>€ 13.95</b> |



|     |  |               |               |                |
|-----|--|---------------|---------------|----------------|
| 1 m |  | <b>984012</b> | <b>984014</b> | <b>€ 6.45</b>  |
| 2 m |  | <b>984013</b> | <b>984015</b> | <b>€ 13.95</b> |




|     |  |               |               |                |
|-----|--|---------------|---------------|----------------|
| 1 m |  | <b>984512</b> | <b>984514</b> | <b>€ 6.45</b>  |
| 2 m |  | <b>984513</b> | <b>984515</b> | <b>€ 13.95</b> |




|     |               |  |  |                |
|-----|---------------|--|--|----------------|
| 1 m | <b>985010</b> |  |  | <b>€ 6.45</b>  |
| 2 m | <b>985011</b> |  |  | <b>€ 13.95</b> |

**end caps set** | 2 pieces | Plastic | € 3.95


White Grey Black




|               |               |               |
|---------------|---------------|---------------|
| <b>978130</b> | <b>978131</b> | <b>978132</b> |
|---------------|---------------|---------------|




|               |               |               |
|---------------|---------------|---------------|
| <b>978630</b> | <b>978631</b> | <b>978632</b> |
|---------------|---------------|---------------|



|               |               |               |
|---------------|---------------|---------------|
| <b>979060</b> | <b>979061</b> | <b>979062</b> |
|---------------|---------------|---------------|



|               |               |               |
|---------------|---------------|---------------|
| <b>979560</b> | <b>979561</b> | <b>979562</b> |
|---------------|---------------|---------------|



|               |               |
|---------------|---------------|
| <b>980060</b> | <b>980061</b> |
|---------------|---------------|

**930348** 3M double-sided adhesive tape 50,000x15x0.20 mm**€ 30.95****987004** Set of 2 retaining clips for AU-10**€ 3.45****987080** Universal holding clip mount (swivel) set of 2 pieces**€ 18.95****Onlineshop**

You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.




ET-01-12

·For LED strips up to 13.3 mm wide

Housing                      Aluminium  
Length                      2000 mm

| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 975041  |  Silver | Matt / Anodised      | € 25.95 |
| 975049  |  Black  | Matt / Anodised      | € 25.95 |
| 975045  |  White  | Matt / Powder-coated | € 25.95 |







Cover | PMMA - Polymethyl methacrylate

|     | Clear                                                                             | Matt   | Milky  |         |
|-----|-----------------------------------------------------------------------------------|--------|--------|---------|
|     |  |        |        |         |
| 1 m | 983020                                                                            | 983022 | 983024 | € 6.45  |
| 2 m | 983021                                                                            | 983023 | 983025 | € 13.95 |
|     |  |        |        |         |
| 1 m | 983520                                                                            | 983522 | 983524 | € 6.45  |
| 2 m | 983521                                                                            | 983523 | 983525 | € 13.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984022 | 984024 | € 6.45  |
| 2 m |                                                                                   | 984023 | 984025 | € 13.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984522 | 984524 | € 6.45  |
| 2 m |                                                                                   | 984523 | 984525 | € 13.95 |

end caps set | 2 pieces | Plastic | € 3.95

| White                                                                             | Grey   | Black  |
|-----------------------------------------------------------------------------------|--------|--------|
|  |        |        |
| 978100                                                                            | 978101 | 978102 |
|  |        |        |
| 978600                                                                            | 978601 | 978602 |
|  |        |        |
| 979050                                                                            | 979051 | 979052 |
|  |        |        |
| 979550                                                                            | 979551 | 979552 |

930348 3M double-sided adhesive tape 50,000x15x0.20 mm



€ 30.95

987006 Set of 2 retaining clips for AU-12



€ 3.45

987080 Universal holding clip mount (swivel) set of 2 pieces



€ 18.95








ET-02-12

·For LED strips up to 13.3 mm wide

Housing                      Aluminium  
 Length                      2000 mm




| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 975141  |  Silver | Matt / Anodised      | € 28.95 |
| 975143  |  Black  | Matt / Anodised      | € 28.95 |
| 975145  |  White  | Matt / Powder-coated | € 28.95 |



Cover | PMMA - Polymethyl methacrylate

|     | Clear                                                                             | Matt   | Milky  |         |
|-----|-----------------------------------------------------------------------------------|--------|--------|---------|
|     |  |        |        |         |
| 1 m | 983020                                                                            | 983022 | 983024 | € 6.45  |
| 2 m | 983021                                                                            | 983023 | 983025 | € 13.95 |
|     |  |        |        |         |
| 1 m | 983520                                                                            | 983522 | 983524 | € 6.45  |
| 2 m | 983521                                                                            | 983523 | 983525 | € 13.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984022 | 984024 | € 6.45  |
| 2 m |                                                                                   | 984023 | 984025 | € 13.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984522 | 984524 | € 6.45  |
| 2 m |                                                                                   | 984523 | 984525 | € 13.95 |

end caps set | 2 pieces | Plastic | € 3.95

| White                                                                             | Grey   | Black  |
|-----------------------------------------------------------------------------------|--------|--------|
|  |        |        |
| 978140                                                                            | 978141 | 978142 |
|  |        |        |
| 978640                                                                            | 978641 | 978642 |
|  |        |        |
| 979070                                                                            | 979071 | 979072 |
|  |        |        |
|                                                                                   | 979571 | 979572 |

930348 3M double-sided adhesive tape 50,000x15x0.20 mm



€ 30.95

987006 Set of 2 retaining clips for AU-12



€ 3.45

987080 Universal holding clip mount (swivel) set of 2 pieces



€ 18.95






ET-02-15

·For LED strips up to 16.3 mm wide

Housing                      Aluminium  
 Length                      2000 mm



| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 975161  |  Silver | Matt / Anodised      | € 28.95 |
| 975163  |  Black  | Matt / Anodised      | € 28.95 |
| 975165  |  White  | Matt / Powder-coated | € 28.95 |



Cover | PMMA - Polymethyl methacrylate

|     | Clear                                                                             | Matt   | Milky  |         |
|-----|-----------------------------------------------------------------------------------|--------|--------|---------|
|     |  |        |        |         |
| 1 m | 983030                                                                            | 983032 | 983034 | € 7.95  |
| 2 m | 983031                                                                            | 983033 | 983035 | € 15.95 |
|     |  |        |        |         |
| 1 m | 983530                                                                            | 983532 | 983534 | € 7.95  |
| 2 m | 983531                                                                            | 983533 | 983535 | € 15.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984032 | 984034 | € 7.95  |
| 2 m |                                                                                   | 984033 | 984035 | € 15.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984532 | 984534 | € 7.95  |
| 2 m |                                                                                   | 984533 | 984535 | € 15.95 |

end caps set | 2 pieces | Plastic | € 3.95

| White                                                                             | Grey   | Black  |
|-----------------------------------------------------------------------------------|--------|--------|
|  |        |        |
| 978150                                                                            | 978151 | 978152 |
|  |        |        |
| 978650                                                                            | 978651 | 978652 |
|  |        |        |
| 979150                                                                            | 979151 | 979152 |
|  |        |        |
| 979650                                                                            | 979651 | 979652 |

930349 3M double-sided adhesive tape 50,000x20x0.20 mm



€ 38.95

987008 Set of 2 retaining clips for AU-15



€ 3.45

987080 Universal holding clip mount (swivel) set of 2 pieces



€ 18.95







With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg



#### H- AND GROOVE-PROFILES

Groove and H-profiles are offered with a comprehensive range of mounting accessories and are hard to beat in terms of versatility. The range of accessories includes cable suspensions, tension springs, sliding blocks and much more.







AU-10-12

For LED strips up to 13 mm wide

Housing

Aluminium

| Article | Housing Color                                                                            | Surface              | Length  | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|---------|
| 970280  |  Silver | Matt / Anodised      | 2000 mm | € 28.95 |
| 970281  |  Silver | Matt / Anodised      | 3000 mm | € 43.95 |
| 970284  |  White  | Matt / Powder-coated | 2000 mm | € 28.95 |
| 970285  |  White  | Matt / Powder-coated | 3000 mm | € 43.95 |

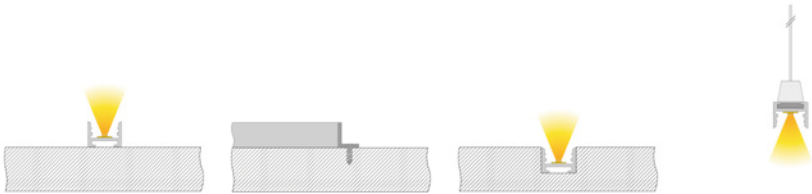

Cover | Polycarbonate

Clear      Milky      Black




|      |               |               |               |                 |
|------|---------------|---------------|---------------|-----------------|
| 2 m  | <b>983096</b> | <b>983090</b> | <b>983093</b> | <b>€ 18.95</b>  |
| 3 m  | <b>983097</b> | <b>983091</b> | <b>983094</b> | <b>€ 28.95</b>  |
| 20 m | <b>983098</b> | <b>983092</b> |               | <b>€ 159.95</b> |

end caps set | Aluminium | € 15.95

Silver



**980021**



**980023**      Mounting clip, set (2 pieces)



**€ 3.95**

**987025**      Sliding block/longitudinal connector



**€ 7.95**

**987026**      Sliding block/corner connector 120°



**€ 7.95**

**987027**      Sliding block/corner connector 90°



**€ 7.95**

Accessories for **970280, 970281**


**980020**      end caps set aluminium 2 pieces

**19,95 €**


**980021**      end caps set aluminium 2 pieces

**19,95 €**

**980020**

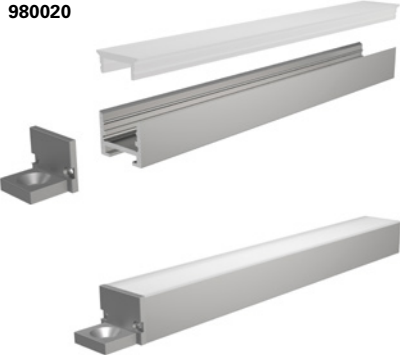

**980021**

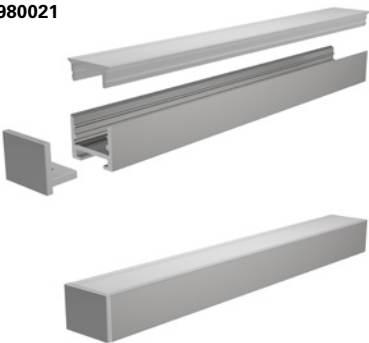




With the kind support of Albtherme Waldbronn / Ziegler Technics [buero@ziegler-technics.de](mailto:buero@ziegler-technics.de)



**STEP-, SOCKET-, ANGLE-, CORNER-PROFILES**

The perfect light is not always planned from the very start. With the mounting and corner profiles, you can also integrate linear light at a later stage.

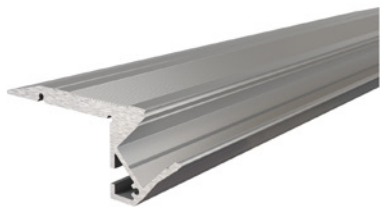


**AL-01-10**

·For LED strips up to 11.3 mm wide

Housing                      Aluminium  
Surface                     Matt, Anodised

| Article | Housing Color                                                                            | Length  | Price   |
|---------|------------------------------------------------------------------------------------------|---------|---------|
| 970503  |  Silver | 2000 mm | € 47.95 |
| 970502  |  Silver | 3000 mm | € 75.95 |

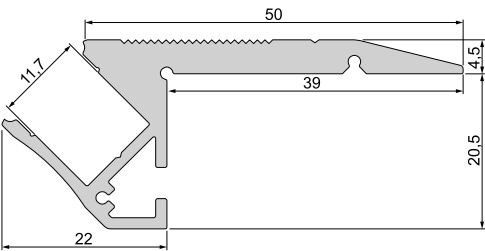

Cover | PMMA - Polymethyl methacrylate

Cover | Polycarbonate

Clear      Matt      Milky



|     |        |        |        |         |
|-----|--------|--------|--------|---------|
| 1 m | 983010 | 983012 | 983014 | € 6.45  |
| 1 m |        |        | 983080 | € 8.95  |
| 2 m | 983011 | 983013 | 983015 | € 13.95 |
| 2 m |        |        | 983081 | € 17.95 |
| 3 m | 983016 | 983017 | 983018 | € 20.95 |
| 3 m |        |        | 983082 | € 25.95 |

end caps set | 2 pieces (left/right) | Plastic | € 3.95

Grey



978191

930105      Assembly adhesive 310 ml



€ 28.95









AL-02-10

For LED strips up to 11.3 mm wide

Housing Aluminium  
Surface Matt, Anodised

| Article | Housing Color      | Length  | Price   |
|---------|--------------------|---------|---------|
| 970523  | <div></div> Silver | 2000 mm | € 47.95 |
| 970522  | <div></div> Silver | 3000 mm | € 75.95 |

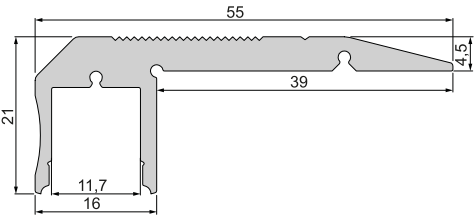


**Cover** | PMMA - Polymethyl methacrylate  
Clear      Matt      Milky



|     |               |               |               |                |
|-----|---------------|---------------|---------------|----------------|
| 1 m | <b>983010</b> | <b>983012</b> | <b>983014</b> | <b>€ 6.45</b>  |
| 2 m | <b>983011</b> | <b>983013</b> | <b>983015</b> | <b>€ 13.95</b> |
| 3 m | <b>983016</b> | <b>983017</b> | <b>983018</b> | <b>€ 20.95</b> |

**end caps set** | 2 pieces (left/right) | Plastic | € 3.95  
Grey



**978201**

**930105**      Assembly adhesive 310 ml



**€ 28.95**







AV-01-20

·For LED strips up to 22 mm wide

Housing                      Aluminium  
Surface                     Matt, Anodised  
Length                      2000 mm

| Article | Housing Color                                                                            | Price   |
|---------|------------------------------------------------------------------------------------------|---------|
| 970460  |  Silver | € 28.95 |

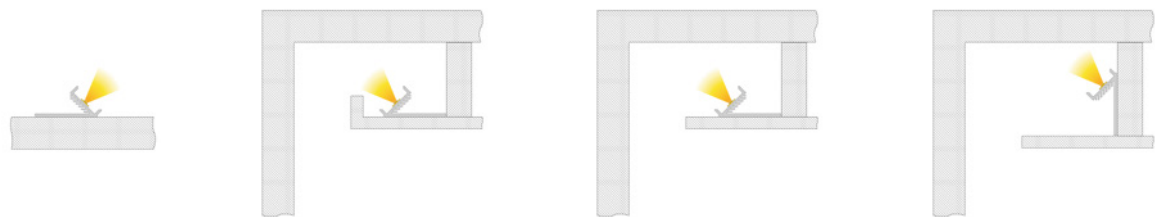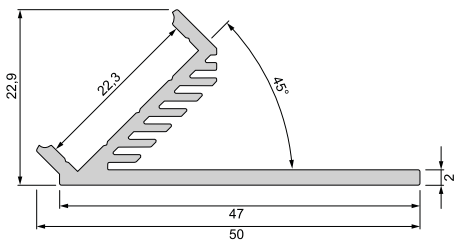


Cover | PMMA - Polymethyl methacrylate


Clear

Milky


|     |               |               |                |
|-----|---------------|---------------|----------------|
| 1 m | <b>983040</b> | <b>983044</b> | <b>€ 8.95</b>  |
| 2 m | <b>983041</b> | <b>983045</b> | <b>€ 17.95</b> |
| 3 m |               | <b>983046</b> | <b>€ 25.95</b> |



|     |  |               |                |
|-----|--|---------------|----------------|
| 1 m |  | <b>984044</b> | <b>€ 8.95</b>  |
| 2 m |  | <b>984045</b> | <b>€ 17.95</b> |



|     |  |               |                |
|-----|--|---------------|----------------|
| 1 m |  | <b>984544</b> | <b>€ 8.95</b>  |
| 2 m |  | <b>984545</b> | <b>€ 17.95</b> |



**930105** Assembly adhesive 310 ml



€ 28.95









AV-02-20

·For LED strips up to 22 mm wide

Housing Aluminium  
Surface Matt, Anodised  
Length 2000 mm

| Article | Housing Color                                                                            | Price   |
|---------|------------------------------------------------------------------------------------------|---------|
| 970470  |  Silver | € 28.95 |

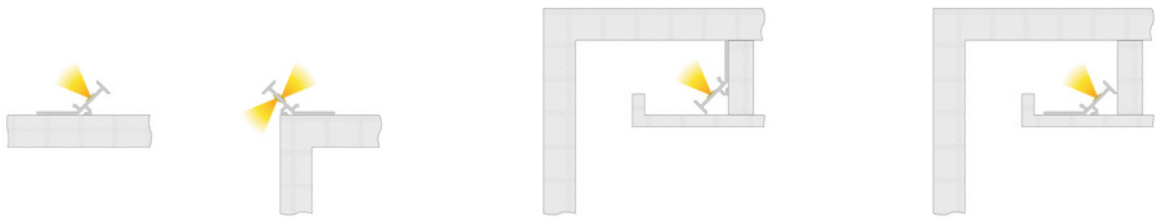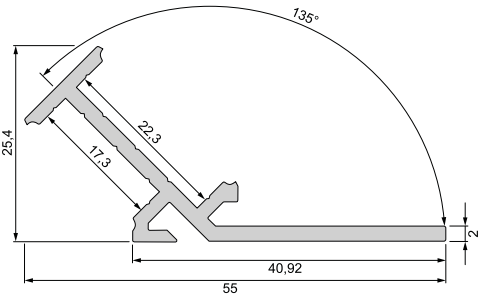

Cover | PMMA - Polymethyl methacrylate


Clear      Matt      Milky

|     |                                                                                   |               |         |
|-----|-----------------------------------------------------------------------------------|---------------|---------|
|     |  |               |         |
| 1 m | <b>983040</b>                                                                     | <b>983044</b> | € 8.95  |
| 2 m | <b>983041</b>                                                                     | <b>983045</b> | € 17.95 |
| 3 m |                                                                                   | <b>983046</b> | € 25.95 |

|     |                                                                                   |               |         |
|-----|-----------------------------------------------------------------------------------|---------------|---------|
|     |  |               |         |
| 3 m |                                                                                   | <b>983539</b> | € 22.95 |

|     |                                                                                   |               |         |
|-----|-----------------------------------------------------------------------------------|---------------|---------|
|     |  |               |         |
| 1 m |                                                                                   | <b>984044</b> | € 8.95  |
| 2 m |                                                                                   | <b>984045</b> | € 17.95 |

|     |                                                                                   |               |         |
|-----|-----------------------------------------------------------------------------------|---------------|---------|
|     |  |               |         |
| 1 m |                                                                                   | <b>984544</b> | € 8.95  |
| 2 m |                                                                                   | <b>984545</b> | € 17.95 |

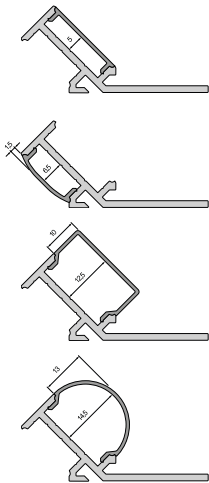

**930105** Assembly adhesive 310 ml



€ 28.95









**AM-01-10**

·For LED strips up to 11.3 mm wide

Housing                      Aluminium  
 Length                      2000 mm

| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 970301  |  Silver | Matt / Anodised      | € 29.95 |
| 970303  |  Black  | Matt / Anodised      | € 29.95 |
| 970305  |  White  | Matt / Powder-coated | € 29.95 |



Cover | PMMA - Polymethyl methacrylate

Clear      Matt      Milky




|     |               |               |               |                |
|-----|---------------|---------------|---------------|----------------|
| 1 m | <b>983010</b> | <b>983012</b> | <b>983014</b> | <b>€ 6.45</b>  |
| 2 m | <b>983011</b> | <b>983013</b> | <b>983015</b> | <b>€ 13.95</b> |



|     |               |               |               |                |
|-----|---------------|---------------|---------------|----------------|
| 1 m | <b>983510</b> | <b>983512</b> | <b>983514</b> | <b>€ 6.45</b>  |
| 2 m | <b>983511</b> | <b>983513</b> | <b>983515</b> | <b>€ 13.95</b> |
| 3 m | <b>983516</b> | <b>983517</b> | <b>983518</b> | <b>€ 20.95</b> |

end caps set | 2 pieces | Plastic | € 3.95

White      Grey      Black




|               |               |               |
|---------------|---------------|---------------|
| <b>978700</b> | <b>978701</b> | <b>978702</b> |
|---------------|---------------|---------------|

**930105**      Assembly adhesive 310 ml



**€ 28.95**

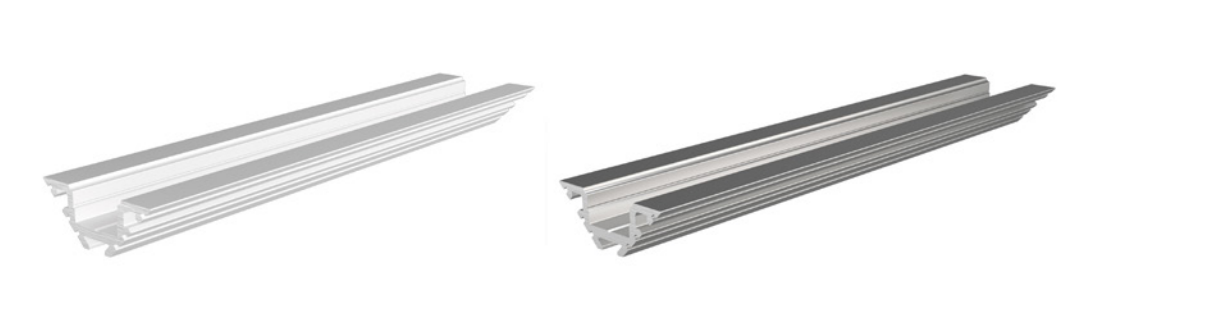

**AV-01-10**

·For LED strips up to 11.3 mm wide

Housing                      Aluminium

| Article       | Housing Color                                                                            | Surface              | Length  | Price          |
|---------------|------------------------------------------------------------------------------------------|----------------------|---------|----------------|
| <b>970401</b> |  Silver | Matt / Anodised      | 2000 mm | <b>€ 28.95</b> |
| <b>970404</b> |  Silver | Matt / Anodised      | 3000 mm | <b>€ 43.95</b> |
| <b>970403</b> |  White  | Matt / Powder-coated | 2000 mm | <b>€ 28.95</b> |




Foto: Daniel Veser - Architekturfotografie, Karlsruhe

Cover | PMMA - Polymethyl methacrylate

Clear      Matt      Milky



|     |               |               |               |                |
|-----|---------------|---------------|---------------|----------------|
| 1 m | <b>983010</b> | <b>983012</b> | <b>983014</b> | <b>€ 6.45</b>  |
| 2 m | <b>983011</b> | <b>983013</b> | <b>983015</b> | <b>€ 13.95</b> |
| 3 m | <b>983016</b> | <b>983017</b> | <b>983018</b> | <b>€ 20.95</b> |



|     |               |               |               |                |
|-----|---------------|---------------|---------------|----------------|
| 1 m | <b>983510</b> | <b>983512</b> | <b>983514</b> | <b>€ 6.45</b>  |
| 2 m | <b>983511</b> | <b>983513</b> | <b>983515</b> | <b>€ 13.95</b> |
| 3 m | <b>983516</b> | <b>983517</b> | <b>983518</b> | <b>€ 20.95</b> |



|     |  |               |               |                |
|-----|--|---------------|---------------|----------------|
| 1 m |  | <b>984012</b> | <b>984014</b> | <b>€ 6.45</b>  |
| 2 m |  | <b>984013</b> | <b>984015</b> | <b>€ 13.95</b> |
| 3 m |  | <b>984017</b> | <b>984018</b> | <b>€ 20.95</b> |



|     |  |               |               |                |
|-----|--|---------------|---------------|----------------|
| 1 m |  | <b>984512</b> | <b>984514</b> | <b>€ 6.45</b>  |
| 2 m |  | <b>984513</b> | <b>984515</b> | <b>€ 13.95</b> |
| 3 m |  | <b>984517</b> | <b>984518</b> | <b>€ 20.95</b> |



|     |               |  |  |                |
|-----|---------------|--|--|----------------|
| 1 m | <b>985010</b> |  |  | <b>€ 6.45</b>  |
| 2 m | <b>985011</b> |  |  | <b>€ 13.95</b> |
| 3 m | <b>985016</b> |  |  | <b>€ 20.95</b> |

end caps set | 2 pieces | Plastic | € 3.95

White      Grey



|               |               |
|---------------|---------------|
| <b>978170</b> | <b>978171</b> |
|---------------|---------------|

**930105**      Assembly adhesive 310 ml

**930348**      3M double-sided adhesive tape 50,000x15x0.20 mm



**€ 28.95**

**€ 30.95**



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.





EV-04-12

·For LED strips up to 13.3 mm wide

Housing                      Aluminium  
Surface                     Matt, Anodised


| Article | Housing Color                                                                            | Length  | Price   |
|---------|------------------------------------------------------------------------------------------|---------|---------|
| 975411  |  Silver | 2000 mm | € 31.95 |
| 975412  |  Silver | 3000 mm | € 49.95 |

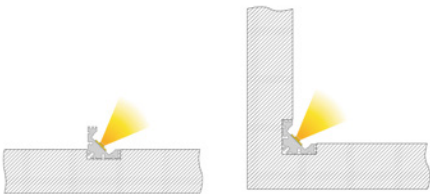




Cover | PMMA - Polymethyl methacrylate

|     | Clear                                                                             | Matt   | Milky  |         |
|-----|-----------------------------------------------------------------------------------|--------|--------|---------|
|     |  |        |        |         |
| 1 m | 983020                                                                            | 983022 | 983024 | € 6.45  |
| 2 m | 983021                                                                            | 983023 | 983025 | € 13.95 |
| 3 m | 983028                                                                            | 983027 | 983026 | € 20.95 |
|     |  |        |        |         |
| 1 m | 983520                                                                            | 983522 | 983524 | € 6.45  |
| 2 m | 983521                                                                            | 983523 | 983525 | € 13.95 |
| 3 m | 983527                                                                            |        | 983526 | € 20.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984022 | 984024 | € 6.45  |
| 2 m |                                                                                   | 984023 | 984025 | € 13.95 |
| 3 m |                                                                                   |        | 984026 | € 20.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984522 | 984524 | € 6.45  |
| 2 m |                                                                                   | 984523 | 984525 | € 13.95 |
| 3 m |                                                                                   |        | 984526 | € 20.95 |

end caps set | Plastic | € 3.95



978341



930105 Assembly adhesive 310 ml



€ 28.95

987006 Set of 2 retaining clips for AU-12



€ 3.45

987080 Universal holding clip mount (swivel) set of 2 pieces



€ 18.95









AV-05-12

·For LED strips up to 12 mm wide

Housing                      Aluminium  
Surface                     Matt, Anodised

| Article | Housing Color                                                                            | Length  | Price   |
|---------|------------------------------------------------------------------------------------------|---------|---------|
| 970550  |  Silver | 2000 mm | € 31.95 |
| 970551  |  Silver | 3000 mm | € 47.95 |

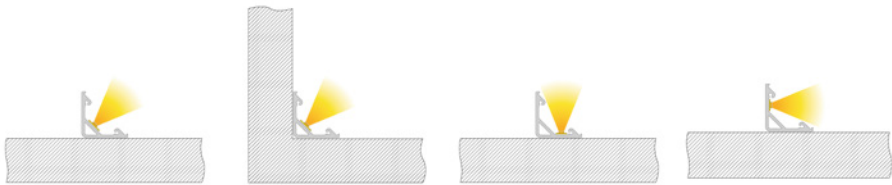

Cover | Polycarbonate

Milky



2 m 983100 € 18.95  
3 m 983101 € 28.95




2 m 984570 € 18.95  
3 m 984571 € 28.95


2 m 985570 € 18.95  
3 m 985571 € 28.95

end caps set | 2 pieces  
1x installation material | Aluminium | € 26.95

Silver



978370



979760



980550







AV-05-15

·For LED strips up to 15 mm wide

Housing                      Aluminium  
Surface                     Matt, Anodised

| Article | Housing Color                                                                            | Length  | Price   |
|---------|------------------------------------------------------------------------------------------|---------|---------|
| 970560  |  Silver | 2000 mm | € 39.95 |
| 970561  |  Silver | 3000 mm | € 63.95 |

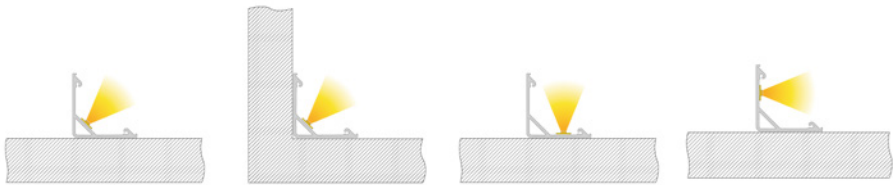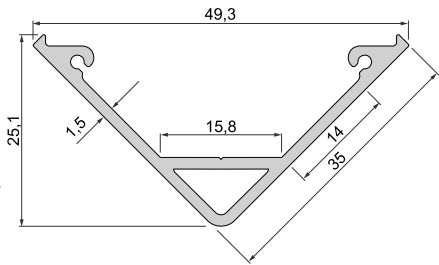

Cover | Polycarbonate

Milky



2 m 983110 € 24.95  
3 m 983111 € 35.95




2 m 984580 € 24.95  
3 m 984581 € 35.95




2 m 985580 € 24.95  
3 m 985581 € 35.95

end caps set | 2 pieces  
1x installation material | Aluminium | € 26.95

Silver



978380



979770



980560







AV-05-25

·For LED strips up to 25 mm wide or two 12 mm wide

Housing                      Aluminium  
Surface                     Matt, Anodised

| Article | Housing Color                                                                            | Length  | Price   |
|---------|------------------------------------------------------------------------------------------|---------|---------|
| 970570  |  Silver | 2000 mm | € 55.95 |
| 970571  |  Silver | 3000 mm | € 79.95 |

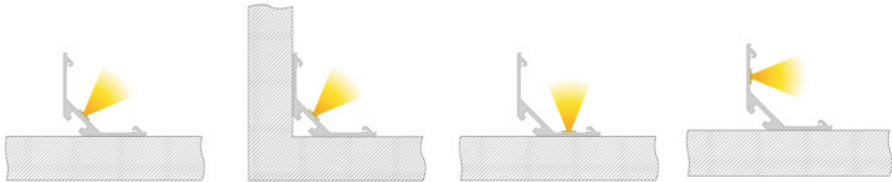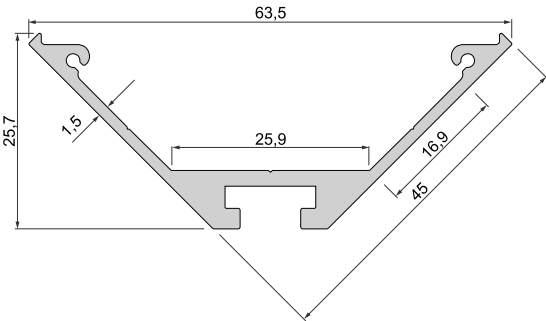





Cover | Polycarbonate

|     |                                                                                   |                |
|-----|-----------------------------------------------------------------------------------|----------------|
|     | Milky                                                                             |                |
|     |  |                |
| 2 m | <b>983120</b>                                                                     | <b>€ 28.95</b> |
| 3 m | <b>983121</b>                                                                     | <b>€ 43.95</b> |
|     |  |                |
| 2 m | <b>984590</b>                                                                     | <b>€ 28.95</b> |
| 3 m | <b>984591</b>                                                                     | <b>€ 43.95</b> |
|     |  |                |
| 2 m | <b>985590</b>                                                                     | <b>€ 28.95</b> |
| 3 m | <b>985591</b>                                                                     | <b>€ 43.95</b> |

end caps set | 2 pieces  
1x installation material | Aluminium | € 26.95  
Silver



978390



979780



980570

Accessories

987020 Universal sliding block/longitudinal connector, set of 2 pieces



€ 7.95

987060 Cable suspension (swivel), set of 2 pieces



€ 35.95



Foto: Daniel Vießer . Architekturfotografie, Karlsruhe






With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg



#### DRY CONSTRUCTION PROFILES

Our dry construction profiles offer you full creative freedom. Redefine linear light – whether as a primary light or for accent lighting.


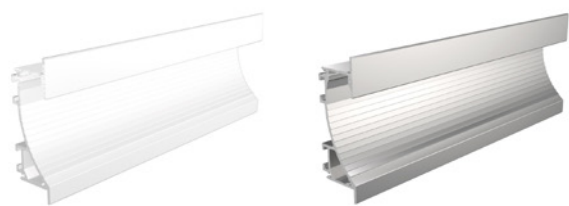


EL-02-12

· For LED strips up to 14 mm wide

Housing                      Aluminium  
 Length                      2000 mm

| Article | Housing Color      | Surface              | Price   |
|---------|--------------------|----------------------|---------|
| 975491  | <div></div> Silver | Matt / Anodised      | € 65.95 |
| 975495  | <div></div> White  | Matt / Powder-coated | € 65.95 |

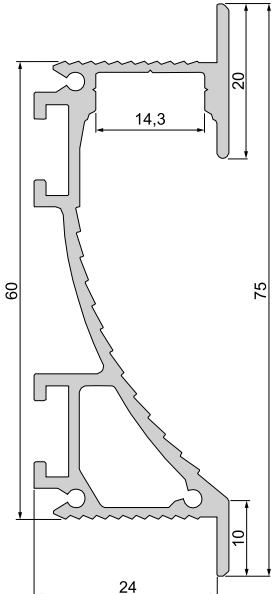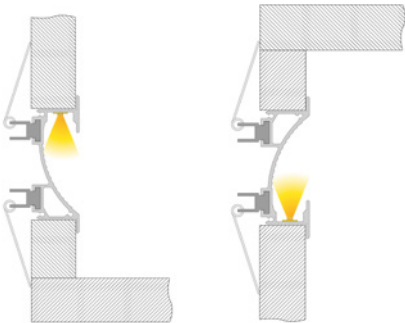



Cover | PMMA - Polymethyl methacrylate

|     | Clear                                                                             | Matt   | Milky  |         |
|-----|-----------------------------------------------------------------------------------|--------|--------|---------|
|     |  |        |        |         |
| 1 m | 983020                                                                            | 983022 | 983024 | € 6.45  |
| 2 m | 983021                                                                            | 983023 | 983025 | € 13.95 |

end caps set | 2 pieces (left/right)  
1x installation material | Plastic  
end caps set | 2 pieces (left/right)  
1x installation material | Aluminium


| White                                                                             | Grey   |         |
|-----------------------------------------------------------------------------------|--------|---------|
|  |        |         |
| 978250                                                                            | 978251 | € 3.95  |
|                                                                                   | 978252 | € 26.95 |


930105 Assembly adhesive 310 ml

930346 3M double-sided adhesive tape 50,000x10x0.2 mm

987020 Universal sliding block/longitudinal connector, set of 2 pieces

987040 Sliding block with tensioning springs, set of 2 pieces

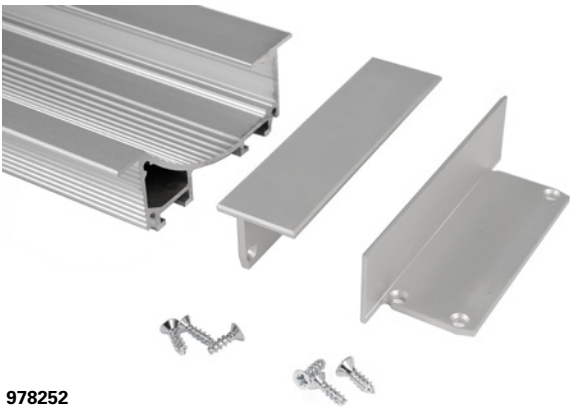

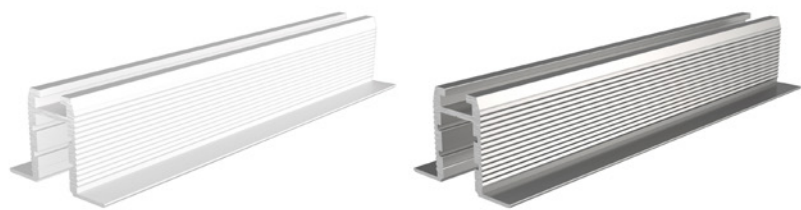


ET-03-10

· For LED strips up to 12 mm wide

Housing                      Aluminium  
Length                      2500 mm



| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 975471  |  Silver | Matt / Anodised      | € 47.95 |
| 975475  |  White  | Matt / Powder-coated | € 47.95 |



Cover | PMMA - Polymethyl methacrylate

|     | Clear                                                                             | Matt   | Milky  |         |
|-----|-----------------------------------------------------------------------------------|--------|--------|---------|
|     |  |        |        |         |
| 1 m | 983010                                                                            | 983012 | 983014 | € 6.45  |
| 2 m | 983011                                                                            | 983013 | 983015 | € 13.95 |
| 3 m | 983016                                                                            | 983017 | 983018 | € 20.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984012 | 984014 | € 6.45  |
| 2 m |                                                                                   | 984013 | 984015 | € 13.95 |
| 3 m |                                                                                   | 984017 | 984018 | € 20.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984512 | 984514 | € 6.45  |
| 2 m |                                                                                   | 984513 | 984515 | € 13.95 |
| 3 m |                                                                                   | 984517 | 984518 | € 20.95 |

end caps set | 2 pieces | Plastic

|  | White                                                                             | Grey   |        |
|--|-----------------------------------------------------------------------------------|--------|--------|
|  |  |        |        |
|  | 978260                                                                            | 978261 | € 3.95 |
|  |  |        |        |
|  | 979200                                                                            | 979201 | € 5.95 |
|  |  |        |        |
|  | 979700                                                                            | 979701 | € 5.95 |

- 930105 Assembly adhesive 310 ml
- 970762 Support profile, LED support T-01-10
- 987020 Universal sliding block/longitudinal connector, set of 2 pieces
- 987040 Sliding block with tensioning springs, set of 2 pieces









EL-03-10

· For LED strips up to 12 mm wide

| Housing | Aluminium          |                      |         |         |
|---------|--------------------|----------------------|---------|---------|
| Article | Housing Color      | Surface              | Length  | Price   |
| 975483  | <div></div> Silver | Matt / Anodised      | 2000 mm | € 47.95 |
| 975485  | <div></div> White  | Matt / Powder-coated | 2500 mm | € 63.95 |

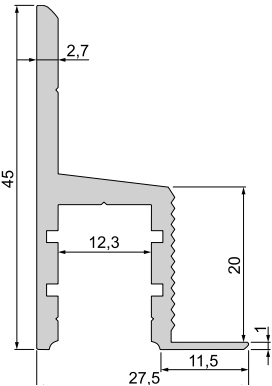


Cover | PMMA - Polymethyl methacrylate

|     | Clear                                                                             | Matt   | Milky  |         |
|-----|-----------------------------------------------------------------------------------|--------|--------|---------|
|     |  |        |        |         |
| 1 m | 983010                                                                            | 983012 | 983014 | € 6.45  |
| 2 m | 983011                                                                            | 983013 | 983015 | € 13.95 |
| 3 m | 983016                                                                            | 983017 | 983018 | € 20.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984012 | 984014 | € 6.45  |
| 2 m |                                                                                   | 984013 | 984015 | € 13.95 |
| 3 m |                                                                                   | 984017 | 984018 | € 20.95 |
|     |  |        |        |         |
| 1 m |                                                                                   | 984512 | 984514 | € 6.45  |
| 2 m |                                                                                   | 984513 | 984515 | € 13.95 |
| 3 m |                                                                                   | 984517 | 984518 | € 20.95 |

end caps set | 2 pieces (left/right) | Plastic

|        | White                                                                             | Grey   |  |
|--------|-----------------------------------------------------------------------------------|--------|--|
|        |  |        |  |
| 978270 | 978271                                                                            | € 3.95 |  |
|        |  |        |  |
| 979210 | 979211                                                                            | € 5.95 |  |
|        |  |        |  |
| 979710 | 979711                                                                            | € 5.95 |  |




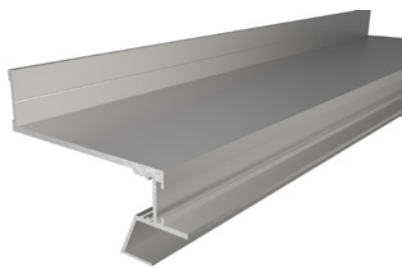


EL-04-12

- for LED strips up to 14 mm wide
- for plasterboard 12.5 mm thick

|         |           |
|---------|-----------|
| Housing | Aluminium |
| Surface | Natural   |
| Length  | 3000 mm   |

| Article | Housing Color                                                                            | Price   |
|---------|------------------------------------------------------------------------------------------|---------|
| 975530  |  Silver | € 79.95 |

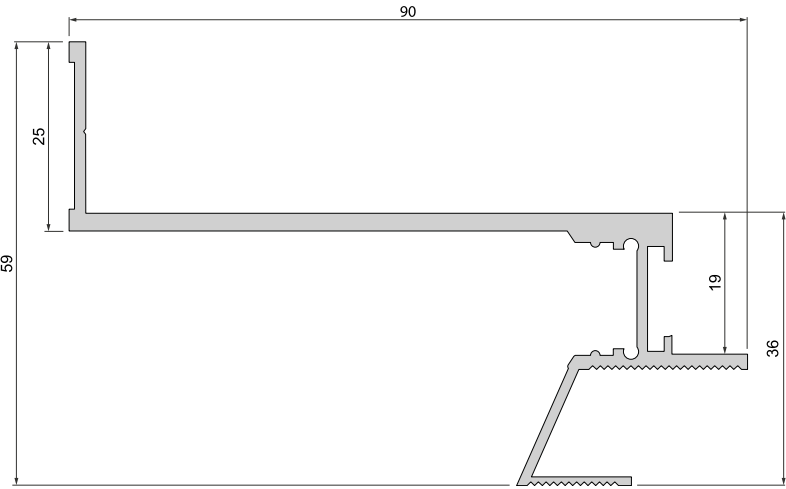

Cover | Polycarbonate

Milky



|     |        |         |
|-----|--------|---------|
| 2 m | 983090 | € 18.95 |
| 3 m | 983091 | € 28.95 |




**5-year guarantee**

Benefit from the maximum quality promise:  
 All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



Foto: Daniel Visser, Architektur fotografie, Karlsruhe

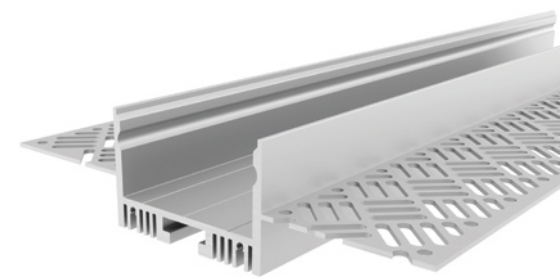


EU-01-36

· For LED strips up to 36 mm wide

|         |           |
|---------|-----------|
| Housing | Aluminium |
| Surface | Natural   |
| Length  | 3000 mm   |

| Article | Housing Color      | Price   |
|---------|--------------------|---------|
| 975501  | <div></div> Silver | € 99.95 |

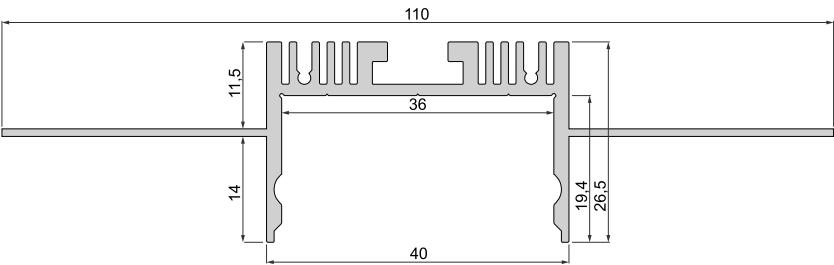

**Cover** | PMMA - Polymethyl methacrylate

Milky



3 m    **985601**    € 33.95

**end caps set** | 2 pieces  
**1x installation material** | Aluminium | € 15.95

Grey



**978175**    € 15.95

**985605**    Dummy cover




€ 24.95







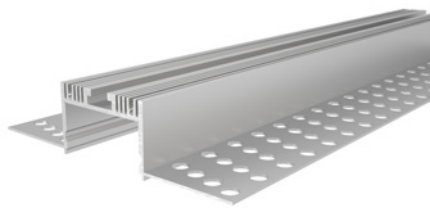


EU-02-36

· For LED strips up to 36 mm wide

|         |                |
|---------|----------------|
| Housing | Aluminium      |
| Surface | Matt, Anodised |
| Length  | 3000 mm        |

| Article | Housing Color                                                                            | Price    |
|---------|------------------------------------------------------------------------------------------|----------|
| 975525  |  Silver | € 103.95 |

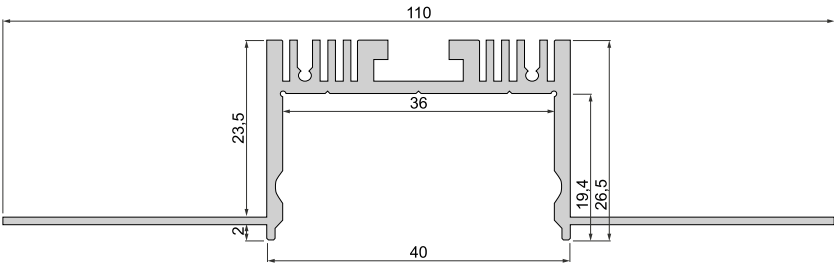

**Cover** | PMMA - Polymethyl methacrylate  
 Milky



|     |        |         |
|-----|--------|---------|
| 3 m | 985601 | € 33.95 |
|-----|--------|---------|

|        |             |
|--------|-------------|
| 985605 | Dummy cover |
|--------|-------------|



€ 24.95



**5-year guarantee**  
 Benefit from the maximum quality promise:  
 All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



**Lighting design**

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.





EU-10-12

· For LED strips up to 12 mm wide

|         |                |
|---------|----------------|
| Housing | Aluminium      |
| Surface | Matt, Anodised |
| Length  | 3000 mm        |

| Article | Housing Color                                                                            | Price   |
|---------|------------------------------------------------------------------------------------------|---------|
| 975511  |  Silver | € 47.95 |

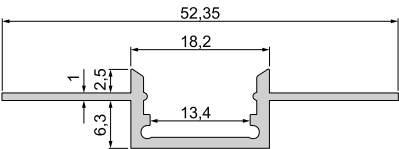

Cover | Polycarbonate  
Milky




|     |        |         |
|-----|--------|---------|
| 2 m | 983090 | € 18.95 |
| 3 m | 983091 | € 28.95 |



**Lighting design**  
Interested in our lighting design service?  
Your contact person will be happy to answer any questions you may have.




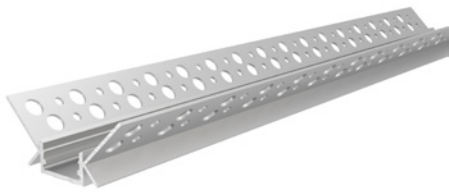


EV-11-12

· For LED strips up to 12 mm wide

|         |                |
|---------|----------------|
| Housing | Aluminium      |
| Surface | Matt, Anodised |
| Length  | 3000 mm        |

| Article | Housing Color      | Price   |
|---------|--------------------|---------|
| 975516  | <div></div> Silver | € 55.95 |

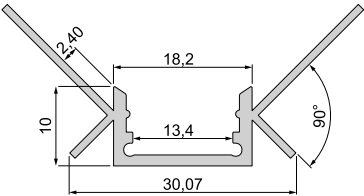

Cover | Polycarbonate  
 Milky




|     |        |         |
|-----|--------|---------|
| 2 m | 983090 | € 18.95 |
| 3 m | 983091 | € 28.95 |



**5-year guarantee**  
 Benefit from the maximum quality promise:  
 All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.






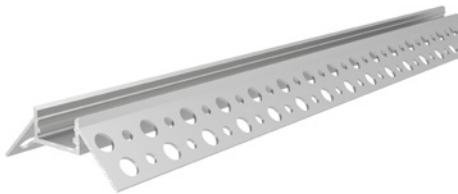


EV-12-12

· For LED strips up to 12 mm wide

|         |                |
|---------|----------------|
| Housing | Aluminium      |
| Surface | Matt, Anodised |
| Length  | 3000 mm        |

| Article | Housing Color                                                                            | Price   |
|---------|------------------------------------------------------------------------------------------|---------|
| 975521  |  Silver | € 47.95 |

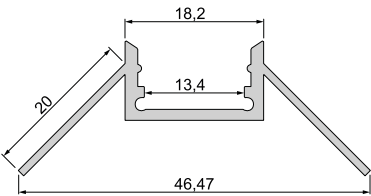

Cover | Polycarbonate  
 Milky



|     |        |         |
|-----|--------|---------|
| 2 m | 983090 | € 18.95 |
| 3 m | 983091 | € 28.95 |



**Lighting design**  
 Interested in our lighting design service?  
 Your contact person will be happy to answer any questions you may have.








#### TILE PROFILES

Tile profiles play to every corner and closing area. Do away with conventional tile end profiles and set a new standard with linear light.


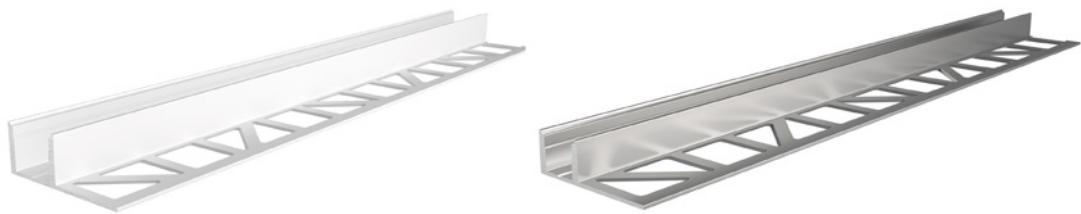


EL-03-12

- For LED strips up to 13.3 mm wide
- For tile thicknesses up to max. 12 mm

|         |           |  |  |
|---------|-----------|--|--|
| Housing | Aluminium |  |  |
| Length  | 2500 mm   |  |  |

| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 975361  |  Silver | Matt / Anodised      | € 47.95 |
| 975365  |  White  | Matt / Powder-coated | € 47.95 |

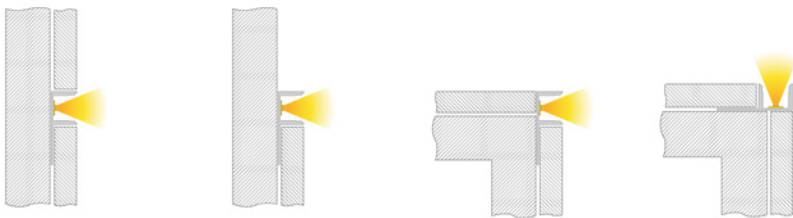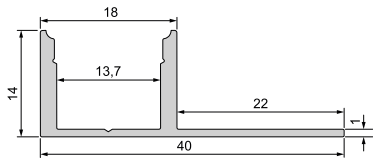


Cover | PMMA - Polymethyl methacrylate

|     |                                                                                     |        |        |         |
|-----|-------------------------------------------------------------------------------------|--------|--------|---------|
|     | Clear                                                                               | Matt   | Milky  |         |
|     |  |        |        |         |
| 1 m | 983020                                                                              | 983022 | 983024 | € 6.45  |
| 2 m | 983021                                                                              |        |        | € 13.95 |
| 3 m | 983028                                                                              | 983027 | 983026 | € 20.95 |
|     |  |        |        |         |
| 1 m | 984022                                                                              | 984024 |        | € 6.45  |
| 3 m |                                                                                     | 984026 |        | € 20.95 |







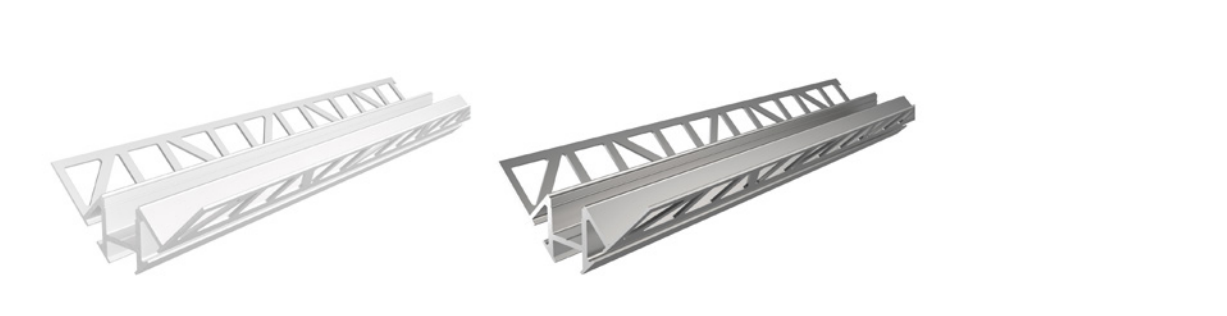


EV-01-12

- For LED strips up to 13.3 mm wide
- For tile thicknesses up to max. 12 mm

Housing                      Aluminium  
Length                      2500 mm

| Article | Housing Color                                                                            | Surface              | Price   |
|---------|------------------------------------------------------------------------------------------|----------------------|---------|
| 975371  |  Silver | Matt / Anodised      | € 79.95 |
| 975375  |  White  | Matt / Powder-coated | € 79.95 |

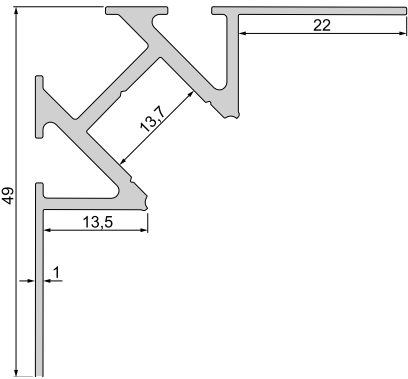

Cover | PMMA - Polymethyl methacrylate

Clear      Matt      Milky



|     |        |        |        |         |
|-----|--------|--------|--------|---------|
| 1 m | 983020 | 983022 | 983024 | € 6.45  |
| 2 m | 983021 | 983023 | 983025 | € 13.95 |
| 3 m | 983028 | 983027 | 983026 | € 20.95 |





EV-02-12

- For LED strips up to 13.3 mm wide
- For tile thicknesses up to max. 12 mm



Housing

Aluminium

Length

2500 mm

| Article | Housing Color                | Surface              | Price   |
|---------|------------------------------|----------------------|---------|
| 975381  | <div><div></div>Silver</div> | Matt / Anodised      | € 79.95 |
| 975385  | <div><div></div>White</div>  | Matt / Powder-coated | € 79.95 |

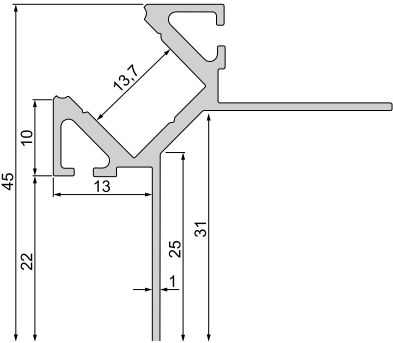

Cover | PMMA - Polymethyl methacrylate

Clear

Matt

Milky



|     |        |        |        |         |
|-----|--------|--------|--------|---------|
| 1 m | 983020 | 983022 | 983024 | € 6.45  |
| 2 m | 983021 | 983023 | 983025 | € 13.95 |
| 3 m | 983028 | 983027 | 983026 | € 20.95 |







With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg





#### PROFILES FOR OUTDOOR USE

Outdoor areas have different requirements than indoor areas. Our IP profiles are walkable and passable and inspire as a highlight in any outdoor design.







AU-05-15

For LED strips up to 15.6 mm wide

|         |           |
|---------|-----------|
| Housing | Aluminium |
| Surface | Natural   |
| Length  | 2000 mm   |

| Article | Housing Color                                                                                                                                      | Price   |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 970741  | <div style="display: inline-block; width: 10px; height: 10px; background-color: #c0c0c0; border: 1px solid #000; margin-right: 5px;"></div> Silver | € 33.95 |

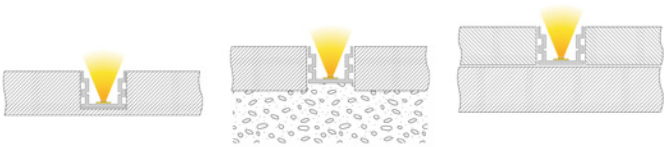

**Cover** | PMMA - Polymethyl methacrylate  
Milky



|     |               |                |
|-----|---------------|----------------|
| 1 m | <b>988084</b> | <b>€ 8.95</b>  |
| 2 m | <b>988085</b> | <b>€ 17.95</b> |

**end caps set** | 2 pieces (left/right) | Plastic | € 3.95  
Grey



|               |               |
|---------------|---------------|
| <b>981031</b> | <b>€ 3.95</b> |
|---------------|---------------|

**930104** Natural stone sealant 310 ml



**€ 31.95**


**970764** Support profile, LED support T-01-15



**€ 6.45**



Foto: Daniel Vieser, Architektur fotografie, Karlsruhe

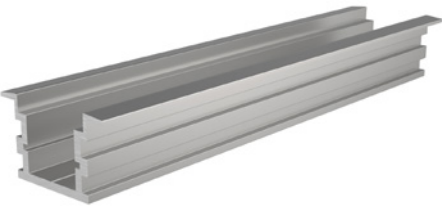


ET-05-15

For LED strips up to 15.6 mm wide

|         |                |
|---------|----------------|
| Housing | Aluminium      |
| Surface | Matt, Anodised |
| Length  | 2000 mm        |

| Article | Housing Color                                                                                                                                      | Price   |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 975741  | <div style="display: inline-block; width: 15px; height: 15px; background-color: #c0c0c0; border: 1px solid #000; margin-right: 5px;"></div> Silver | € 33.95 |




**Cover** | PMMA - Polymethyl methacrylate  
Milky



|     |               |                |
|-----|---------------|----------------|
| 1 m | <b>988084</b> | <b>€ 8.95</b>  |
| 2 m | <b>988085</b> | <b>€ 17.95</b> |

**end caps set** | 2 pieces (left/right) | Plastic | € 3.95  
Grey



|               |               |
|---------------|---------------|
| <b>981041</b> | <b>€ 3.95</b> |
|---------------|---------------|

**930104** Natural stone sealant 310 ml



**€ 31.95**

**970764** Support profile, LED support T-01-15



**€ 6.45**









EU-01-12

For LED strips up to 12 mm wide

|         |                |
|---------|----------------|
| Housing | Aluminium      |
| Surface | Matt, Anodised |
| Length  | 2000 mm        |

| Article | Housing Color                                                                            | Price   |
|---------|------------------------------------------------------------------------------------------|---------|
| 975781  |  Silver | € 63.95 |

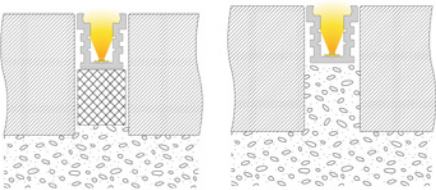

Cover | PMMA - Polymethyl methacrylate  
Milky



|     |        |         |
|-----|--------|---------|
| 1 m | 988054 | € 8.95  |
| 2 m | 988055 | € 17.95 |

end caps set | 2 pieces (left/right) | Plastic | € 3.95  
Grey



|        |        |
|--------|--------|
| 981021 | € 3.95 |
|--------|--------|

930104 Natural stone sealant 310 ml

970762 Support profile, LED support T-01-10

990109 Foam underlay



€ 31.95



€ 6.45



€ 6.45







LED STRIPES

- 724 Quickfinder
- 728 COB
- 744 12V
- 746 24V
- 770 48V
- 784 230V
- 786 Mounting material for LED strips



page 729



page 732



page 734



page 745



page 747



page 748



page 750



page 751

led stripes



| width in mm | Voltage [DC] | W/m  | design        | light colour | colour temperature | lm / m | LED / m | length in mm | protection rating | article number | page |
|-------------|--------------|------|---------------|--------------|--------------------|--------|---------|--------------|-------------------|----------------|------|
| 4,0         | 24V          | 11,0 | SMD           | WW           | 2700 K             | 995    | 280     | 5000         | IP20              | <b>840175</b>  | 776  |
| 4,0         | 24V          | 11,0 | SMD           | WW           | 3000 K             | 1090   | 209     | 5000         | IP20              | <b>840210</b>  | 749  |
| 4,0         | 24V          | 11,5 | SMD           | NW           | 4000 K             | 1100   | 209     | 5000         | IP20              | <b>840267</b>  | 749  |
| 5,0         | 24V          | 9,6  | SMD           | WW           | 2700 K             | 770    | 120     | 5000         | IP20              | <b>840158</b>  | 748  |
| 5,0         | 24V          | 9,6  | SMD           | WW           | 3000 K             | 820    | 120     | 5000         | IP20              | <b>840159</b>  | 748  |
| 5,0         | 24V          | 11,0 | SMD           | WW CW        | 3000-6500 K        | 1025   | 196     | 5000         | IP20              | <b>840350</b>  | 750  |
| 5,0         | 24V          | 11,0 | SMD           | RGB          |                    | 500    | 120     | 5000         | IP20              | <b>840276</b>  | 752  |
| 6,0         | 48V          | 4,0  | SMD           | WW           | 3000 K             | 400    | 520     | 15000        | IP20              | <b>840317</b>  | 783  |
| 7,4         | 24V          | 12,5 | SMD           | WW CW        | 3000-6500 K        | 1070   | 196     | 5000         | IP65              | <b>840349</b>  | 751  |
| 8,0         | 12V          | 7,0  | SMD           | WW           | 2700 K             | 570    | 120     | 5000         | IP20              | <b>840164</b>  | 745  |
| 8,0         | 12V          | 7,0  | SMD           | WW           | 3000 K             | 555    | 120     | 5000         | IP20              | <b>840165</b>  | 745  |
| 8,0         | 12V          | 7,0  | SMD           | NW           | 4000 K             | 670    | 120     | 5000         | IP20              | <b>840166</b>  | 745  |
| 8,0         | 12V          | 7,0  | SMD           | CW           | 6500 K             | 630    | 120     | 5000         | IP20              | <b>840167</b>  | 745  |
| 8,0         | 24V          | 14,0 | SMD           | WW           | 2700 K             | 1110   | 120     | 5000         | IP20              | <b>840178</b>  | 756  |
| 8,0         | 24V          | 14,0 | SMD           | WW           | 3000 K             | 1100   | 120     | 5000         | IP20              | <b>840179</b>  | 756  |
| 8,0         | 24V          | 14,0 | SMD           | NW           | 4000 K             | 1220   | 60      | 5000         | IP20              | <b>840180</b>  | 756  |
| 8,0         | 24V          | 14,0 | SMD           | WW           | 3000 K             | 1100   | 120     | 50000        | IP20              | <b>930512</b>  | 756  |
| 10,0        | 24V          | 8,0  | Neon, 3D Bend | WW           | 2700 K             | 720    | 160     | 5000         | IP67              | <b>840417</b>  | 769  |
| 10,0        | 24V          | 8,0  | Neon, 3D Bend | WW           | 3000 K             | 744    | 160     | 5000         | IP67              | <b>840418</b>  | 769  |
| 10,0        | 24V          | 8,0  | Neon, 3D Bend | NW           | 4000 K             | 800    | 160     | 5000         | IP67              | <b>840419</b>  | 769  |
| 10,0        | 24V          | 9,5  | SMD           | WW           | 3000 K             | 705    | 120     | 10000        | IP20              | <b>840291</b>  | 747  |
| 10,0        | 24V          | 12,0 | COB           | WW           | 2700 K             | 1050   | 480     | 5000         | IP20              | <b>840474</b>  | 736  |
| 10,0        | 24V          | 12,0 | COB           | WW           | 3000 K             | 1360   | 480     | 5000         | IP20              | <b>840475</b>  | 736  |
| 10,0        | 24V          | 12,0 | COB           | NW           | 4000 K             | 1320   | 480     | 5000         | IP20              | <b>840476</b>  | 736  |
| 10,0        | 24V          | 13,0 | SMD           | RGB          |                    | 580    | 60      | 5000         | IP20              | <b>840254</b>  | 754  |
| 10,0        | 24V          | 14,0 | SMD           | RGB          |                    | 665    | 120     | 5000         | IP20              | <b>840147</b>  | 756  |
| 10,0        | 24V          | 15,0 | COB           | WW           | 2700 K             | 2100   | 288     | 5000         | IP20              | <b>840466</b>  | 742  |
| 10,0        | 24V          | 15,0 | COB           | WW           | 3000 K             | 2550   | 288     | 5000         | IP20              | <b>840467</b>  | 742  |
| 10,0        | 24V          | 15,0 | COB           | NW           | 4000 K             | 2690   | 288     | 5000         | IP20              | <b>840468</b>  | 742  |
| 10,0        | 24V          | 15,0 | COB           | CW           | 6500 K             | 2690   | 288     | 5000         | IP20              | <b>840469</b>  | 742  |
| 10,0        | 24V          | 15,0 | SMD           | WW CW        | 2700-6500 K        | 1550   |         | 5000         | IP20              | <b>840480</b>  | 738  |
| 10,0        | 24V          | 16,0 | SMD           | RGB WW       | 3000 K             | 820    | 60      | 5000         | IP20              | <b>840236</b>  | 759  |
| 10,0        | 24V          | 16,0 | SMD           | RGB NW       | 4000 K             | 765    | 60      | 5000         | IP44              | <b>840373</b>  | 760  |
| 10,0        | 24V          | 16,0 | SMD           | WW           | 3000 K             | 820    | 60      | 50000        | IP20              | <b>930517</b>  | 759  |
| 10,0        | 24V          | 16,5 | SMD           | RGB NW       | 4000 K             | 775    | 60      | 5000         | IP20              | <b>840353</b>  | 758  |
| 10,0        | 24V          | 17,2 | SMD           | WW CW        | 2700-6500 K        | 1765   | 140     | 5000         | IP20              | <b>840378</b>  | 761  |
| 10,0        | 24V          | 18,5 | SMD           | WW           | 2700 K             | 1215   | 240     | 5000         | IP20              | <b>840192</b>  | 762  |
| 10,0        | 24V          | 19,0 | SMD           | WW           | 3000 K             | 1605   | 240     | 5000         | IP20              | <b>840193</b>  | 762  |
| 10,0        | 24V          | 20,0 | SMD           | CW           | 6000 K             | 1720   | 120     | 5000         | IP20              | <b>840124</b>  | 762  |
| 10,0        | 24V          | 20,0 | SMD           | NW           | 4000 K             | 1770   | 240     | 5000         | IP20              | <b>840194</b>  | 762  |
| 10,0        | 24V          | 23,0 | SMD           | WW           | 3000 K             | 2650   | 160     | 5000         | IP44              | <b>840333</b>  | 764  |
| 10,0        | 24V          | 23,0 | SMD           | NW           | 4000 K             | 2780   | 160     | 5000         | IP44              | <b>840334</b>  | 764  |

| width in mm | Voltage [DC] | W/m  | design | light colour | colour temperature | lm / m | LED / m | length in mm | protection rating | article number | page |
|-------------|--------------|------|--------|--------------|--------------------|--------|---------|--------------|-------------------|----------------|------|
| 10,0        | 24V          | 23,0 | SMD    | WW           | 3000 K             | 3010   | 160     | 5000         | IP20              | <b>840331</b>  | 763  |
| 10,0        | 24V          | 23,0 | SMD    | NW           | 4000 K             | 3130   | 160     | 5000         | IP20              | <b>840332</b>  | 763  |
| 10,0        | 48V          | 4,0  | SMD    | WW           | 3000 K             | 485    | 520     | 15000        | IP20              | <b>840318</b>  | 782  |
| 10,0        | 48V          | 4,0  | SMD    | WW           | 3000 K             | 485    | 130     | 50000        | IP20              | <b>840337</b>  | 782  |
| 10,0        | 48V          | 4,0  | SMD    | NW           | 4000 K             | 530    | 520     | 15000        | IP20              | <b>840320</b>  | 782  |
| 10,0        | 48V          | 4,0  | SMD    | NW           | 4000 K             | 530    | 130     | 50000        | IP20              | <b>840339</b>  | 782  |
| 10,0        | 48V          | 4,0  | SMD    | WW           | 3000 K             | 400    | 130     | 50000        | IP44              | <b>840338</b>  | 783  |
| 10,0        | 48V          | 4,0  | SMD    | NW           | 4000 K             | 455    | 520     | 15000        | IP44              | <b>840319</b>  | 783  |
| 10,0        | 48V          | 4,0  | SMD    | NW           | 4000 K             | 455    | 130     | 50000        | IP44              | <b>840340</b>  | 783  |
| 10,0        | 48V          | 10,0 | SMD    | WW           | 2700 K             | 1210   | 140     | 15000        | IP20              | <b>840393</b>  | 780  |
| 10,0        | 48V          | 10,0 | SMD    | WW           | 3000 K             | 1240   | 140     | 15000        | IP20              | <b>840394</b>  | 780  |
| 10,0        | 48V          | 10,0 | SMD    | NW           | 4000 K             | 1300   | 140     | 15000        | IP20              | <b>840395</b>  | 780  |
| 10,0        | 48V          | 10,0 | SMD    | WW           | 2700 K             | 1210   | 140     | 50000        | IP20              | <b>840401</b>  | 780  |
| 10,0        | 48V          | 10,0 | SMD    | WW           | 3000 K             | 1240   | 140     | 50000        | IP20              | <b>840402</b>  | 780  |
| 10,0        | 48V          | 10,0 | SMD    | NW           | 4000 K             | 1300   | 140     | 50000        | IP20              | <b>840403</b>  | 780  |
| 10,0        | 48V          | 10,0 | SMD    | WW           | 2700 K             | 1210   | 140     | 5000         | IP20              | <b>840440</b>  | 780  |
| 10,0        | 48V          | 10,0 | SMD    | RGB          |                    | 550    | 140     | 15000        | IP20              | <b>840399</b>  | 778  |
| 10,0        | 48V          | 10,0 | SMD    | RGB          |                    | 550    | 140     | 50000        | IP20              | <b>840407</b>  | 778  |
| 10,0        | 48V          | 10,0 | SMD    | RGB          |                    | 550    | 140     | 5000         | IP20              | <b>840446</b>  | 778  |
| 10,0        | 48V          | 10,0 | SMD    | WW CW        | 2700-6500 K        | 1200   | 224     | 15000        | IP20              | <b>840434</b>  | 772  |
| 10,0        | 48V          | 10,0 | SMD    | WW CW        | 2700-6500 K        | 1200   | 224     | 5000         | IP20              | <b>840438</b>  | 772  |
| 10,0        | 48V          | 10,0 | SMD    | WW CW        | 2700-6500 K        | 1200   | 224     | 50000        | IP20              | <b>840436</b>  | 772  |
| 11,5        | 24V          | 11,0 | SMD    | WW           | 2700 K             | 900    | 120     | 5000         | IP67              | <b>840186</b>  | 753  |
| 11,5        | 24V          | 11,0 | SMD    | WW           | 3000 K             | 930    | 36      | 5000         | IP67              | <b>840187</b>  | 753  |
| 12,0        | 24V          | 10,0 | COB    | WW           | 2700 K             | 850    | 480     | 2000         | IP67              | <b>840409</b>  | 729  |
| 12,0        | 24V          | 10,0 | COB    | WW           | 3000 K             | 900    | 480     | 2000         | IP67              | <b>840410</b>  | 729  |
| 12,0        | 24V          | 10,0 | COB    | WW           | 2700 K             | 850    | 480     | 5000         | IP67              | <b>840411</b>  | 729  |
| 12,0        | 24V          | 10,0 | COB    | WW           | 3000 K             | 900    | 480     | 5000         | IP67              | <b>840412</b>  | 729  |
| 12,0        | 24V          | 12,0 | COB    | WW           | 2700 K             | 1170   | 480     | 5000         | IP67              | <b>840477</b>  | 737  |
| 12,0        | 24V          | 12,0 | COB    | WW           | 3000 K             | 1220   | 480     | 5000         | IP67              | <b>840478</b>  | 737  |
| 12,0        | 24V          | 12,0 | COB    | NW           | 4000 K             | 1400   | 480     | 5000         | IP67              | <b>840479</b>  | 737  |
| 12,0        | 24V          | 15,0 | COB    | WW           | 2700 K             | 2060   | 288     | 5000         | IP67              | <b>840470</b>  | 743  |
| 12,0        | 24V          | 15,0 | COB    | WW           | 3000 K             | 2060   | 288     | 5000         | IP67              | <b>840471</b>  | 743  |
| 12,0        | 24V          | 15,0 | COB    | NW           | 4000 K             | 2160   | 288     | 5000         | IP67              | <b>840472</b>  | 743  |
| 12,0        | 24V          | 15,0 | COB    | CW           | 6500 K             | 2150   | 288     | 5000         | IP67              | <b>840473</b>  | 743  |
| 12,0        | 24V          | 15,0 | COB    | WW CW        | 2700-6500 K        | 1300   |         | 5000         | IP67              | <b>840481</b>  | 739  |
| 12,0        | 24V          | 16,0 | COB    | RGB WW       | 3000 K             | 800    |         | 5000         | IP20              | <b>840482</b>  | 740  |
| 12,0        | 24V          | 22,0 | SMD    | RGB NW       | 4000 K             | 985    | 240     | 5000         | IP20              | <b>840309</b>  | 765  |
| 12,0        | 24V          | 22,0 | SMD    | RGB WW       | 3000 K             | 955    | 140     | 5000         | IP20              | <b>840308</b>  | 765  |
| 12,0        | 48V          | 10,0 | SMD    | WW           | 3000 K             | 1240   | 140     | 5000         | IP20              | <b>840442</b>  | 780  |
| 12,0        | 48V          | 10,0 | SMD    | NW           | 4000 K             | 1300   | 140     | 5000         | IP20              | <b>840444</b>  | 780  |
| 12,0        | 48V          | 10,0 | SMD    | RGB WW       | 3000 K             | 660    | 112     | 50000        | IP20              | <b>840456</b>  | 776  |




| width in mm | Voltage [DC] | W/m  | design | light colour | colour temperature | lm / m | LED / m | length in mm | protection rating | article number | page |
|-------------|--------------|------|--------|--------------|--------------------|--------|---------|--------------|-------------------|----------------|------|
| 12,0        | 48V          | 10,0 | SMD    | RGB WW       | 3000 K             | 660    | 112     | 5000         | IP20              | <b>840458</b>  | 776  |
| 12,0        | 48V          | 10,0 | SMD    | RGB WW       | 3000 K             | 660    | 112     | 15000        | IP20              | <b>840454</b>  | 776  |
| 12,0        | 48V          | 10,0 | SMD    | RGB NW       | 4000 K             | 700    | 112     | 50000        | IP20              | <b>840462</b>  | 776  |
| 12,0        | 48V          | 10,0 | SMD    | RGB NW       | 4000 K             | 700    | 112     | 5000         | IP20              | <b>840464</b>  | 776  |
| 12,0        | 48V          | 10,0 | SMD    | RGB NW       | 4000 K             | 700    | 112     | 15000        | IP20              | <b>840460</b>  | 776  |
| 12,0        | 48V          | 10,0 | SMD    | RGB WW CW    | 2700-6500 K        | 800    | 180     | 15000        | IP20              | <b>840448</b>  | 774  |
| 12,0        | 48V          | 10,0 | SMD    | RGB WW CW    | 2700-6500 K        | 800    | 180     | 50000        | IP20              | <b>840450</b>  | 774  |
| 12,0        | 48V          | 10,0 | SMD    | RGB WW CW    | 2700-6500 K        | 800    | 180     | 5000         | IP20              | <b>840452</b>  | 774  |
| 12,0        | 48V          | 10,0 | SMD    | WW           | 2700 K             | 1090   | 140     | 15000        | IP67              | <b>840396</b>  | 781  |
| 12,0        | 48V          | 10,0 | SMD    | WW           | 3000 K             | 1120   | 140     | 15000        | IP67              | <b>840397</b>  | 781  |
| 12,0        | 48V          | 10,0 | SMD    | NW           | 4000 K             | 1180   | 140     | 15000        | IP67              | <b>840398</b>  | 781  |
| 12,0        | 48V          | 10,0 | SMD    | WW           | 2700 K             | 1090   | 140     | 50000        | IP67              | <b>840404</b>  | 781  |
| 12,0        | 48V          | 10,0 | SMD    | WW           | 3000 K             | 1120   | 140     | 50000        | IP67              | <b>840405</b>  | 781  |
| 12,0        | 48V          | 10,0 | SMD    | NW           | 4000 K             | 1180   | 140     | 50000        | IP67              | <b>840406</b>  | 781  |
| 12,0        | 48V          | 10,0 | SMD    | RGB          |                    | 510    | 140     | 15000        | IP67              | <b>840400</b>  | 779  |
| 12,0        | 48V          | 10,0 | SMD    | RGB          |                    | 510    | 140     | 50000        | IP67              | <b>840408</b>  | 779  |
| 12,0        | 48V          | 10,0 | SMD    | RGB          |                    | 510    | 140     | 5000         | IP67              | <b>840447</b>  | 779  |
| 12,0        | 48V          | 10,0 | SMD    | WW CW        | 2700-6500 K        | 1100   | 224     | 50000        | IP67              | <b>840437</b>  | 773  |
| 12,0        | 48V          | 10,0 | SMD    | WW CW        | 2700-6500 K        | 1100   | 224     | 15000        | IP67              | <b>840435</b>  | 773  |
| 12,0        | 48V          | 10,0 | SMD    | WW CW        | 2700-6500 K        | 1100   | 224     | 5000         | IP67              | <b>840439</b>  | 773  |
| 12,0        | 48V          | 15,0 | COB    | WW           | 2700 K             | 1575   | 480     | 15000        | IP67              | <b>840420</b>  | 732  |
| 12,0        | 48V          | 15,0 | COB    | WW           | 3000 K             | 1650   | 480     | 15000        | IP67              | <b>840421</b>  | 732  |
| 12,0        | 48V          | 15,0 | COB    | NW           | 4000 K             | 1800   | 480     | 15000        | IP67              | <b>840422</b>  | 732  |
| 12,0        | 48V          | 15,0 | COB    | WW           | 2700 K             | 1575   | 480     | 5000         | IP67              | <b>840423</b>  | 732  |
| 12,0        | 48V          | 15,0 | COB    | WW           | 3000 K             | 1650   | 480     | 5000         | IP67              | <b>840424</b>  | 732  |
| 12,0        | 48V          | 15,0 | COB    | NW           | 4000 K             | 1800   | 480     | 5000         | IP67              | <b>840425</b>  | 732  |
| 12,0        | 48V          | 15,0 | COB    | WW NW CW     | 2700-6500 K        | 610    | 560     | 15000        | IP67              | <b>840426</b>  | 732  |
| 12,0        | 48V          | 15,0 | COB    | WW NW CW     | 2700-6500 K        | 610    | 560     | 5000         | IP67              | <b>840427</b>  | 732  |
| 14,0        | 24V          | 15,0 | COB    | RGB WW       | 2700 K             | 600    | 1344    | 2000         | IP67              | <b>840414</b>  | 730  |
| 14,0        | 24V          | 15,0 | COB    | RGB WW       | 2700 K             | 600    | 1344    | 5000         | IP67              | <b>840416</b>  | 730  |
| 14,0        | 24V          | 16,0 | COB    | RGB WW       | 3000 K             | 800    |         | 5000         | IP67              | <b>840483</b>  | 741  |
| 14,0        | 48V          | 18,5 | COB    | RGB WW       | 3000 K             | 890    | 1120    | 15000        | IP67              | <b>840430</b>  | 734  |
| 14,0        | 48V          | 18,5 | COB    | RGB NW       | 4000 K             | 1010   | 1120    | 15000        | IP67              | <b>840431</b>  | 734  |
| 14,0        | 48V          | 18,5 | COB    | RGB WW       | 3000 K             | 890    | 1120    | 5000         | IP67              | <b>840432</b>  | 734  |
| 14,0        | 48V          | 18,5 | COB    | RGB NW       | 4000 K             | 1010   | 1120    | 5000         | IP67              | <b>840433</b>  | 734  |
| 14,5        | 24V          | 13,5 | SMD    | RGB          |                    | 670    | 60      | 5000         | IP67              | <b>840256</b>  | 755  |
| 14,5        | 24V          | 15,0 | SMD    | RGB WW       | 3000 K             | 740    | 60      | 5000         | IP67              | <b>840239</b>  | 757  |
| 14,5        | 48V          | 10,0 | SMD    | WW           | 2700 K             | 1090   | 140     | 5000         | IP67              | <b>840441</b>  | 781  |
| 14,5        | 48V          | 10,0 | SMD    | WW           | 3000 K             | 1120   | 140     | 5000         | IP67              | <b>840443</b>  | 781  |
| 14,5        | 48V          | 10,0 | SMD    | NW           | 4000 K             | 1180   | 140     | 5000         | IP67              | <b>840445</b>  | 781  |
| 14,5        | 48V          | 10,0 | SMD    | RGB WW       | 3000 K             | 600    | 112     | 50000        | IP67              | <b>840457</b>  | 777  |
| 14,5        | 48V          | 10,0 | SMD    | RGB WW       | 3000 K             | 600    | 112     | 5000         | IP67              | <b>840459</b>  | 777  |



| width in mm | Voltage [DC] | W/m  | design         | light colour                                                                      | colour temperature | lm / m | LED / m | length in mm | protection rating | article number | page |
|-------------|--------------|------|----------------|-----------------------------------------------------------------------------------|--------------------|--------|---------|--------------|-------------------|----------------|------|
| 14,5        | 48V          | 10,0 | SMD            |  | 3000 K             | 600    | 112     | 15000        | IP67              | <b>840455</b>  | 777  |
| 14,5        | 48V          | 10,0 | SMD            |  | 4000 K             | 650    | 180     | 50000        | IP67              | <b>840463</b>  | 777  |
| 14,5        | 48V          | 10,0 | SMD            |  | 4000 K             | 650    | 112     | 5000         | IP67              | <b>840465</b>  | 777  |
| 14,5        | 48V          | 10,0 | SMD            |  | 4000 K             | 650    | 112     | 15000        | IP67              | <b>840461</b>  | 777  |
| 14,5        | 48V          | 10,0 | SMD            |  | 2700-6500 K        | 750    | 112     | 15000        | IP67              | <b>840449</b>  | 775  |
| 14,5        | 48V          | 10,0 | SMD            |  | 2700-6500 K        | 750    | 112     | 50000        | IP67              | <b>840451</b>  | 775  |
| 14,5        | 48V          | 10,0 | SMD            |  | 2700-6500 K        | 750    | 112     | 5000         | IP67              | <b>840453</b>  | 775  |
| 14,5        | 48V          | 15,0 | COB            |  |                    | 670    | 840     | 15000        | IP67              | <b>840428</b>  | 732  |
| 14,5        | 48V          | 15,0 | COB            |  |                    | 670    | 840     | 5000         | IP67              | <b>840429</b>  | 732  |
| 16,0        | 24V          | 10,5 | Neon, Top-View |  | 3000 K             | 320    | 36      | 5000         | IP68              | <b>840289</b>  | 767  |
| 17,0        | 230V         | 14,0 | SMD            |  | 3000 K             | 1470   | 84      | 15000        | IP65              | <b>840386</b>  | 785  |
| 17,0        | 230V         | 14,0 | SMD            |  | 3000 K             | 1470   | 84      | 50000        | IP65              | <b>840387</b>  | 785  |
| 17,0        | 230V         | 14,0 | SMD            |  | 4000 K             | 1596   | 82      | 15000        | IP65              | <b>840388</b>  | 785  |
| 17,0        | 230V         | 14,0 | SMD            |  | 4000 K             | 1596   | 82      | 50000        | IP65              | <b>840389</b>  | 785  |
| 17,0        | 230V         | 14,0 | SMD            |  | 2700 K             | 1442   | 82      | 15000        | IP65              | <b>840390</b>  | 785  |
| 17,0        | 230V         | 14,0 | SMD            |  | 2700 K             | 1442   | 82      | 50000        | IP65              | <b>840391</b>  | 785  |

## COB STRIPES

These LED strips are ideal if the focus is on a homogeneous light pattern.

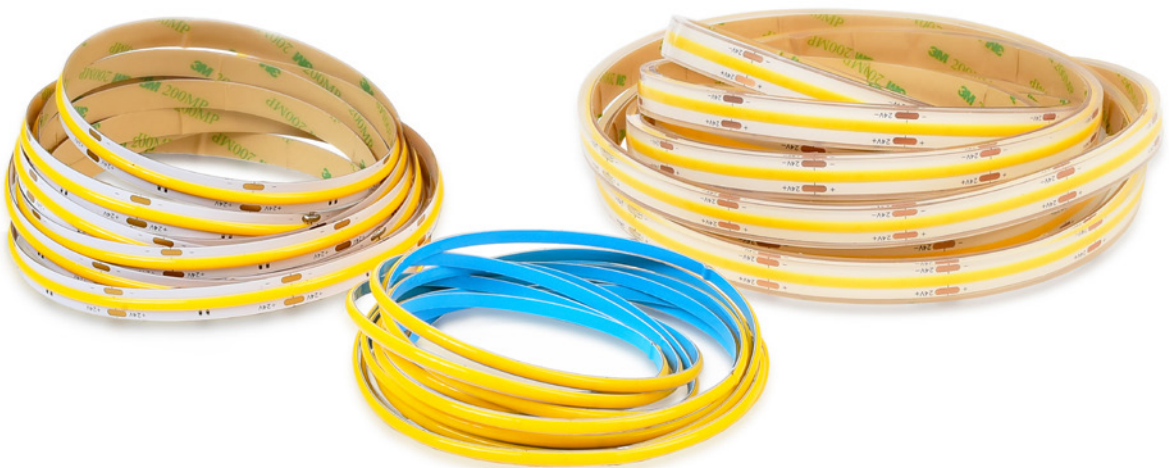

COB 24V-10W SAUNA IP67

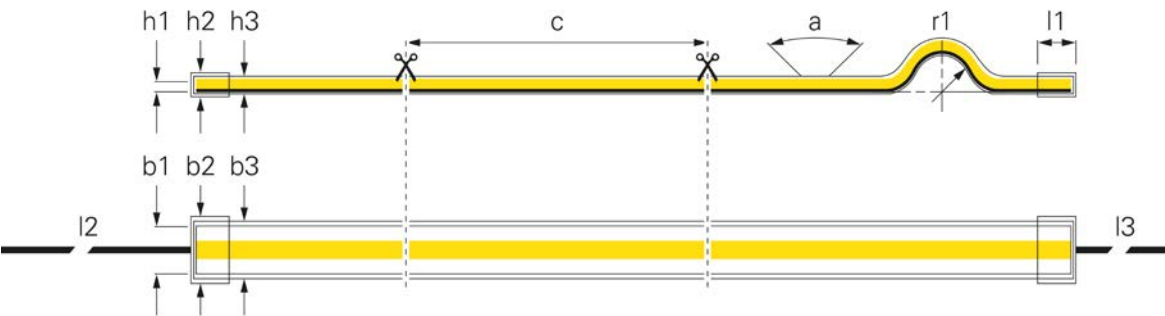

- UV-resistant
- durably temperature-resistant [-10°C to 105°C]
- Lifetime 75,000h L70B50 / 50,000h L80B10
- 2 m model ideal for home saunas with 2 m internal dimensions
- extra long supply line, Incl. mounting material

|                          |            |                           |                                  |
|--------------------------|------------|---------------------------|----------------------------------|
| (p) LED Distance         | 2.08 mm    | (l1) Length End Cap       | 10 mm                            |
| (c) Segment Length       | 50 mm      | (l2) Primary Cable Length | 1.8 m                            |
| (a) Light Beam Angle     | 180 Degree | Rated Input 1m            | 10 W                             |
| (r1) Bending Radius min. | 50 mm      | Rated Input Voltage       | 24 V/DC                          |
| (h1) Height              | 5.5 mm     | CRI (Ra)                  | 90                               |
| (h2) Height End Cap      | 6.5 mm     | Control                   | Dimmable via optional controller |
| (h3) Height Hose         | 5.5 mm     | Working Temperature       | -10 to 105 °C                    |
| (b1) Width               | 12 mm      | Channels                  | 1                                |
| (b2) Width end cap       | 14.2 mm    |                           |                                  |
| (b3) Width Hose          | 12 mm      |                           |                                  |

| Article | Colour Temperature | (l3) Secondary Cable Length | Luminous Efficiency 1m | Luminous Flux 1m | Length  | Price    |
|---------|--------------------|-----------------------------|------------------------|------------------|---------|----------|
| 840409  | WW 2700 K          |                             | 85 lm/W                | 850 lm           | 2000 mm | € 79.95  |
| 840411  | WW 2700 K          | 1.8 m                       | 85 lm/W                | 850 lm           | 5000 mm | € 179.95 |
| 840410  | WW 3000 K          |                             | 90 lm/W                | 900 lm           | 2000 mm | € 79.95  |
| 840412  | WW 3000 K          | 1.8 m                       | 90 lm/W                | 900 lm           | 5000 mm | € 179.95 |




Accessories

- 930737 Supply cable for 24 V COB Sauna stripe
- 930738 Connector for 24 V COB Sauna stripe
- 930736 Silicone end cap set of 2 pieces for 24 V COB Sauna stripe
- 930740 Plastic profile 1 m for 24 V COB Sauna stripe
- 930741 Plastic profile 2 m for 24 V COB Sauna stripe
- 930739 Silicone clamps for 24 V COB Sauna stripe
- 930850 Silicone adhesive 10 ml

|  |         |
|--|---------|
|  | € 9.95  |
|  | € 13.95 |
|  | € 0.75  |
|  | € 3.95  |
|  | € 7.95  |
|  | € 1.45  |
|  | € 3.95  |


COB 24V-15W SAUNA IP67

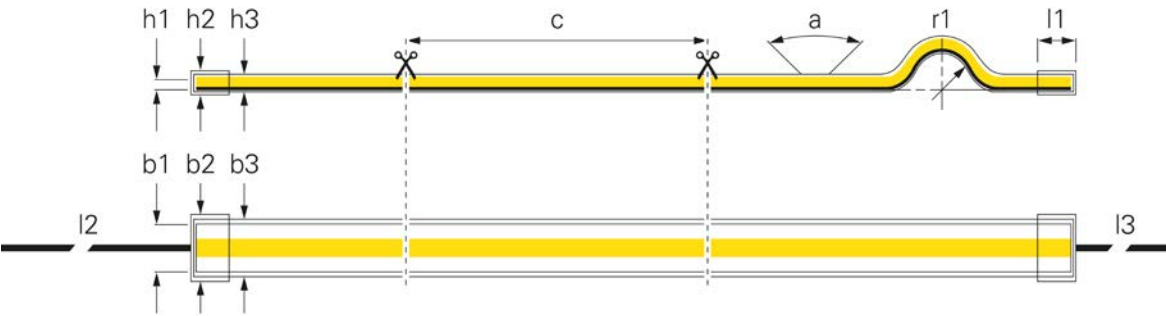

- for saunas and steam baths
- available as RGB or RGBW [2,700K] variant
- UV-resistant
- durably temperature-resistant [-10°C to 105°C]
- 2 m model ideal for home saunas with 2 m internal dimensions
- extra long supply line
- lifetime 75,000h L70B50 / 50,000 L80B10
- incl. mounting material

|                           |         |                        |                                  |
|---------------------------|---------|------------------------|----------------------------------|
| (p) LED Distance          | 1.3 mm  | Colour Temperature     | 2700 K                           |
| (c) Segment Length        | 83.3 mm | Luminous Efficiency 1m | 40 lm/W                          |
| (r1) Bending Radius min.  | 50 mm   | Luminous Flux 1m       | 600 lm                           |
| (h1) Height               | 5 mm    | Rated Input 1m         | 15 W                             |
| (h2) Height End Cap       | 6.5 mm  | Rated Input Voltage    | 24 V/DC                          |
| (h3) Height Hose          | 5 mm    | CRI (Ra)               | 90                               |
| (b1) Width                | 14 mm   | Control                | Dimmable via optional controller |
| (b2) Width end cap        | 16.2 mm | Working Temperature    | -10 to 105 °C                    |
| (b3) Width Hose           | 14 mm   | Channels               | 4                                |
| (l1) Length End Cap       | 10 mm   |                        |                                  |
| (l2) Primary Cable Length | 1.8 m   |                        |                                  |

| Article | (l3) Secondary Cable Length | Length  | Price    |
|---------|-----------------------------|---------|----------|
| 840414  |                             | 2000 mm | € 119.95 |
| 840416  | 1.8 m                       | 5000 mm | € 267.95 |



Accessories


- 930800** Supply cable for 24 V COB RGBW Sauna stripe
- 930801** Connector for 24 V COB RGBW Sauna stripe
- 930797** Silicone end cap set of 2 pieces for 24 V COB RGB/RGBW Sauna stripe
- 930803** Plastic profile 1 m for 24 V COB RGB/RGBW Sauna stripe
- 930804** Plastic profile 2 m for 24 V COB RGB/RGBW Sauna stripe
- 930802** Silicone clamps for 24 V COB RGB/RGBW Sauna stripe
- 930850** Silicone adhesive 10 ml

|                                                                                   |         |
|-----------------------------------------------------------------------------------|---------|
|  | € 9.95  |
|  | € 13.95 |
|  | € 0.75  |
|  | € 4.95  |
|  | € 9.95  |
|  | € 1.45  |
|  | € 3.95  |





COB 48V-15W FACADE LONG RUN IP67

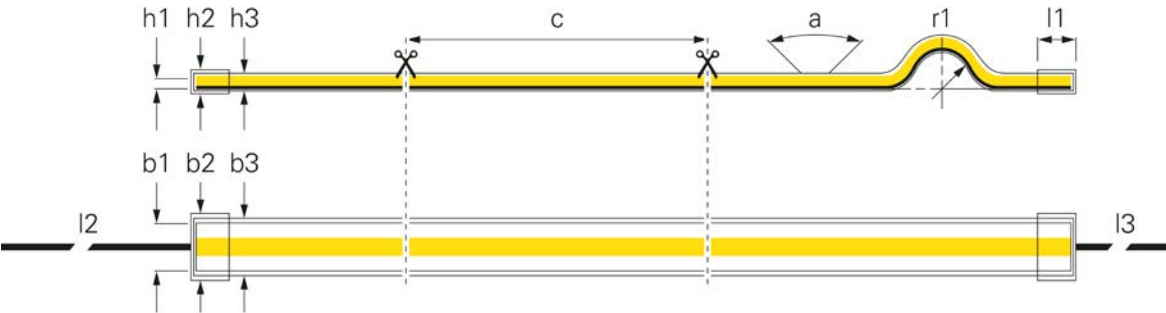

- for weather-exposed building facades
- for outdoor areas with direct sunlight
- UV-resistant
- permanently temperature-resistant (-40°C to 95°C)
- long service life with 75,000h L70B50 / 50,000h L80B10
- solder-free accessories
- 3M VHB 5604A adhesive tape with silicone primer pre-treatment

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (c) Segment Length          | 100 mm     | Rated Input 1m      | 15 W                             |
| (a) Light Beam Angle        | 120 Degree | Rated Input Voltage | 48 V/DC                          |
| (r1) Bending Radius min.    | 50 mm      | Control             | Dimmable via optional controller |
| (l1) Length End Cap         | 10 mm      | Working Temperature | -40 to 95 °C                     |
| (l2) Primary Cable Length   | 1 m        |                     |                                  |
| (l3) Secondary Cable Length | 1 m        |                     |                                  |

| Article | Colour | Temperature (p) | LED Distance | (h1) Height | (h2) Height | (h3) Height | (b1) Width | EEL | Price    |
|---------|--------|-----------------|--------------|-------------|-------------|-------------|------------|-----|----------|
| 840428  | RGB    |                 | 1.19 mm      | 5 mm        | 5.5 mm      | 5 mm        | 14.5 mm    |     | € 719.95 |
| 840429  | RGB    |                 | 1.19 mm      | 5 mm        | 5.5 mm      | 5 mm        | 14.5 mm    |     | € 259.95 |
| 840426  | WW     | CW 2700-6500 K  | 1.79 mm      | 5.5 mm      | 6.5 mm      | 5.5 mm      | 12 mm      | G   | € 539.95 |
| 840427  | WW     | CW 2700-6500 K  | 1.79 mm      | 5.5 mm      | 6.5 mm      | 5.5 mm      | 12 mm      | G   | € 199.95 |
| 840420  | WW     | 2700 K          | 2.08 mm      | 5.5 mm      | 6.5 mm      | 5.5 mm      | 12 mm      | F   | € 399.95 |
| 840423  | WW     | 2700 K          | 2.08 mm      | 5.5 mm      | 6.5 mm      | 5.5 mm      | 12 mm      | F   | € 143.95 |
| 840421  | WW     | 3000 K          | 2.08 mm      | 5.5 mm      | 6.5 mm      | 5.5 mm      | 12 mm      | F   | € 399.95 |
| 840424  | WW     | 3000 K          | 2.08 mm      | 5.5 mm      | 6.5 mm      | 5.5 mm      | 12 mm      | F   | € 143.95 |
| 840422  | NW     | 4000 K          | 2.08 mm      | 5.5 mm      | 6.5 mm      | 5.5 mm      | 12 mm      | E   | € 399.95 |
| 840425  | NW     | 4000 K          | 2.08 mm      | 5.5 mm      | 6.5 mm      | 5.5 mm      | 12 mm      | E   | € 143.95 |



## Accessories

|               |                                                                             |                                                                                   |         |
|---------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------|
| <b>930850</b> | Silicone adhesive 10 ml                                                     |  | € 3.95  |
| <b>843279</b> | MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free |  | € 91.95 |

Accessories for **840420, 840421, 840422**

|               |                                           |                                                                                   |          |
|---------------|-------------------------------------------|-----------------------------------------------------------------------------------|----------|
| <b>862276</b> | BASIC, DIM, CV, LCP DALI, 48V, 240W, IP20 |  | € 175.95 |
|---------------|-------------------------------------------|-----------------------------------------------------------------------------------|----------|

Accessories for **840420, 840421, 840422, 840423, 840424, 840425**

|               |                                        |                                                                                   |         |
|---------------|----------------------------------------|-----------------------------------------------------------------------------------|---------|
| <b>930737</b> | Supply cable for 24 V COB Sauna stripe |  | € 9.95  |
| <b>930738</b> | Connector for 24 V COB Sauna stripe    |  | € 13.95 |

Accessories for **840420, 840421, 840422, 840423, 840424, 840425, 840426, 840427**

|               |                                                                          |                                                                                   |         |
|---------------|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------|
| <b>930736</b> | Silicone end cap set of 2 pieces for 24 V COB Sauna stripe               |  | € 0.75  |
| <b>930739</b> | Silicone clamps for 24 V COB Sauna stripe                                |  | € 1.45  |
| <b>930740</b> | Plastic profile 1 m for 24 V COB Sauna stripe                            |  | € 3.95  |
| <b>930741</b> | Plastic profile 2 m for 24 V COB Sauna stripe                            |  | € 7.95  |
| <b>843341</b> | DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT6                              |  | € 67.95 |
| <b>843501</b> | RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control |  | € 79.95 |

Accessories for **840420, 840421, 840422, 840426, 840428**

|               |                                 |                                                                                   |          |
|---------------|---------------------------------|-----------------------------------------------------------------------------------|----------|
| <b>862272</b> | LONG-FLAT, CV, LT-240-48        |  | € 127.95 |
| <b>862281</b> | Long-Flat, DIM, CV, 48V 80-240W |  | € 127.95 |
| <b>872125</b> | CV, HLG-600H-48 A               |  | € 391.95 |
| <b>872126</b> | DIM, CV, HLG-600H-48B           |  | € 399.95 |
| <b>872145</b> | IP, CV, V6-320-48               |  | € 175.95 |

Accessories for **840423, 840424, 840425**

|               |                                           |                                                                                   |          |
|---------------|-------------------------------------------|-----------------------------------------------------------------------------------|----------|
| <b>862273</b> | BASIC, DIM, CV, LCP DALI, 48V, 75W, IP20  |  | € 103.95 |
| <b>862275</b> | BASIC, DIM, CV, LCP DALI, 48V, 150W, IP20 |  | € 135.95 |
| <b>872115</b> | CV, PWM-200-48 KN                         |  | € 195.95 |

Accessories for **840423, 840424, 840425, 840427, 840429**

|               |                                               |                                                                                     |          |
|---------------|-----------------------------------------------|-------------------------------------------------------------------------------------|----------|
| <b>862269</b> | Long-Flat, DIM, CV, 48 V 50-150 W             |    | € 103.95 |
| <b>862270</b> | LONG-FLAT, CV, LT-100-48                      |    | € 77.95  |
| <b>862271</b> | LONG-FLAT, CV, LT-150-48                      |  | € 103.95 |
| <b>862274</b> | BASIC, DIM, CV, 48 V 34-100 W                 |  | € 115.95 |
| <b>862283</b> | Long-Flat, DIM, CV, 48V 25-75W                |  | € 79.95  |
| <b>872142</b> | LED power supply, IP, DIM, CV, 48 V, 33-100 W |  | € 135.95 |
| <b>872143</b> | LED power supply, IP, DIM, CV, 48 V, 66-200 W |  | € 165.95 |



Accessories for **840426, 840427**

|               |                                             |                                                                                     |         |
|---------------|---------------------------------------------|-------------------------------------------------------------------------------------|---------|
| <b>930865</b> | End cap for Facade Long Run series          |  | € 6.95  |
| <b>930866</b> | Connecting cable for Facade Long Run series |  | € 9.95  |
| <b>843342</b> | DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT8 |  | € 67.95 |

Accessories for **840428, 840429**

|               |                                                                     |                                                                                     |         |
|---------------|---------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------|
| <b>930797</b> | Silicone end cap set of 2 pieces for 24 V COB RGB/RGBW Sauna stripe |  | € 0.75  |
| <b>930798</b> | Supply cable for 24 V COB RGB Sauna stripe                          |  | € 9.95  |
| <b>930799</b> | Connector for 24 V COB RGB Sauna stripe                             |  | € 13.95 |
| <b>930802</b> | Silicone clamps for 24 V COB RGB/RGBW Sauna stripe                  |  | € 1.45  |
| <b>930803</b> | Plastic profile 1 m for 24 V COB RGB/RGBW Sauna stripe              |  | € 4.95  |
| <b>930804</b> | Plastic profile 2 m for 24 V COB RGB/RGBW Sauna stripe              |  | € 9.95  |
| <b>843343</b> | DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6                         |  | € 75.95 |
| <b>843502</b> | RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20   |  | € 79.95 |


COB 48 V-18.5 W FACADE LONG RUN IP67

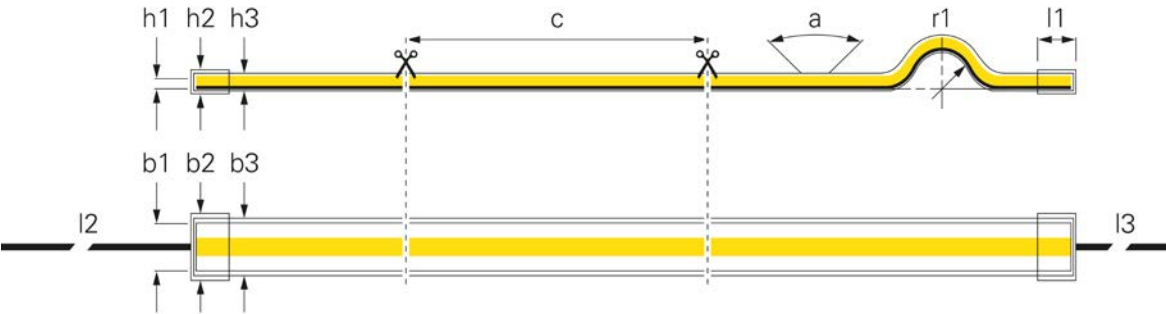

- For weathered building façades
- For outdoor areas exposed to direct sunlight
- UV-resistant
- Permanently temperature-resistant (-40 °C to 95 °C)
- Long service life with 75,000 h L70B50/50,000 h L80B10
- Solder-free accessories
- 3M VHB 5604A adhesive tape with silicone primer pre-treatment

|                          |            |                             |                                  |
|--------------------------|------------|-----------------------------|----------------------------------|
| (p) LED Distance         | 1.56 mm    | (l1) Length End Cap         | 10 mm                            |
| (c) Segment Length       | 100 mm     | (l2) Primary Cable Length   | 1 m                              |
| (a) Light Beam Angle     | 120 Degree | (l3) Secondary Cable Length | 1 m                              |
| (r1) Bending Radius min. | 50 mm      | Rated Input 1m              | 18.5 W                           |
| (h1) Height              | 0.5 mm     | Rated Input Voltage         | 48 V/DC                          |
| (h2) Height End Cap      | 5.5 mm     | CRI (Ra)                    | 90                               |
| (h3) Height Hose         | 5.5 mm     | Control                     | Dimmable via optional controller |
| (b1) Width               | 12 mm      | Working Temperature         | -40 to 95 °C                     |
| (b2) Width end cap       | 14 mm      | Channels                    | 4                                |
| (b3) Width Hose          | 14 mm      |                             |                                  |

| Article | Colour Temperature |        | Luminous Efficiency 1m | Luminous Flux 1m | Length   | Price    |
|---------|--------------------|--------|------------------------|------------------|----------|----------|
| 840432  |                    | 3000 K | 64 lm/W                | 890 lm           | 5000 mm  | € 303.95 |
| 840430  |                    | 3000 K | 64 lm/W                | 890 lm           | 15000 mm | € 799.95 |
| 840433  |                    | 4000 K | 45 lm/W                | 1010 lm          | 5000 mm  | € 303.95 |
| 840431  |                    | 4000 K | 45 lm/W                | 1010 lm          | 15000 mm | € 799.95 |



## Accessories

|               |                                                                             |                                                                                   |         |
|---------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------|
| <b>930800</b> | Supply cable for 24 V COB RGBW Sauna stripe                                 |  | € 9.95  |
| <b>930801</b> | Connector for 24 V COB RGBW Sauna stripe                                    |  | € 13.95 |
| <b>930797</b> | Silicone end cap set of 2 pieces for 24 V COB RGB/RGBW Sauna stripe         |  | € 0.75  |
| <b>930803</b> | Plastic profile 1 m for 24 V COB RGB/RGBW Sauna stripe                      |  | € 4.95  |
| <b>930804</b> | Plastic profile 2 m for 24 V COB RGB/RGBW Sauna stripe                      |  | € 9.95  |
| <b>930802</b> | Silicone clamps for 24 V COB RGB/RGBW Sauna stripe                          |  | € 1.45  |
| <b>930850</b> | Silicone adhesive 10 ml                                                     |  | € 3.95  |
| <b>843502</b> | RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20           |  | € 79.95 |
| <b>843343</b> | DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6                                 |  | € 75.95 |
| <b>843344</b> | DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8                                 |  | € 75.95 |
| <b>843279</b> | MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free |  | € 91.95 |

Accessories for **840430, 840431**


|               |                                 |                                                                                   |          |
|---------------|---------------------------------|-----------------------------------------------------------------------------------|----------|
| <b>862272</b> | LONG-FLAT, CV, LT-240-48        |  | € 127.95 |
| <b>862281</b> | Long-Flat, DIM, CV, 48V 80-240W |  | € 127.95 |
| <b>872125</b> | CV, HLG-600H-48 A               |  | € 391.95 |
| <b>872126</b> | DIM, CV, HLG-600H-48B           |  | € 399.95 |
| <b>872145</b> | IP, CV, V6-320-48               |  | € 175.95 |

Accessories for **840432, 840433**

|               |                                               |                                                                                   |          |
|---------------|-----------------------------------------------|-----------------------------------------------------------------------------------|----------|
| <b>862269</b> | Long-Flat, DIM, CV, 48 V 50-150 W             |  | € 103.95 |
| <b>862270</b> | LONG-FLAT, CV, LT-100-48                      |  | € 77.95  |
| <b>862271</b> | LONG-FLAT, CV, LT-150-48                      |  | € 103.95 |
| <b>862274</b> | BASIC, DIM, CV, 48 V 34-100 W                 |  | € 115.95 |
| <b>862283</b> | Long-Flat, DIM, CV, 48V 25-75W                |  | € 79.95  |
| <b>872142</b> | LED power supply, IP, DIM, CV, 48 V, 33-100 W |  | € 135.95 |
| <b>872143</b> | LED power supply, IP, DIM, CV, 48 V, 66-200 W |  | € 165.95 |




COB 24V-12W STANDARD IP20

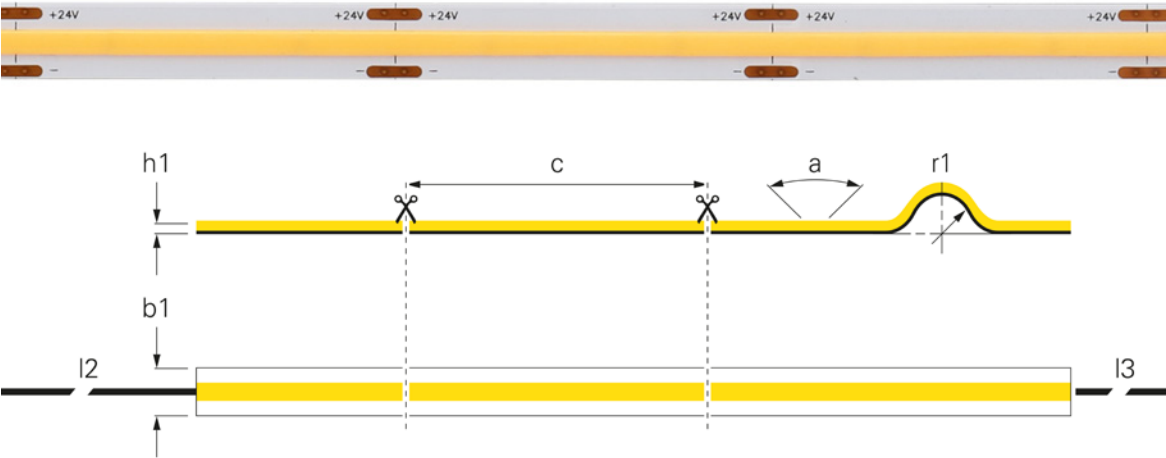

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 2.08 mm    | Length              | 5000 mm                          |
| (c) Segment Length          | 50 mm      | Rated Input 1m      | 12 W                             |
| (a) Light Beam Angle        | 180 Degree | Rated Input Voltage | 24 V/DC                          |
| (r1) Bending Radius min.    | 30 mm      | CRI (Ra)            | 90                               |
| (h1) Height                 | 2.2 mm     | Control             | Dimmable via optional controller |
| (b1) Width                  | 10 mm      | Working Temperature | -20 to 50 °C                     |
| (l2) Primary Cable Length   | 0.5 m      | Channels            | 1                                |
| (l3) Secondary Cable Length | 0.5 m      |                     |                                  |

| Article | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | Price   |
|---------|--------------------|------------------------|------------------|---------|
| 840474  | WW 2700 K          | 88 lm/W                | 1050 lm          | € 55.95 |
| 840475  | WW 3000 K          | 113 lm/W               | 1360 lm          | € 55.95 |
| 840476  | NW 4000 K          | 110 lm/W               | 1320 lm          | € 55.95 |





Accessories

|        |                                               |
|--------|-----------------------------------------------|
| 862270 | LONG-FLAT, CV, LT-100-48                      |
| 862271 | LONG-FLAT, CV, LT-150-48                      |
| 862269 | Long-Flat, DIM, CV, 48 V 50-150 W             |
| 862274 | BASIC, DIM, CV, 48 V 34-100 W                 |
| 872142 | LED power supply, IP, DIM, CV, 48 V, 33-100 W |
| 872143 | LED power supply, IP, DIM, CV, 48 V, 66-200 W |
| 862262 | BASIC, DIM, CV, LCP DALI, 24V, 150W, IP20     |
| 862263 | BASIC, DIM, CV, LCP DALI, 24V, 240W, IP20     |
| 872113 | CV, PWM-120-24 KN                             |
| 931101 | Mounting roller for 8/10mm LED-Stripes, blue  |
| 931102 | Mounting roller for 10/12mm LED-Stripes, blue |


|  |          |
|--|----------|
|  | € 77.95  |
|  | € 103.95 |
|  | € 103.95 |
|  | € 115.95 |
|  | € 135.95 |
|  | € 165.95 |
|  | € 135.95 |
|  | € 175.95 |
|  | € 167.95 |
|  | € 11.95  |
|  | € 11.95  |

COB 24V-12W STANDARD IP67

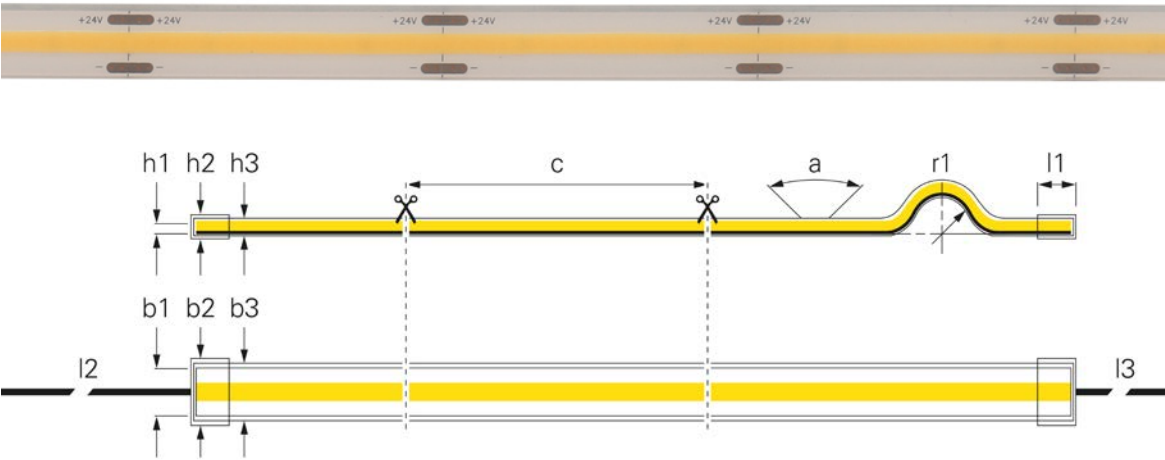

|                          |            |                             |                                  |
|--------------------------|------------|-----------------------------|----------------------------------|
| (p) LED Distance         | 2.08 mm    | (l2) Primary Cable Length   | 0.5 m                            |
| (c) Segment Length       | 50 mm      | (l3) Secondary Cable Length | 0.5 m                            |
| (a) Light Beam Angle     | 180 Degree | Length                      | 5000 mm                          |
| (r1) Bending Radius min. | 70 mm      | Rated Input 1m              | 12 W                             |
| (h1) Height              | 4.5 mm     | Rated Input Voltage         | 24 V/DC                          |
| (h2) Height End Cap      | 3.2 mm     | CRI (Ra)                    | 90                               |
| (h3) Height Hose         | 2.2 mm     | Control                     | Dimmable via optional controller |
| (b1) Width               | 12 mm      | Type of IP Protection       | Silicone hose                    |
| (b2) Width end cap       | 14 mm      | Working Temperature         | -20 to 50 °C                     |
| (b3) Width Hose          | 12 mm      | Channels                    | 1                                |
| (l1) Length End Cap      | 10 mm      |                             |                                  |

| Article | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | Price   |
|---------|--------------------|------------------------|------------------|---------|
| 840477  | WW 2700 K          | 98 lm/W                | 1170 lm          | € 71.95 |
| 840478  | WW 3000 K          | 102 lm/W               | 1220 lm          | € 71.95 |
| 840479  | NW 4000 K          | 117 lm/W               | 1400 lm          | € 71.95 |





Accessories

|        |                                               |
|--------|-----------------------------------------------|
| 862270 | LONG-FLAT, CV, LT-100-48                      |
| 862271 | LONG-FLAT, CV, LT-150-48                      |
| 862269 | Long-Flat, DIM, CV, 48 V 50-150 W             |
| 862274 | BASIC, DIM, CV, 48 V 34-100 W                 |
| 872142 | LED power supply, IP, DIM, CV, 48 V, 33-100 W |
| 872143 | LED power supply, IP, DIM, CV, 48 V, 66-200 W |
| 862262 | BASIC, DIM, CV, LCP DALI, 24V, 150W, IP20     |
| 862263 | BASIC, DIM, CV, LCP DALI, 24V, 240W, IP20     |
| 872113 | CV, PWM-120-24 KN                             |
| 931102 | Mounting roller for 10/12mm LED-Stripes, blue |

|  |          |
|--|----------|
|  | € 77.95  |
|  | € 103.95 |
|  | € 103.95 |
|  | € 115.95 |
|  | € 135.95 |
|  | € 165.95 |
|  | € 135.95 |
|  | € 175.95 |
|  | € 167.95 |
|  | € 11.95  |




COB 24V-15W STANDARD IP20

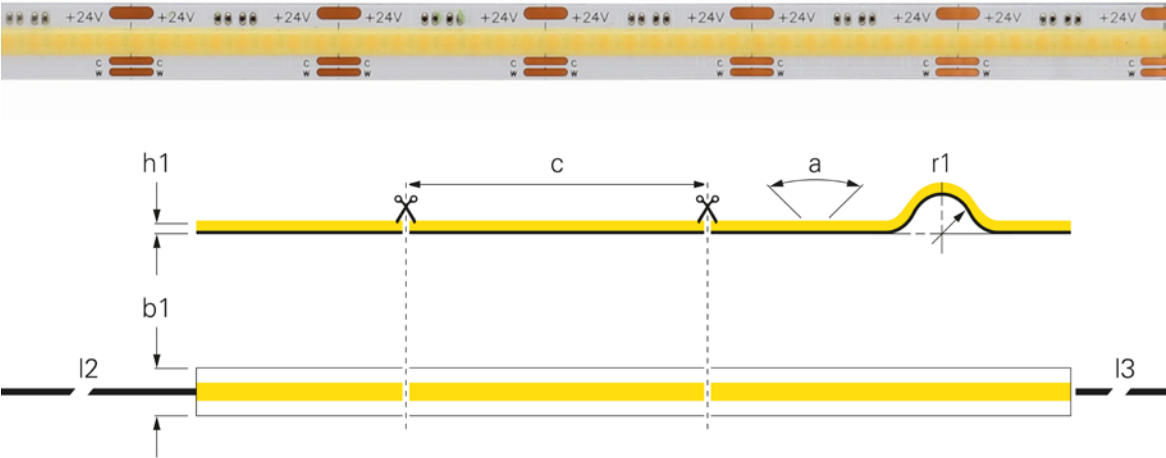

|                             |             |                     |                                  |
|-----------------------------|-------------|---------------------|----------------------------------|
| (p) LED Distance            | 1.73 mm     | Luminous Flux 1m    | 1550 lm                          |
| (c) Segment Length          | 27.8 mm     | Length              | 5000 mm                          |
| (a) Light Beam Angle        | 180 Degree  | Rated Input 1m      | 15 W                             |
| (r1) Bending Radius min.    | 15 mm       | Rated Input Voltage | 24 V/DC                          |
| (h1) Height                 | 1.8 mm      | CRI (Ra)            | 90                               |
| (b1) Width                  | 10 mm       | Control             | Dimmable via optional controller |
| (l2) Primary Cable Length   | 0.5 m       | Working Temperature | -20 to 50 °C                     |
| (l3) Secondary Cable Length | 0.5 m       | Channels            | 2                                |
| Colour Temperature          | 2700-6500 K |                     |                                  |


| Article | Colour Temperature | Price    |
|---------|--------------------|----------|
| 840480  | WW CW 2700-6500 K  | € 119.95 |



Accessories


|        |                                                                           |          |
|--------|---------------------------------------------------------------------------|----------|
| 843501 | RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control  | € 79.95  |
| 843037 | Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)                            | € 143.95 |
| 843279 | MULTILED dimmer 1-4 channels, DMX/auto/manual, 12-48V, 20 A, flicker-free | € 91.95  |
| 843341 | DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT6                               | € 67.95  |
| 843342 | DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT8                               | € 67.95  |
| 862270 | LONG-FLAT, CV, LT-100-48                                                  | € 77.95  |
| 862271 | LONG-FLAT, CV, LT-150-48                                                  | € 103.95 |
| 931101 | Mounting roller for 8/10mm LED-Stripes, blue                              | € 11.95  |
| 931102 | Mounting roller for 10/12mm LED-Stripes, blue                             | € 11.95  |

COB 24V-15W STANDARD IP67

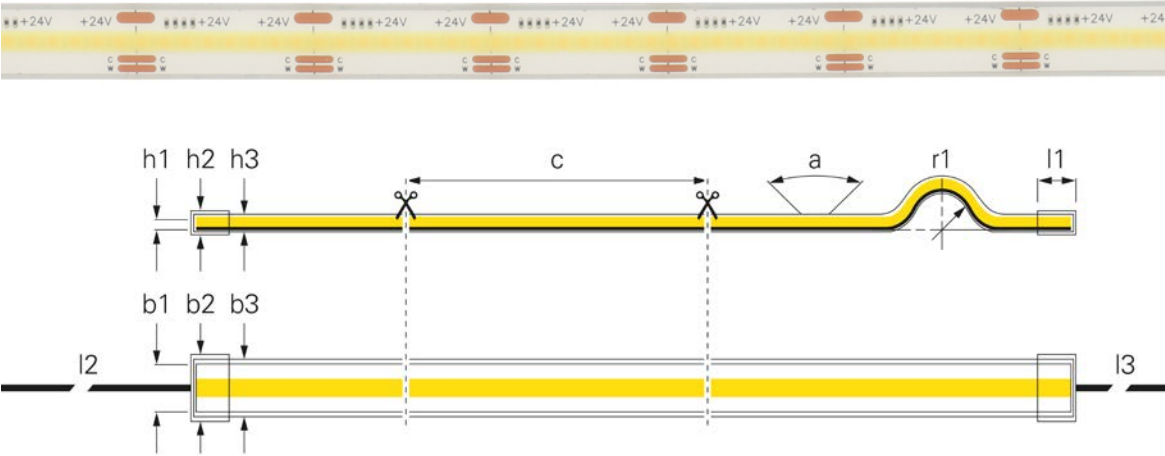

|                           |            |                             |                                  |
|---------------------------|------------|-----------------------------|----------------------------------|
| (p) LED Distance          | 1.73 mm    | (l3) Secondary Cable Length | 0.5 m                            |
| (c) Segment Length        | 27.8 mm    | Colour Temperature          | 2700-6500 K                      |
| (a) Light Beam Angle      | 180 Degree | Luminous Flux 1m            | 1300 lm                          |
| (r1) Bending Radius min.  | 50 mm      | Length                      | 5000 mm                          |
| (h1) Height               | 4.5 mm     | Rated Input 1m              | 15 W                             |
| (h2) Height End Cap       | 6 mm       | Rated Input Voltage         | 24 V/DC                          |
| (h3) Height Hose          | 4.5 mm     | CRI (Ra)                    | 90                               |
| (b1) Width                | 12 mm      | Control                     | Dimmable via optional controller |
| (b2) Width end cap        | 14 mm      | Type of IP Protection       | Silicone hose                    |
| (b3) Width Hose           | 12 mm      | Working Temperature         | -20 to 50 °C                     |
| (l1) Length End Cap       | 10 mm      | Channels                    | 2                                |
| (l2) Primary Cable Length | 0.5 m      |                             |                                  |



| Article | Colour Temperature | Price    |
|---------|--------------------|----------|
| 840481  | WW CW 2700-6500 K  | € 135.95 |



Accessories

|        |                                                                            |          |
|--------|----------------------------------------------------------------------------|----------|
| 843501 | RF-smart, starter set LED single/CCT, 12-48V, 20 A incl. remote control    | € 79.95  |
| 843037 | Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)                             | € 143.95 |
| 843279 | MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48V, 20 A, flicker-free | € 91.95  |
| 843341 | DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT6                                | € 67.95  |
| 843342 | DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT8                                | € 67.95  |
| 862270 | LONG-FLAT, CV, LT-100-48                                                   | € 77.95  |
| 862271 | LONG-FLAT, CV, LT-150-48                                                   | € 103.95 |
| 931102 | Mounting roller for 10/12mm LED-Stripes, blue                              | € 11.95  |

COB 24V-16W STANDARD IP20

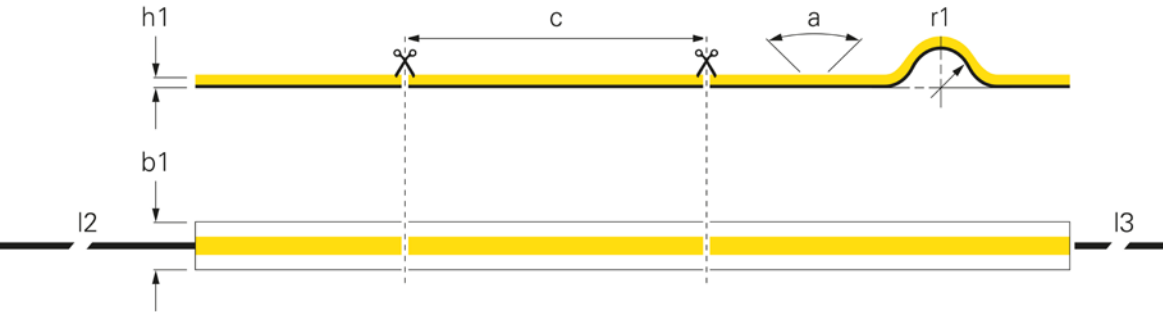


·high-performance adhesive tape 3M 300MP

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 1.78 mm    | Luminous Flux 1m    | 800 lm                           |
| (c) Segment Length          | 50 mm      | Length              | 5000 mm                          |
| (a) Light Beam Angle        | 180 Degree | Rated Input 1m      | 16 W                             |
| (r1) Bending Radius min.    | 15 mm      | Rated Input Voltage | 24 V/DC                          |
| (h1) Height                 | 1.8 mm     | CRI (Ra)            | 90                               |
| (b1) Width                  | 12 mm      | Control             | Dimmable via optional controller |
| (l2) Primary Cable Length   | 0.5 m      | Working Temperature | -20 to 50 °C                     |
| (l3) Secondary Cable Length | 0.5 m      | Channels            | 4                                |
| Colour Temperature          | 3000 K     |                     |                                  |
| Luminous Efficiency 1m      | 49 lm/W    |                     |                                  |

ArticlePrice

840482€ 159.95




Accessories

|        |                                                                             |
|--------|-----------------------------------------------------------------------------|
| 843542 | RF-smart, Starter-Set RGB/W/CCT, 12-48V, 20A incl. Remote, IP20             |
| 843037 | Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)                              |
| 843279 | MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free |
| 843343 | DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6                                 |
| 843344 | DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8                                 |
| 862166 | BASIC, CV, Q8H-24-100 W                                                     |
| 872089 | IP, CV, V6-240-24                                                           |
| 862301 | Basic, Casambi 3/4 Kanal, 24V, 150W, IP20                                   |
| 931102 | Mounting roller for 10/12mm LED-Stripes, blue                               |

|                                                                                     |          |
|-------------------------------------------------------------------------------------|----------|
|  | € 91.95  |
|  | € 143.95 |
|  | € 91.95  |
|  | € 75.95  |
|  | € 75.95  |
|  | € 77.95  |
|  | € 147.95 |
|  | € 167.95 |
|  | € 11.95  |

## COB 24V-16W STANDARD IP67

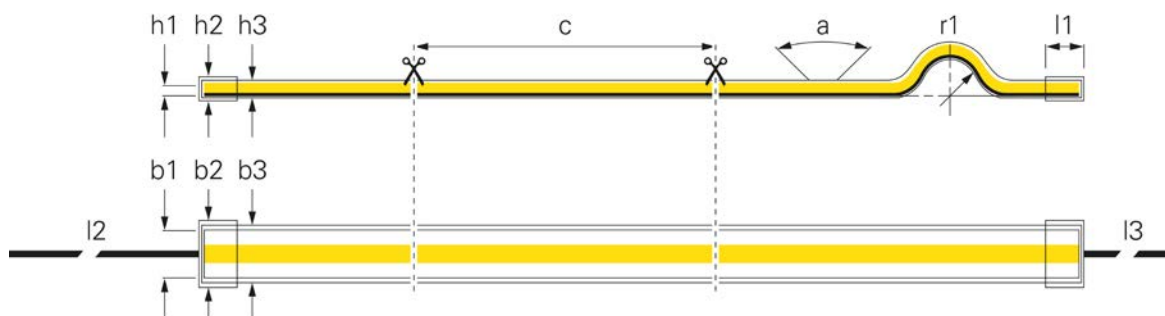

|                             |            |                        |                                  |
|-----------------------------|------------|------------------------|----------------------------------|
| (p) LED Distance            | 1.78 mm    | Colour Temperature     | 3000 K                           |
| (c) Segment Length          | 50 mm      | Luminous Efficiency 1m | 49 lm/W                          |
| (a) Light Beam Angle        | 180 Degree | Luminous Flux 1m       | 800 lm                           |
| (r1) Bending Radius min.    | 50 mm      | Length                 | 5000 mm                          |
| (h1) Height                 | 4.5 mm     | Rated Input 1m         | 16 W                             |
| (h2) Height End Cap         | 6 mm       | Rated Input Voltage    | 24 V/DC                          |
| (h3) Height Hose            | 4.5 mm     | CRI (Ra)               | 90                               |
| (b1) Width                  | 14 mm      | Control                | Dimmable via optional controller |
| (b2) Width end cap          | 14 mm      | Type of IP Protection  | Silicone hose                    |
| (b3) Width Hose             | 14 mm      | Working Temperature    | -20 to 50 °C                     |
| (l1) Length End Cap         | 10 mm      | Channels               | 4                                |
| (l2) Primary Cable Length   | 0.5 m      |                        |                                  |
| (l3) Secondary Cable Length | 0.5 m      |                        |                                  |

Article Price



**840483** **€ 175.95**



## Accessories


|               |                                                                             |  |                 |
|---------------|-----------------------------------------------------------------------------|--|-----------------|
| <b>843542</b> | RF-smart, Starter-Set RGB/W/CCT, 12-48V, 20A incl. Remote, IP20             |  | <b>€ 91.95</b>  |
| <b>843037</b> | Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)                              |  | <b>€ 143.95</b> |
| <b>843279</b> | MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free |  | <b>€ 91.95</b>  |
| <b>843343</b> | DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6                                 |  | <b>€ 75.95</b>  |
| <b>843344</b> | DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8                                 |  | <b>€ 75.95</b>  |
| <b>862166</b> | BASIC, CV, Q8H-24-100 W                                                     |  | <b>€ 77.95</b>  |
| <b>872089</b> | IP, CV, V6-240-24                                                           |  | <b>€ 147.95</b> |
| <b>862301</b> | Basic, Casambi 3/4 Kanal, 24V, 150W, IP20                                   |  | <b>€ 167.95</b> |

COB 24V-15W PROFESSIONAL IP20

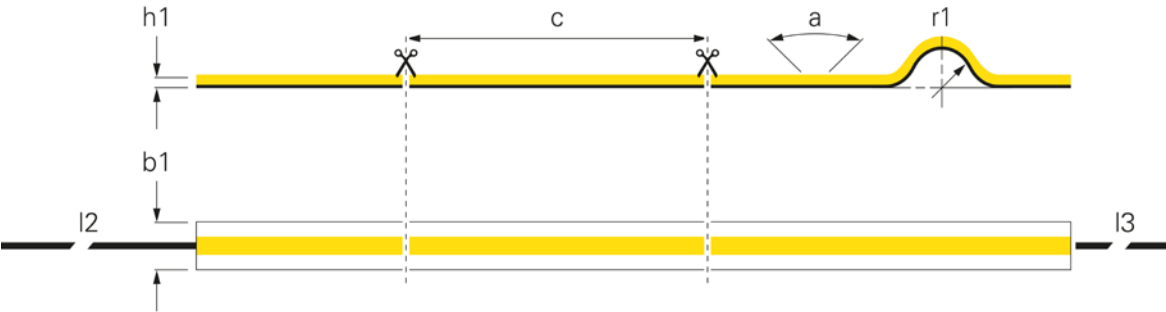

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 3.47 mm    | Length              | 5000 mm                          |
| (c) Segment Length          | 27.77 mm   | Rated Input 1m      | 15 W                             |
| (a) Light Beam Angle        | 180 Degree | Rated Input Voltage | 24 V/DC                          |
| (r1) Bending Radius min.    | 30 mm      | CRI (Ra)            | 90                               |
| (h1) Height                 | 2.2 mm     | Control             | Dimmable via optional controller |
| (b1) Width                  | 10 mm      | Working Temperature | -20 to 50 °C                     |
| (l2) Primary Cable Length   | 0.5 m      | Channels            | 1                                |
| (l3) Secondary Cable Length | 0.5 m      |                     |                                  |

| Article | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | Price   |
|---------|--------------------|------------------------|------------------|---------|
| 840466  | WW 2700 K          | 140 lm/W               | 2100 lm          | € 71.95 |
| 840467  | WW 3000 K          | 170 lm/W               | 2550 lm          | € 71.95 |
| 840468  | NW 4000 K          | 179 lm/W               | 2690 lm          | € 71.95 |
| 840469  | CW 6500 K          | 179 lm/W               | 2690 lm          | € 71.95 |





Accessories

|        |                                               |
|--------|-----------------------------------------------|
| 862270 | LONG-FLAT, CV, LT-100-48                      |
| 862271 | LONG-FLAT, CV, LT-150-48                      |
| 862269 | Long-Flat, DIM, CV, 48 V 50-150 W             |
| 862274 | BASIC, DIM, CV, 48 V 34-100 W                 |
| 872142 | LED power supply, IP, DIM, CV, 48 V, 33-100 W |
| 872143 | LED power supply, IP, DIM, CV, 48 V, 66-200 W |
| 862262 | BASIC, DIM, CV, LCP DALI, 24V, 150W, IP20     |
| 862263 | BASIC, DIM, CV, LCP DALI, 24V, 240W, IP20     |
| 872113 | CV, PWM-120-24 KN                             |
| 931101 | Mounting roller for 8/10mm LED-Stripes, blue  |
| 931102 | Mounting roller for 10/12mm LED-Stripes, blue |


|  |          |
|--|----------|
|  | € 77.95  |
|  | € 103.95 |
|  | € 103.95 |
|  | € 115.95 |
|  | € 135.95 |
|  | € 165.95 |
|  | € 135.95 |
|  | € 175.95 |
|  | € 167.95 |
|  | € 11.95  |
|  | € 11.95  |

COB 24V-15W PROFESSIONAL IP67

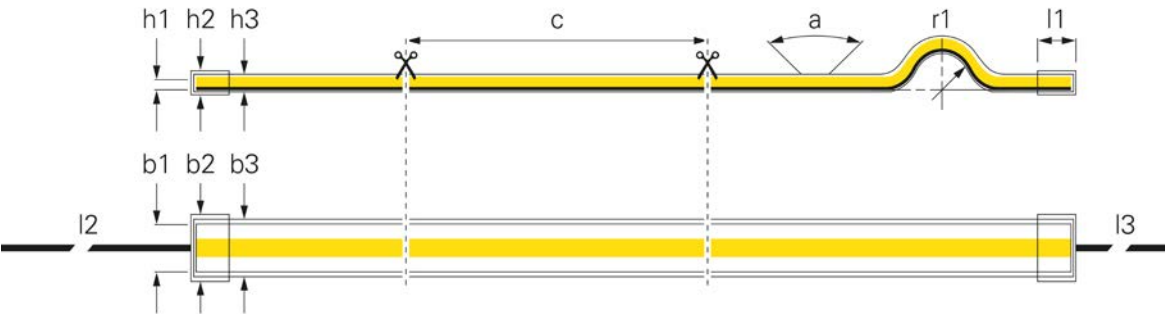

|                          |            |                             |                                  |
|--------------------------|------------|-----------------------------|----------------------------------|
| (p) LED Distance         | 3.47 mm    | (l2) Primary Cable Length   | 0.5 m                            |
| (c) Segment Length       | 27.77 mm   | (l3) Secondary Cable Length | 0.5 m                            |
| (a) Light Beam Angle     | 180 Degree | Length                      | 5000 mm                          |
| (r1) Bending Radius min. | 70 mm      | Rated Input 1m              | 15 W                             |
| (h1) Height              | 4.5 mm     | Rated Input Voltage         | 24 V/DC                          |
| (h2) Height End Cap      | 3.2 mm     | CRI (Ra)                    | 90                               |
| (h3) Height Hose         | 2.2 mm     | Control                     | Dimmable via optional controller |
| (b1) Width               | 12 mm      | Type of IP Protection       | Silicone hose                    |
| (b2) Width end cap       | 14 mm      | Working Temperature         | -20 to 50 °C                     |
| (b3) Width Hose          | 12 mm      | Channels                    | 1                                |
| (l1) Length End Cap      | 10 mm      |                             |                                  |

| Article | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | Price   |
|---------|--------------------|------------------------|------------------|---------|
| 840470  | WW 2700 K          | 137 lm/W               | 2060 lm          | € 87.95 |
| 840471  | WW 3000 K          | 137 lm/W               | 2060 lm          | € 87.95 |
| 840472  | NW 4000 K          | 144 lm/W               | 2160 lm          | € 87.95 |
| 840473  | CW 6500 K          | 143 lm/W               | 2150 lm          | € 87.95 |



Accessories

|        |                                               |
|--------|-----------------------------------------------|
| 862270 | LONG-FLAT, CV, LT-100-48                      |
| 862271 | LONG-FLAT, CV, LT-150-48                      |
| 862269 | Long-Flat, DIM, CV, 48 V 50-150 W             |
| 862274 | BASIC, DIM, CV, 48 V 34-100 W                 |
| 872142 | LED power supply, IP, DIM, CV, 48 V, 33-100 W |
| 872143 | LED power supply, IP, DIM, CV, 48 V, 66-200 W |
| 862262 | BASIC, DIM, CV, LCP DALI, 24V, 150W, IP20     |
| 862263 | BASIC, DIM, CV, LCP DALI, 24V, 240W, IP20     |
| 872113 | CV, PWM-120-24 KN                             |
| 931102 | Mounting roller for 10/12mm LED-Stripes, blue |

|  |          |
|--|----------|
|  | € 77.95  |
|  | € 103.95 |
|  | € 103.95 |
|  | € 115.95 |
|  | € 135.95 |
|  | € 165.95 |
|  | € 135.95 |
|  | € 175.95 |
|  | € 167.95 |
|  | € 11.95  |




## 12V LED STRIPES

These LED strips are ideally suited for all standard applications and special assemblies with the most diverse requirements. With voltages of 12V, different protection classes, lumens, number of LEDs, power and much more, you too can find the right LED strip for your application.




## SMD 12V-7W SHORT CUT IP20

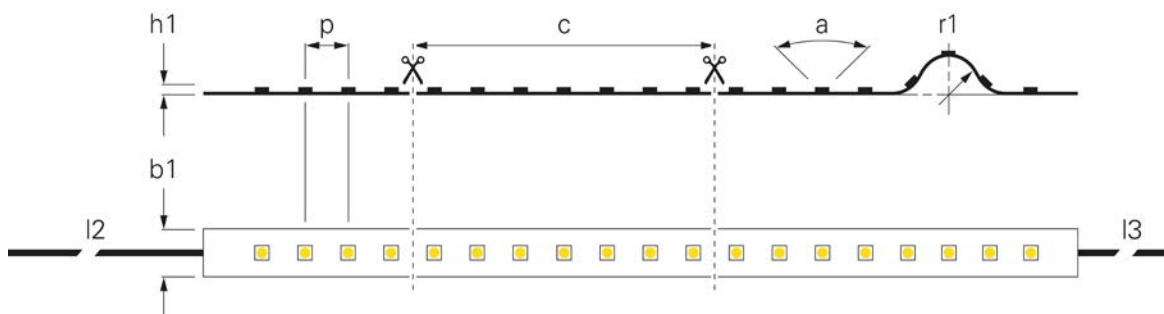

• high-performance adhesive 3M 9448A

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 8.33 mm    | Length              | 5000 mm                          |
| (c) Segment Length          | 25 mm      | Rated Input Voltage | 12 V/DC                          |
| (a) Light Beam Angle        | 120 Degree | CRI (Ra)            | 90                               |
| (r1) Bending Radius min.    | 20 mm      | Control             | Dimmable via optional controller |
| (h1) Height                 | 3 mm       | Working Temperature | -15 to 50 °C                     |
| (b1) Width                  | 8 mm       | Channels            | 1                                |
| (l2) Primary Cable Length   | 1 m        |                     |                                  |
| (l3) Secondary Cable Length | 1 m        |                     |                                  |

| Article       | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | Rated Input 1m | EEL | Price          |
|---------------|--------------------|------------------------|------------------|----------------|-----|----------------|
| <b>840164</b> | 2700 K             | 81.43 lm/W             | 570 lm           | 7.0 W          |     | <b>€ 71.95</b> |
| <b>840165</b> | 3000 K             | 85.38 lm/W             | 555 lm           | 6.5 W          |     | <b>€ 71.95</b> |
| <b>840166</b> | 4000 K             | 95.71 lm/W             | 670 lm           | 7.0 W          |     | <b>€ 71.95</b> |
| <b>840167</b> | 6500 K             | 90 lm/W                | 630 lm           | 7.0 W          |     | <b>€ 71.95</b> |



### Aluminium profiles


In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

## 24V LED STRIPES

These LED strips are ideal for all standard applications and special assemblies with a wide range of requirements. With voltages of 24V, different protection classes, lumens, number of LEDs, power and much more, you too will find the right LED strip for your application.



## SMD 24V-10W LONG RUN IP20

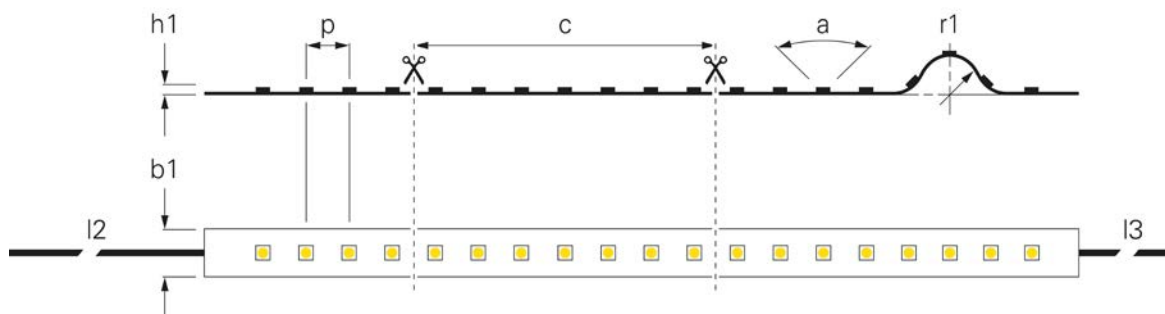

## ·high-performance adhesive 3M 9448A

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 8.33 mm    | Luminous Flux 1m    | 705 lm                           |
| (c) Segment Length          | 50 mm      | Length              | 10000 mm                         |
| (a) Light Beam Angle        | 120 Degree | Rated Input 1m      | 9.5 W                            |
| (r1) Bending Radius min.    | 20 mm      | Rated Input Voltage | 24 V/DC                          |
| (h1) Height                 | 2 mm       | CRI (Ra)            | 90                               |
| (b1) Width                  | 10 mm      | Control             | Dimmable via optional controller |
| (l2) Primary Cable Length   | 1 m        | Working Temperature | -15 to 50 °C                     |
| (l3) Secondary Cable Length | 1 m        | Channels            | 1                                |
| Colour Temperature          | 3000 K     |                     |                                  |
| Luminous Efficiency 1m      | 74.21 lm/W |                     |                                  |


Article Price

840291  € 319.95**Lighting design**

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.


SMD 24V-10W SLIM IP20

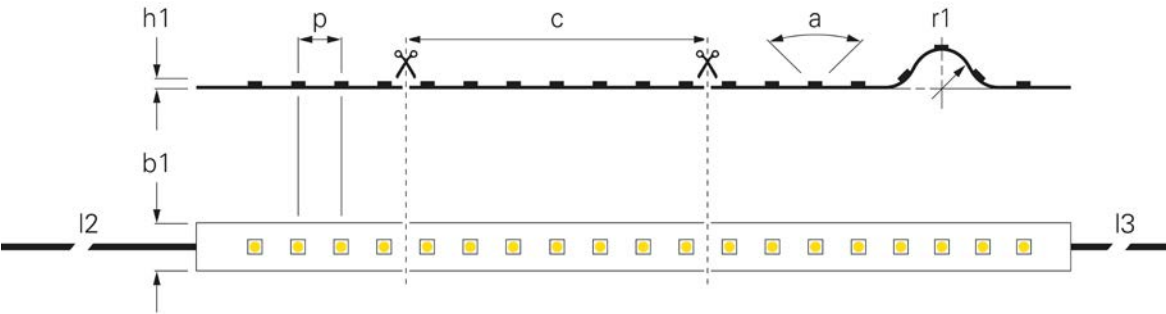

·high-performance adhesive 3M 9448A

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 8.33 mm    | Length              | 5000 mm                          |
| (c) Segment Length          | 50 mm      | Rated Input 1m      | 9.6 W                            |
| (a) Light Beam Angle        | 120 Degree | Rated Input Voltage | 24 V/DC                          |
| (r1) Bending Radius min.    | 20 mm      | CRI (Ra)            | 90                               |
| (h1) Height                 | 3 mm       | Control             | Dimmable via optional controller |
| (b1) Width                  | 5 mm       | Working Temperature | -15 to 50 °C                     |
| (l2) Primary Cable Length   | 1 m        | Channels            | 1                                |
| (l3) Secondary Cable Length | 1 m        |                     |                                  |


| Article | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | Price   |
|---------|--------------------|------------------------|------------------|---------|
| 840158  | WW 2700 K          | 80 lm/W                | 770 lm           | € 63.95 |
| 840159  | WW 3000 K          | 85 lm/W                | 820 lm           | € 63.95 |



**Aluminium profiles**

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.


## SMD 24V-11W SLIM IP20

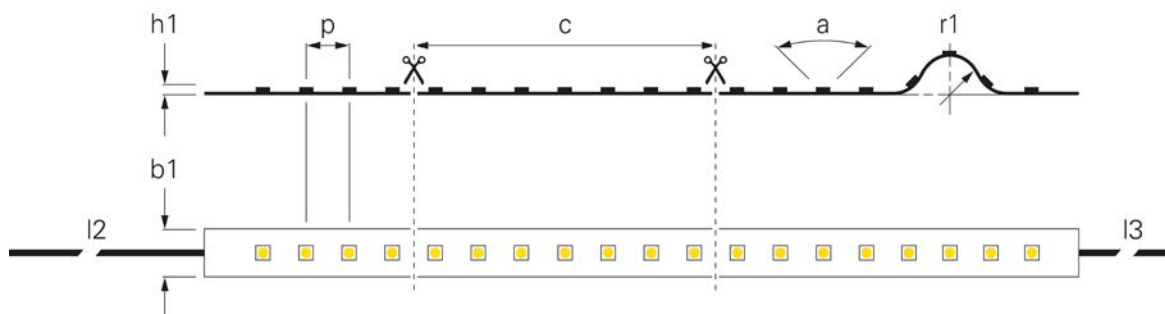

## • high-performance adhesive 3M 9448A

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 3.8 mm     | Length              | 5000 mm                          |
| (c) Segment Length          | 26.3 mm    | Rated Input Voltage | 24 V/DC                          |
| (a) Light Beam Angle        | 120 Degree | CRI (Ra)            | 90                               |
| (r1) Bending Radius min.    | 20 mm      | Control             | Dimmable via optional controller |
| (h1) Height                 | 2 mm       | Working Temperature | -15 to 50 °C                     |
| (b1) Width                  | 4 mm       | Channels            | 1                                |
| (l2) Primary Cable Length   | 1 m        |                     |                                  |
| (l3) Secondary Cable Length | 1 m        |                     |                                  |


| Article       | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | Rated Input 1m | Price           |
|---------------|--------------------|------------------------|------------------|----------------|-----------------|
| <b>840175</b> | 2700 K             | 90.45 lm/W             | 995 lm           | 11.0 W         | <b>€ 135.95</b> |
| <b>840210</b> | 3000 K             | 99.09 lm/W             | 1090 lm          | 11.0 W         | <b>€ 135.95</b> |
| <b>840267</b> | 4000 K             | 95.65 lm/W             | 1100 lm          | 11.5 W         | <b>€ 135.95</b> |

**Power supply units**

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.




SMD 24 V-11 W CCT SLIM IP20

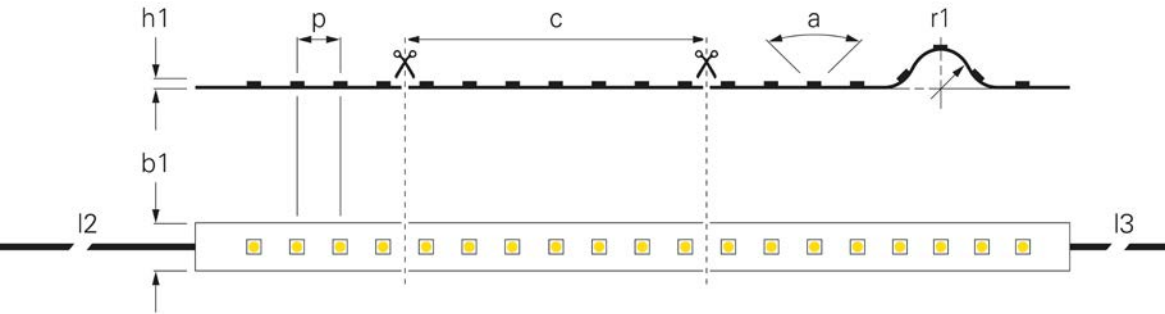

·high-performance adhesive tape 3M 200MP


|                             |            |                        |                                  |
|-----------------------------|------------|------------------------|----------------------------------|
| (p) LED Distance            | 10.2 mm    | Colour Temperature     | 3000-6500 K                      |
| (c) Segment Length          | 71.4 mm    | Luminous Efficiency 1m | 93.18 lm/W                       |
| (a) Light Beam Angle        | 120 Degree | Luminous Flux 1m       | 1025 lm                          |
| (r1) Bending Radius min.    | 50 mm      | Length                 | 5000 mm                          |
| (h1) Height                 | 1.2 mm     | Rated Input 1m         | 11 W                             |
| (h2) Height End Cap         | 2.6 mm     | Rated Input Voltage    | 24 V/DC                          |
| (b1) Width                  | 5 mm       | CRI (Ra)               | 90                               |
| (b2) Width end cap          | 5.5 mm     | Control                | Dimmable via optional controller |
| (l1) Length End Cap         | 15 mm      | Working Temperature    | -10 to 60 °C                     |
| (l2) Primary Cable Length   | 1 m        | Channels               | 2                                |
| (l3) Secondary Cable Length | 1 m        |                        |                                  |

| Article | Colour Temperature | Price   |
|---------|--------------------|---------|
| 840350  | WW CW 3000-6500 K  | € 99.95 |



**Aluminium profiles**  
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

## SMD 24V-12W SLIM IP65

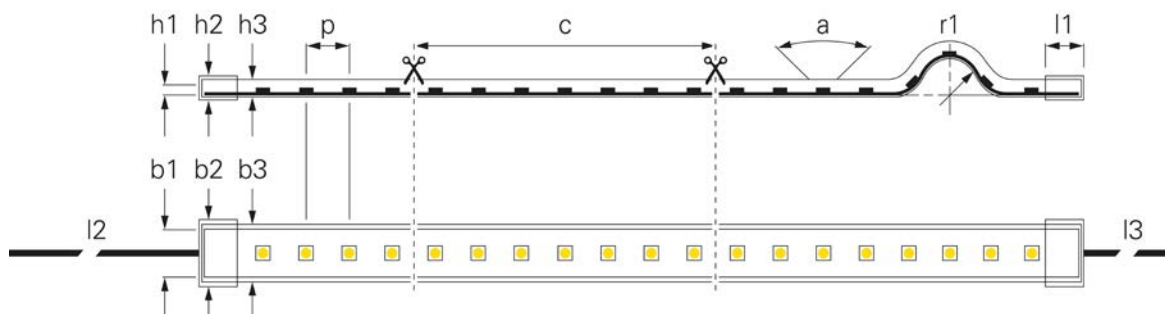


- Including mounting material
- high-performance adhesive tape 3M 200MP

|                             |            |                        |                                  |
|-----------------------------|------------|------------------------|----------------------------------|
| (p) LED Distance            | 5.1 mm     | Colour Temperature     | 3000-6500 K                      |
| (c) Segment Length          | 71.4 mm    | Luminous Efficiency 1m | 85.6 lm/W                        |
| (a) Light Beam Angle        | 120 Degree | Luminous Flux 1m       | 1070 lm                          |
| (r1) Bending Radius min.    | 50 mm      | Length                 | 5000 mm                          |
| (h1) Height                 | 5.3 mm     | Rated Input 1m         | 12.5 W                           |
| (h2) Height End Cap         | 5.3 mm     | Rated Input Voltage    | 24 V/DC                          |
| (h3) Height Hose            | 3.7 mm     | CRI (Ra)               | 90                               |
| (b1) Width                  | 5 mm       | Control                | Dimmable via optional controller |
| (b2) Width end cap          | 10 mm      | Type of IP Protection  | Silicone hose                    |
| (b3) Width Hose             | 7.4 mm     | Working Temperature    | -10 to 60 °C                     |
| (l1) Length End Cap         | 10.2 mm    | Channels               | 2                                |
| (l2) Primary Cable Length   | 1 m        |                        |                                  |
| (l3) Secondary Cable Length | 1 m        |                        |                                  |


Article      Colour Temperature      Price

**840349** 3000-6500 K **€ 119.95**

**Power supply units**

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-11W STANDARD IP20

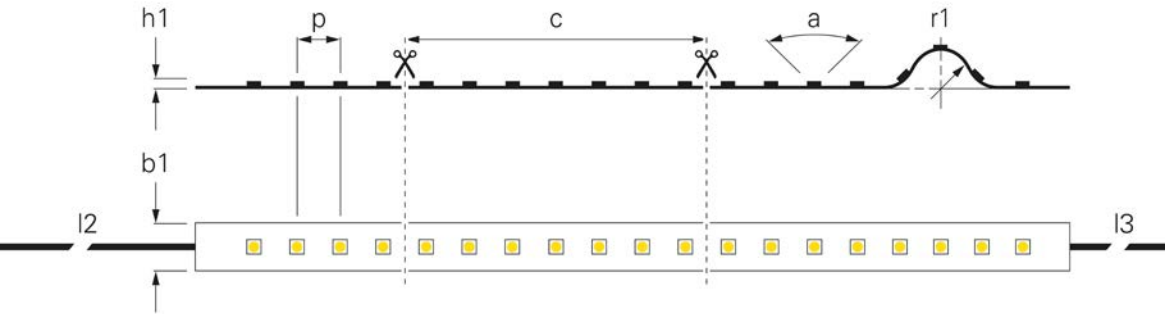

·high-performance adhesive 3M 9448A

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 8.33 mm    | Luminous Flux 1m    | 500 lm                           |
| (c) Segment Length          | 50 mm      | Length              | 5000 mm                          |
| (a) Light Beam Angle        | 110 Degree | Rated Input 1m      | 11 W                             |
| (r1) Bending Radius min.    | 20 mm      | Rated Input Voltage | 24 V/DC                          |
| (h1) Height                 | 2 mm       | CRI (Ra)            | 60                               |
| (b1) Width                  | 5 mm       | Control             | Dimmable via optional controller |
| (l2) Primary Cable Length   | 1 m        | Working Temperature | -15 to 50 °C                     |
| (l3) Secondary Cable Length | 1 m        | Channels            | 3                                |
| Luminous Efficiency 1m      | 45.45 lm/W |                     |                                  |

| Article                                                                                    | Price   |
|--------------------------------------------------------------------------------------------|---------|
| 840276  | € 87.95 |

CV





3 CH

IP20








**Aluminium profiles**

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

## SMD 24V-11W STANDARD IP67

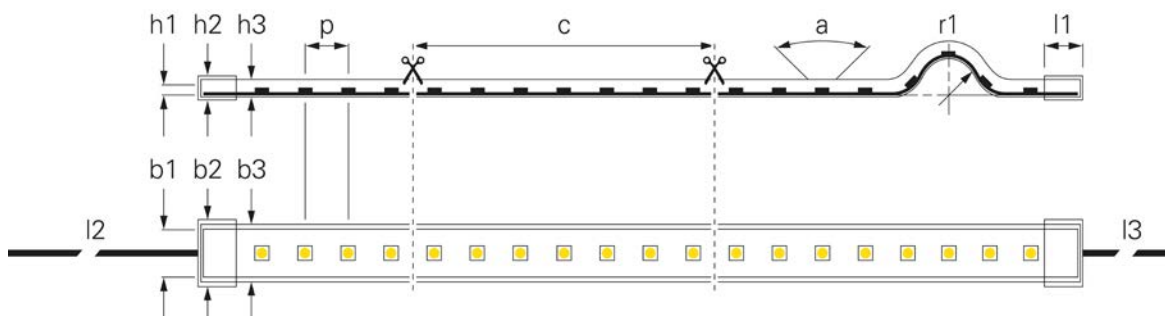


•Including mounting material

•high-performance adhesive 3M 9448A

|                          |            |                             |                                  |
|--------------------------|------------|-----------------------------|----------------------------------|
| (p) LED Distance         | 5.5 mm     | (l2) Primary Cable Length   | 1 m                              |
| (c) Segment Length       | 33.3 mm    | (l3) Secondary Cable Length | 1 m                              |
| (a) Light Beam Angle     | 120 Degree | Length                      | 5000 mm                          |
| (r1) Bending Radius min. | 50 mm      | Rated Input Voltage         | 24 V/DC                          |
| (h1) Height              | 5.5 mm     | CRI (Ra)                    | 90                               |
| (h2) Height End Cap      | 6.5 mm     | Control                     | Dimmable via optional controller |
| (h3) Height Hose         | 5.5 mm     | Type of IP Protection       | Silicone hose                    |
| (b1) Width               | 11.5 mm    | Working Temperature         | -15 to 50 °C                     |
| (b2) Width end cap       | 12.5 mm    | Channels                    | 1                                |
| (b3) Width Hose          | 11.5 mm    |                             |                                  |
| (l1) Length End Cap      | 10 mm      |                             |                                  |


| Article       | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | Rated Input 1m | EEL | Price           |
|---------------|--------------------|------------------------|------------------|----------------|-----|-----------------|
| <b>840186</b> | 2700 K             | 78.26 lm/W             | 900 lm           | 11.5 W         |     | <b>€ 147.95</b> |
| <b>840187</b> | 3000 K             | 84.55 lm/W             | 930 lm           | 11.0 W         |     | <b>€ 147.95</b> |



#### Power supply units

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-13W STANDARD IP20

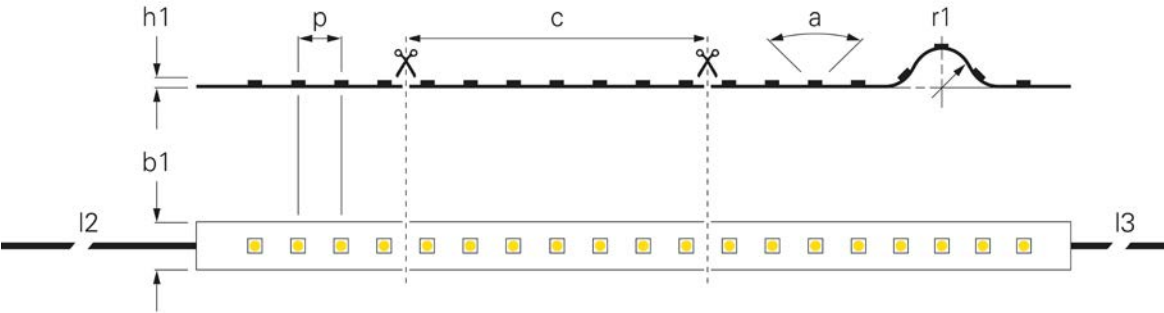

·high-performance adhesive 3M 9448A

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 16.66 mm   | Luminous Flux 1m    | 580 lm                           |
| (c) Segment Length          | 100 mm     | Length              | 5000 mm                          |
| (a) Light Beam Angle        | 120 Degree | Rated Input 1m      | 13 W                             |
| (r1) Bending Radius min.    | 20 mm      | Rated Input Voltage | 24 V/DC                          |
| (h1) Height                 | 3 mm       | Control             | Dimmable via optional controller |
| (b1) Width                  | 10 mm      | Working Temperature | -15 to 50 °C                     |
| (l2) Primary Cable Length   | 1 m        | Channels            | 3                                |
| (l3) Secondary Cable Length | 1 m        |                     |                                  |
| Luminous Efficiency 1m      | 44.62 lm/W |                     |                                  |


Article Price

840254  € 107.95



**Aluminium profiles**  
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

## SMD 24V-13W STANDARD IP67

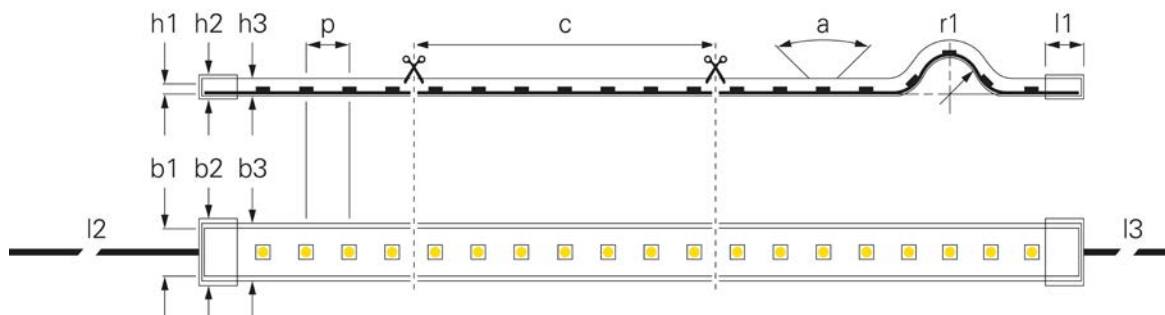


- Including mounting material
- high-performance adhesive 3M 9448A

|                           |            |                             |                                  |
|---------------------------|------------|-----------------------------|----------------------------------|
| (p) LED Distance          | 16.66 mm   | (l3) Secondary Cable Length | 1 m                              |
| (c) Segment Length        | 100 mm     | Luminous Efficiency 1m      | 49.6 lm/W                        |
| (a) Light Beam Angle      | 120 Degree | Luminous Flux 1m            | 670 lm                           |
| (r1) Bending Radius min.  | 50 mm      | Length                      | 5000 mm                          |
| (h1) Height               | 6 mm       | Rated Input 1m              | 13.5 W                           |
| (h2) Height End Cap       | 6.5 mm     | Rated Input Voltage         | 24 V/DC                          |
| (h3) Height Hose          | 5.5 mm     | Control                     | Dimmable via optional controller |
| (b1) Width                | 13 mm      | Type of IP Protection       | Silicone hose                    |
| (b2) Width end cap        | 15.5 mm    | Working Temperature         | -15 to 50 °C                     |
| (b3) Width Hose           | 14.5 mm    | Channels                    | 3                                |
| (l1) Length End Cap       | 10 mm      |                             |                                  |
| (l2) Primary Cable Length | 1 m        |                             |                                  |

Article Price

840256  € 127.95




#### Power supply units

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.



SMD 24V-14W STANDARD IP20

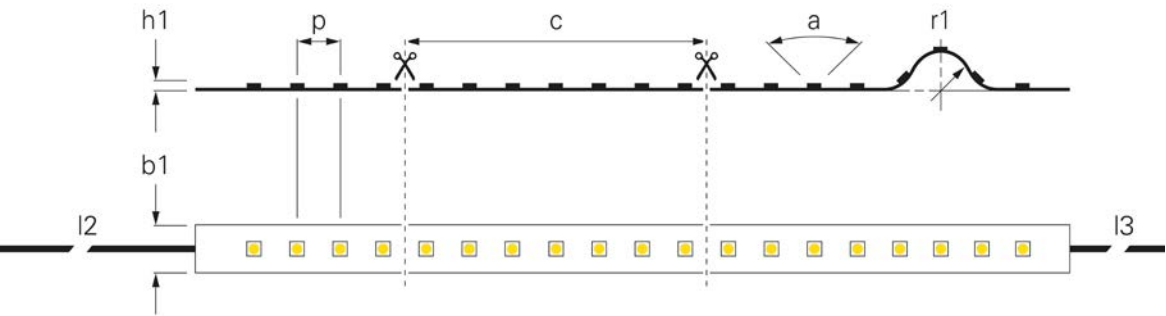

·high-performance adhesive 3M 9448A



|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (a) Light Beam Angle        | 120 Degree | Rated Input Voltage | 24 V/DC                          |
| (r1) Bending Radius min.    | 20 mm      | Control             | Dimmable via optional controller |
| (I2) Primary Cable Length   | 1 m        |                     |                                  |
| (I3) Secondary Cable Length | 1 m        |                     |                                  |

| Article | Colour Temperature | (p) LED Distance | (c) Segment Length | (h1) Height | (b1) Width | EEL | Price    |
|---------|--------------------|------------------|--------------------|-------------|------------|-----|----------|
| 840147  | RGB                | 10.4 mm          | 83.3 mm            | 2 mm        | 10 mm      |     | € 135.95 |
| 840178  | WW 2700 K          | 5.56 mm          | 33.4 mm            | 3 mm        | 8 mm       |     | € 99.95  |
| 840179  | WW 3000 K          | 5.56 mm          | 33.4 mm            | 3 mm        | 8 mm       |     | € 99.95  |
| 930512  | WW 3000 K          | 5.56 mm          | 33.4 mm            | 3 mm        | 8 mm       |     | € 935.95 |
| 840180  | NW 4000 K          | 5.56 mm          | 33.4 mm            | 3 mm        | 8 mm       |     | € 99.95  |



**Aluminium profiles**  
 In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

## SMD 24V-15W STANDARD IP67

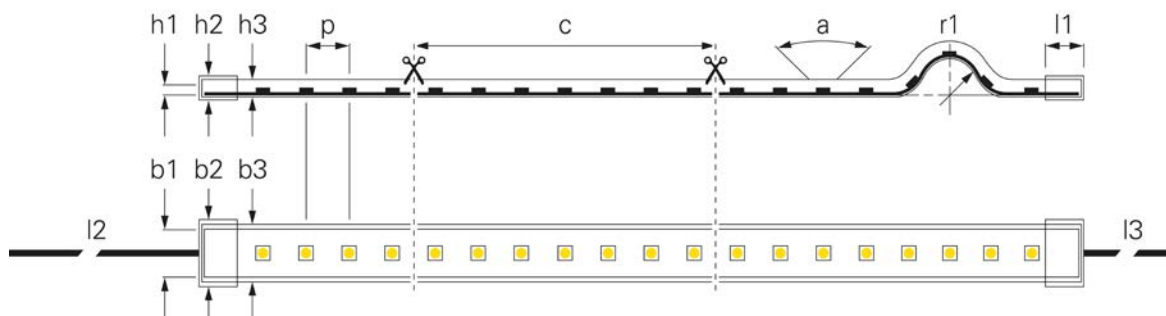


- Including mounting material
- high-performance adhesive 3M 9448A

|                             |            |                        |                                  |
|-----------------------------|------------|------------------------|----------------------------------|
| (p) LED Distance            | 16.7 mm    | Colour Temperature     | 3000 K                           |
| (c) Segment Length          | 100 mm     | Luminous Efficiency 1m | 49 lm/W                          |
| (a) Light Beam Angle        | 120 Degree | Luminous Flux 1m       | 740 lm                           |
| (r1) Bending Radius min.    | 50 mm      | Length                 | 5000 mm                          |
| (h1) Height                 | 5.5 mm     | Rated Input 1m         | 15 W                             |
| (h2) Height End Cap         | 6.5 mm     | Rated Input Voltage    | 24 V/DC                          |
| (h3) Height Hose            | 5.5 mm     | CRI (Ra)               | 80                               |
| (b1) Width                  | 14.5 mm    | Control                | Dimmable via optional controller |
| (b2) Width end cap          | 15.5 mm    | Type of IP Protection  | Silicone hose                    |
| (b3) Width Hose             | 14.5 mm    | Working Temperature    | -15 to 50 °C                     |
| (l1) Length End Cap         | 10 mm      | Channels               | 4                                |
| (l2) Primary Cable Length   | 1 m        |                        |                                  |
| (l3) Secondary Cable Length | 1 m        |                        |                                  |

Article Price


840239  € 139.95



#### Power supply units

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24 V-16 W RGBNW STANDARD IP20

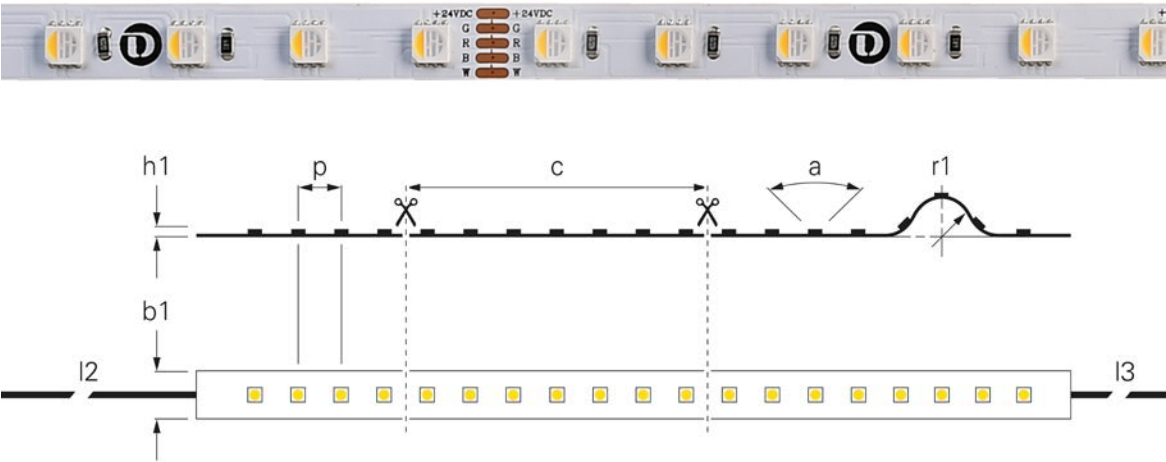


·high-performance adhesive tape 3M 200MP

|                             |            |                        |                                  |
|-----------------------------|------------|------------------------|----------------------------------|
| (p) LED Distance            | 16.66 mm   | Colour Temperature     | 4000 K                           |
| (c) Segment Length          | 166.66 mm  | Luminous Efficiency 1m | 46.97 lm/W                       |
| (a) Light Beam Angle        | 120 Degree | Luminous Flux 1m       | 775 lm                           |
| (r1) Bending Radius min.    | 50 mm      | Length                 | 5000 mm                          |
| (h1) Height                 | 2 mm       | Rated Input 1m         | 16.5 W                           |
| (h2) Height End Cap         | 3 mm       | Rated Input Voltage    | 24 V/DC                          |
| (b1) Width                  | 10 mm      | CRI (Ra)               | 80                               |
| (b2) Width end cap          | 10.5 mm    | Control                | Dimmable via optional controller |
| (l1) Length End Cap         | 15 mm      | Working Temperature    | -10 to 60 °C                     |
| (l2) Primary Cable Length   | 1 m        | Channels               | 4                                |
| (l3) Secondary Cable Length | 1 m        |                        |                                  |


Article Price

840353   € 119.95



**Aluminium profiles**  
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.


SMD 24V-16W RGBWW STANDARD IP20

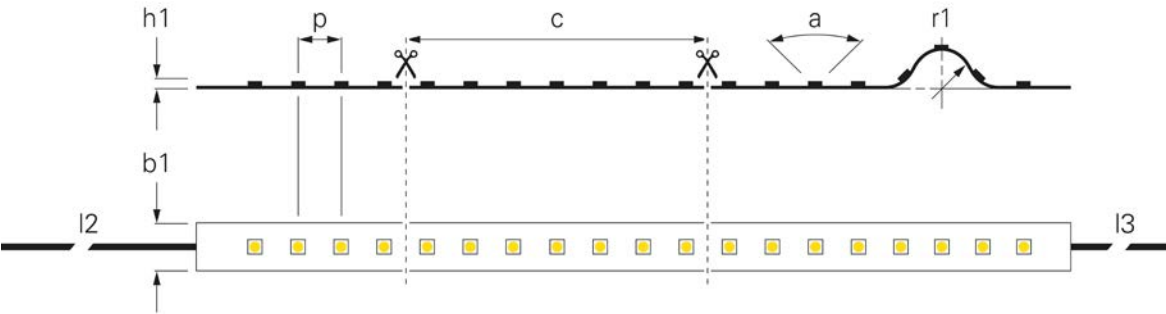

·high-performance adhesive 3M 9448A



|                             |            |                        |                                  |
|-----------------------------|------------|------------------------|----------------------------------|
| (p) LED Distance            | 16.66 mm   | Luminous Efficiency 1m | 51.25 lm/W                       |
| (c) Segment Length          | 100 mm     | Luminous Flux 1m       | 820 lm                           |
| (a) Light Beam Angle        | 120 Degree | Rated Input 1m         | 16 W                             |
| (r1) Bending Radius min.    | 50 mm      | Rated Input Voltage    | 24 V/DC                          |
| (h1) Height                 | 3 mm       | CRI (Ra)               | 80                               |
| (b1) Width                  | 10 mm      | Control                | Dimmable via optional controller |
| (l2) Primary Cable Length   | 1 m        | Working Temperature    | -15 to 50 °C                     |
| (l3) Secondary Cable Length | 1 m        | Channels               | 4                                |
| Colour Temperature          | 3000 K     |                        |                                  |

| Article | (h3) Height Hose | (b3) Width Hose | Length   | Price     |
|---------|------------------|-----------------|----------|-----------|
| 840236  |                  |                 | 5000 mm  | € 115.95  |
| 930517  | 2 mm             | 10 mm           | 50000 mm | € 1039.95 |



**Power supply units**  
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-16W STANDARD IP44

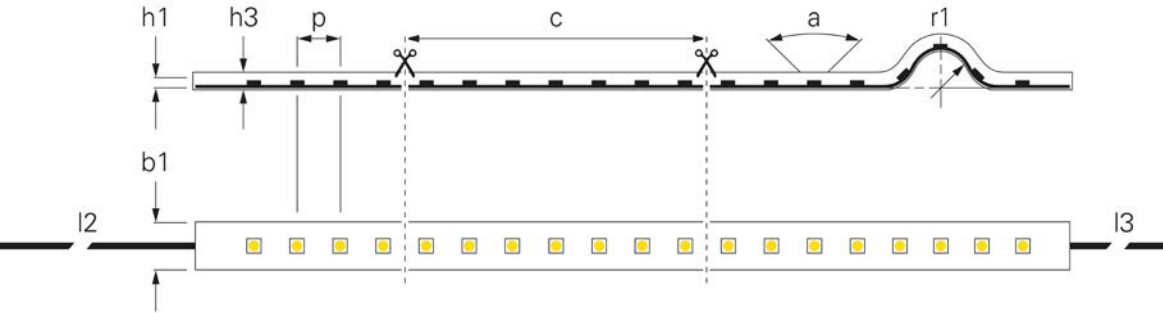

·high-performance adhesive tape 3M 200MP

|                             |            |                        |                                  |
|-----------------------------|------------|------------------------|----------------------------------|
| (p) LED Distance            | 16.66 mm   | Colour Temperature     | 4000 K                           |
| (c) Segment Length          | 166.66 mm  | Luminous Efficiency 1m | 47.81 lm/W                       |
| (a) Light Beam Angle        | 120 Degree | Luminous Flux 1m       | 765 lm                           |
| (r1) Bending Radius min.    | 50 mm      | Length                 | 5000 mm                          |
| (h1) Height                 | 2.6 mm     | Rated Input 1m         | 16 W                             |
| (h2) Height End Cap         | 3 mm       | Rated Input Voltage    | 24 V/DC                          |
| (h3) Height Hose            | 2.6 mm     | CRI (Ra)               | 80                               |
| (b1) Width                  | 10 mm      | Control                | Dimmable via optional controller |
| (b2) Width end cap          | 10.5 mm    | Type of IP Protection  | Silicone                         |
| (b3) Width Hose             | 10 mm      | Working Temperature    | -10 to 60 °C                     |
| (l1) Length End Cap         | 15 mm      | Channels               | 4                                |
| (l2) Primary Cable Length   | 1 m        |                        |                                  |
| (l3) Secondary Cable Length | 1 m        |                        |                                  |

| Article                                                                                                                                                                        | Price    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| 840373   | € 127.95 |

CV





4 CH

IP44







A  
↑  
G




G



**Aluminium profiles**

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

## SMD 24V-17W STANDARD IP20

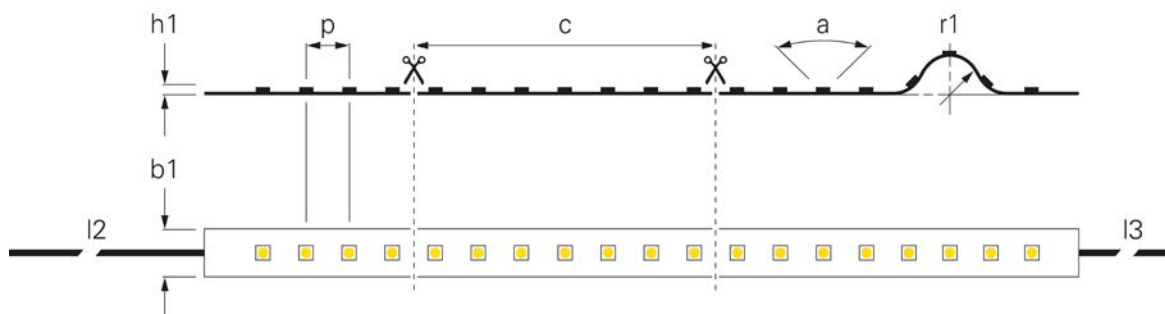


|                             |             |                     |                                  |
|-----------------------------|-------------|---------------------|----------------------------------|
| (p) LED Distance            | 7.11 mm     | Luminous Flux 1m    | 1765 lm                          |
| (c) Segment Length          | 50 mm       | Length              | 5000 mm                          |
| (a) Light Beam Angle        | 120 Degree  | Rated Input 1m      | 17.2 W                           |
| (r1) Bending Radius min.    | 50 mm       | Rated Input Voltage | 24 V/DC                          |
| (h1) Height                 | 2 mm        | CRI (Ra)            | 90                               |
| (b1) Width                  | 10 mm       | Control             | Dimmable via optional controller |
| (l2) Primary Cable Length   | 1 m         | Working Temperature | -10 to 40 °C                     |
| (l3) Secondary Cable Length | 1 m         | Channels            | 2                                |
| Colour Temperature          | 2700-6500 K |                     |                                  |
| Luminous Efficiency 1m      | 103 lm/W    |                     |                                  |

Article Colour Temperature

Price

840378 WW CW 2700-6500 K


€ 159.95

**Power supply units**

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.



SMD 24V-20W POWER IP20

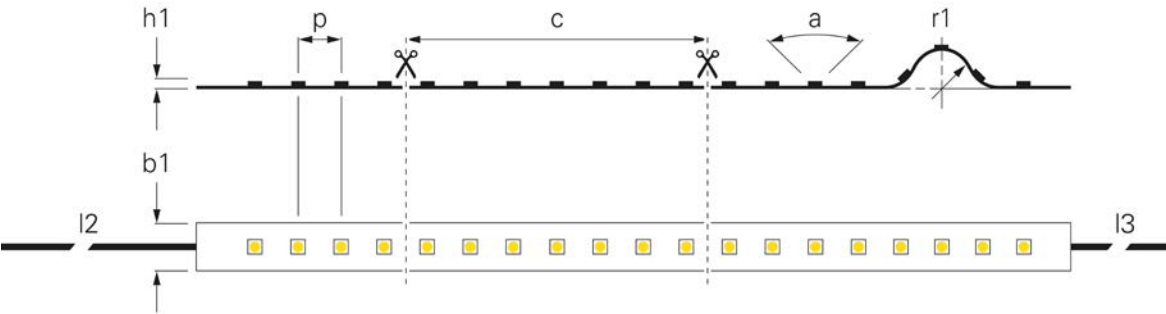

·high-performance adhesive 3M 9448A

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (a) Light Beam Angle        | 120 Degree | Rated Input Voltage | 24 V/DC                          |
| (r1) Bending Radius min.    | 20 mm      | CRI (Ra)            | 90                               |
| (h1) Height                 | 2 mm       | Control             | Dimmable via optional controller |
| (b1) Width                  | 10 mm      | Working Temperature | -15 to 50 °C                     |
| (l2) Primary Cable Length   | 1 m        | Channels            | 1                                |
| (l3) Secondary Cable Length | 1 m        |                     |                                  |
| Length                      | 5000 mm    |                     |                                  |


| Article       | Colour Temperature | (p) LED Distance | (c) Segment Length | Luminous Efficiency 1m | Luminous Flux 1m | EEL | Price    |
|---------------|--------------------|------------------|--------------------|------------------------|------------------|-----|----------|
| <b>840192</b> | WW 2700 K          | 4.16 mm          | 25 mm              | 65.68 lm/W             | 1215 lm          |     | € 131.95 |
| <b>840193</b> | WW 3000 K          | 4.16 mm          | 25 mm              | 84.47 lm/W             | 1605 lm          |     | € 131.95 |
| <b>840194</b> | NW 4000 K          | 4.16 mm          | 25 mm              | 88.5 lm/W              | 1770 lm          |     | € 131.95 |
| <b>840124</b> | CW 6000 K          | 8.33 mm          | 50 mm              | 86 lm/W                | 1720 lm          |     | € 155.95 |



**Aluminium profiles**

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

## SMD 24V-23W POWER IP20

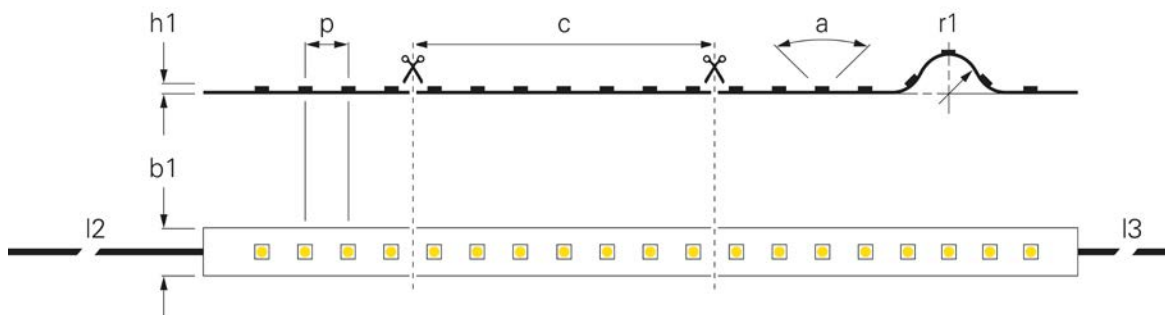

• high-performance adhesive 3M 9448A

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 6.25 mm    | Length              | 5000 mm                          |
| (c) Segment Length          | 50 mm      | Rated Input 1m      | 23 W                             |
| (a) Light Beam Angle        | 110 Degree | Rated Input Voltage | 24 V/DC                          |
| (r1) Bending Radius min.    | 20 mm      | CRI (Ra)            | 90                               |
| (h1) Height                 | 2 mm       | Control             | Dimmable via optional controller |
| (b1) Width                  | 10 mm      | Working Temperature | -15 to 50 °C                     |
| (l2) Primary Cable Length   | 1 m        | Channels            | 1                                |
| (l3) Secondary Cable Length | 1 m        |                     |                                  |


| Article       | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | Price           |
|---------------|--------------------|------------------------|------------------|-----------------|
| <b>840331</b> | 3000 K             | 130.9 lm/W             | 3010 lm          | <b>€ 199.95</b> |
| <b>840332</b> | 4000 K             | 136.1 lm/W             | 3130 lm          | <b>€ 199.95</b> |



#### Power supply units

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-23W POWER IP44

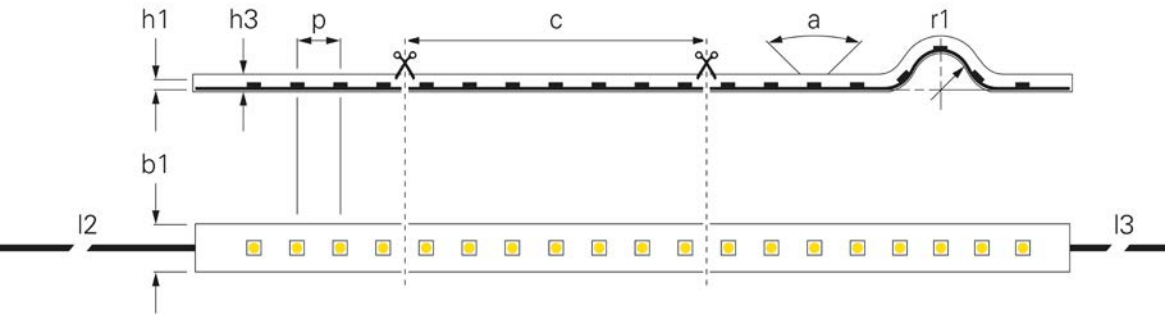

•high-performance adhesive 3M 9448A

|                             |            |                       |                                  |
|-----------------------------|------------|-----------------------|----------------------------------|
| (p) LED Distance            | 6.25 mm    | Rated Input 1m        | 23 W                             |
| (c) Segment Length          | 50 mm      | Rated Input Voltage   | 24 V/DC                          |
| (a) Light Beam Angle        | 110 Degree | CRI (Ra)              | 90                               |
| (r1) Bending Radius min.    | 20 mm      | Control               | Dimmable via optional controller |
| (h1) Height                 | 3 mm       | Type of IP Protection | Silicone                         |
| (b1) Width                  | 10 mm      | Working Temperature   | -15 to 50 °C                     |
| (l2) Primary Cable Length   | 1 m        | Channels              | 1                                |
| (l3) Secondary Cable Length | 1 m        |                       |                                  |
| Length                      | 5000 mm    |                       |                                  |

| Article | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | Price    |
|---------|--------------------|------------------------|------------------|----------|
| 840333  | 3000 K             | 115.2 lm/W             | 2650 lm          | € 207.95 |
| 840334  | 4000 K             | 120.9 lm/W             | 2780 lm          | € 207.95 |

CV

1 CH

IP44

A ↑ G


E



**Aluminium profiles**

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.


## SMD 24 V-22 W RGBW POWER IP20

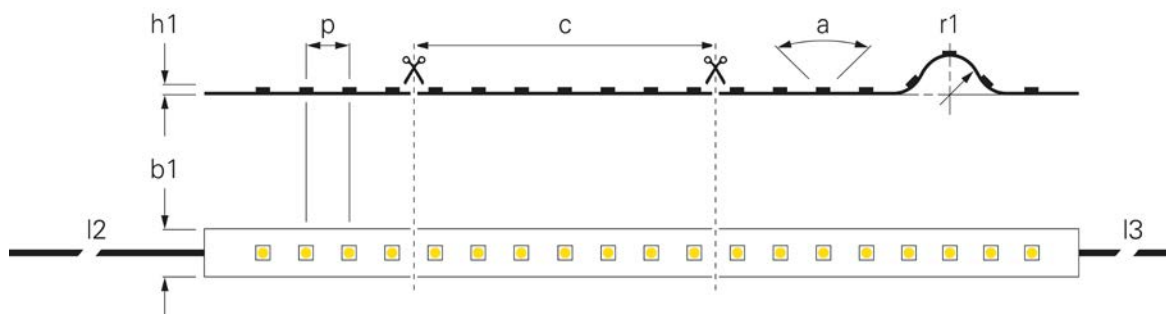

## •high-performance adhesive 3M 9448A

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 10.4 mm    | Length              | 5000 mm                          |
| (c) Segment Length          | 62.5 mm    | Rated Input 1m      | 22 W                             |
| (a) Light Beam Angle        | 110 Degree | Rated Input Voltage | 24 V/DC                          |
| (r1) Bending Radius min.    | 20 mm      | CRI (Ra)            | 60                               |
| (h1) Height                 | 2 mm       | Control             | Dimmable via optional controller |
| (b1) Width                  | 12 mm      | Working Temperature | -15 to 50 °C                     |
| (l2) Primary Cable Length   | 1 m        | Channels            | 4                                |
| (l3) Secondary Cable Length | 1 m        |                     |                                  |


| Article       | Colour Temperature                                                                         | Luminous Efficiency 1m | Luminous Flux 1m | Price           |
|---------------|--------------------------------------------------------------------------------------------|------------------------|------------------|-----------------|
| <b>840308</b> |  3000 K | 43.41 lm/W             | 955 lm           | <b>€ 143.95</b> |
| <b>840309</b> |  4000 K | 44.77 lm/W             | 985 lm           | <b>€ 143.95</b> |

**Power supply units**



You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

## SIDE VIEW

The LED strip is arranged / installed vertically, allowing the Flex-Stripe to be bent to the left and right.  
[Note the minimum bending radius in each case.]

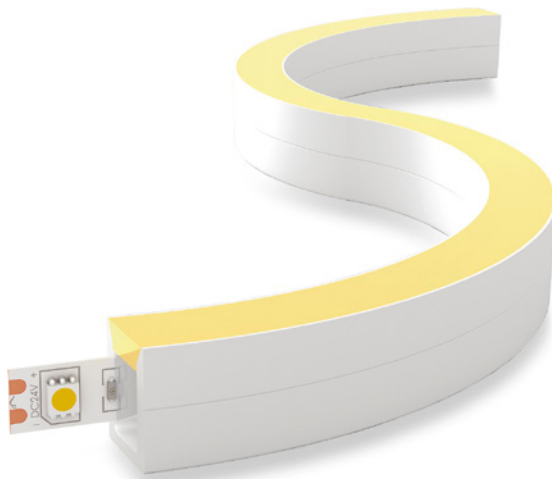

## NEON 24 V-10 W RGBW D FLEX LINE TOP-VIEW IP68

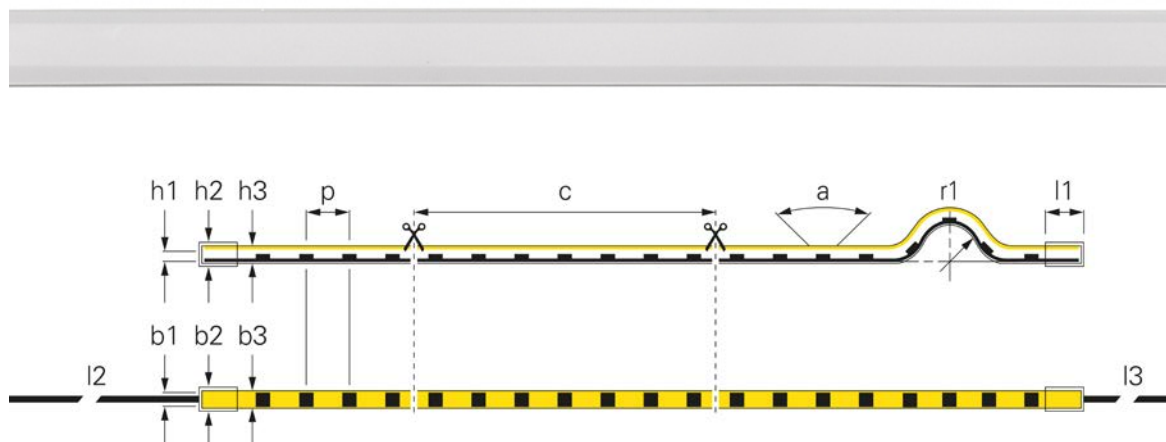


- Spot-free homogeneous illumination
- Very easy installation using adapted profile
- UV and salt water-resistant IP68
- Ultra-flexible and therefore very versatile
- Light-fast polyurethane encapsulation

|                             |            |                        |                                  |
|-----------------------------|------------|------------------------|----------------------------------|
| (p) LED Distance            | 11.9 mm    | Colour Temperature     | 3000 K                           |
| (c) Segment Length          | 71.43 mm   | Luminous Efficiency 1m | 30.48 lm/W                       |
| (a) Light Beam Angle        | 117 Degree | Luminous Flux 1m       | 320 lm                           |
| (r1) Bending Radius min.    | 150 mm     | Length                 | 5000 mm                          |
| (h1) Height                 | 15 mm      | Rated Input 1m         | 10.5 W                           |
| (h2) Height End Cap         | 18 mm      | Rated Input Voltage    | 24 V/DC                          |
| (h3) Height Hose            | 15 mm      | CRI (Ra)               | 80                               |
| (b1) Width                  | 16 mm      | Control                | Dimmable via optional controller |
| (b2) Width end cap          | 18 mm      | Type of IP Protection  | PVC cover                        |
| (b3) Width Hose             | 16 mm      | Working Temperature    | -25 to 45 °C                     |
| (l1) Length End Cap         | 11.5 mm    | Channels               | 4                                |
| (l2) Primary Cable Length   | 3 m        |                        |                                  |
| (l3) Secondary Cable Length | 3 m        |                        |                                  |

Article Price

**840289**  **€ 623.95**



## Accessories

- 930448** Profile for D Flex Line TOP  
**930449** Profile for D Flex Line TOP  
**930533** Assembly kit for D Flex Line 16.0 x 15.0 mm  
**930593** Gel adhesive for bonding the end caps 3 g




**€ 11.95**  
**€ 9.95**  
**€ 8.95**  
**€ 4.95**





### NEON 24V-8W OMNIFLEX MINI IP67

The OMNIFLEX 24 V 8W IP67 LED strip is available in three different light colors [2,700 K, 3,000 K, 4,000 K]. With a length of 5 meters, it enables flexible use in different areas. Uniform illumination is guaranteed thanks to the point-free light distribution. The very small bending radii in all directions allow a great deal of design freedom when creating shapes. Straight lines are also no problem. All variants are possible thanks to the extensive range of accessories. With a primary and secondary feed of 300 cm each, flexible installation is guaranteed. Thanks to its salt water and UV resistance and IP67 protection rating, the OMNIFLEX LED strip is also ideal for outdoor use.

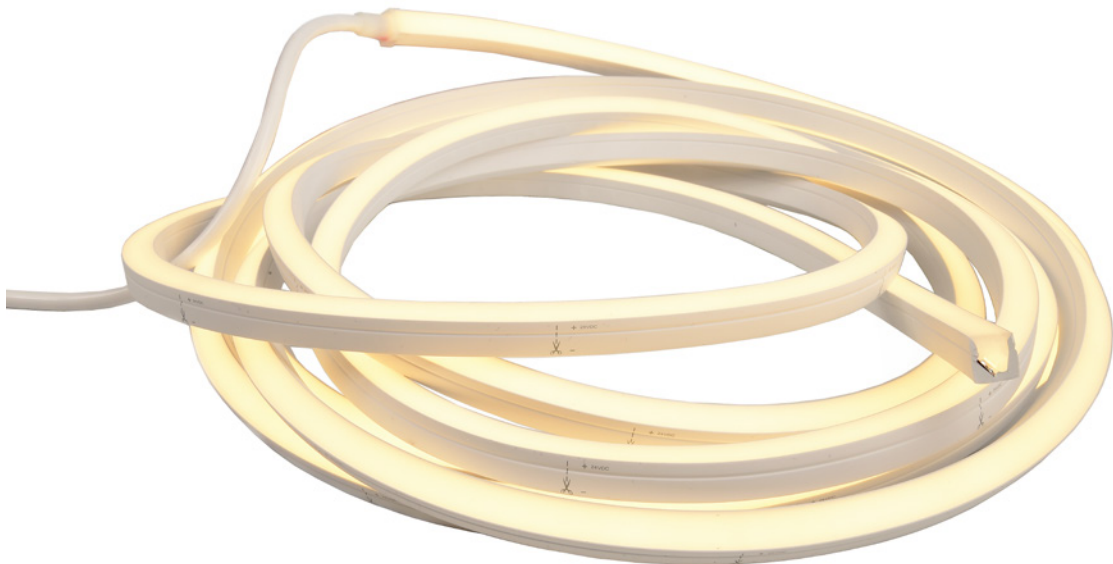

## NEON 24V-8W OMNIFLEX MINI IP67

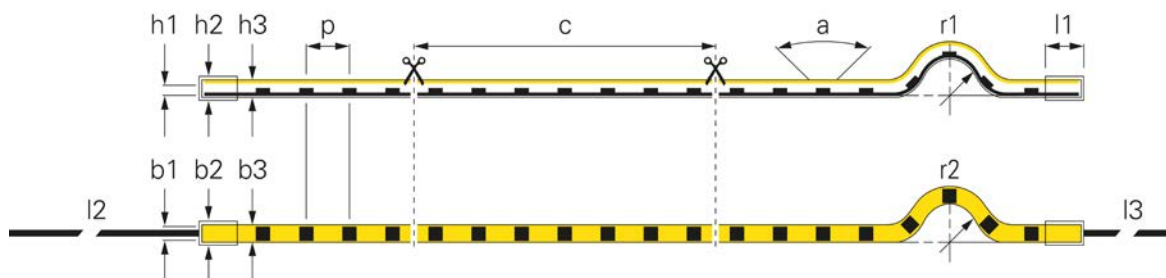

- Spot-free light pattern for homogeneous illumination
- Neon effect
- Small bending radius in all directions provides a great deal of freedom
- Minimum bending radius to the front: 60 mm/to the side: 100 mm
- 300 cm long primary and secondary infeed
- UV- and salt water-resistant
- A comprehensive range of accessories enables you to customise your design
- Including mounting material

|                                  |            |                             |                                  |
|----------------------------------|------------|-----------------------------|----------------------------------|
| (p) LED Distance                 | 6.25 mm    | (l2) Primary Cable Length   | 3 m                              |
| (c) Segment Length               | 100 mm     | (l3) Secondary Cable Length | 3 m                              |
| (a) Light Beam Angle             | 120 Degree | Length                      | 5000 mm                          |
| (r1) Bending Radius min.         | 100 mm     | Rated Input 1m              | 8 W                              |
| (r2) Bending Radius Left / Right | 60 mm      | Rated Input Voltage         | 24 V/DC                          |
| (h1) Height                      | 10 mm      | CRI (Ra)                    | 80                               |
| (h2) Height End Cap              | 10 mm      | Control                     | Dimmable via optional controller |
| (h3) Height Hose                 | 10 mm      | Type of IP Protection       | Silicone hose                    |
| (b1) Width                       | 10 mm      | Working Temperature         | -10 to 55 °C                     |
| (b2) Width end cap               | 10 mm      | Channels                    | 1                                |
| (b3) Width Hose                  | 10 mm      |                             |                                  |
| (l1) Length End Cap              | 10 mm      |                             |                                  |

| Article       | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | EEL | Price           |
|---------------|--------------------|------------------------|------------------|-----|-----------------|
| <b>840417</b> | 2700 K             | 90 lm/W                | 720 lm           |     | <b>€ 239.95</b> |
| <b>840418</b> | 3000 K             | 93 lm/W                | 744 lm           |     | <b>€ 239.95</b> |
| <b>840419</b> | 4000 K             | 100 lm/W               | 800 lm           |     | <b>€ 239.95</b> |



## Accessories

|               |                                                             |  |                |
|---------------|-------------------------------------------------------------|--|----------------|
| <b>930846</b> | Assembly clamps set of 10 pieces for neon Omniflex Mini     |  | <b>€ 3.95</b>  |
| <b>930847</b> | Aluminium profile 1 m for neon Omniflex Mini                |  | <b>€ 7.95</b>  |
| <b>930849</b> | Flexible stainless steel profile 5 m for neon Omniflex Mini |  | <b>€ 55.95</b> |

## 48V LED STRIPES

Our new LED stripes in 48V technology offer users numerous advantages. The key advantage: Compared to 12V and 24V stripes, 48V stripes allow longer running lengths. By comparison, conventional LED stripes with lower output voltage require a new feed after only 2.5 metres [single-sided feed] or 5 metres [feed from both sides], for continuous operation. LED stripes with 48V can be used up to a length of 25 metres [single-sided feed] or feed] or 50 metres [feed on both sides] - perfect for lighting coves, long corridors and simplified integration into existing installations, that only allow a single-sided feed.

### Advantages of 48V LED stripes

- 48V = lower current
- 48V = longer running length
- 48V = thinner wire cross-sections
- 48V = faster installation
- 48V = more versatile applications
- 48V = lower brightness drop

In addition to the advantages mentioned above, our new 48V LED stripes have a very long service life of up to 75,000h for L70B50

and 50,000h for L80B10. Thanks to reel-to-reel production, the 48V LED stripes have no soldered joints. As we have set ourselves the goal to become climate-neutral, the LED stripes are packaged in an environmentally friendly paper-based packaging.

In addition to the new 48V LED stripes, we of course also offer accessories in the form of power supply units and controllers for the relevant control protocols [RF, DALI, KNX etc.] in order to cover all potential future applications for 48V stripes.




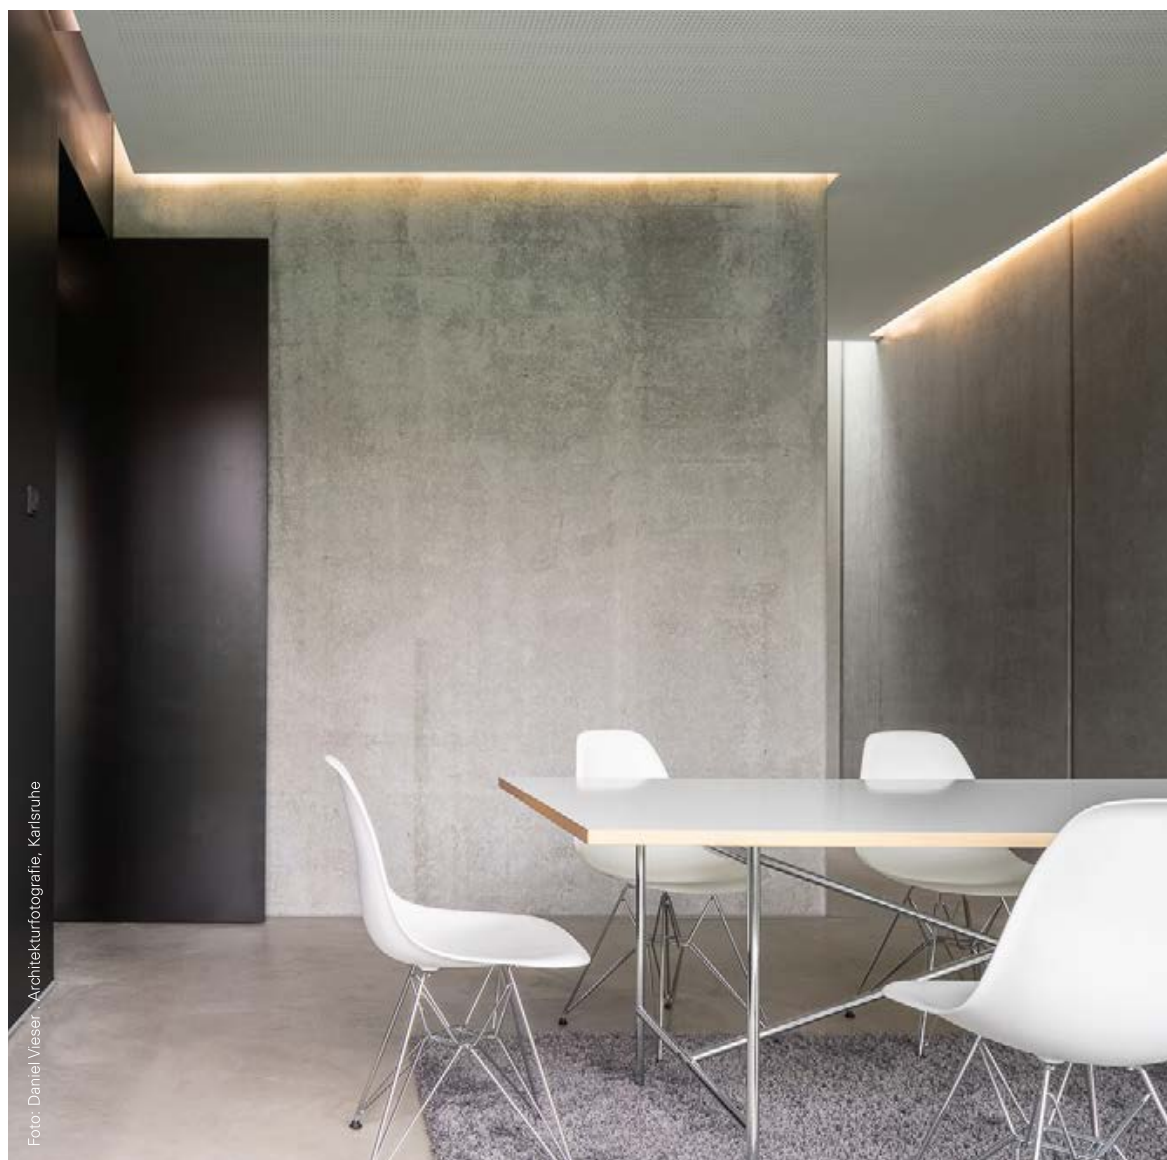


Foto: Daniel Vieser, Architekturfotografie, Karlsruhe


SMD 48V-10W LONG RUN CCT IP20

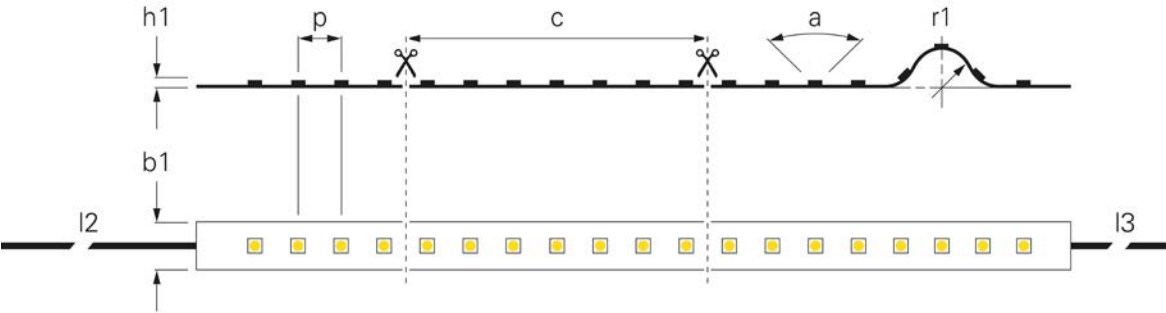


- ideal solution for long distances (up to 50m)
- fewer power supply points required
- smaller cable cross-section required compared to 12/24V
- up to 25m with single-ended power supply
- up to 50 metres with power supply at both ends
- reel-to-reel production process (long LED strips without any breaks)

|                             |             |                        |                                  |
|-----------------------------|-------------|------------------------|----------------------------------|
| (p) LED Distance            | 4.46 mm     | Luminous Efficiency 1m | 120 lm/W                         |
| (c) Segment Length          | 125 mm      | Luminous Flux 1m       | 1200 lm                          |
| (a) Light Beam Angle        | 120 Degree  | Rated Input 1m         | 10 W                             |
| (r1) Bending Radius min.    | 50 mm       | Rated Input Voltage    | 48 V/DC                          |
| (h1) Height                 | 2.5 mm      | CRI (Ra)               | 90                               |
| (b1) Width                  | 10 mm       | Control                | Dimmable via optional controller |
| (I2) Primary Cable Length   | 1 m         | Working Temperature    | -10 to 55 °C                     |
| (I3) Secondary Cable Length | 1 m         | Channels               | 2                                |
| Colour Temperature          | 2700-6500 K |                        |                                  |

| Article |       | Length   | Price     |
|---------|-------|----------|-----------|
| 840438  | WW CW | 5000 mm  | € 155.95  |
| 840434  | WW CW | 15000 mm | € 467.95  |
| 840436  | WW CW | 50000 mm | € 1559.95 |




## SMD 48V-10W LONG RUN CCT IP67

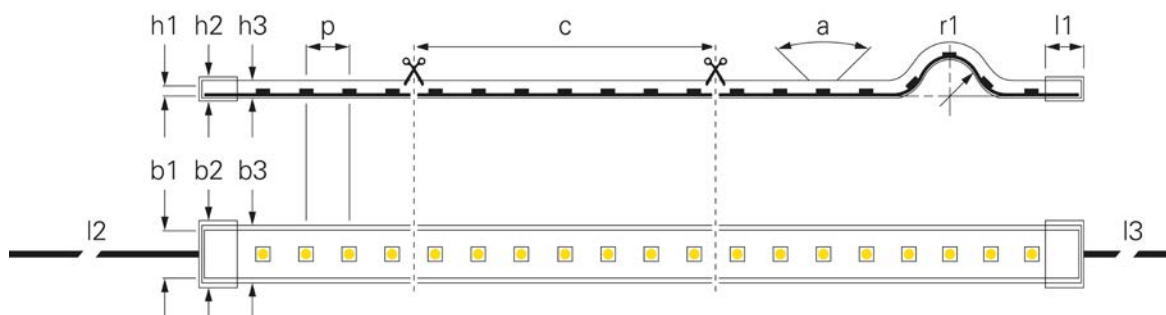

- ideal solution for long distances (up to 50m)
- fewer power supply points required
- smaller cable cross-section required compared to 12/24V
- up to 25m with single-ended power supply
- up to 50 metres with power supply at both ends
- reel-to-reel production process (long LED strips without any breaks)


|                           |            |                             |                                  |
|---------------------------|------------|-----------------------------|----------------------------------|
| (p) LED Distance          | 4.46 mm    | (l3) Secondary Cable Length | 1 m                              |
| (c) Segment Length        | 125 mm     | Colour Temperature          | 2700-6500 K                      |
| (a) Light Beam Angle      | 120 Degree | Luminous Efficiency 1m      | 110 lm/W                         |
| (r1) Bending Radius min.  | 50 mm      | Luminous Flux 1m            | 1100 lm                          |
| (h1) Height               | 2.5 mm     | Rated Input 1m              | 10 W                             |
| (h2) Height End Cap       | 6.5 mm     | Rated Input Voltage         | 48 V/DC                          |
| (h3) Height Hose          | 5 mm       | CRI (Ra)                    | 90                               |
| (b1) Width                | 10 mm      | Control                     | Dimmable via optional controller |
| (b2) Width end cap        | 14.2 mm    | Type of IP Protection       | Silicone hose                    |
| (b3) Width Hose           | 12 mm      | Working Temperature         | -10 to 55 °C                     |
| (l1) Length End Cap       | 10 mm      | Channels                    | 2                                |
| (l2) Primary Cable Length | 1 m        |                             |                                  |

| Article       |       | Length   | Price     |
|---------------|-------|----------|-----------|
| <b>840439</b> | WW CW | 5000 mm  | € 171.95  |
| <b>840435</b> | WW CW | 15000 mm | € 515.95  |
| <b>840437</b> | WW CW | 50000 mm | € 1719.95 |





SMD 48V-10W LONG RUN RGB+CCT IP20

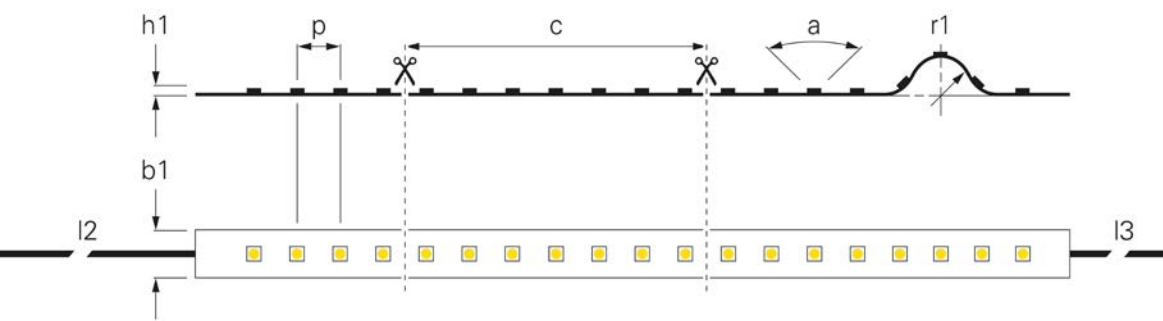


- ideal solution for long distances (up to 50m)
- fewer power supply points required
- smaller cable cross-section required compared to 12/24V
- up to 25m with single-ended power supply
- up to 50 metres with power supply at both ends
- reel-to-reel production process (long LED strips without any breaks)

|                             |             |                        |                                  |
|-----------------------------|-------------|------------------------|----------------------------------|
| (p) LED Distance            | 5.56 mm     | Luminous Efficiency 1m | 80 lm/W                          |
| (c) Segment Length          | 167 mm      | Luminous Flux 1m       | 800 lm                           |
| (a) Light Beam Angle        | 120 Degree  | Rated Input 1m         | 10 W                             |
| (r1) Bending Radius min.    | 50 mm       | Rated Input Voltage    | 48 V/DC                          |
| (h1) Height                 | 2.5 mm      | CRI (Ra)               | 90                               |
| (b1) Width                  | 12 mm       | Control                | Dimmable via optional controller |
| (I2) Primary Cable Length   | 1 m         | Working Temperature    | -10 to 55 °C                     |
| (I3) Secondary Cable Length | 1 m         | Channels               | 5                                |
| Colour Temperature          | 2700-6500 K |                        |                                  |

| Article |           | Length   | Price     |
|---------|-----------|----------|-----------|
| 840452  | RGB WW CW | 5000 mm  | € 199.95  |
| 840448  | RGB WW CW | 15000 mm | € 599.95  |
| 840450  | RGB WW CW | 50000 mm | € 1999.95 |




## SMD 48V-10W LONG RUN RGB+CCT IP67

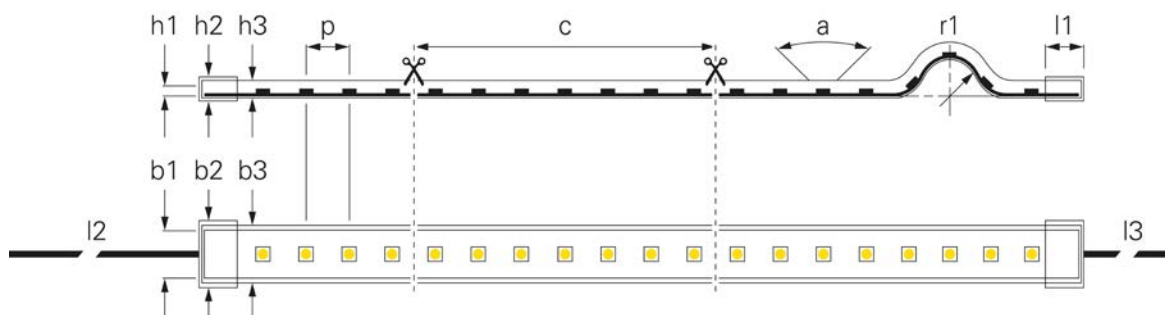


- ideal solution for long distances (up to 50m)
- fewer power supply points required
- smaller cable cross-section required compared to 12/24V
- up to 25m with single-ended power supply
- up to 50 metres with power supply at both ends
- reel-to-reel production process (long LED strips without any breaks)

|                           |            |                             |                                  |
|---------------------------|------------|-----------------------------|----------------------------------|
| (p) LED Distance          | 5.56 mm    | (l3) Secondary Cable Length | 1 m                              |
| (c) Segment Length        | 167 mm     | Colour Temperature          | 2700-6500 K                      |
| (a) Light Beam Angle      | 120 Degree | Luminous Efficiency 1m      | 75 lm/W                          |
| (r1) Bending Radius min.  | 50 mm      | Luminous Flux 1m            | 750 lm                           |
| (h1) Height               | 2.5 mm     | Rated Input 1m              | 10 W                             |
| (h2) Height End Cap       | 6.5 mm     | Rated Input Voltage         | 48 V/DC                          |
| (h3) Height Hose          | 6 mm       | CRI (Ra)                    | 90                               |
| (b1) Width                | 12 mm      | Control                     | Dimmable via optional controller |
| (b2) Width end cap        | 16.5 mm    | Type of IP Protection       | Silicone hose                    |
| (b3) Width Hose           | 14.5 mm    | Working Temperature         | -10 to 55 °C                     |
| (l1) Length End Cap       | 10 mm      | Channels                    | 5                                |
| (l2) Primary Cable Length | 1 m        |                             |                                  |

| Article |           | Length   | Price     |
|---------|-----------|----------|-----------|
| 840453  | RGB WW CW | 5000 mm  | € 219.95  |
| 840449  | RGB WW CW | 15000 mm | € 659.95  |
| 840451  | RGB WW CW | 50000 mm | € 2199.95 |



SMD 48V-10W LONG RUN RGB+W IP20

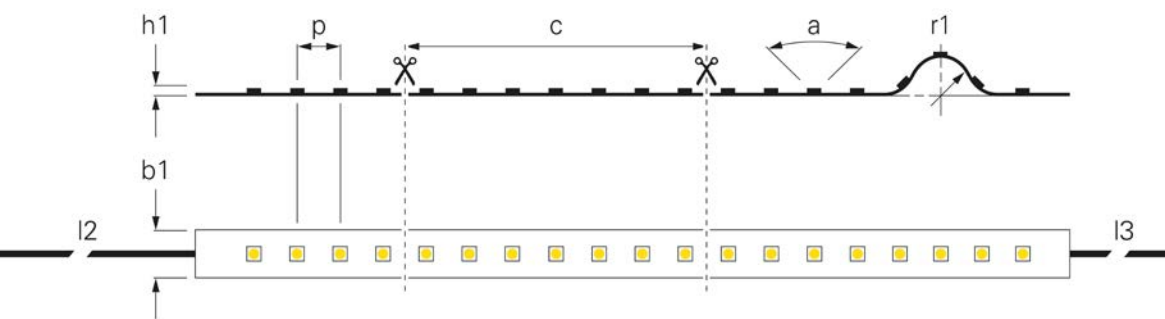


- ideal solution for long distances (up to 50m)
- fewer power supply points required
- smaller cable cross-section required compared to 12/24V
- up to 25m with single-ended power supply
- up to 50 metres with power supply at both ends
- reel-to-reel production process (long LED strips without any breaks)

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 8.9 mm     | Rated Input 1m      | 10 W                             |
| (c) Segment Length          | 125 mm     | Rated Input Voltage | 48 V/DC                          |
| (a) Light Beam Angle        | 120 Degree | CRI (Ra)            | 90                               |
| (r1) Bending Radius min.    | 50 mm      | Control             | Dimmable via optional controller |
| (h1) Height                 | 2.5 mm     | Working Temperature | -10 to 55 °C                     |
| (b1) Width                  | 12 mm      | Channels            | 4                                |
| (l2) Primary Cable Length   | 1 m        |                     |                                  |
| (l3) Secondary Cable Length | 1 m        |                     |                                  |

| Article | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | Length   | EEL | Price     |
|---------|--------------------|------------------------|------------------|----------|-----|-----------|
| 840458  | RGB WW 3000 K      | 66 lm/W                | 660 lm           | 5000 mm  |     | € 199.95  |
| 840454  | RGB WW 3000 K      | 66 lm/W                | 660 lm           | 15000 mm |     | € 599.95  |
| 840456  | RGB WW 3000 K      | 66 lm/W                | 660 lm           | 50000 mm |     | € 1999.95 |
| 840464  | RGB NW 4000 K      | 70 lm/W                | 700 lm           | 5000 mm  |     | € 199.95  |
| 840460  | RGB NW 4000 K      | 70 lm/W                | 700 lm           | 15000 mm |     | € 599.95  |
| 840462  | RGB NW 4000 K      | 70 lm/W                | 700 lm           | 50000 mm |     | € 1999.95 |




## SMD 48V-10W LONG RUN RGB+W IP67

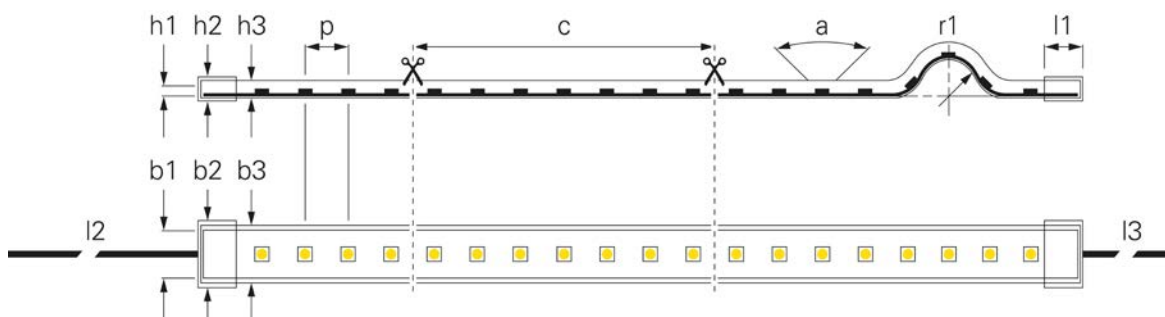


- ideal solution for long distances (up to 50m)
- fewer power supply points required
- smaller cable cross-section required compared to 12/24V
- up to 25m with single-ended power supply
- up to 50 metres with power supply at both ends
- reel-to-reel production process (long LED strips without any breaks)

|                          |            |                             |                                  |
|--------------------------|------------|-----------------------------|----------------------------------|
| (c) Segment Length       | 125 mm     | (l2) Primary Cable Length   | 1 m                              |
| (a) Light Beam Angle     | 120 Degree | (l3) Secondary Cable Length | 1 m                              |
| (r1) Bending Radius min. | 50 mm      | Rated Input 1m              | 10 W                             |
| (h1) Height              | 2.5 mm     | Rated Input Voltage         | 48 V/DC                          |
| (h2) Height End Cap      | 6.5 mm     | CRI (Ra)                    | 90                               |
| (h3) Height Hose         | 6 mm       | Control                     | Dimmable via optional controller |
| (b1) Width               | 14.5 mm    | Type of IP Protection       | Silicone hose                    |
| (b2) Width end cap       | 16.5 mm    | Working Temperature         | -10 to 55 °C                     |
| (b3) Width Hose          | 14.5 mm    | Channels                    | 4                                |
| (l1) Length End Cap      | 10 mm      |                             |                                  |

| Article       | Colour Temperature | (p) LED Distance | Luminous Efficiency 1m | Luminous Flux 1m | Length   | Price     |
|---------------|--------------------|------------------|------------------------|------------------|----------|-----------|
| <b>840459</b> | RGB WW 3000 K      | 8.9 mm           | 60 lm/W                | 600 lm           | 5000 mm  | € 219.95  |
| <b>840455</b> | RGB WW 3000 K      | 8.9 mm           | 60 lm/W                | 600 lm           | 15000 mm | € 659.95  |
| <b>840457</b> | RGB WW 3000 K      | 8.9 mm           | 60 lm/W                | 600 lm           | 50000 mm | € 2199.95 |
| <b>840463</b> | RGB NW 4000 K      | 5.5 mm           | 65 lm/W                | 650 lm           | 50000 mm | € 2199.95 |
| <b>840465</b> | RGB NW 4000 K      | 8.9 mm           | 65 lm/W                | 650 lm           | 5000 mm  | € 219.95  |
| <b>840461</b> | RGB NW 4000 K      | 8.9 mm           | 65 lm/W                | 650 lm           | 15000 mm | € 659.95  |



SMD 48V-10W LONG RUN RGB IP20

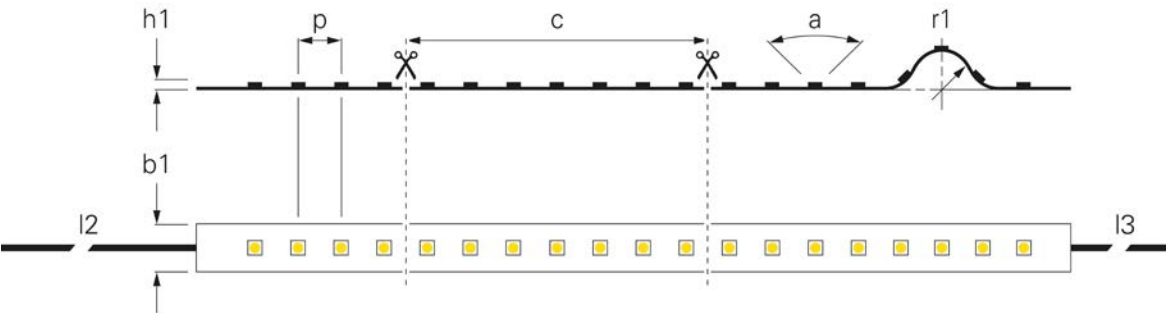


- ideal solution for long distances (up to 50m)
- fewer power supply points required
- smaller cable cross-section required compared to 12/24V
- up to 25m with single-ended power supply
- up to 50 metres with power supply at both ends
- reel-to-reel production process (long LED strips without any breaks)

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 7.14 mm    | Luminous Flux 1m    | 550 lm                           |
| (c) Segment Length          | 100 mm     | Rated Input 1m      | 10 W                             |
| (a) Light Beam Angle        | 120 Degree | Rated Input Voltage | 48 V/DC                          |
| (r1) Bending Radius min.    | 50 mm      | CRI (Ra)            | 65                               |
| (h1) Height                 | 2.5 mm     | Control             | Dimmable via optional controller |
| (b1) Width                  | 10 mm      | Working Temperature | -10 to 55 °C                     |
| (l2) Primary Cable Length   | 1 m        | Channels            | 3                                |
| (l3) Secondary Cable Length | 1 m        |                     |                                  |
| Luminous Efficiency 1m      | 55 lm/W    |                     |                                  |

| Article |  | Length   | Price     |
|---------|--|----------|-----------|
| 840446  |  | 5000 mm  | € 107.95  |
| 840399  |  | 15000 mm | € 319.95  |
| 840407  |  | 50000 mm | € 1063.95 |




## SMD 48V-10W LONG RUN RGB IP67

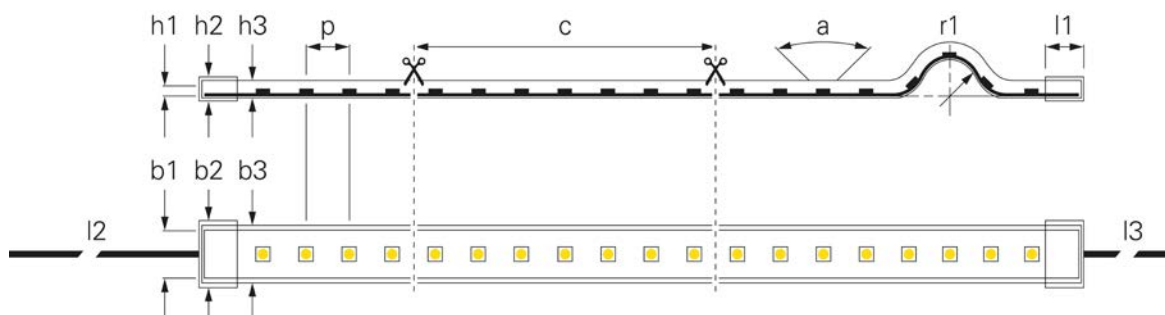

- ideal solution for long distances (up to 50m)
- fewer power supply points required
- smaller cable cross-section required compared to 12/24V
- up to 25m with single-ended power supply
- up to 50 metres with power supply at both ends
- reel-to-reel production process (long LED strips without any breaks)


|                           |            |                             |                                  |
|---------------------------|------------|-----------------------------|----------------------------------|
| (p) LED Distance          | 7.14 mm    | (l3) Secondary Cable Length | 1 m                              |
| (a) Light Beam Angle      | 120 Degree | Luminous Efficiency 1m      | 51 lm/W                          |
| (r1) Bending Radius min.  | 50 mm      | Luminous Flux 1m            | 510 lm                           |
| (h1) Height               | 2.5 mm     | Rated Input 1m              | 10 W                             |
| (h2) Height End Cap       | 6.5 mm     | Rated Input Voltage         | 48 V/DC                          |
| (h3) Height Hose          | 4.5 mm     | CRI (Ra)                    | 65                               |
| (b1) Width                | 10 mm      | Control                     | Dimmable via optional controller |
| (b2) Width end cap        | 14.2 mm    | Working Temperature         | -10 to 55 °C                     |
| (b3) Width Hose           | 12 mm      | Channels                    | 3                                |
| (l1) Length End Cap       | 10 mm      |                             |                                  |
| (l2) Primary Cable Length | 1 m        |                             |                                  |

| Article       | (c) Segment Length | Length   | Type of IP Protection | Price            |
|---------------|--------------------|----------|-----------------------|------------------|
| <b>840400</b> | 100 mm             | 15000 mm | Silicone hose         | <b>€ 367.95</b>  |
| <b>840408</b> | 100 mm             | 50000 mm | Silicone hose         | <b>€ 1223.95</b> |
| <b>840447</b> | 125 mm             | 5000 mm  |                       | <b>€ 119.95</b>  |





SMD 48V-10W LONG RUN SINGLE IP20

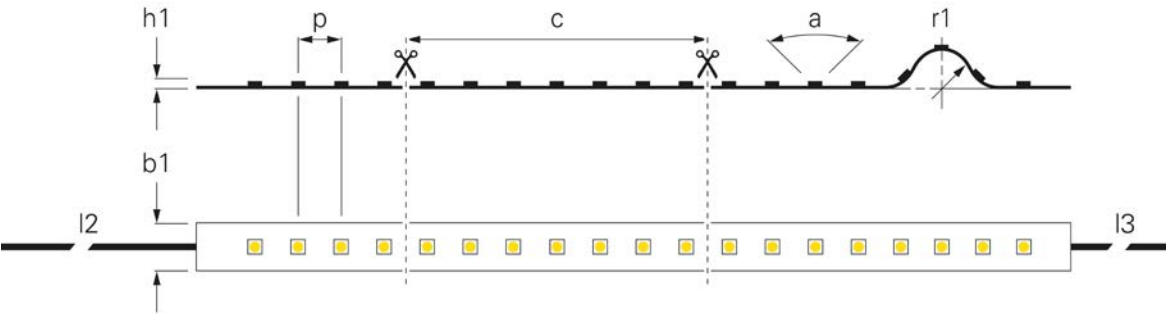


- ideal solution for long distances (up to 50m)
- fewer power supply points required
- smaller cable cross-section required compared to 12/24V
- up to 25m with single-ended power supply
- up to 50 metres with power supply at both ends
- reel-to-reel production process (long LED strips without any breaks)

|                             |            |                     |                                  |
|-----------------------------|------------|---------------------|----------------------------------|
| (p) LED Distance            | 7.14 mm    | Rated Input 1m      | 10 W                             |
| (c) Segment Length          | 100 mm     | Rated Input Voltage | 48 V/DC                          |
| (a) Light Beam Angle        | 120 Degree | CRI (Ra)            | 90                               |
| (r1) Bending Radius min.    | 50 mm      | Control             | Dimmable via optional controller |
| (h1) Height                 | 2.5 mm     | Working Temperature | -10 to 55 °C                     |
| (I2) Primary Cable Length   | 1 m        | Channels            | 1                                |
| (I3) Secondary Cable Length | 1 m        |                     |                                  |

| Article | Colour Temperature | (b1) Width | Luminous Efficiency 1m | Luminous Flux 1m | Length   | EEL | Price    |
|---------|--------------------|------------|------------------------|------------------|----------|-----|----------|
| 840440  | WW 2700 K          | 10 mm      | 121 lm/W               | 1210 lm          | 5000 mm  |     | € 87.95  |
| 840393  | WW 2700 K          | 10 mm      | 121 lm/W               | 1210 lm          | 15000 mm |     | € 271.95 |
| 840401  | WW 2700 K          | 10 mm      | 121 lm/W               | 1210 lm          | 50000 mm |     | € 903.95 |
| 840394  | WW 3000 K          | 10 mm      | 124 lm/W               | 1240 lm          | 15000 mm |     | € 271.95 |
| 840402  | WW 3000 K          | 10 mm      | 124 lm/W               | 1240 lm          | 50000 mm |     | € 903.95 |
| 840442  | WW 3000 K          | 12 mm      | 124 lm/W               | 1240 lm          | 5000 mm  |     | € 87.95  |
| 840395  | NW 4000 K          | 10 mm      | 130 lm/W               | 1300 lm          | 15000 mm |     | € 271.95 |
| 840403  | NW 4000 K          | 10 mm      | 130 lm/W               | 1300 lm          | 50000 mm |     | € 903.95 |
| 840444  | NW 4000 K          | 12 mm      | 130 lm/W               | 1300 lm          | 5000 mm  |     | € 87.95  |




## SMD 48V-10W LONG RUN SINGLE IP67

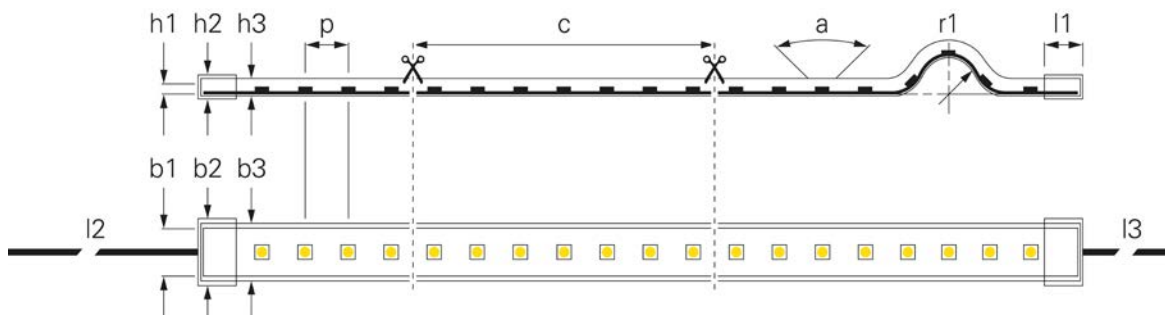


- Ideal for covered lighting and long run lengths
- Up to 50 m in single section with single-/double-sided infeed
- 3M 300 LSE [IP20] strong adhesive tape/3M VHB 5604A with primer pre-treatment [IP67]

|                           |            |                             |                                  |
|---------------------------|------------|-----------------------------|----------------------------------|
| (p) LED Distance          | 7.14 mm    | (l3) Secondary Cable Length | 1 m                              |
| (c) Segment Length        | 100 mm     | Rated Input 1m              | 10 W                             |
| (a) Light Beam Angle      | 120 Degree | Rated Input Voltage         | 48 V/DC                          |
| (r1) Bending Radius min.  | 50 mm      | CRI (Ra)                    | 90                               |
| (h1) Height               | 2.5 mm     | Control                     | Dimmable via optional controller |
| (h2) Height End Cap       | 6.5 mm     | Type of IP Protection       | Silicone hose                    |
| (h3) Height Hose          | 4.5 mm     | Working Temperature         | -10 to 55 °C                     |
| (b1) Width                | 10 mm      | Channels                    | 1                                |
| (l1) Length End Cap       | 10 mm      |                             |                                  |
| (l2) Primary Cable Length | 1 m        |                             |                                  |

| Article       | Colour Temperature | (b2) Width end cap | (b3) Width Hose | Luminous Efficiency 1m | Luminous Flux 1m | Price            |
|---------------|--------------------|--------------------|-----------------|------------------------|------------------|------------------|
| <b>840396</b> | 2700 K             | 14.2 mm            | 12 mm           | 109 lm/W               | 1090 lm          | <b>€ 319.95</b>  |
| <b>840404</b> | 2700 K             | 14.2 mm            | 12 mm           | 109 lm/W               | 1090 lm          | <b>€ 1059.95</b> |
| <b>840441</b> | 2700 K             | 14.5 mm            | 14.5 mm         | 109 lm/W               | 1090 lm          | <b>€ 103.95</b>  |
| <b>840397</b> | 3000 K             | 14.2 mm            | 12 mm           | 112 lm/W               | 1120 lm          | <b>€ 319.95</b>  |
| <b>840405</b> | 3000 K             | 14.2 mm            | 12 mm           | 112 lm/W               | 1120 lm          | <b>€ 1059.95</b> |
| <b>840443</b> | 3000 K             | 14.5 mm            | 14.5 mm         | 112 lm/W               | 1120 lm          | <b>€ 103.95</b>  |
| <b>840398</b> | 4000 K             | 14.2 mm            | 12 mm           | 118 lm/W               | 1180 lm          | <b>€ 319.95</b>  |
| <b>840406</b> | 4000 K             | 14.2 mm            | 12 mm           | 118 lm/W               | 1180 lm          | <b>€ 1059.95</b> |
| <b>840445</b> | 4000 K             | 14.5 mm            | 14.5 mm         | 118 lm/W               | 1180 lm          | <b>€ 103.95</b>  |




SMD 48V-4W LONG RUN SINGLE IP20

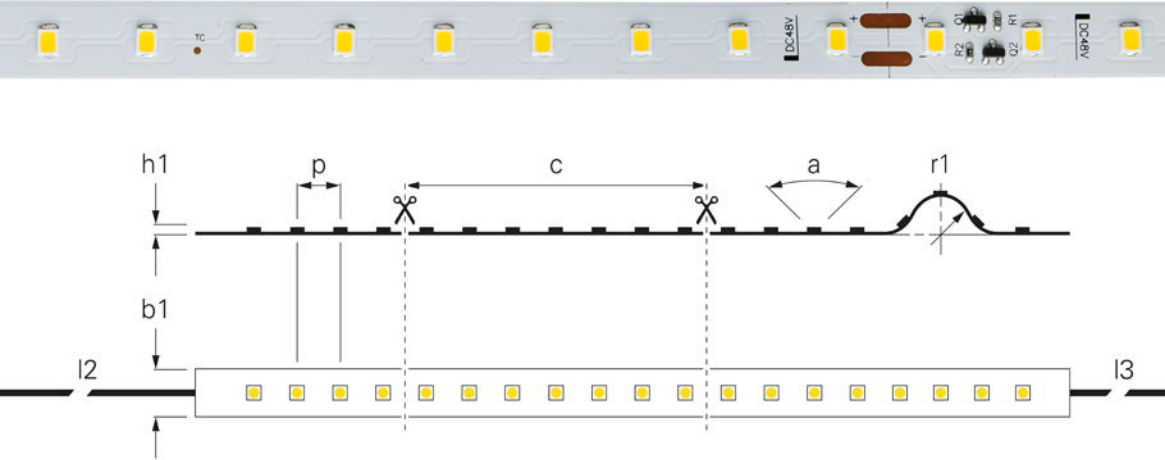

·high-performance adhesive tape 3M 200MP

|                          |            |                             |                                  |
|--------------------------|------------|-----------------------------|----------------------------------|
| (p) LED Distance         | 12.82 mm   | (l2) Primary Cable Length   | 1 m                              |
| (c) Segment Length       | 166.66 mm  | (l3) Secondary Cable Length | 1 m                              |
| (a) Light Beam Angle     | 120 Degree | Rated Input 1m              | 4 W                              |
| (r1) Bending Radius min. | 50 mm      | Rated Input Voltage         | 48 V/DC                          |
| (h1) Height              | 1.3 mm     | CRI (Ra)                    | 80                               |
| (h2) Height End Cap      | 2.8 mm     | Control                     | Dimmable via optional controller |
| (b1) Width               | 10 mm      | Working Temperature         | -15 to 50 °C                     |
| (b2) Width end cap       | 10.5 mm    | Channels                    | 1                                |
| (l1) Length End Cap      | 15 mm      |                             |                                  |


| Article       | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | Length   | Price    |
|---------------|--------------------|------------------------|------------------|----------|----------|
| <b>840318</b> | WW 3000 K          | 121 lm/W               | 485 lm           | 15000 mm | € 231.95 |
| <b>840337</b> | WW 3000 K          | 121 lm/W               | 485 lm           | 50000 mm | € 799.95 |
| <b>840320</b> | NW 4000 K          | 133 lm/W               | 530 lm           | 15000 mm | € 231.95 |
| <b>840339</b> | NW 4000 K          | 133 lm/W               | 530 lm           | 50000 mm | € 799.95 |



**Aluminium profiles**  
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

## SMD 48V-4W LONG RUN SINGLE IP44

IP44

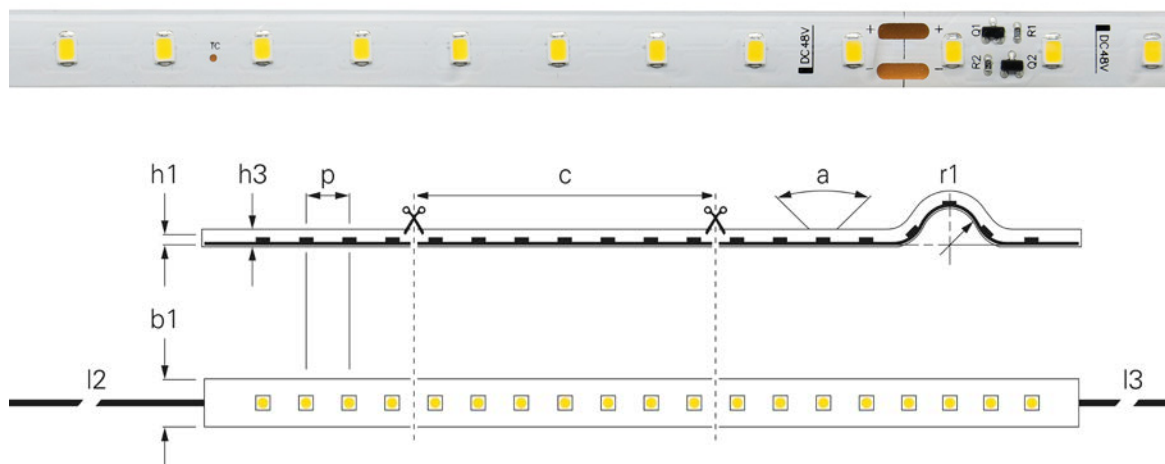

## · high-performance adhesive tape 3M 200MP

|                             |            |                       |                                  |
|-----------------------------|------------|-----------------------|----------------------------------|
| (a) Light Beam Angle        | 120 Degree | CRI (Ra)              | 80                               |
| (r1) Bending Radius min.    | 50 mm      | Control               | Dimmable via optional controller |
| (l2) Primary Cable Length   | 1 m        | Type of IP Protection | Silicone                         |
| (l3) Secondary Cable Length | 1 m        | Channels              | 1                                |
| Rated Input 1m              | 4 W        |                       |                                  |
| Rated Input Voltage         | 48 V/DC    |                       |                                  |

| Article       | Colour Temperature | (p) LED Distance | (c) Segment Length | (h1) Height | (h2) Height End Cap | (h3) Height Hose | Price           |
|---------------|--------------------|------------------|--------------------|-------------|---------------------|------------------|-----------------|
| <b>840317</b> | WW 3000 K          | 8.33 mm          | 50 mm              | 12 mm       | 12 mm               | 12 mm            | <b>€ 279.95</b> |
| <b>840338</b> | WW 3000 K          | 12.82 mm         | 166.66 mm          | 2.6 mm      | 2.8 mm              | 2.6 mm           | <b>€ 899.95</b> |
| <b>840319</b> | NW 4000 K          | 12.82 mm         | 166.66 mm          | 2.6 mm      | 2.8 mm              | 2.6 mm           | <b>€ 279.95</b> |
| <b>840340</b> | NW 4000 K          | 12.82 mm         | 166.66 mm          | 2.6 mm      | 2.8 mm              | 2.6 mm           | <b>€ 899.95</b> |

**Power supply units**

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

## 230V LED STRIPES


This LED stripe is ideally suited if the requirements and focus are on flexible, water-protected and long-lasting lighting routes in indoor and outdoor areas.

Due to the voltage of 230V, no additional power supply unit is required. The delivery is ready for connection with mounted Schuko plug and moulded endcap.

Applications of large distances, such as on buildings or hotel corridors can be operated in one piece up to 50m.



SMD 230V-14W LONG RUN IP65

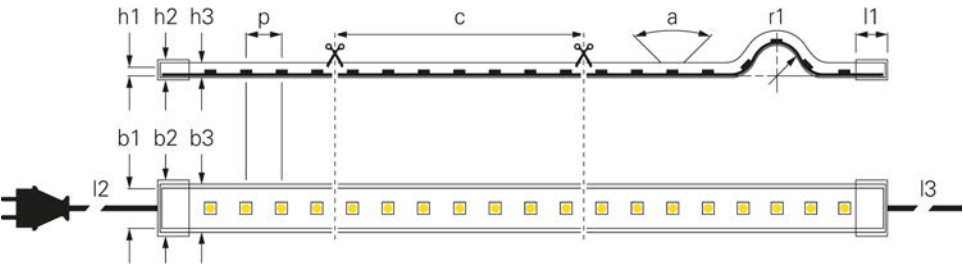

- 230 V direct connection
- Ready to connect using IP44 shaped plug and end cap
- Total length to be operated up to 50 m
- Including mounting material

|                          |            |                           |              |
|--------------------------|------------|---------------------------|--------------|
| (p) LED Distance         | 11.9 mm    | (l1) Length End Cap       | 27 mm        |
| (c) Segment Length       | 166.7 mm   | (l2) Primary Cable Length | 3 m          |
| (a) Light Beam Angle     | 120 Degree | Rated Input 1m            | 14 W         |
| (r1) Bending Radius min. | 150 mm     | Rated Input Voltage       | 220-240 V/AC |
| (h1) Height              | 13.2 mm    | CRI (Ra)                  | 80           |
| (h2) Height End Cap      | 18 mm      | Type of IP Protection     | PVC cover    |
| (h3) Height Hose         | 13.2 mm    | IP Protection Type Plug   | IP 44        |
| (b1) Width               | 17 mm      | Working Temperature       | -10 to 60 °C |
| (b2) Width end cap       | 21.8 mm    | Channels                  | 1            |
| (b3) Width Hose          | 17 mm      |                           |              |

| Article | Colour Temperature | Luminous Efficiency 1m | Luminous Flux 1m | Length   | EEL | Price     |
|---------|--------------------|------------------------|------------------|----------|-----|-----------|
| 840390  | WW 2700 K          | 103 lm/W               | 1442 lm          | 15000 mm |     | € 615.95  |
| 840391  | WW 2700 K          | 103 lm/W               | 1442 lm          | 50000 mm |     | € 1999.95 |
| 840386  | WW 3000 K          | 105 lm/W               | 1470 lm          | 15000 mm |     | € 615.95  |
| 840387  | WW 3000 K          | 105 lm/W               | 1470 lm          | 50000 mm |     | € 1999.95 |
| 840388  | NW 4000 K          | 114 lm/W               | 1596 lm          | 15000 mm |     | € 615.95  |
| 840389  | NW 4000 K          | 114 lm/W               | 1596 lm          | 50000 mm |     | € 1999.95 |



Accessories

- 930689 End cap set of 2 pieces for 230 V LED stripe
- 930690 Supply cable with shaped plug for 230 V LED stripe
- 930691 Flex connector for 230 V LED stripe
- 930692 Mounting clamp set of 10 pieces for 230 V LED stripe
- 930693 Plastic profile 1 m for 230 V LED stripe
- 930809 Plastic profile 2 m for 230 V LED stripe



- € 3.95
- € 27.95
- € 19.95
- € 7.95
- € 11.95
- € 19.95





## ASSEMBLY KIT FOR IP65/IP67 LED STRIPS


- Set comprises:
  - 15 silicone retaining clips
  - 30 stainless steel screws
  - Five end caps
  - Supplied without silicone/adhesive



| Housing       | Silicone                          |               |
|---------------|-----------------------------------|---------------|
| Article       | for Stripes with outer dimensions | Price         |
| <b>840293</b> | 11-12 mm                          | <b>€ 3.95</b> |
| <b>840294</b> | 13-15 mm                          | <b>€ 3.95</b> |
| <b>840295</b> | 17-19 mm                          | <b>€ 3.95</b> |
| <b>840392</b> | 8-10 mm                           | <b>€ 3.95</b> |

## 3M™ DOUBLE-SIDED ADHESIVE TAPE

- For installing aluminium profiles/LED strips on smooth surfaces
- Not suitable for IP65/67 silicone strips



| Length        | 50 m  | Height         | 0.2 mm |
|---------------|-------|----------------|--------|
| Article       | Width | Price          |        |
| <b>930345</b> | 8 mm  | <b>€ 21.95</b> |        |
| <b>930346</b> | 10 mm | <b>€ 23.95</b> |        |
| <b>930347</b> | 12 mm | <b>€ 25.95</b> |        |
| <b>930348</b> | 15 mm | <b>€ 30.95</b> |        |
| <b>930349</b> | 20 mm | <b>€ 38.95</b> |        |
| <b>930350</b> | 25 mm | <b>€ 45.95</b> |        |

## 3M™ DOUBLE-SIDED ADHESIVE TAPE FOR SILICONE SURFACES

- Special adhesive tape for LED strips with silicone tube/full potting
- High solvent resistance
- Excellent temperature resistance
- Strong initial bond
- High adhesive strength on most silicone surfaces and on substrates that are difficult to bond



| Length        | 55 m  | Height          | 0.127 mm |
|---------------|-------|-----------------|----------|
| Width         | 12 mm |                 |          |
| Article       | Width | Price           |          |
| <b>930406</b> | 12 mm | <b>€ 199.95</b> |          |





## POWER SUPPLIES

- 790 Overview power supplies
  - 792 DC - CV
  - 808 DC - CC
  - 818 AC - CV
- 



■  
page 798



■  
page 798



□ ■  
page 799



■  
page 799



■  
page 800




■  
page 800



■  
page 801



■  
page 801



■  
page 802



■  
page 802



■  
page 803



■ ■  
page 804

power supplies





☐ page 805



☐ page 805



☒ page 807



☐ page 807



☐ page 811



☒ page 811



☒ page 812



☒ page 812



☒ page 813



☒ page 813



☒ page 814



☒ page 814



☐ page 815



☒ page 817



☐ page 819



☒ page 819



PLANNING ELECTRICAL INSTALLATIONS EVEN BETTER

You will certainly notice the new technical data when browsing through our power supplies and ask yourself what it is all about? In future, we would like to support you even better in the planning and dimensioning of your installations. The background to this is that more and more power supplies for lighting are already being installed in standard buildings [directly in the luminaires or as an external power supply].

Due to the inrush currents inherent in the design, e.g. after a power failure and the subsequent simultaneous start of all power supplies, an overload of the circuit breakers may occur. In order to be able to take this into account during the planning stage, we provide you with the necessary data for all our power supplies.

WIRE CROSS SECTION

When installing voltage-stable [CV] or current-stable [CC] power supply units and associated components, always ensure that the cable cross-sections are sufficiently dimensioned, especially with regard to the dependence of the cablelength.

The specified cable cross-sections [mm²] were adapted to the commercially available cross-sections. The maximum cable length of 10 m should not be exceeded. »Red values« must be avoided urgently.

| 12 V  | 2 m  | 5 m   | 10 m  | 12 m    |
|-------|------|-------|-------|---------|
| 25 W  | 0,25 | 0,75  | 1,50  | [2,50]  |
| 50 W  | 0,75 | 1,50  | 4,00  | [4,00]  |
| 75 W  | 1,00 | 2,50  | 4,00  | [6,00]  |
| 100 W | 1,50 | 4,00  | 6,00  | [10,00] |
| 125 W | 1,50 | 4,00  | 10,00 | [10,00] |
| 150 W | 2,50 | 6,00  | 10,00 | -       |
| 200 W | 2,50 | 6,00  | -     | -       |
| 300 W | 4,00 | 10,00 | -     | -       |
| 400 W | 6,00 | -     | -     | -       |

| 24 V  | 2 m  | 5 m  | 10 m | 12 m   |
|-------|------|------|------|--------|
| 25 W  | 0,25 | 0,25 | 0,50 | [0,50] |
| 50 W  | 0,25 | 0,50 | 0,75 | [1,00] |
| 75 W  | 0,25 | 0,75 | 1,00 | [1,50] |
| 100 W | 0,50 | 0,75 | 1,50 | [2,50] |
| 125 W | 0,50 | 1,00 | 2,50 | [2,50] |
| 150 W | 0,50 | 1,50 | 2,50 | [4,00] |
| 200 W | 0,75 | 1,50 | 4,00 | [4,00] |
| 300 W | 1,00 | 2,50 | 6,00 | -      |
| 400 W | 1,50 | 4,00 | 6,00 | -      |

| 48 V  | 2 m  | 5 m  | 10 m | 12 m   |
|-------|------|------|------|--------|
| 25 W  | 0,25 | 0,25 | 0,25 | [0,25] |
| 50 W  | 0,25 | 0,25 | 0,25 | [0,25] |
| 75 W  | 0,25 | 0,25 | 0,50 | [0,50] |
| 100 W | 0,25 | 0,25 | 0,50 | [0,50] |
| 125 W | 0,25 | 0,25 | 0,50 | [0,75] |
| 150 W | 0,25 | 0,50 | 0,75 | [0,75] |
| 200 W | 0,25 | 0,50 | 1,00 | [1,00] |
| 300 W | 0,25 | 0,75 | 1,50 | [1,50] |
| 400 W | 0,50 | 1,00 | 2,50 | [2,50] |

HOW MANY POWER SUPPLY UNITS PER CIRCUIT BREAKER?

The maximum number of power supply units that may be connected to the respective circuit breaker is directly dependent on the inrush current. In our quick finders you will find the number for the most common types of circuit breaker [B10A, B16A, C10A, C16A].

CAPACITIVE LOAD OF POWER SUPPLIES

Due to their design, power supplies sometimes represent very different capacitive loads. Especially in combination with motion detectors, twilight switches or switching/dimming actuators, this value [as with the capacitor in nF/pF], which is available for many power supplies and specified in our quick finders, plays an important role with regard to the suitability and durability of all components. Please also refer to the manufacturer's data sheets.

| electr. data |              | dimmable via    |  |         |                     |      |     | usage / design |         | electrical limit values |                 | power supply                                      |             |      |
|--------------|--------------|-----------------|--|---------|---------------------|------|-----|----------------|---------|-------------------------|-----------------|---------------------------------------------------|-------------|------|
| voltage      | power        | leading cut-off |  | 1 - 10V | touch dimmer [push] | DALI | KNX | indoor         | outdoor | design                  | capacitive load | max. quantity<br>per automatic<br>circuit breaker | item number | page |
|              |              |                 |  |         |                     |      |     |                |         |                         |                 |                                                   |             |      |
|              |              |                 |  |         |                     |      |     |                |         |                         |                 |                                                   |             |      |
|              |              |                 |  |         |                     |      |     |                |         |                         |                 |                                                   |             |      |
| 12V          | 20 W         |                 |  |         |                     |      |     | x              |         | flat                    | 938uF           | B10A=17, B16A=27,<br>C10A=36, C16A=58             | 862232      | 869  |
| 12V          | 2,5-<br>25 W | x               |  |         |                     |      |     | x              |         | basic                   | 31.16nF         | B10=35, B16=56,<br>C10=35, C16=56                 | 862240      | 873  |
| 12V          | 40 W         |                 |  |         |                     |      |     | x              |         | basic                   | 251.7nF         | B10A=11, B16A=18,<br>C10A=24, C16A=39             | 862162      | 870  |

DO YOU KNOW OUR LONG-FLAT POWER SUPPLIES?

The popular Long-Flat power supply series for installation in ceiling coves, shadow gaps or all other installation situations with limited space is now available in on/off and trailing edge dimmable versions in 12V, 24V and 48V in a wide range of versions from 45-240W.

All Long-Flat power supplies can be found on page 799.



| electr. data |          | dimmable via    |         |                     |      |     |         | usage / design |         |           | electrical limit values |                                             | power supply  |      |
|--------------|----------|-----------------|---------|---------------------|------|-----|---------|----------------|---------|-----------|-------------------------|---------------------------------------------|---------------|------|
| voltage      | power    | leading cut-off | 1 - 10V | touch dimmer (push) | DALI | KNX | Casambi | indoor         | outdoor | design    | capacitive load         | max. quantity per automatic circuit breaker | item number   | page |
| 12V          | 4 W      |                 |         |                     |      |     |         | x              | x       | mini      |                         | B10A=17, B16A=28, C10A=37, C16A=59          | <b>872127</b> | 798  |
| 12V          | 6 W      |                 |         |                     |      |     |         | x              |         | flat      | 38.83nF                 | B10A=17, B16A=28, C10A=37, C16A=59          | <b>872629</b> | 799  |
| 12V          | 12 W     |                 |         |                     |      |     |         | x              | x       | octo      | 101uF                   | B10A=17, B16A=27, C10A=36, C16A=58          | <b>862229</b> | 798  |
| 12V          | 12 W     |                 |         |                     |      |     |         | x              |         | flat      |                         | B10A=17, B16A=27, C10A=36, C16A=58          | <b>862231</b> | 799  |
| 12V          | 20 W     |                 |         |                     |      |     |         | x              |         | flat      | 938uF                   | B10A=17, B16A=27, C10A=36, C16A=58          | <b>862232</b> | 799  |
| 12V          | 9,6-25W  | x               |         |                     |      |     |         | x              |         | basic     | 31.16nF                 | B10=35, B16=56, C10=35, C16=56              | <b>862240</b> | 803  |
| 12V          | 40 W     |                 |         |                     |      |     |         | x              |         | basic     | 251.7nF                 | B10A=11, B16A=18, C10A=24, C16A=39          | <b>862162</b> | 800  |
| 12V          | 40 W     |                 |         |                     |      |     |         | x              | x       | IP        | 621.5nF                 | B10A=5, B16A=9, C10A=12, C16A=19            | <b>872082</b> | 800  |
| 12V          | 40 W     |                 | x       | x                   | x    |     |         | x              |         | basic     |                         | B10A=18, B16A=28, C10A=36, C16A=56          | <b>862253</b> | 805  |
| 12V          | 45 W     |                 |         |                     |      |     |         | x              |         | long-flat | 462.1nF                 | B10A=5, B16A=9, C10A=12, C16A=19            | <b>862123</b> | 799  |
| 12V          | 50 W     |                 |         |                     |      |     |         | x              |         | flat      | 485.5nF                 | B10A=11, B16A=18, C10A=24, C16A=39          | <b>862121</b> | 799  |
| 12V          | 12-50 W  | x               |         |                     |      |     |         | x              |         | basic     | 1924uF                  | B10A=17, B16A=28, C10A=17, C16A=28          | <b>862220</b> | 803  |
| 12V          | 60 W     |                 |         |                     |      |     |         | x              |         | long-flat | 462.1nF                 | B10A=5, B16A=9, C10A=12, C16A=19            | <b>862093</b> | 799  |
| 12V          | 60 W     |                 |         |                     |      | x   |         | x              | x       | IP        |                         | B10A=6, B16A=9, C10A=10, C16A=16            | <b>872109</b> | 807  |
| 12V          | 75 W     |                 |         |                     |      |     |         | x              |         | basic     | 870nF                   | B10A=11, B16A=18, C10A=24, C16A=39          | <b>862127</b> | 800  |
| 12V          | 75 W     |                 |         |                     |      |     |         | x              | x       | IP        | 621.5nF                 | B10A=5, B16A=8, C10A=10, C16A=16            | <b>872084</b> | 800  |
| 12V          | 75 W     |                 | x       | x                   | x    |     |         | x              |         | basic     |                         | B10A=10, B16A=16, C10A=20, C16A=32          | <b>862254</b> | 805  |
| 12V          | 100 W    |                 |         |                     |      |     |         | x              |         | basic     | 842.2nF                 | B10A=3, B16A=5, C10A=7, C16A=11             | <b>862165</b> | 800  |
| 12V          | 100 W    |                 |         |                     |      |     |         | x              | x       | IP        | 621.5nF                 | B10A=3, B16A=5, C10A=7, C16A=11             | <b>872093</b> | 800  |
| 12V          | 100 W    |                 |         |                     |      |     |         | x              |         | long-flat | 462.1nF                 | B10A=3, B16A=5, C10A=7, C16A=11             | <b>862125</b> | 799  |
| 12V          | 33-100 W | x               |         |                     |      |     |         | x              | x       | IP        | 93,14nF                 | B10=7, B16=15, C10=7, C16=15                | <b>872135</b> | 804  |
| 12V          | 34-100 W | x               |         |                     |      |     |         | x              |         | basic     | 146,34nF                | B10=7, B16=15, C10=7, C16=15                | <b>862241</b> | 803  |
| 12V          | 120 W    |                 |         |                     |      | x   |         | x              |         | IP        |                         | B10A=2, B16A=4, C10A=4, C16A=6              | <b>872110</b> | 807  |
| 12V          | 150 W    |                 |         |                     |      |     |         | x              |         | long-flat | 462.1nF                 | B10A=3, B16A=5, C10A=6, C16A=10             | <b>862172</b> | 799  |
| 12V          | 150 W    |                 |         |                     |      |     |         | x              |         | basic     | 591.2nF                 | B10A=2, B16A=4, C10A=6, C16A=9              | <b>862167</b> | 799  |
| 12V          | 150 W    |                 |         |                     |      |     |         | x              | x       | IP        | 621.5nF                 | B10A=2, B16A=4, C10A=6, C16A=9              | <b>872086</b> | 800  |

| electr. data |          | dimmable via    |         |                     |      |     |         | usage / design |         |           | electrical limit values |                                             | power supply  |      |
|--------------|----------|-----------------|---------|---------------------|------|-----|---------|----------------|---------|-----------|-------------------------|---------------------------------------------|---------------|------|
| voltage      | power    | leading cut-off | 1 - 10V | touch dimmer (push) | DALI | KNX | Casambi | indoor         | outdoor | design    | capacitive load         | max. quantity per automatic circuit breaker | item number   | page |
| 12V          | 66-200 W | x               |         |                     |      |     |         | x              | x       | IP        | 148,64nF                | B10=3, B16=7, C10=3, C16=7                  | <b>872137</b> | 804  |
| 12V          | 200 W    |                 |         |                     |      |     |         | x              | x       | IP        | 621.5nF                 | B10A=2, B16A=3, C10A=4, C16A=7              | <b>872088</b> | 800  |
| 12V          | 200 W    |                 |         |                     |      | x   |         | x              |         | IP        |                         | B10A=2, B16A=4, C10A=4, C16A=6              | <b>872111</b> | 807  |
| 24V          | 4 W      |                 |         |                     |      |     |         | x              | x       | mini      |                         | B10A=59, B16A=94, C10A=123, C16A=197        | <b>872128</b> | 798  |
| 24V          | 6 W      |                 |         |                     |      |     |         | x              |         | flat      | 43.5nF                  | B10A=17, B16A=28, C10A=37, C16A=59          | <b>872630</b> | 799  |
| 24V          | 12 W     |                 |         |                     |      |     |         | x              | x       | octo      | 620uF                   | B10A=17, B16A=27, C10A=36, C16A=58          | <b>862230</b> | 798  |
| 24V          | 12 W     |                 |         |                     |      |     |         | x              |         | flat      | 311uF                   | B10A=17, B16A=27, C10A=36, C16A=58          | <b>862233</b> | 799  |
| 24V          | 20 W     |                 |         |                     |      |     |         | x              |         | flat      | 446uF                   | B10A=17, B16A=27, C10A=36, C16A=58          | <b>862234</b> | 799  |
| 24V          | 9,6-25W  | x               |         |                     |      |     |         | x              |         | basic     | 9520uF                  | B10=35, B16=56, C10=35, C16=56              | <b>862221</b> | 803  |
| 24V          | 30W      | x               |         |                     |      |     |         | x              |         | long-flat |                         | B16A=25, C16A=40                            | <b>862277</b> | 803  |
| 24V          | 12-30W   |                 |         | x                   | x    |     |         | x              |         | long-flat |                         | B10A=27, B16A=44, C10A=44, C16A=70          | <b>872146</b> | 807  |
| 24V          | 40 W     |                 |         |                     |      |     |         | x              |         | basic     | 762nF                   | B10A=11, B16A=18, C10A=24, C16A=39          | <b>862163</b> | 800  |
| 24V          | 40 W     |                 |         |                     |      |     |         | x              | x       | IP        | 626.3nF                 | B10A=5, B16A=9, C10A=12, C16A=19            | <b>872083</b> | 800  |
| 24V          | 40 W     |                 | x       | x                   | x    |     |         | x              |         | basic     |                         | B10A=18, B16A=28, C10A=36, C16A=56          | <b>862255</b> | 805  |
| 24V          | 45 W     |                 |         |                     |      |     |         | x              |         | long-flat | 451.2nF                 | B10A=5, B16A=9, C10A=12, C16A=19            | <b>862124</b> | 799  |
| 24V          | 12-50 W  | x               |         |                     |      |     |         | x              |         | basic     | 10520uF                 | B10A=17, B16A=28, C10A=17, C16A=28          | <b>862222</b> | 803  |
| 24V          | 50 W     |                 |         |                     |      |     |         | x              |         | flat      | 604.5nF                 | B10A=11, B16A=18, C10A=24, C16A=39          | <b>862122</b> | 799  |
| 24V          | 60 W     |                 |         |                     |      |     |         | x              |         | long-flat | 451.2nF                 | B10A=5, B16A=9, C10A=12, C16A=19            | <b>862094</b> | 799  |
| 24V          | 60 W     |                 |         |                     |      | x   |         | x              |         | IP        |                         | B10A=6, B16A=9, C10A=10, C16A=16            | <b>872112</b> | 807  |
| 24V          | 12-60 W  | x               |         |                     |      |     |         | x              | x       | *         |                         |                                             | <b>872045</b> | 802  |
| 24V          | 60W      | x               |         |                     |      |     |         | x              |         | long-flat |                         | B16A= 25, B16A=40                           | <b>862278</b> | 803  |
| 24V          | 26-60W   |                 |         | x                   | x    |     |         | x              |         | long-flat |                         | B10A=23, B16A=37, C10A=37, C16A=59          | <b>872147</b> | 807  |
| 24V          | 75 W     |                 |         |                     |      |     |         | x              |         | basic     | 760nF                   | B10A=11, B16A=18, C10A=24, C16A=39          | <b>862164</b> | 800  |
| 24V          | 75 W     |                 |         |                     |      |     |         | x              | x       | IP        | 626.3nF                 | B10A=5, B16A=8, C10A=10, C16A=16            | <b>872085</b> | 800  |
| 24V          | 75 W     |                 | x       | x                   | x    |     |         | x              |         | basic     |                         | B10A=10, B16A=16, C10A=20, C16A=32          | <b>862256</b> | 805  |
| 24V          | 25-75W   | x               |         |                     |      |     |         | x              |         | long-flat |                         | B10A=2, B16A=4 C10A=5, C16A=9               | <b>862282</b> | 802  |

| electr. data |          | dimmable via    |         |                     |      |     |         | usage / design |         |           | electrical limit values |                                             | power supply  |      |
|--------------|----------|-----------------|---------|---------------------|------|-----|---------|----------------|---------|-----------|-------------------------|---------------------------------------------|---------------|------|
| voltage      | power    | leading cut-off | 1 - 10V | touch dimmer (push) | DALI | KNX | Casambi | indoor         | outdoor | design    | capacitive load         | max. quantity per automatic circuit breaker | item number   | page |
| 24V          | 90 W     |                 |         |                     |      |     |         | x              | x       | IP        |                         | B10A=2, B16A=3, C10A=3, C16A=6              | <b>872103</b> |      |
| 24V          | 100 W    |                 |         |                     |      |     |         | x              |         | basic     | 724.2nF                 | B10A=3, B16A=5, C10A=7, C16A=11             | <b>862166</b> | 800  |
| 24V          | 33-100 W | x               |         |                     |      |     |         | x              |         | IP        | 94, 13nF                | B10=7, B16=15, C10=7, C16=15                | <b>872136</b> | 804  |
| 24V          | 34-100 W | x               |         |                     |      |     |         | x              |         | basic     | 140.74nF                | B10=7, B16=15, C10=7, C16=15                | <b>862242</b> | 803  |
| 24V          | 100 W    |                 |         |                     |      |     |         | x              |         | long-flat | 451.2nF                 | B10A=3, B16A=5, C10A=7, C16A=11             | <b>862126</b> | 799  |
| 24V          | 100 W    |                 |         |                     |      |     |         | x              | x       | IP        | 626.3nF                 | B10A=3, B16A=5, C10A=7, C16A=11             | <b>872094</b> | 800  |
| 24V          | 120 W    |                 |         |                     |      | x   |         | x              | x       | IP        |                         | B10A=2, B16A=4, C10A=4, C16A=6              | <b>872113</b> | 807  |
| 24V          | 150 W    |                 |         |                     |      |     |         | x              |         | basic     | 591.2nF                 | B10A=2, B16A=4, C10A=6, C16A=9              | <b>862168</b> | 800  |
| 24V          | 150 W    |                 |         |                     |      |     |         | x              |         | long-flat | 451.2nF                 | B10A=3, B16A=5, C10A=6, C16A=10             | <b>862173</b> | 799  |
| 24V          | 150 W    |                 |         |                     |      |     |         | x              | x       | IP        | 626.3nF                 | B10A=2, B16A=4, C10A=6, C16A=9              | <b>872087</b> | 800  |
| 24V          | 150 W    |                 |         |                     |      |     | 1K      | x              |         | basic     |                         | B10A=5, B16A=9, C10A=9, C16A=15             | <b>862299</b> | 807  |
| 24V          | 150 W    |                 |         |                     |      |     | 2K      | x              |         | basic     |                         | B10A=5, B16A=9, C10A=9, C16A=15             | <b>862300</b> | 807  |
| 24V          | 150 W    |                 |         |                     |      |     | 3/4K    | x              |         | basic     |                         | B10A=5, B16A=9, C10A=9, C16A=15             | <b>862301</b> | 807  |
| 24V          | 30-150 W | x               |         |                     |      |     |         | x              | x       | *         |                         |                                             | <b>872046</b> | 802  |
| 24V          | 50-150 W | x               |         |                     |      |     |         | x              |         | long-flat |                         | B10A=2, B16A=3, C10A=4, C16A=7              | <b>862268</b> | 802  |
| 24V          | 150 W    |                 | x       | x                   | x    |     |         | x              |         | basic     |                         | B10A=5, B16A=9, C10A=10, C16A=18            | <b>862262</b> | 805  |
| 24V          | 45-150W  |                 |         | x                   | x    |     |         | x              |         | long-flat |                         | B10A=11, B16A=17, C10A=17, C16A=27          | <b>872148</b> | 807  |
| 24V          | 200 W    |                 |         |                     |      | x   |         | x              |         | IP        |                         | B10A=2, B16A=4, C10A=4, C16A=6              | <b>872114</b> | 807  |
| 24V          | 66-200 W | x               |         |                     |      |     |         | x              | x       | IP        | 148.64nF                | B10=3, B16=7, C10=3, C16=7                  | <b>872138</b> | 804  |
| 24V          | 240 W    |                 |         |                     |      |     |         | x              | x       | IP        | 626.3nF                 | B10A=2, B16A=3, C10A=4, C16A=7              | <b>872089</b> | 800  |
| 24V          | 240 W    |                 |         |                     |      |     |         | x              |         | long-flat | 5600uF                  | B10A=1, B16A=2, C10A=3, C16A=5              | <b>862265</b> | 799  |
| 24V          | 80-240W  | x               |         |                     |      |     |         | x              |         | long-flat |                         | B10A=2, B16A=3, C10A=4, C16A=6              | <b>862280</b> | 802  |
| 24V          | 240 W    |                 | x       | x                   | x    |     |         | x              |         | basic     |                         | B10A=3, B16A=5, C10A=6, C16A=10             | <b>862263</b> | 805  |
| 24V          | 320 W    |                 |         |                     |      |     |         | x              | x       | IP        | 626.3nF                 | B10A=2, B16A=2, C10A=4, C16A=6              | <b>872091</b> | 800  |
| 48V          | 40 W     |                 |         |                     |      |     |         | x              | x       | IP        |                         | B10A=6, B16A=9, C10A=10, C16A=16            | <b>872105</b> | 801  |
| 48V          | 60 W     |                 |         |                     |      |     |         | x              | x       | IP        |                         | B10A=6, B16A=9, C10A=10, C16A=16            | <b>872106</b> | 801  |

| electr. data |          | dimmable via    |         |                     |      |     |         | usage / design |         |           | electrical limit values |                                             | power supply  |      |
|--------------|----------|-----------------|---------|---------------------|------|-----|---------|----------------|---------|-----------|-------------------------|---------------------------------------------|---------------|------|
| voltage      | power    | leading cut-off | 1 - 10V | touch dimmer (push) | DALI | KNX | Casambi | indoor         | outdoor | design    | capacitive load         | max. quantity per automatic circuit breaker | item number   | page |
| 48V          | 25-75W   | x               |         |                     |      |     |         | x              |         | long-flat |                         | B10A=2, B16A=4<br>C10A=5, C16A=9            | <b>862283</b> | 802  |
| 48V          | 75 W     |                 | x       | x                   | x    |     |         | x              |         | basic     |                         | B10A=10, B16A=16,<br>C10A=20, C16A=32       | <b>862273</b> | 805  |
| 48V          | 90 W     |                 |         |                     |      |     |         | x              | x       | IP        |                         | B10A=2, B16A=3,<br>C10A=3, C16A=6           | <b>872107</b> | 801  |
| 48V          | 33-100 W | x               |         |                     |      |     |         | x              |         | IP        | 6,6uF                   | B10=3 B16=5,<br>C10=7, C16=11               | <b>872142</b> | 804  |
| 48V          | 34-100 W | x               |         |                     |      |     |         | x              |         | basic     | 140,74nF                | B10=7 B16=15, C10=7,<br>C16=15              | <b>862274</b> | 803  |
| 48V          | 100 W    |                 |         |                     |      |     |         | x              |         | long-flat | 451.2nF                 | B10A=3, B16A=5,<br>C10A=7, C16A=11          | <b>862270</b> | 799  |
| 48V          | 120 W    |                 |         |                     |      |     |         | x              | x       | IP        |                         | B10A=2, B16A=4,<br>C10A=4, C16A=6           | <b>872108</b> | 801  |
| 48V          | 150 W    |                 | x       | x                   | x    |     |         | x              |         | basic     |                         | B10A=5, B16A=9,<br>C10A=10 C16A=18          | <b>862275</b> | 805  |
| 48V          | 50-150 W | x               |         |                     |      |     |         | x              |         | long-flat |                         | B10A=2, B16A=3,<br>C10A=4, C16A=7           | <b>862269</b> | 802  |
| 48V          | 150 W    |                 |         |                     |      |     |         | x              |         | long-flat | 451.2nF                 | B10A=3, B16A=5,<br>C10A=6, C16A=10          | <b>862271</b> | 799  |
| 48V          | 80-240W  | x               |         |                     |      |     |         | x              |         | long-flat |                         | B10A=2, B16A=3<br>C10A=4, C16A=6            | <b>862281</b> | 802  |
| 48V          | 320 W    |                 |         |                     |      |     |         | x              | x       | IP        | 626.3nF                 | B10A=2, B16A=3,<br>C10A=4, C16A=6           | <b>872145</b> | 800  |
| 48V          | 66-200 W | x               |         |                     |      |     |         | x              | x       | IP        | 6,6uF                   | B10=2, B16=3,<br>C10=4 C16=7                | <b>872143</b> | 804  |
| 48V          | 200 W    |                 |         |                     |      | x   |         | x              |         | IP        |                         | B10A=2, B16A=4,<br>C10A=4, C16A=6           | <b>872115</b> | 807  |
| 48V          | 240 W    |                 | x       | x                   | x    |     |         | x              |         | basic     |                         | B10A=3, B16A=5,<br>C10A=6, C16A=10          | <b>862276</b> | 805  |
| 48V          | 240 W    |                 |         |                     |      |     |         | x              |         | long-flat | 5600uF                  | B10A=1, B16A=2,<br>C10A=3, C16A=5           | <b>862272</b> | 799  |
| 48V          | 600 W    |                 |         |                     |      |     |         | x              | x       | IP        |                         | B10A=1, B16A=1,<br>C10A=1, C16A=2           | <b>872125</b> | 801  |
| 48V          | 600 W    |                 | x       |                     |      |     |         | x              | x       | IP        |                         | B10A=1, B16A=1,<br>C10A=1, C16A=2           | <b>872126</b> | 805  |

## power supplies design



mini



round / octo



flat



basic



long-flat



IP

\* special design






DEKO-LIGHT POWER SUPPLY UNITS CV | MINI DESIGN

- Flicker-free
- Secured against short circuits and overloads



|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Width               | 27 mm        |
| Power   | 4 W     | Height              | 21 mm        |
| Length  | 53 mm   | Rated Input Voltage | 220-240 V/AC |

| Article |   | Output Voltage | Output Current | Price  |
|---------|---|----------------|----------------|--------|
| 872127  | ■ | 12 V/DC        | 0-330 mA       | € 9.95 |
| 872128  | ■ | 24 V/DC        | 0-170 mA       | € 9.95 |




DEKO-LIGHT POWER SUPPLY UNITS CV IP | OCTO DESIGN

- Flicker-free
- Secured against short circuits and overloads



|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Width               | 48 mm        |
| Power   | 12 W    | Height              | 24 mm        |
| Length  | 50 mm   | Rated Input Voltage | 220-240 V/AC |

| Article |   | Output Voltage | Output Current | Price   |
|---------|---|----------------|----------------|---------|
| 862229  | ■ | 12 V/DC        | 0-1000 mA      | € 17.95 |
| 862230  | ■ | 24 V/DC        | 0-500 mA       | € 17.95 |




DEKO-LIGHT POWER SUPPLY UNITS CV | FLAT DESIGN

- Ideal for concealed mounting in ceiling coves
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection




|         |                |        |                     |        |              |        |         |
|---------|----------------|--------|---------------------|--------|--------------|--------|---------|
| Housing | Plastic        |        | Rated Input Voltage |        | 220-240 V/AC |        |         |
| Article | Output Voltage | Power  | Output Current      | Length | Width        | Height | Price   |
| 872629  | 12 V/DC        | 6.0 W  | 0-500 mA            | 98 mm  | 46 mm        | 11 mm  | € 13.95 |
| 862231  | 12 V/DC        | 12.0 W | 0-1000 mA           | 128 mm | 50 mm        | 13 mm  | € 17.95 |
| 862232  | 12 V/DC        | 20.0 W | 0-1670 mA           | 128 mm | 50 mm        | 13 mm  | € 20.95 |
| 862121  | 12 V/DC        | 50.0 W | 0-4160 mA           | 185 mm | 62 mm        | 22 mm  | € 41.95 |
| 872630  | 24 V/DC        | 6.0 W  | 0-250 mA            | 98 mm  | 46 mm        | 11 mm  | € 13.95 |
| 862233  | 24 V/DC        | 12.0 W | 0-500 mA            | 128 mm | 50 mm        | 13 mm  | € 17.95 |
| 862234  | 24 V/DC        | 20.0 W | 0-830 mA            | 128 mm | 50 mm        | 13 mm  | € 20.95 |
| 862122  | 24 V/DC        | 50.0 W | 0-2100 mA           | 185 mm | 62 mm        | 22 mm  | € 41.95 |




DEKO-LIGHT POWER SUPPLY UNITS CV | LONG-FLAT DESIGN

- Ideal for concealed mounting in ceiling coves
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection



|         |                |         |                     |        |              |         |          |
|---------|----------------|---------|---------------------|--------|--------------|---------|----------|
| Housing | Plastic        |         | Rated Input Voltage |        | 220-240 V/AC |         |          |
| Article | Output Voltage | Power   | Output Current      | Length | Width        | Height  | Price    |
| 862123  | 12 V/DC        | 45.0 W  | 0-3750 mA           | 251 mm | 30 mm        | 16 mm   | € 39.95  |
| 862093  | 12 V/DC        | 60.0 W  | 0-5000 mA           | 305 mm | 30 mm        | 17 mm   | € 47.95  |
| 862125  | 12 V/DC        | 100.0 W | 0-8340 mA           | 312 mm | 30 mm        | 18.2 mm | € 77.95  |
| 862172  | 12 V/DC        | 132.0 W | 0-11000 mA          | 335 mm | 30 mm        | 21.6 mm | € 103.95 |
| 862124  | 24 V/DC        | 45.0 W  | 0-1870 mA           | 251 mm | 30 mm        | 16 mm   | € 39.95  |
| 862094  | 24 V/DC        | 60.0 W  | 0-2500 mA           | 305 mm | 30 mm        | 18.2 mm | € 47.95  |
| 862126  | 24 V/DC        | 100.0 W | 0-4170 mA           | 312 mm | 30 mm        | 18.2 mm | € 77.95  |
| 862173  | 24 V/DC        | 150.0 W | 0-6250 mA           | 335 mm | 30 mm        | 21.6 mm | € 103.95 |
| 862265  | 24 V/DC        | 240.0 W | 0-10000 mA          | 357 mm | 32 mm        | 23 mm   | € 127.95 |
| 862270  | 48 V/DC        | 100.0 W | 0-2080 mA           | 312 mm | 30 mm        | 18.2 mm | € 77.95  |
| 862271  | 48 V/DC        | 150.0 W | 0-3125 mA           | 335 mm | 30 mm        | 21.6 mm | € 103.95 |
| 862272  | 48 V/DC        | 240.0 W | 0-5000 mA           | 357 mm | 32 mm        | 22.5 mm | € 127.95 |



DEKO-LIGHT POWER SUPPLY UNITS CV | BASIC DESIGN

- Flicker-free
- Secured against short circuits and overloads
- Overheating protection



HousingPlasticRated Input Voltage220-240 V/AC

| Article |                                                                                   | Output Voltage | Power   | Output Current | Length | Width | Height | Price    |
|---------|-----------------------------------------------------------------------------------|----------------|---------|----------------|--------|-------|--------|----------|
| 862162  |  | 12 V/DC        | 40.0 W  | 0-3300 mA      | 166 mm | 52 mm | 24 mm  | € 37.95  |
| 862127  |  | 12 V/DC        | 75.0 W  | 0-6300 mA      | 184 mm | 61 mm | 32 mm  | € 59.95  |
| 862165  |  | 12 V/DC        | 100.0 W | 0-8300 mA      | 184 mm | 61 mm | 32 mm  | € 77.95  |
| 862167  |  | 12 V/DC        | 150.0 W | 0-12500 mA     | 210 mm | 67 mm | 34 mm  | € 103.95 |
| 862163  |  | 24 V/DC        | 40.0 W  | 0-1700 mA      | 166 mm | 52 mm | 24 mm  | € 37.95  |
| 862164  |  | 24 V/DC        | 75.0 W  | 0-3100 mA      | 184 mm | 61 mm | 32 mm  | € 59.95  |
| 862166  |  | 24 V/DC        | 100.0 W | 0-4200 mA      | 184 mm | 61 mm | 32 mm  | € 77.95  |
| 862168  |  | 24 V/DC        | 150.0 W | 0-6250 mA      | 210 mm | 67 mm | 34 mm  | € 103.95 |




DEKO-LIGHT POWER SUPPLY UNITS CV IP | IP DESIGN

- Robust housing
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection



HousingAluminiumRated Input Voltage100-240 V/AC

| Article |                                                                                     | Output Voltage | Power   | Output Current | Length | Width | Height  | Price    |
|---------|-------------------------------------------------------------------------------------|----------------|---------|----------------|--------|-------|---------|----------|
| 872082  |  | 12 V/DC        | 40.0 W  | 0-3340 mA      | 176 mm | 58 mm | 30.5 mm | € 59.95  |
| 872084  |  | 12 V/DC        | 75.0 W  | 0-6250 mA      | 186 mm | 64 mm | 39 mm   | € 75.95  |
| 872093  |  | 12 V/DC        | 100.0 W | 0-8340 mA      | 186 mm | 64 mm | 39 mm   | € 91.95  |
| 872086  |  | 12 V/DC        | 150.0 W | 0-12500 mA     | 191 mm | 70 mm | 40 mm   | € 119.95 |
| 872088  |  | 12 V/DC        | 200.0 W | 0-16670 mA     | 249 mm | 72 mm | 41 mm   | € 143.95 |
| 872083  |  | 24 V/DC        | 40.0 W  | 0-1670 mA      | 176 mm | 58 mm | 30.5 mm | € 59.95  |
| 872085  |  | 24 V/DC        | 75.0 W  | 0-3125 mA      | 186 mm | 64 mm | 39 mm   | € 75.95  |
| 872094  |  | 24 V/DC        | 100.0 W | 0-4170 mA      | 186 mm | 64 mm | 39 mm   | € 91.95  |
| 872087  |  | 24 V/DC        | 150.0 W | 0-6250 mA      | 191 mm | 70 mm | 40 mm   | € 119.95 |
| 872089  |  | 24 V/DC        | 240.0 W | 0-10000 mA     | 249 mm | 72 mm | 40 mm   | € 147.95 |
| 872091  |  | 24 V/DC        | 320.0 W | 0-13340 mA     | 252 mm | 90 mm | 44 mm   | € 175.95 |
| 872145  |  | 48 V/DC        | 320.0 W | 0-6660 mA      | 252 mm | 90 mm | 44 mm   | € 175.95 |







ABN LED SAFETY TRANSFORMER CV DIM IP

- Safety transformer [DC] in accordance with DIN 2006-7 EN 61558-2-6: 2010-04
- Reinforced double insulation [separate primary and secondary winding]
- Additional insulating plastic parts
- More stringent test conditions
- Suitable for applications in areas of increased personal protection in accordance with DIN EN 61558 for operating lights in swimming pools, fountains, wet rooms or similar.
- Primary dimming possible using leading-edge phase dimmers
- Maximum load: 80 % output in continuous operation



|                |         |                     |              |
|----------------|---------|---------------------|--------------|
| Housing        | Plastic | Rated Input Voltage | 220-240 V/AC |
| Output Voltage | 24 V/DC | Channels            | 1            |

| Article |                                                                                   | Power        | Length | Width  | Height | Price    |
|---------|-----------------------------------------------------------------------------------|--------------|--------|--------|--------|----------|
| 872045  |  | 12.0-60.0 W  | 150 mm | 90 mm  | 70 mm  | € 295.95 |
| 872046  |  | 30.0-150.0 W | 176 mm | 116 mm | 110 mm | € 495.95 |



DEKO-LIGHT NETZGERÄTE CV DIM / BAUFORM LONG-FLAT

- dimmable with leading/trailing edge phase dimmers
- ideal for retrofitting existing installations, as primarily dimmable with rotary/ push-button dimmers [C-compatible]
- long, compact design
- not combinable with PWM dimmers such as RF, DMX, DALI, KNX
- flicker-free
- short-circuit and overload-proof
- overheating protection



|         |         |          |   |
|---------|---------|----------|---|
| Housing | Plastic | Channels | 1 |
| Width   | 32 mm   |          |   |

| Article |                                                                                     | Output Voltage | Power        | Length | Height  | Rated Input Voltage | Price    |
|---------|-------------------------------------------------------------------------------------|----------------|--------------|--------|---------|---------------------|----------|
| 862282  |  | 24 V/DC        | 25.0-75.0 W  | 400 mm | 21.6 mm | 198-264 V/AC        | € 79.95  |
| 862268  |  | 24 V/DC        | 50.0-150.0 W | 400 mm | 21.6 mm | 220-240 V/AC        | € 103.95 |
| 862280  |  | 24 V/DC        | 80.0-240.0 W | 443 mm | 23 mm   | 220-240 V/AC        | € 127.95 |
| 862283  |  | 48 V/DC        | 25.0-75.0 W  | 400 mm | 21.6 mm | 198-264 V/AC        | € 79.95  |
| 862269  |  | 48 V/DC        | 50.0-150.0 W | 400 mm | 21.6 mm | 220-240 V/AC        | € 103.95 |
| 862281  |  | 48 V/DC        | 80.0-240.0 W | 443 mm | 23 mm   | 220-240 V/AC        | € 127.95 |



KGP/NEXIVO POWER SUPPLY UNITS CV DIM / LONG-FLAT DESIGN

- Can be dimmed using trailing-edge phase dimmers
- Ideal for retrofitting existing installations, since it can be dimmed primarily with rotary/push-button dimmers [C-compatible]
- Long, extremely compact design
- Cannot be combined with PWM dimmers such as RF, DMX, DALI or KNX
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection



|                |               |                     |              |
|----------------|---------------|---------------------|--------------|
| Housing        | Polycarbonate | Height              | 18.5 mm      |
| Output Voltage | 24 V/DC       | Rated Input Voltage | 220-240 V/AC |
| Width          | 30 mm         | Channels            | 1            |

| Article |  | Power      | Length | Price    |
|---------|--|------------|--------|----------|
| 862278  |  | 0.0-60.0 W | 300 mm | € 143.95 |
| 862277  |  | 0.0-30.0 W | 260 mm | € 91.95  |




DEKO-LIGHT POWER SUPPLY UNITS CV DIM | BASIC DESIGN

- Can be dimmed using leading-edge/trailing-edge phase dimmers
- Ideal for retrofitting existing installations, since it can be dimmed primarily with rotary/push-button dimmers (C-compatible)
- Cannot be combined with PWM dimmers such as RF, DMX, DALI or KNX
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection



|                     |              |          |   |
|---------------------|--------------|----------|---|
| Housing             | Plastic      | Channels | 1 |
| Rated Input Voltage | 220-240 V/AC |          |   |

| Article |  | Output Voltage | Power        | Length | Width | Height | Price    |
|---------|--|----------------|--------------|--------|-------|--------|----------|
| 862240  |  | 12 V/DC        | 9.6-25.0 W   | 128 mm | 52 mm | 30 mm  | € 43.95  |
| 862220  |  | 12 V/DC        | 12.0-50.0 W  | 184 mm | 61 mm | 32 mm  | € 59.95  |
| 862241  |  | 12 V/DC        | 34.0-100.0 W | 210 mm | 67 mm | 34 mm  | € 115.95 |
| 862221  |  | 24 V/DC        | 9.6-25.0 W   | 128 mm | 52 mm | 30 mm  | € 43.95  |
| 862222  |  | 24 V/DC        | 12.0-50.0 W  | 184 mm | 61 mm | 32 mm  | € 59.95  |
| 862242  |  | 24 V/DC        | 34.0-100.0 W | 210 mm | 67 mm | 34 mm  | € 115.95 |
| 862274  |  | 48 V/DC        | 34.0-100.0 W | 210 mm | 67 mm | 34 mm  | € 115.95 |








DEKO-LIGHT POWER SUPPLY UNITS CV DIM IP | IP DESIGN

- Can be dimmed using leading-edge/trailing-edge phase dimmers
- Ideal for retrofitting existing installations, since it can be dimmed primarily with rotary/push-button dimmers [C-compatible]
- Cannot be combined with PWM dimmers such as RF, DMX, DALI or KNX
- Robust housing
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection



|         |           |                     |              |
|---------|-----------|---------------------|--------------|
| Housing | Aluminium | Rated Input Voltage | 220-240 V/AC |
| Height  | 40 mm     | Channels            | 1            |

| Article |  | Output Voltage | Power        | Length | Width | Price    |
|---------|--|----------------|--------------|--------|-------|----------|
| 872135  |  | 12 V/DC        | 33.0-100.0 W | 191 mm | 70 mm | € 135.95 |
| 872137  |  | 12 V/DC        | 66.0-200.0 W | 249 mm | 72 mm | € 165.95 |
| 872136  |  | 24 V/DC        | 33.0-100.0 W | 191 mm | 70 mm | € 135.95 |
| 872138  |  | 24 V/DC        | 66.0-200.0 W | 249 mm | 72 mm | € 165.95 |
| 872142  |  | 48 V/DC        | 33.0-100.0 W | 191 mm | 70 mm | € 135.95 |
| 872143  |  | 48 V/DC        | 66.0-200.0 W | 249 mm | 72 mm | € 165.95 |



**Lighting design**

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.




DEKO-LIGHT POWER SUPPLY UNITS CV DIM | LCP DALI

- Can be dimmed using DALI2/DALI1
- Can be dimmed using 0-10 V/1-10 V
- Can be dimmed using touch dimmer via 230 V push-button (iPush)
- New Intelli-Push function [shortcut synchronises all connected power supply units when needed]
- Power supply unit and PWM dimmer in one device
- Secured against short circuits and overloads
- Overheating protection



|                     |              |          |   |
|---------------------|--------------|----------|---|
| Housing             | Plastic      | Channels | 1 |
| Rated Input Voltage | 220-240 V/AC |          |   |

| Article |  | Output Voltage | Power   | Length | Width   | Height  | Price    |
|---------|--|----------------|---------|--------|---------|---------|----------|
| 862253  |  | 12 V/DC        | 40.0 W  | 185 mm | 42.5 mm | 28.5 mm | € 79.95  |
| 862254  |  | 12 V/DC        | 75.0 W  | 295 mm | 40 mm   | 32 mm   | € 103.95 |
| 862255  |  | 24 V/DC        | 40.0 W  | 185 mm | 42.5 mm | 28.5 mm | € 79.95  |
| 862256  |  | 24 V/DC        | 75.0 W  | 295 mm | 40 mm   | 32 mm   | € 103.95 |
| 862262  |  | 24 V/DC        | 150.0 W | 295 mm | 40 mm   | 32 mm   | € 135.95 |
| 862263  |  | 24 V/DC        | 240.0 W | 360 mm | 40 mm   | 32 mm   | € 175.95 |
| 862273  |  | 48 V/DC        | 75.0 W  | 295 mm | 40 mm   | 32 mm   | € 103.95 |
| 862275  |  | 48 V/DC        | 150.0 W | 295 mm | 40 mm   | 32 mm   | € 135.95 |
| 862276  |  | 48 V/DC        | 240.0 W | 360 mm | 40 mm   | 32 mm   | € 175.95 |



MEANWELL POWER SUPPLY UNIT CV DIM IP | ELG/HLG SERIES

- Can be dimmed using 0-10 V/1-10 V
- Flicker-free, secured against short circuits and overloads
- Overheating protection



|                |           |                     |             |
|----------------|-----------|---------------------|-------------|
| Housing        | Aluminium | Width               | 144 mm      |
| Output Voltage | 48 V/DC   | Height              | 48.5 mm     |
| Power          | 600 W     | Rated Input Voltage | 90-305 V/AC |
| Length         | 280 mm    | Channels            | 1           |

| Article | Price    |
|---------|----------|
| 872126  | € 399.95 |





KGP/NEXIVO POWER SUPPLY UNITS CV DALI / LONG-FLAT DESIGN

- Can be dimmed using DALI1/DALI2
- Power supply unit and DALI PWM dimmer in one device
- Extremely compact design
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection



|                |           |                     |              |
|----------------|-----------|---------------------|--------------|
| Housing        | Aluminium | Rated Input Voltage | 100-305 V/AC |
| Output Voltage | 24 V/DC   | Channels            | 1            |
| Width          | 30 mm     |                     |              |

| Article |                          | Power        | Length | Height | Price    |
|---------|--------------------------|--------------|--------|--------|----------|
| 872146  | <input type="checkbox"/> | 12.0-30.0 W  | 300 mm | 16 mm  | € 51.95  |
| 872147  | <input type="checkbox"/> | 26.0-60.0 W  | 350 mm | 18 mm  | € 63.95  |
| 872148  | <input type="checkbox"/> | 45.0-150.0 W | 350 mm | 18 mm  | € 103.95 |



**5-year guarantee**

Benefit from the maximum quality promise:  
 All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



DEKO-LIGHT POWER SUPPLY UNITS CV DIM | LCP CASAMBI

- Dimmable/can be controlled with Casambi via Bluetooth 4.0/5.1 Low Energy (BLE)
- Power supply unit and Casambi dimmer in one device
- Compact design
- Flicker-free (20 kHz)
- Secured against short circuits and overloads
- Overheating protection



|                     |              |           |                                                                                                                                                                               |
|---------------------|--------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Housing             | Plastic      | Functions | Bluetooth data transfer, Short-circuit proof, Protective extra-low voltage, Overloading protection, Lamp control gear 110, Furniture installation, Overtemperature protection |
| Output Voltage      | 24 V/DC      |           |                                                                                                                                                                               |
| Power               | 150 W        |           |                                                                                                                                                                               |
| Length              | 295 mm       |           |                                                                                                                                                                               |
| Width               | 40 mm        |           |                                                                                                                                                                               |
| Height              | 32 mm        |           |                                                                                                                                                                               |
| Rated Input Voltage | 220-240 V/AC |           |                                                                                                                                                                               |

| Article |                          | Channels | Price    |
|---------|--------------------------|----------|----------|
| 862299  | <input type="checkbox"/> | 1        | € 159.95 |
| 862300  | <input type="checkbox"/> | 2        | € 167.95 |
| 862301  | <input type="checkbox"/> | 3 / 4    | € 167.95 |




MEANWELL POWER SUPPLY UNITS CV DIM | PWM KNX

- Can be dimmed using KNX bus
- Flicker-free, secured against short circuits and overloads
- Overheating protection



|                     |             |          |   |
|---------------------|-------------|----------|---|
| Housing             | Plastic     | Channels | 1 |
| Rated Input Voltage | 90-305 V/AC |          |   |

| Article |                                     | Output Voltage | Power   | Length | Width | Height  | Price    |
|---------|-------------------------------------|----------------|---------|--------|-------|---------|----------|
| 872109  | <input checked="" type="checkbox"/> | 12 V/DC        | 60.0 W  | 150 mm | 53 mm | 35 mm   | € 127.95 |
| 872110  | <input checked="" type="checkbox"/> | 12 V/DC        | 120.0 W | 191 mm | 63 mm | 37.5 mm | € 167.95 |
| 872111  | <input checked="" type="checkbox"/> | 12 V/DC        | 200.0 W | 195 mm | 68 mm | 39.5 mm | € 195.95 |
| 872112  | <input checked="" type="checkbox"/> | 24 V/DC        | 60.0 W  | 150 mm | 53 mm | 35 mm   | € 127.95 |
| 872113  | <input checked="" type="checkbox"/> | 24 V/DC        | 120.0 W | 191 mm | 63 mm | 37.5 mm | € 167.95 |
| 872114  | <input checked="" type="checkbox"/> | 24 V/DC        | 200.0 W | 195 mm | 68 mm | 39.5 mm | € 195.95 |
| 872115  | <input checked="" type="checkbox"/> | 48 V/DC        | 200.0 W | 195 mm | 68 mm | 39.5 mm | € 195.95 |




| electr. data     |             |         | dimmable via    |                     |      |     | usage / design |         |        | electrical limit values |                                             | power supply  |      |
|------------------|-------------|---------|-----------------|---------------------|------|-----|----------------|---------|--------|-------------------------|---------------------------------------------|---------------|------|
| current strength | power       | voltage | leading cut-off | touch dimmer (push) | DALI | KNX | indoor         | outdoor | design | capacitive load         | max. quantity per automatic circuit breaker | item number   | page |
| 260 mA           | 6,0-12,0W   | 23-46V  | x               |                     |      |     | x              |         | basic  |                         | B10A= 17, B16A=28<br>C10A=37, C16A=59       | <b>862285</b> | 814  |
| 350 mA           | 0,9-3,9 W   | 2,5-11V |                 |                     |      |     | x              | x       | mini   |                         | B10A=70, B16A=112,<br>C10A=140, C16A=224    | <b>872129</b> | 811  |
| 350 mA           | 2,1-4,0W    | 6-12V   | x               |                     |      |     | x              | x       | mini   | 10.00nF                 | B10A=35, B16A=56,<br>C10A=74, C16A=118      | <b>872132</b> | 813  |
| 350 mA           | 0,7-6,0W    | 2-18V   |                 |                     |      |     | x              |         | flat   | 40.44nF                 | B10A=17, B16A=28,<br>C10A=37, C16A=59       | <b>872628</b> | 812  |
| 350 mA           | 3,9-9,0 W   | 11-26V  | x               |                     |      |     | x              |         | basic  |                         | B10A=17, B16A=28,<br>C10A=37, C16A=59       | <b>862202</b> | 814  |
| 350 mA           | 6,0-10,0 W  | 17-29V  |                 |                     |      |     | x              |         | mini   |                         | B10A=57, B16A=92,<br>C10A=57, C16A=92       | <b>862239</b> | 812  |
| 350 mA           | 6,3-12,0 W  | 18-35V  | x               |                     |      |     | x              |         | basic  | 20,65pF                 | B10A=17, B16A=28,<br>C10A=37, C16A=59       | <b>862203</b> | 814  |
| 350 mA           | 0,7-12,0 W  | 2-35V   |                 |                     |      |     | x              |         | flat   | 194,0uF                 | B10A=11, B16A=18,<br>C10A=24, C16A=39       | <b>862223</b> | 812  |
| 350 mA           | 6,3-12,0 W  | 18-37V  | x               |                     |      |     | x              | x       | octo   | 190uF                   | B10A=35, B16A=56,<br>C10A=74, C16A=118      | <b>862235</b> | 813  |
| 350 mA           | 9,1-15,0 W  | 26-43V  | x               |                     |      |     | x              |         | basic  |                         | B10A=38, B16A=61,<br>C10A=38, C16A=61       | <b>862266</b> | 815  |
| 350 mA           | 0,7- 18,0 W | 2-52V   |                 |                     |      |     | x              |         | basic  | 147nF                   | B10A=17, B16A=28,<br>C10A=37, C16A=59       | <b>180512</b> | 812  |
| 350 mA           | 9,8- 20,0 W | 28-57V  | x               |                     |      |     | x              |         | basic  |                         | B10A=11, B16A=18,<br>C10A=24, C16A=39       | <b>862204</b> | 814  |
| 350 mA           | 0,7- 20,0 W | 2-57V   |                 |                     |      |     | x              |         | flat   | 195uF                   | B10A=11, B16A=18,<br>C10A=24, C16A=39       | <b>862224</b> | 812  |
| 450 mA           | 9,9-19,0 W  | 22-42V  | x               |                     |      |     | x              |         | quick  |                         | B10A=11, B16A=18,<br>C10A=24, C16A=39       | <b>862257</b> | 814  |
| 500 mA           | 2,0-4,0 W   | 4-8V    |                 |                     |      |     | x              | x       | mini   | 85,0pF                  | B10A=70, B16A=112,<br>C10A=140, C16A=224    | <b>872130</b> | 811  |
| 500 mA           | 2,0-4,0 W   | 4-8V    | x               |                     |      |     | x              | x       | mini   | 4.75nF                  | B10A=35, B16A=56,<br>C10A=74, C16A=118      | <b>872014</b> | 814  |
| 500 mA           | 1,0-6,0 W   | 2-12V   |                 |                     |      |     | x              |         | flat   | 38.48nF                 | B10A=17, B16A=28,<br>C10A=37, C16A=59       | <b>862130</b> | 812  |
| 500 mA           | 1,0- 12,0 W | 2-24V   |                 |                     |      |     | x              |         | flat   | 298uF                   | B10A=11, B16A=18,<br>C10A=24, C16A=39       | <b>862225</b> | 812  |
| 500 mA           | 6,5-10,0 W  | 13-20V  |                 |                     |      |     | x              |         | mini   |                         | B10A=57, B16A=92,<br>C10A=57, C16A=92       | <b>862238</b> | 812  |
| 500 mA           | 6,0- 12,0 W | 12-24V  | x               |                     |      |     | x              | x       | octo   | 186uF                   | B10A=35, B16A=56,<br>C10A=74, C16A=118      | <b>862236</b> | 814  |
| 500 mA           | 1,0- 18,0 W | 2-38V   |                 |                     |      |     | x              |         | basic  | 147nF                   | B10A=17, B16A=28,<br>C10A=37, C16A=59       | <b>180513</b> | 812  |
| 500 mA           | 1,0- 20,0 W | 2-40V   |                 |                     |      |     | x              |         | flat   | 292uF                   | B10A=11, B16A=18,<br>C10A=24, C16A=39       | <b>862226</b> | 812  |
| 500 mA           | 10,0-20,0 W | 20-40V  | x               |                     |      |     | x              |         | basic  |                         | B10A=11, B16A=18,<br>C10A=24, C16A=39       | <b>862205</b> | 814  |
| 500 mA           | 15,0-30,0 W | 30-60V  |                 |                     |      |     | x              |         | basic  | 366nF                   | B10A=11, B16A=18,<br>C10A=24, C16A=39       | <b>862196</b> | 812  |
| 500 mA           | 20,0-40,0 W | 40-80V  |                 |                     |      |     | x              |         | basic  | 356nF                   | B10A=8, B16A=14,<br>C10A=18, C16A=29        | <b>862197</b> | 812  |
| 500 mA           | 20,0-40,0 W | 40-80V  | x               |                     |      |     | x              |         | basic  | 29.84nF                 | B10A=35, B16A=56,<br>C10A=35, C16A=56       | <b>862136</b> | 814  |

| electr. data     |              |         | dimmable via        |      |     |        | usage / design |        |       | electrical limit values |                                             |               | power supply |  |
|------------------|--------------|---------|---------------------|------|-----|--------|----------------|--------|-------|-------------------------|---------------------------------------------|---------------|--------------|--|
| current strength | power        | voltage | leading cut-off     |      |     |        | indoor         |        |       | capacitive load         | max. quantity per automatic circuit breaker | item number   | page         |  |
|                  |              |         | touch dimmer (push) | DALI | KNX | indoor | outdoor        | design |       |                         |                                             |               |              |  |
| 700 mA           | 1,7-4,0 W    | 2-6V    |                     |      |     |        | x              | x      | mini  | 82pF                    | B10A=70, B16A=112, C10A=140, C16A=224       | <b>872131</b> | 811          |  |
| 700 mA           | 2,0-4,0 W    | 2,5-6V  | x                   |      |     |        | x              | x      | mini  | 10nF                    | B10A=35, B16A=56, C10A=74, C16A=118         | <b>872134</b> | 813          |  |
| 700 mA           | 1,4-6,0 W    | 2-9V    |                     |      |     |        | x              |        | flat  | 40.44nF                 | B10A=17, B16A=28, C10A=37, C16A=59          | <b>862048</b> | 812          |  |
| 700 mA           | 1,4- 12,0 W  | 2-17V   |                     |      |     |        | x              |        | flat  | 427uF                   | B10A=11, B16A=18, C10A=24, C16A=39          | <b>862227</b> | 812          |  |
| 700 mA           | 7,0- 12,0 W  | 10-17V  | x                   |      |     |        | x              | x      | octo  | 188uF                   | B10A=35, B16A=56, C10A=74, C16A=118         | <b>862237</b> | 813          |  |
| 700 mA           | 1,4- 18,0 W  | 2-26V   |                     |      |     |        | x              |        | basic | 147nF                   | B10A=17, B16A=28, C10A=37, C16A=59          | <b>180514</b> | 812          |  |
| 700 mA           | 1,4- 20,0 W  | 2-29V   |                     |      |     |        | x              |        | flat  | 295uF                   | B10A=11, B16A=18, C10A=24, C16A=39          | <b>862228</b> | 812          |  |
| 700 mA           | 9,8- 20,0 W  | 14-28V  | x                   |      |     |        | x              |        | basic |                         | B10A=11, B16A=18, C10A=24, C16A=39          | <b>862207</b> | 814          |  |
| 700 mA           | 9,1- 30,0 W  | 13-43V  |                     |      |     |        | x              |        | basic |                         | B10A=11, B16A=18, C10A=24, C16A=39          | <b>862198</b> | 812          |  |
| 700 mA           | 20,3- 35,0 W | 29-57V  |                     |      |     |        | x              |        | basic | 359,3nF                 | B10A=8, B16A=14, C10A=18, C16A=29           | <b>862199</b> | 812          |  |
| 700 mA           | 19,6- 40,0 W | 28-56V  | x                   |      |     |        | x              |        | basic |                         | B10A=35, B16A=56, C10A=35, C16A=56          | <b>862208</b> | 814          |  |
| 900mA            | 19,8- 40,0 W | 22-44V  |                     |      |     |        | x              |        | basic | 13.5pF                  | B10A=8, B16A=14, C10A=18, C16A=29           | <b>862157</b> | 812          |  |
| 900mA            | 19,8- 40,0 W | 22-44V  | x                   |      |     |        | x              |        | basic | 30nF                    | B10A=35, B16A=56, C10A=35, C16A=56          | <b>862264</b> | 814          |  |
| 1050 mA          | 20,0- 40,0 W | 19-38V  |                     |      |     |        | x              |        | basic |                         | B10A=8, B16A=14, C10A=18, C16A=29           | <b>862201</b> | 812          |  |
| 1050 mA          | 20,0- 40,0 W | 19-38V  | x                   |      |     |        | x              |        | basic |                         | B10A=35, B16A=56, C10A=35, C16A=56          | <b>862209</b> | 814          |  |
| 1050 mA          | 23,5- 45,0 W | 22-43V  | x                   |      |     |        | x              |        | basic | 33,46nF                 | B10A=35, B16A=56, C10A=35, C16A=56          | <b>862210</b> | 814          |  |
| 1050 mA          | 23,1- 45,0 W | 22-43V  | x                   |      |     |        | x              |        | quick | 33,46nF                 | B10A=35, B16A=56, C10A=35, C16A=56          | <b>862258</b> | 814          |  |
| 1300 mA          | 26,0- 50,0 W | 20-39V  | x                   |      |     |        | x              |        | basic |                         | B10A=35, B16A=56, C10A=35, C16A=56          | <b>862211</b> | 814          |  |
| 1500 mA          | 40,0- 60,0 W | 27-42V  | x                   |      |     |        | x              |        | quick |                         | B10A=25, B16A=41, C10A=25, C16A=41          | <b>862259</b> | 814          |  |
| MULTI*           | 3,2- 12,0 W  | 15-54V  |                     | x    | x   |        | x              |        | basic |                         | B10A=23, B16A=37, C10A=46, C16A=74          | <b>862190</b> | 817          |  |
| MULTI*           | 5,0- 25,0 W  | 20-60V  |                     | x    | x   |        | x              |        | basic |                         | B10A=23, B16A=37, C10A=46, C16A=74          | <b>862191</b> | 817          |  |
| MULTI*           | 8,75- 45,0 W | 21-70V  |                     | x    | x   |        | x              |        | basic |                         | B10A=12, B16A=20, C10A=25, C16A=40          | <b>862192</b> | 817          |  |
| MULTI*           | 14,7- 45,0 W | 14-43V  |                     | x    | x   |        | x              |        | basic |                         | B10A=12, B16A=20, C10A=25, C16A=40          | <b>862193</b> | 817          |  |
| MULTI*           | 26,3- 75,5 W | 25-71V  |                     | x    | x   |        | x              |        | basic |                         | B10A=3, B16A=5, C10A=6, C16A=10             | <b>862194</b> | 817          |  |

\* Due to the large number of possible settings, please refer to the detailed technical data on the specified product page.

#### power supplies design








## TIPS AND TRICKS FOR CURRENT-STABLE POWER SUPPLIES

In contrast to voltage-stable power supplies [CV], current-stable power supply units, often abbreviated to CC [constant current], the output current is stable. This important factors that must be taken into focus during planning and installation.

- Do not connect LEDs to CC power supply units below voltage, as this can damage them and cause them to fail after a short period of operation.
- if possible: 1 luminaire = 1 power supply
- if necessary: operate max. 2 luminaires in a series connection on one power supply unit.  
However, the voltage range and the power of the power supply must be checked carefully.

### Netzgerätedaten prüfen! Check driver data!



**Installationshinweis für Netzgerät stromstabil [CC]: LED nicht unter Spannung anschließen!**  
**installation instruction for power supply constant current [CC]: Don't connect LED under voltage!**




DEKO-LIGHT POWER SUPPLY UNITS CC | MINI DESIGN

- Flicker-free
- Secured against short circuits and overloads
- Overheating protection



|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 21 mm        |
| Length  | 53 mm   | Rated Input Voltage | 220-240 V/AC |
| Width   | 27 mm   |                     |              |

| Article |   | Output Current | Power     | Output Voltage | Price  |
|---------|---|----------------|-----------|----------------|--------|
| 872129  | ■ | 350 mA         | 0.9-3.9 W | 2.5-11 V/DC    | € 9.95 |
| 872130  | ■ | 500 mA         | 2.0-4.0 W | 4-8 V/DC       | € 9.95 |
| 872131  | ■ | 700 mA         | 1.7-4.0 W | 2.5-6 V/DC     | € 9.95 |




HEP POWER SUPPLY UNITS CC | G5S10W

- Compact design
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection



|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 20 mm        |
| Length  | 58.1 mm | Rated Input Voltage | 220-240 V/AC |
| Width   | 39.1 mm |                     |              |

| Article |   | Output Current | Power      | Output Voltage | Price   |
|---------|---|----------------|------------|----------------|---------|
| 862239  | □ | 350 mA         | 6.0-10.0 W | 17-29 V/DC     | € 21.95 |
| 862238  | □ | 500 mA         | 6.5-10.0 W | 13-32 V/DC     | € 21.95 |




DEKO-LIGHT POWER SUPPLY UNITS CC | FLAT DESIGN

- Flicker-free
- Secured against short circuits and overloads
- Overheating protection



HousingPlasticRated Input Voltage220-240 V/AC

| Article |                                                                                   | Output Current | Power      | Output Voltage | Length | Width | Height | Price   |
|---------|-----------------------------------------------------------------------------------|----------------|------------|----------------|--------|-------|--------|---------|
| 862224  |  | 350 mA         | 0.7-20.0 W | 2-57 V/DC      | 128 mm | 50 mm | 13 mm  | € 22.95 |
| 862223  |  | 350 mA         | 0.7-12.0 W | 2-35 V/DC      | 128 mm | 50 mm | 13 mm  | € 19.95 |
| 872628  |  | 350 mA         | 0.7-6.0 W  | 2-18 V/DC      | 98 mm  | 46 mm | 11 mm  | € 13.95 |
| 862226  |  | 500 mA         | 1.0-20.0 W | 2-40 V/DC      | 128 mm | 50 mm | 13 mm  | € 22.95 |
| 862225  |  | 500 mA         | 1.0-12.0 W | 2-24 V/DC      | 128 mm | 50 mm | 13 mm  | € 19.95 |
| 862130  |  | 500 mA         | 1.0-6.0 W  | 2-12 V/DC      | 98 mm  | 46 mm | 11 mm  | € 13.95 |
| 862228  |  | 700 mA         | 1.4-20.0 W | 2-29 V/DC      | 128 mm | 50 mm | 13 mm  | € 22.95 |
| 862227  |  | 700 mA         | 1.4-12.0 W | 2-17 V/DC      | 128 mm | 50 mm | 13 mm  | € 19.95 |
| 862048  |  | 700 mA         | 1.4-6.0 W  | 2-9 V/DC       | 98 mm  | 46 mm | 11 mm  | € 13.95 |




DEKO-LIGHT POWER SUPPLY UNITS CC | BASIC DESIGN

- Flicker-free
- Secured against short circuits and overloads
- Overheating protection



HousingPlasticRated Input Voltage220-240 V/AC

| Article |                                                                                     | Output Current | Power       | Output Voltage | Length | Width | Height | Price   |
|---------|-------------------------------------------------------------------------------------|----------------|-------------|----------------|--------|-------|--------|---------|
| 180512  |  | 350 mA         | 0.7-18.0 W  | 2-52 V/DC      | 115 mm | 45 mm | 21 mm  | € 18.95 |
| 180513  |  | 500 mA         | 1.0-18.0 W  | 2-38 V/DC      | 115 mm | 45 mm | 21 mm  | € 18.95 |
| 862196  |  | 500 mA         | 15.0-30.0 W | 30-60 V/DC     | 127 mm | 43 mm | 28 mm  | € 21.95 |
| 862197  |  | 500 mA         | 20.0-40.0 W | 40-80 V/DC     | 127 mm | 43 mm | 28 mm  | € 23.95 |
| 180514  |  | 700 mA         | 1.4-18.0 W  | 2-26 V/DC      | 115 mm | 45 mm | 21 mm  | € 18.95 |
| 862198  |  | 700 mA         | 14.0-30.0 W | 21-43 V/DC     | 127 mm | 43 mm | 28 mm  | € 21.95 |
| 862199  |  | 700 mA         | 20.0-40.0 W | 29-57 V/DC     | 127 mm | 43 mm | 28 mm  | € 23.95 |
| 862157  |  | 900 mA         | 19.0-40.0 W | 22-44 V/DC     | 127 mm | 43 mm | 28 mm  | € 23.95 |
| 862201  |  | 1050 mA        | 20.0-40.0 W | 19-38 V/DC     | 127 mm | 43 mm | 28 mm  | € 23.95 |





DEKO-LIGHT POWER SUPPLY UNITS CC DIM | BASIC DESIGN

- Can be dimmed using trailing-edge phase dimmers
- Flicker-free
- Short circuit, overload and overheating protection




Housing

Plastic

Rated Input Voltage

220-240 V/AC

| Article |                                                                                   | Output Current | Power       | Output Voltage | Length | Width | Height | Price   |
|---------|-----------------------------------------------------------------------------------|----------------|-------------|----------------|--------|-------|--------|---------|
| 862285  |  | 260 mA         | 6.0-12.0 W  | 23-46 V/DC     | 115 mm | 39 mm | 22 mm  | € 25.95 |
| 862202  |  | 350 mA         | 4.5-9.0 W   | 13-26 V/DC     | 115 mm | 39 mm | 22 mm  | € 22.95 |
| 862203  |  | 350 mA         | 6.3-12.0 W  | 18-35 V/DC     | 115 mm | 39 mm | 22 mm  | € 29.95 |
| 862204  |  | 350 mA         | 9.8-20.0 W  | 28-57 V/DC     | 127 mm | 44 mm | 28 mm  | € 31.95 |
| 862205  |  | 500 mA         | 10.0-20.0 W | 20-40 V/DC     | 127 mm | 44 mm | 28 mm  | € 31.95 |
| 862136  |  | 500 mA         | 20.0-40.0 W | 40-80 V/DC     | 166 mm | 52 mm | 24 mm  | € 37.95 |
| 862207  |  | 700 mA         | 9.8-19.6 W  | 14-28 V/DC     | 127 mm | 44 mm | 28 mm  | € 31.95 |
| 862208  |  | 700 mA         | 19.0-40.0 W | 28-56 V/DC     | 166 mm | 52 mm | 24 mm  | € 37.95 |
| 862264  |  | 900 mA         | 19.6-40.0 W | 22-44 V/DC     | 166 mm | 52 mm | 25 mm  | € 37.95 |
| 862209  |  | 1050 mA        | 20.0-40.0 W | 19-38 V/DC     | 166 mm | 52 mm | 25 mm  | € 37.95 |
| 862210  |  | 1050 mA        | 23.0-45.0 W | 22-43 V/DC     | 166 mm | 52 mm | 25 mm  | € 39.95 |
| 862211  |  | 1300 mA        | 25.0-50.0 W | 20-39 V/DC     | 166 mm | 52 mm | 25 mm  | € 41.95 |



DEKO-LIGHT POWER SUPPLY UNITS CC DIM | QUICK DESIGN

- Particularly quick and easy to install with integrated three-pin feed-through wiring
- Push terminals for wires from 0.5 to 1.5 mm<sup>2</sup>
- Push terminals also on secondary side
- No additional installation material required
- Can be dimmed using compatible [C-compatible] trailing-edge phase dimmers
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection



Housing

Plastic

Height

32 mm

Length

208 mm


Rated Input Voltage

220-240 V/AC

Width

60 mm

| Article |                                                                                     | Output Current | Power       | Output Voltage | Price   |
|---------|-------------------------------------------------------------------------------------|----------------|-------------|----------------|---------|
| 862257  |  | 450 mA         | 9.9-19.0 W  | 22-42 V/DC     | € 29.95 |
| 862258  |  | 1050 mA        | 23.1-44.1 W | 22-42 V/DC     | € 37.95 |
| 862259  |  | 1500 mA        | 40.5-63.0 W | 27-42 V/DC     | € 45.95 |




HEP POWER SUPPLY UNIT CC DIM | G6LT15W350LR-Z

- Can be dimmed using trailing-edge phase dimmers
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection



|                |            |                     |              |
|----------------|------------|---------------------|--------------|
| Housing        | Plastic    | Length              | 85 mm        |
| Output Current | 350 mA     | Width               | 40.4 mm      |
| Power          | 9.1-15 W   | Height              | 22 mm        |
| Output Voltage | 26-43 V/DC | Rated Input Voltage | 220-240 V/AC |

| Article                                                                                  | Price   |
|------------------------------------------------------------------------------------------|---------|
| 862266  | € 25.95 |



**Technical data sheet**  
New in the onlineshop: The technical data sheets offer even more information:  
Light and energy data, light distribution curves, dimensional drawings and more.



DEKO-LIGHT MULTI-CURRENT DALI 2.0 POWER SUPPLIES DALI 2  
IE-12D | IE-25D | IE-45D | IE-45HD | IE-75D

A must for every electrician: the new MULT-CC DALI 2.0 power supplies from DEKO-LIGHT are a real all-purpose weapon for universal use.

They can be controlled via DALI1 or DALI2 [fully upward and downward compatible] or via Intelli-Push. In this case, the multi-current-power supplies do not require any additional control components and are controlled by means of cost-effective 230V standard push-buttons. With the new Intelli-Push function, they also have a pioneering synchronisation option if one of the connected power supplies no longer runs synchronously with the others.

In addition, the MULTI-power supplies can also be operated undimmed without control as a reliable and universal power supplier. With a total of five models, the new DALI series covers a CC current range from 180mA to 1600mA and power ratings from 4 to 75 watts.

- plastic housing
- compact housing design
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection
- overheat control
- current range adjustable via DIP switch
- DALI 2 BUS ready according to IEC 62386
- fully downward compatible with DALI 1
- dimming range: 1-100%
- dimmable via DALI or touch dimmer function [push] new Intelli-Push function [key combination synchronises all connected power supplies]
- can also be operated without control as universal power supply unit universal power supply [no dimming function]
- 3.2-75 watts and 37 CC variants in only 3 different housing sizes




design example 114 x 52 x 24 mm



design example 133 x 71 x 24 mm



design example 159 x 79 x 30 mm



controllable with DALI2, DALI1 or by touch dim using a regular 230V push-button

TOUCH-DIM / INTELLI-PUSH VIA 230V PUSH BUTTON  
WITHOUT ADDITIONAL CONTROL:

- |                             |                                                                       |
|-----------------------------|-----------------------------------------------------------------------|
| press button short          | switch lamp on/off                                                    |
| press button long           | dim lamp bright/dark/bright                                           |
| press button for 15 seconds | All connected power supplies are synchronised to the same brightness. |



| electr. data                   |               | dimmable via            |                          |              |                 | usage / design |         |        | electrical limit values |                                             | power supply |      |
|--------------------------------|---------------|-------------------------|--------------------------|--------------|-----------------|----------------|---------|--------|-------------------------|---------------------------------------------|--------------|------|
| current strength               | power         | electronic power supply | conventional transformer | leading edge | leading cut-off | indoor         | outdoor | design | capacitive load         | max. quantity per automatic circuit breaker | item number  | page |
|                                |               |                         |                          |              |                 |                |         |        |                         |                                             |              |      |
| electronic power supply units: |               |                         |                          |              |                 |                |         |        |                         |                                             |              |      |
| 12V                            | 0,0-70,0 W    | x                       |                          |              | x               | x              |         | basic  | 97.79nF                 | B10A=8, B16A=14, C10A=18, C16A=29           | 180515       | 819  |
| 12V                            | 0,0-105,0 W   | x                       |                          |              | x               | x              |         | basic  | 139.58nF                | B10A=5, B16A=9, C10A=12, C16A=19            | 180529       | 819  |
| wound transformers:            |               |                         |                          |              |                 |                |         |        |                         |                                             |              |      |
| 12V                            | 11,5-20,0 W   |                         | x                        | x            |                 | x              |         | *      |                         |                                             | 000097       | 819  |
| 12V                            | 34,5-60,0 W   |                         | x                        | x            |                 | x              |         | *      |                         |                                             | 000099       | 819  |
| 12V                            | 60,5-105,0 W  |                         | x                        | x            |                 | x              |         | *      |                         |                                             | 000107       | 819  |
| 12V                            | 86,5-150,0 W  |                         | x                        | x            |                 | x              |         | *      |                         |                                             | 000103       | 819  |
| 12V                            | 115,0-200,0 W |                         | x                        | x            |                 | x              |         | *      |                         |                                             | 000104       | 819  |
| 12V                            | 172,5-300,0 W |                         | x                        | x            |                 | x              |         | *      |                         |                                             | 000106       | 819  |
| 12V                            | 287,5-500,0 W |                         | x                        | x            |                 | x              |         | *      |                         |                                             | 000109       | 819  |


DEKO-LIGHT TRANSFORMER CV DIM | ULTRA 12 VOLT/AC

- Can be dimmed using trailing-edge phase dimmers
- 11.5 V lamp-friendly voltage
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection
- 180515: 0-70 W halogen or 0-50 W LED/max. 6 LEDs
- 180529: 0-105 W halogen or 0-50 W LED/max. 6 LEDs



|                |           |                     |              |
|----------------|-----------|---------------------|--------------|
| Housing        | Plastic   | Width               | 44 mm        |
| Output Voltage | 11.5 V/AC | Height              | 28 mm        |
| Length         | 113 mm    | Rated Input Voltage | 220-240 V/AC |

| Article |  | Power       | Price   |
|---------|--|-------------|---------|
| 180529  |  | 0.0-105.0 W | € 18.95 |
| 180515  |  | 0.0-70.0 W  | € 14.95 |



ABN TRANSFORMERS CV DIM | 12 VOLT/AC

- Conventional wound transformer [L load]
- 11.5 V lamp-friendly voltage
- Can be dimmed using leading-edge phase dimmers



|                |           |                     |              |
|----------------|-----------|---------------------|--------------|
| Housing        | Plastic   | Rated Input Voltage | 220-240 V/AC |
| Output Voltage | 11.5 V/AC |                     |              |

| Article |  | Power         | Apparent power | Length | Width  | Height | Price    |
|---------|--|---------------|----------------|--------|--------|--------|----------|
| 000097  |  | 11.5-20.0 W   | 20 VA          | 82 mm  | 56 mm  | 50 mm  | € 71.95  |
| 000099  |  | 34.5-60.0 W   | 60 VA          | 100 mm | 70 mm  | 61 mm  | € 105.95 |
| 000107  |  | 60.0-105.0 W  | 105 VA         | 107 mm | 78 mm  | 66 mm  | € 129.95 |
| 000103  |  | 86.5-150.0 W  | 150 VA         | 130 mm | 88 mm  | 78 mm  | € 154.95 |
| 000104  |  | 115.0-200.0 W | 200 VA         | 130 mm | 88 mm  | 88 mm  | € 179.95 |
| 000106  |  | 172.0-300.0 W | 300 VA         | 130 mm | 88 mm  | 103 mm | € 199.95 |
| 000109  |  | 287.5-500.0 W | 500 VA         | 177 mm | 107 mm | 130 mm | € 349.95 |



Accessories for 000103, 000104, 000106

000111 Housing Pyra 120-300 VA



€ 16.95

Accessories for 000107

000110 Housing Pyra 105 VA



€ 16.95



## CONTROLLER

- 850 Casambi Bluetooth
- 852 DALI / DMX dimmer
- 824 RF-Smart





☒ ☐  
page 826



☒ ☐  
page 827



☒ ☐  
page 828



☒ ☐  
page 831



☒ ☐  
page 832



☒ ☐  
page 834



☒ ☐  
page 835



☐ ☒  
page 836



☒ ☐  
page 841



☐ ☐  
page 843



☐ ☐  
page 844



☐ ☐  
page 847

controller



☐ page 848



☒ page 849



☐ page 850



☐ page 850



☒ ☐ page 851



☐ page 851



☒ page 852



☒ page 852



☐ page 853



☐ page 854



☐ page 854



☐ page 855



☐ page 855

RF-SMART: COMPONENTS

We hereby present the multifunctional RF-smart control system from DEKO-LIGHT. It enables the switching and dimming of devices with 230V mains voltage and offers LED dimmers for LED strips with 1-5 channels from 12V to 48V voltage. Dimmers in IP67 design are available for outdoor use. The system is complemented by luminaires with an integrated RF module, such as outdoor spotlights and LED retrofit luminaires. RF-smart components can be controlled with RF radio remote controls and Zigbee 3.0 compatible radio modules. This enables control via smartphone, tablet or voice and offers comprehensive smart home functions. Installation is quick and easy.



simple control via RF remote controls



smart control via ZigBee 3.0



control via push-button

remote controls

The remote controls can be used to control the components on different channels in one or more zones. The remote controls are available as mobile versions or for wall mounting.

- 1 zone [1-2 oder 3-5 channels]
- 4 zones [1-5 channels]
- 8 zones [1-5 channels]
- power supply via 2x AAA batteries [3V]
- 230V direct connection [optional]



PIR motion detector

The PIR motion detector detects movement at an angle of 120° and a range of 1 to 7 metres - ideal for precise, energy-efficient lighting control.

- power supply via 1x CR123A battery



page 848

repeater

With the repeater, the wireless range of the remote controls can be extended by up to 30 metres.

- 230V AC



page 847



### illuminants

The LED retrofit illuminants are equipped with an RF-smart radio module and fit into standard GU10 and E27 sockets.

- GU10 RGB+CCT
- E27 A60/MAX RGB+CCT
- 230V AC
- controllable via remote control and ZigBee 3.0



page 863



page 865



page 866

### luminaires

The RF-smart lights are equipped with a ZigBee-compatible wireless module and can therefore also be controlled via the market-leading smart home systems from Amazon, Google & Co.

- FLOOD RGB+CCT
- SPOT RGB+CCT
- 230V AC
- IP67 / IP44
- controllable via remote control and ZigBee 3.0



page 540



page 509



page 510

### Triac dimmer

The triac dimmers work with phase cut-off dimming and enable the switching and/or dimming of devices with 230V mains voltage.

- 230V AC
- IP20 / IP67
- on/off, Dimmen
- controllable via remote control, push-button and ZigBee 3.0



page 832



page 833

### LED dimmer

The LED dimmers can be used to control LED stripes with 1-5 channels and 12V to 48V voltage.

- 12-48V DC
- IP20 / IP67
- on/off, dimming, automatic programmes, RGB/CCT colour settings
- controllable via remote control, push-button and ZigBee 3.0



page 834



page 835




DEKO-LIGHT RF-SMART STARTER-SET 4, 230V TRIAC DIMMER + RF PUSH-BUTTON REMOTE CONTROL

- Easy commissioning and operation (on/off - light-dark-bright)
- Light switch haptics
- Fits perfectly into existing switch programmes
- Intelli-Push Dim function (on/off, brightness) via potential-free push-button
- can also be controlled with all RF-Smart remote controls
- controllable with all Zigbee 3.0 compatible controllers / apps (gateway required)
- Program and remote control synchronisation when operating multiple RF Smart components (repeater function)
- Control of 230 V (R/C) components
- Minimum brightness adjustable in ten levels
- Switch mode adjustable (dimming deactivated)
- Up to 10x LED-LM / 7x LED ballast can be connected (max. 300 W for R/C loads)
- one control zone
- Mounting using adhesive pad or screws
- Operation remote control with 1x CR 2032 battery (not included)
- Set consisting of: 1 x 843503 / 1 x 843535

|                     |              |          |                                                              |
|---------------------|--------------|----------|--------------------------------------------------------------|
| Housing             | Plastic      | Control  | RF-Smart, Trailing-edge dimmer, ZigBee 3.0, Intelli Push-Dim |
| Power               | 1.0-300 W    |          |                                                              |
| Output Current      | 1.36 A       | Channels | 1                                                            |
| Rated Input Voltage | 100-240 V/AC |          |                                                              |

| Article                                                                                    | Price   |
|--------------------------------------------------------------------------------------------|---------|
| 843537  | € 75.95 |



Accessories

843536 Battery, Varta, CR2032, Lithium 3 V



€ 3.95



**DEKO-LIGHT RF-SMART STARTER-SET 1, 230V TRIAC DIMMER + RF-REMOTE CONTROL**

- Dimmable brightness
- Intelli-Push dim function [on/off, brightness] via potential-free push-button
- Can be controlled with all RF-smart wireless remote controls [2.4 GHz, range approx. 30 m]
- Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]
- Program and remote control synchronisation when operating multiple RF-smart components [repeater function]
- Control of 230 V [R/C] components
- Minimum brightness adjustable in ten steps
- Adjustable switch mode [dimming disabled]
- Up to 10x LED-LM/7x LED ballast units can be connected [max. 300 W for R/C loads]
- One control zone
- Remote control requires 2x AAA batteries [not included in the scope of delivery]
- Set consisting of: 1x 843503 + 1x 843508

|                |           |                     |                                                              |
|----------------|-----------|---------------------|--------------------------------------------------------------|
| Housing        | Plastic   | Rated Input Voltage | 100-240 V/AC                                                 |
| Length         | 49 mm     | Control             | RF-Smart, Trailing-edge dimmer, ZigBee 3.0, Intelli Push-Dim |
| Power          | 1.0-300 W |                     |                                                              |
| Output Current | 1.36 A    | Channels            | 1                                                            |

| Article                                                                                    | Price   |
|--------------------------------------------------------------------------------------------|---------|
| 843500  | € 79.95 |







DEKO-LIGHT RF-SMART STARTER-SET 5, LED DIMMER + RF PUSH-BUTTON REMOTE CONTROL SINGLE

- Easy commissioning and operation (on/off - light-dark-bright)
- Light switch haptics
- Fits perfectly into existing switch programmes
- Intelli-Push Dim function (on/off, brightness) via pontential-free push-button
- Soft-On / Soft-Off for gentle switching on / off
- additionally controllable with all RF-Smart radio remote controls
- controllable with all Zigbee 3.0 compatible controllers / apps (gateway required)
- Program and remote control synchronisation when operating multiple RF Smart components (repeater function)
- Control of single components
- flicker-free (image/video recordings)
- Power: max. 20 A / controller, max. 10 A / channel
- 12 V = 240 W, 24 V = 480 W, 48 V = 960 W
- one control zone
- Mounting with adhesive pad or screws
- Operation remote control with 1x CR2032 battery (not included)
- Set consisting of: 1 x 843505 / 1 x 843535

|                     |            |          |                                        |
|---------------------|------------|----------|----------------------------------------|
| Housing             | Plastic    | Control  | RF-Smart, ZigBee 3.0, Intelli Push-Dim |
| Output Current      | 20 A       |          |                                        |
| Rated Input Voltage | 12-48 V/DC | Channels | 1                                      |

| Article | Price   |
|---------|---------|
| 843538  | € 75.95 |



Accessories

843536
Battery, Varta, CR2032, Lithium 3 V



€ 3.95



DEKO-LIGHT RF-SMART STARTER-SET 2, LED-DIMMER + RF-REMOTE CONTROL SINGLE/CCT

- Dimmable brightness and colour saturation
- Intelli-Push dim function [on/off, brightness] via potential-free push-button
- Can be controlled with all RF-smart wireless remote controls [2.4 GHz, range approx. 30 m]
- Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]
- Program and remote control synchronisation when operating multiple RF-smart components [repeater function]
- Control of single/CCT components
- Flicker-free [images/videos]
- Power: max. 20 A/controller, max. 10 A/channel
- 12 V = 240 W, 24 V = 480 W, 48 V = 960 W
- One control zone
- Remote control requires 2x AAA batteries [not included in the scope of delivery]
- Set consisting of: 1x 843505 + 1x 843508

|                     |            |          |                       |
|---------------------|------------|----------|-----------------------|
| Housing             | Plastic    | Control  | RF-Smart, ZigBee 3.0, |
| Output Current      | 20 A       |          | Intelli Push-Dim      |
| Rated Input Voltage | 12-48 V/DC | Channels | 1, 2                  |

| Article | Price   |
|---------|---------|
| 843501  | € 79.95 |






DEKO-LIGHT RF-SMART STARTER-SET 3, LED-DIMMER + RF-REMOTE CONTROL RGB/RGBW/RGB+CCT

- Dimmable brightness and colour saturation
- 16 million adjustable colours and adjustable colour temperature
- 18 pre-installed automatic programs
- Intelli-Push dim function [on/off, brightness] via potential-free push-button
- Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m]
- Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]
- Program and remote control synchronisation when operating multiple RF-smart components [repeater function]
- Control of RGB components
- Flicker-free [images/videos]
- Power: max. 20 A/controller, max. 10 A/channel
- 12 V = 240 W, 24 V = 480 W, 48 V = 960 W
- One control zone
- Remote control requires 2x AAA batteries [not included in the scope of delivery]
- Set consisting of: 1x 843505 + 1x 843510

|                     |            |          |                       |
|---------------------|------------|----------|-----------------------|
| Housing             | Plastic    | Control  | RF-Smart, ZigBee 3.0, |
| Output Current      | 20 A       |          | Intelli Push-Dim      |
| Rated Input Voltage | 12-48 V/DC | Channels | 3                     |

| Article | Price   |
|---------|---------|
| 843502  | € 79.95 |





DEKO-LIGHT RF-SMART STARTER-SET 6, RGB/W/CCT

- Brightness and colour saturation dimmable
- 16 million colours or colour temperature adjustable
- 18 automatic programmes pre-installed
- Convenient operation via stand / handheld remote control
- Soft-On / Soft-Off for gentle switching on / off
- Intelli-Push Dim function (on/off, brightness) via potential-free push-button
- Controllable with RF-Smart radio remote controls
- controllable with all Zigbee 3.0 compatible controllers / apps (gateway required)
- Program and remote control synchronisation when operating multiple RF Smart components (repeater function)
- Control of single / WW-CW / RGB / RGBW / RGB+CCT components
- flicker-free (image / video recordings)
- Power: max. 20 A / controller, max. 10 A / channel
- 12 V = 240 W, 24 V = 480 W, 48 V = 960 W
- three control zones
- Operation remote control with 2 x AAA battery (not included)
- Set consisting of: 1 x 843505 / 1 x 843525

|                     |            |          |                       |
|---------------------|------------|----------|-----------------------|
| Housing             | Plastic    | Control  | RF-Smart, ZigBee 3.0, |
| Output Current      | 20 A       |          | Intelli Push-Dim      |
| Rated Input Voltage | 12-48 V/DC | Channels | 1, 2, 3, 4, 5         |

| Article                                                                                    | Price   |
|--------------------------------------------------------------------------------------------|---------|
| 843542  | € 91.95 |





DEKO-LIGHT RF-SMART TRIAC DIMMER 230 V

- Dimmable brightness
- Intelli-Push dim function [on/off, brightness] via potential-free push-button
- Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]
- Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]
- Program and remote control synchronisation when operating multiple RF-smart components [repeater function]
- Control of 230 V (R/C) components
- Minimum brightness adjustable in ten steps
- Adjustable switch mode [dimming disabled]
- Up to 10x LED-LM/7x LED ballast units can be connected [max. 300 W for R/C loads]

|                |         |                     |                                                              |
|----------------|---------|---------------------|--------------------------------------------------------------|
| Output Current | 1.36 A  | Power               | 1.0-300 W                                                    |
| Housing        | Plastic | Rated Input Voltage | 100-240 V/AC                                                 |
| Length         | 49 mm   | Control             | RF-Smart, Trailing-edge dimmer, ZigBee 3.0, Intelli Push-Dim |
| Width          | 49 mm   | Channels            | 1                                                            |
| Height         | 25 mm   |                     |                                                              |

| Article                                                                                    | Price   |
|--------------------------------------------------------------------------------------------|---------|
| 843503  | € 55.95 |





DEKO-LIGHT RF-SMART OUTDOOR TRIAC-DIMMER 230V

- Dimmable brightness
- Intelli-Push dim function [on/off, brightness] via potential-free push-button
- Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]
- Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]
- Program and remote control synchronisation when operating multiple RF-smart components [repeater function]
- Control of 230 V (R/C) components
- Minimum brightness adjustable in ten steps
- Adjustable switch mode [dimming disabled, additional load relays can be connected]
- Up to 10x LED-LM/7x LED ballast units can be connected [max. 300 W for R/C loads]
- IP67 outdoor distribution board with up to four cable entry points from 4-14 mm and two blanking plugs

|                |         |                     |                                                              |
|----------------|---------|---------------------|--------------------------------------------------------------|
| Output Current | 1.36 A  | Power               | 1.0-300 W                                                    |
| Housing        | Plastic | Rated Input Voltage | 100-240 V/AC                                                 |
| Length         | 170 mm  | Control             | RF-Smart, Trailing-edge dimmer, ZigBee 3.0, Intelli Push-Dim |
| Width          | 155 mm  | Channels            | 1                                                            |
| Height         | 65 mm   |                     |                                                              |

|         |         |
|---------|---------|
| Article | Price   |
| 843504  | € 71.95 |







DEKO-LIGHT RF-SMART LED-DIMMER 5-IN-1,  
5 CHANNEL SINGLE/CCT/RGB/RGBW/RGB+CCT

- Dimmable brightness and colour saturation
- 16 million adjustable colours and adjustable colour temperature
- 18 pre-installed automatic programs
- Intelli-Push dim function [on/off, brightness] via potential-free push-button
- Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]
- Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]
- Program and remote control synchronisation when operating multiple RF-smart components [repeater function]
- Control of single/CCT/RGB/RGBW/RGB+CCT components
- Flicker-free [images/videos]
- Power: max. 20 A/controller, max. 10 A/channel
- 12 V = 240 W, 24 V = 480 W, 48 V = 960 W

|                |         |                     |                                        |
|----------------|---------|---------------------|----------------------------------------|
| Housing        | Plastic | Rated Input Voltage | 12-48 V/DC                             |
| Length         | 120 mm  | Control             | RF-Smart, ZigBee 3.0, Intelli Push-Dim |
| Width          | 47 mm   | Channels            | 1, 2, 3, 4, 5                          |
| Height         | 23 mm   |                     |                                        |
| Output Current | 20 A    |                     |                                        |

| Article                                                                                    | Price   |
|--------------------------------------------------------------------------------------------|---------|
| 843505  | € 55.95 |





DEKO-LIGHT RF-SMART OUTDOOR LED-DIMMER 5-IN-1,  
5 CHANNEL SINGLE/CCT/RGB/RGBW/RGB+CCT

- Dimmable brightness and colour saturation
- 16 million adjustable colours and adjustable colour temperature
- 18 pre-installed automatic programs
- Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]
- Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]
- Program and remote control synchronisation when operating multiple RF-smart components [repeater function]
- Control of single/CCT/RGB/RGBW/RGB+CCT components
- Flicker-free [images/videos]
- Power: max. 20 A/controller, max. 10 A/channel
- 12 V = 240 W, 24 V = 480 W, 48 V = 960 W
- Input/output pre-fitted on each 20 cm connecting cable

|         |         |                     |                      |
|---------|---------|---------------------|----------------------|
| Housing | Plastic | Output Current      | 20 A                 |
| Length  | 185 mm  | Rated Input Voltage | 12-48 V/DC           |
| Width   | 87 mm   | Control             | RF-Smart, ZigBee 3.0 |
| Height  | 31 mm   | Channels            | 1, 2, 3, 4, 5        |

|         |         |
|---------|---------|
| Article | Price   |
| 843506  | € 87.95 |





DEKO-LIGHT RF-SMART RF-REMOTE CONTROL, SINGLE/CCT

- Dimmable brightness
- Adjustable colour temperature, if necessary
- One control zone
- Range approx. 30 m
- Can be used as a wall-mounted or hand-held remote control [magnetic holder included in the scope of delivery]
- Very simple installation and operation
- Battery-operated with 2x AAA [not included in the scope of delivery]
- Low power consumption
- Control of single/CCT components

|         |         |                     |          |
|---------|---------|---------------------|----------|
| Housing | Plastic | Rated Input Voltage | 3 V/DC   |
| Height  | 24 mm   | Control             | RF-Smart |
| Ø       | 70 mm   | Channels            | 1, 2     |

| Article |  | Price   |
|---------|--|---------|
| 843508  |  | € 30.95 |
| 843509  |  | € 30.95 |



**Lighting design**  
 Interested in our lighting design service?  
 Your contact person will be happy to answer any questions you may have.



DEKO-LIGHT RF-SMART RF-REMOTE CONTROL, RGB/RGBW/RGB+CCT

- Dimmable brightness
- Adjustable colour saturation and colour temperature, if necessary
- 16 million adjustable colours
- Automatic programs can be controlled
- One control zone
- Range approx. 30 m
- Can be used as a wall-mounted or hand-held remote control [magnetic holder included in the scope of delivery]
- Very simple installation and operation
- Battery-operated with 2x AAA [not included in the scope of delivery]
- Low power consumption
- Control of RGB components

|         |         |                     |          |
|---------|---------|---------------------|----------|
| Housing | Plastic | Rated Input Voltage | 3 V/DC   |
| Height  | 24 mm   | Control             | RF-Smart |
| Ø       | 70 mm   | Channels            | 3        |

| Article |                                     | Price   |
|---------|-------------------------------------|---------|
| 843510  | <input type="checkbox"/>            | € 30.95 |
| 843511  | <input checked="" type="checkbox"/> | € 30.95 |



**Onlineshop**  
You can find more information about the products in the onlineshop:  
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.



DEKO-LIGHT RF-SMART RF REMOTE CONTROL, 3 ZONES, SINGLE

- Dimmable brightness
- Up to three different control zones
- Three storable scenes
- Range approx. 30 m
- Can be used as a stand/handheld remote control
- Very simple installation and operation
- Battery-operated with 2x AAA [not included in the scope of delivery]
- Low power consumption
- Controls single components

|         |         |                     |          |
|---------|---------|---------------------|----------|
| Housing | Plastic | Rated Input Voltage | 3 V/DC   |
| Length  | 143 mm  | Control             | RF-Smart |
| Width   | 57 mm   | Channels            | 1        |
| Height  | 44 mm   |                     |          |

| Article                                                                                    | Price   |
|--------------------------------------------------------------------------------------------|---------|
| 843523  | € 39.95 |





DEKO-LIGHT RF-SMART RF REMOTE CONTROL, 3 ZONES, SINGLE/CCT

- Dimmable brightness
- Up to three different control zones
- Three storable scenes
- Range approx. 30 m
- Can be used as a stand/handheld remote control
- Very simple installation and operation
- Battery-operated with 2x AAA [not included in the scope of delivery]
- Low power consumption
- Controls CCT and/or single components

|         |         |                     |          |
|---------|---------|---------------------|----------|
| Housing | Plastic | Rated Input Voltage | 3 V/DC   |
| Length  | 143 mm  | Control             | RF-Smart |
| Width   | 57 mm   | Channels            | 1, 2     |
| Height  | 44 mm   |                     |          |

Article Price

843524  € 39.95







DEKO-LIGHT RF-SMART RF-REMOTE CONTROL,  
3 ZONES SINGLE/CCT/RGB/RGBW/RGB+CCT

- Dimmable brightness
- Can be used as a stand/handheld remote control
- Adjustable colour saturation and colour temperature, if necessary
- 16 million adjustable colours, if necessary
- Separate white light button
- Automatic program and program speed can be controlled
- Up to three different control zones
- Range approx. 30 m
- Very simple installation and operation
- Battery-operated with 2x AAA [not included in the scope of delivery]
- Low power consumption
- Controls single/CCT/RGB/RGBW/RGB+CCT components

|         |         |                     |               |
|---------|---------|---------------------|---------------|
| Housing | Plastic | Rated Input Voltage | 3 V/DC        |
| Length  | 143 mm  | Control             | RF-Smart      |
| Width   | 57 mm   | Channels            | 1, 2, 3, 4, 5 |
| Height  | 44 mm   |                     |               |

| Article                                                                                    | Price   |
|--------------------------------------------------------------------------------------------|---------|
| 843525  | € 39.95 |





**DEKO-LIGHT RF-SMART RF-REMOTE CONTROL,  
8 ZONES SINGLE/CCT/RGB/RGBW/RGB+CCT**

- Dimmable brightness
- Adjustable colour saturation and colour temperature, if necessary
- 16 million adjustable colours, if necessary
- Separate white light button
- Automatic program and program speed can be controlled
- Up to eight different control zones
- Range approx. 30 m
- Wall bracket included in the scope of delivery
- Very simple installation and operation
- Battery-operated with 2x AAA [not included in the scope of delivery]
- Low power consumption
- Control of single/CCT/RGB/RGBW/RGB+CCT components

|         |         |                     |               |
|---------|---------|---------------------|---------------|
| Housing | Plastic | Rated Input Voltage | 3 V/DC        |
| Length  | 153 mm  | Control             | RF-Smart      |
| Width   | 47 mm   | Channels            | 1, 2, 3, 4, 5 |
| Height  | 19 mm   |                     |               |

Article Price

843512  € 39.95








DEKO-LIGHT RF-SMART PUSH-BUTTON WALL-MOUNTED REMOTE CONTROL 1 ZONE

- Easy commissioning and operation (on/off - light-dark-bright)
- Light switch haptics
- Fits perfectly into existing switch programmes
- one control zone
- Range approx. 30 m
- Mounting with adhesive pad or screws
- Battery operation with 1x CR 2032 battery (not included)
- Low power consumption
- Control of single components

|         |         |                     |          |
|---------|---------|---------------------|----------|
| Housing | Plastic | Rated Input Voltage | 3 V/DC   |
| Length  | 86 mm   | Control             | RF-Smart |
| Width   | 86 mm   | Channels            | 1        |
| Height  | 14.5 mm |                     |          |

| Article                                                                                    | Price   |
|--------------------------------------------------------------------------------------------|---------|
| 843535  | € 21.95 |



Accessories  
843536 Battery, Varta, CR2032, Lithium 3 V



€ 3.95




DEKO-LIGHT RF-SMART RF-WALL REMOTE CONTROL,  
4 ZONES, 3V, SINGLE/CCT/RGB/RGBW/RGB+CCT

- Dimmable brightness
- Adjustable colour saturation and colour temperature, if necessary
- 16 million adjustable colours, if necessary
- Automatic program and program speed can be controlled
- Separate white light button
- Up to four different control zones
- Range approx. 30 m
- Magnetic wall bracket included in the scope of delivery
- Very simple installation and operation
- Battery-operated with 2x AAA [not included in the scope of delivery]
- Low power consumption
- Control of single/CCT/RGB/RGBW/RGB+CCT components

|         |         |                     |               |
|---------|---------|---------------------|---------------|
| Housing | Plastic | Rated Input Voltage | 3 V/DC        |
| Length  | 86 mm   | Control             | RF-Smart      |
| Width   | 86 mm   | Channels            | 1, 2, 3, 4, 5 |
| Height  | 16 mm   |                     |               |

| Article                         | Price   |
|---------------------------------|---------|
| 843513 <input type="checkbox"/> | € 55.95 |





**DEKO-LIGHT RF-SMART RF WALL-MOUNTED REMOTE CONTROL, 4 ZONES, 230 V, SINGLE/CCT/RGB/RGBW/RGB+CCT**

- Wall-mounted remote control for fixed installation
- Dimmable brightness
- Adjustable colour saturation and colour temperature, if necessary
- 16 million adjustable colours, if necessary
- Automatic program and program speed can be controlled
- Separate white light button
- Up to four different control zones
- Range approx. 30 m
- Simple operation
- Installation on 68 mm single switch box
- 230 V/AC mains operation
- Low power consumption
- Control of single/CCT/RGB/RGBW/RGB+CCT components


|         |         |                     |               |
|---------|---------|---------------------|---------------|
| Housing | Plastic | Rated Input Voltage | 100-240 V/AC  |
| Length  | 86 mm   | Control             | RF-Smart      |
| Width   | 86 mm   | Channels            | 1, 2, 3, 4, 5 |
| Height  | 9 mm    |                     |               |

Article Price

843522 ☐ € 59.95








DEKO-LIGHT RF-SMART RF WALL-MOUNTED REMOTE CONTROL, 8 ZONES, SINGLE/CCT/RGB/RGBW/RGB+CCT

- Dimmable brightness
- Adjustable colour saturation and colour temperature, if necessary
- 16 million adjustable colours, if necessary
- Automatic program and program speed can be controlled
- Separate white light button
- Up to eight different control zones
- Range approx. 30 m
- Delayed switch-off function [60 s]
- Simple commissioning
- Battery-operated with 2x AAA [not included in the scope of delivery]
- Numerous installation options [68 mm switch socket for operating with optional 230 V power supply]
- Low power consumption
- Control of single/CCT/RGB/RGBW/RGB+CCT components

|         |         |                     |               |
|---------|---------|---------------------|---------------|
| Housing | Plastic | Rated Input Voltage | 3 V/DC        |
| Length  | 146 mm  | Control             | RF-Smart      |
| Width   | 106 mm  | Channels            | 1, 2, 3, 4, 5 |
| Height  | 20 mm   |                     |               |

| Article                                                                                    | Price   |
|--------------------------------------------------------------------------------------------|---------|
| 843514  | € 87.95 |



Accessories

872144 RF-smart, 230 V power supply for 8-zone wall-mounted remote control (3 V DC)


€ 13.95




DEKO-LIGHT RF-SMART RF-REPEATER

- Extends the range of an RF remote control by up to 30 m
- Supports up to 12 remote controls and/or 12 zones simultaneously
- Suitable for outdoor and indoor use
- Incl. 1 m connecting cable with IP44 mains plug
- Compatible with all RF-smart remote controls

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Height              | 34 mm        |
| Length  | 103 mm  | Rated Input Voltage | 100-240 V/AC |
| Width   | 34 mm   | Control             | RF-Smart     |

| Article                         | Price   |
|---------------------------------|---------|
| 843507 <input type="checkbox"/> | € 27.95 |





DEKO-LIGHT RF-SMART PIR MOTION DETECTOR

- Can be rotated/swivelled 360°
- Self-adhesive magnetic holder included in the scope of delivery
- Very simple installation and operation
- Detection angle: 120°
- Detection range: 1-7 m
- RF range: approx. 30 m
- Switches on all RF-smart dimmers, lights/lamps (even when combined with other RF-smart remote controls)
- Motion detector can switch several dimmers, lights/lamps at the same time
- Controls the night light mode of all RF-smart dimmers, lights/lamps (843512 required for programming)
- Preset switching time and daylight threshold value
- Switching time can be adjusted (843512 required for programming)
- Daylight threshold value can be adjusted (843512 required for programming)
- Battery-operated with 1x CR123A [not included in the scope of delivery]
- Low power consumption



|         |         |                     |          |
|---------|---------|---------------------|----------|
| Housing | Plastic | Rated Input Voltage | 3 V/DC   |
| Height  | 56 mm   | Control             | RF-Smart |
| Ø       | 49 mm   | Channels            | 1        |

ArticlePrice

843527  € 30.95



Accessories

|        |                                                             |
|--------|-------------------------------------------------------------|
| 843528 | Photo battery, CR 123 A, lithium 3 V / 1600 mAh             |
| 843503 | RF-smart, Triac dimmer, 230 V, 300 W, IP20                  |
| 843504 | RF-smart, Triac dimmer, 230 V, 300 W, IP67                  |
| 843505 | RF-smart, LED dimmer 5-in-1, 5 channel, 12-48 V, 20 A, IP20 |
| 843506 | RF-smart, LED dimmer 5-in-1, 5 channel, 12-48 V, 20 A, IP67 |
| 843532 | RF-smart, GU10, Zigbee, 4 W, RGB+2700-6500 K, 25 Degree     |
| 843533 | RF-smart, E27, Zigbee, 6 W, RGB+2700-6500 K, 220 Grad       |
| 843534 | RF-smart, E27, Zigbee, 12 W, RGB+2700-6500 K, 220 Grad      |
| 843518 | RF-smart, Flood, 230 V, 30 W, RGB+CCT, IP65                 |
| 843519 | RF-smart, Flood, 230 V, 50 W, RGB+CCT, IP65                 |
| 843520 | RF-smart, Flood, 230 V, 100 W, RGB+CCT, IP65                |
| 843521 | RF-smart, Spot, 230 V, 25 W, RGB+CCT, IP65                  |
| 843530 | Eventus RF-smart, 30W, RF+Zigbee, RGB/CCT, white            |
| 843531 | Eventus RF-smart, 30W, RF+Zigbee, RGB/CCT, black            |

|                                                                                     |          |
|-------------------------------------------------------------------------------------|----------|
|  | € 7.95   |
|  | € 55.95  |
|  | € 71.95  |
|  | € 55.95  |
|  | € 87.95  |
|  | € 37.95  |
|  | € 37.95  |
|  | € 51.95  |
|  | € 199.95 |
|  | € 279.95 |
|  | € 439.95 |
|  | € 191.95 |
|  | € 159.95 |
|  | € 159.95 |



RF-SMART DMX GATEWAY

- RF gateway for operation on standard DMX controllers
- Easy to couple DMX systems to the RF-smart system
- Controls all RF-smart dimmers, lights/lamps (even when combined with other RF-smart remote controls)
- DMX start address can be adjusted via menu keys
- Status LED
- Up to 16 differently controllable zones of 1-5 channels
- Suitable for single/CCT/RGB/W+CCT components
- Occupies 80 DMX channels (regardless of actual channel usage)
- Power supply via supplied USB cable (USB power adapter 5 VDC not included in the scope of delivery)
- Does not support the RF-smart repeater function
- RF range: approx. 30 m

|         |         |                     |               |
|---------|---------|---------------------|---------------|
| Housing | Plastic | Power               | 2.5 W         |
| Length  | 188 mm  | Rated Input Voltage | 5 V/DC        |
| Width   | 47 mm   | Control             | RF-Smart      |
| Height  | 23 mm   | Channels            | 1, 2, 3, 4, 5 |

|                                                                                            |         |
|--------------------------------------------------------------------------------------------|---------|
| Article                                                                                    | Price   |
| 843529  | € 47.95 |



Accessories

|        |                                                             |
|--------|-------------------------------------------------------------|
| 930887 | USB-A plug-in power supply 5 V DC, 1,000 mA, black          |
| 843503 | RF-smart, Triac dimmer, 230 V, 300 W, IP20                  |
| 843504 | RF-smart, Triac dimmer, 230 V, 300 W, IP67                  |
| 843505 | RF-smart, LED dimmer 5-in-1, 5 channel, 12-48 V, 20 A, IP20 |
| 843506 | RF-smart, LED dimmer 5-in-1, 5 channel, 12-48 V, 20 A, IP67 |
| 843532 | RF-smart, GU10, Zigbee, 4 W, RGB+2700-6500 K, 25 Degree     |
| 843533 | RF-smart, E27, Zigbee, 6 W, RGB+2700-6500 K, 220 Grad       |
| 843534 | RF-smart, E27, Zigbee, 12 W, RGB+2700-6500 K, 220 Grad      |
| 843518 | RF-smart, Flood, 230 V, 30 W, RGB+CCT, IP65                 |
| 843519 | RF-smart, Flood, 230 V, 50 W, RGB+CCT, IP65                 |
| 843520 | RF-smart, Flood, 230 V, 100 W, RGB+CCT, IP65                |
| 843521 | RF-smart, Spot, 230 V, 25 W, RGB+CCT, IP65                  |
| 843530 | Eventus RF-smart, 30W, RF+Zigbee, RGB/CCT, white            |
| 843531 | Eventus RF-smart, 30W, RF+Zigbee, RGB/CCT, black            |

|                                                                                     |          |
|-------------------------------------------------------------------------------------|----------|
|  | € 6.95   |
|  | € 55.95  |
|  | € 71.95  |
|  | € 55.95  |
|  | € 87.95  |
|  | € 37.95  |
|  | € 37.95  |
|  | € 51.95  |
|  | € 199.95 |
|  | € 279.95 |
|  | € 439.95 |
|  | € 191.95 |
|  | € 159.95 |
|  | € 159.95 |



**CASAMBI BLUETOOTH CBU-TED | 230 V SWITCHING/DIMMING**

- suitable for R loads [incandescent bulb, high-voltage halogen]
- suitable for C loads [dimmable high-voltage LED, electrical power supply units]
- Power in switching range: incandescent bulb, high-voltage halogen, high-voltage LED, electrical ballasts: max. 150 W
- Output in dimming range: dimmable high-voltage LED, electrical ballasts: max. 50 W/ max. two components
- suitable for 230 V AC lights
- Install the Casambi module in a distributor box, suspended ceiling or similar
- Control and configuration via smartphone app

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Power               | 1.0-50 W     |
| Length  | 40.4 mm | Rated Input Voltage | 220-240 V/AC |
| Width   | 36.3 mm | Control             | Casambi      |
| Height  | 14 mm   | Channels            | 1            |

| Article |                          | Price    |
|---------|--------------------------|----------|
| 843008  | <input type="checkbox"/> | € 115.95 |



**CASAMBI BLUETOOTH CBU-ASD | DALI/0-10 V | 1-10 V**

- Module generates either DALI, 0-10 V or 1-10 V control signal
- Control signal for each ballast unit or power supply unit
- Install the Casambi module in a distributor box, suspended ceiling or similar
- Control and configuration via smartphone app

|         |         |                     |              |
|---------|---------|---------------------|--------------|
| Housing | Plastic | Rated Input Voltage | 220-240 V/AC |
| Length  | 56.5 mm | Control             | Casambi      |
| Width   | 35.8 mm | Channels            | 1            |
| Height  | 22.3 mm |                     |              |

| Article |                          | Price    |
|---------|--------------------------|----------|
| 843011  | <input type="checkbox"/> | € 119.95 |





CASAMBI BLUETOOTH CBU-PWM4 | LED ONE-TO FOUR-CHANNEL DIMMER

- Module suitable for controlling 12 V/24 V LED strips
- One to four channels [WW, CW, WW-CW, RGB, RGBW]
- Power: 144 W at 24 V, 72 W at 12 V
- Install the Casambi module in a distributor box, suspended ceiling or similar
- Control and configuration via smartphone app

|         |         |                     |            |
|---------|---------|---------------------|------------|
| Housing | Plastic | Output Current      | 6 A        |
| Length  | 72.6 mm | Rated Input Voltage | 12-24 V/DC |
| Width   | 30 mm   | Control             | Casambi    |
| Height  | 18 mm   | Channels            | 1, 2, 3, 4 |

| Article |  | Price    |
|---------|--|----------|
| 843037  |  | € 143.95 |



CASAMBI BLUETOOTH WALL-MOUNTED CONTROLLER XPRESS

- Bluetooth wall controller compatible with Casambi system
- Installation with screws or adhesive tape
- No wiring required
- Battery operation [3 V button cell]
- Configured via smartphone app

|         |         |                     |         |
|---------|---------|---------------------|---------|
| Housing | Plastic | Height              | 12 mm   |
| Length  | 90 mm   | Rated Input Voltage | 3 V/DC  |
| Width   | 90 mm   | Control             | Casambi |

| Article |  | Price    |
|---------|--|----------|
| 843049  |  | € 319.95 |
| 843050  |  | € 319.95 |







DEKO-LIGHT MULTI-DIMMER 4,  
4-CHANNEL 3-IN-1 CONTROL/PWM DIMMER

- Easy programming of all settings incl. memory function
- 3-IN-1 control DMX / automatic / manual
- Use as 1, 2, 3, 4 channel dimmer, individually dimmable
- 24 colour change programmes pre-installed [automatic mode]
- Flicker-free 2kHz for image and video recordings
- DMX signal / master-slave pluggable via CAT5

Performance:

- 4x 60W [240W] at 12V, 4x 120W [480W] at 24V, 4x 240W [960W] at 48V
- max. 20A [4x 5A per channel]

|         |         |                     |            |
|---------|---------|---------------------|------------|
| Housing | Metal   | Output Current      | 20 A       |
| Length  | 116 mm  | Rated Input Voltage | 12-48 V/DC |
| Width   | 57 mm   | Channels            | 1, 2, 3, 4 |
| Height  | 26.8 mm |                     |            |

| Article | Price   |
|---------|---------|
| 843279  | € 91.95 |

CV

DMX

1 CH

2 CH

3 CH

4 CH

IP20



DEKO-LIGHT R-DMX 3+1

- complies with DMX 512/1990, RDM protocol/2009
- supports automatic DMX address assignment
- incl. DIN rail adapter and 2 m CAT5 cable [RJ45]
- flicker-free

Performance:

- 4x 48W [192W] at 12V, 4x 96W [384W] at 24V
- max. 16A [4x 4A per channel]

|         |        |                     |            |
|---------|--------|---------------------|------------|
| Housing | Metal  | Output Current      | 16 A       |
| Length  | 120 mm | Rated Input Voltage | 12-24 V/DC |
| Width   | 43 mm  | Channels            | 1, 2, 3, 4 |
| Height  | 23 mm  |                     |            |

| Article | Price   |
|---------|---------|
| 843273  | € 69.95 |

CV

DMX

1 CH

2 CH

3 CH

4 CH

IP20



DALITRIAC DIMMER

- Can be controlled using DALI1/DALI2, DT6, one channel
- Can alternatively be controlled using push-dim button [8-230 V/AC]
- Dimmable brightness/trailing-edge phase dimmers
- Adjustable minimum brightness [push-dim only]
- Optimal for extending DALI systems or installing in Triac dimmable lighting due to its compact size
- LED output [C load] max. 200 W/230 V/max. 10x LM or ECG
- Halogen output [R load] 400 W/230 V, no limit on the number of lamps
- Power consumption at DALI bus: max. 2 mA

|         |           |                     |                                      |
|---------|-----------|---------------------|--------------------------------------|
| Housing | Plastic   | Output Current      | 1.8 A                                |
| Length  | 45.5 mm   | Rated Input Voltage | 100-240 V/AC                         |
| Width   | 45.5 mm   | Control             | DALI 1 / DT6, DALI 2 / DT6, Push-Dim |
| Height  | 20.3 mm   | Channels            | 1                                    |
| Power   | 1.0-400 W |                     |                                      |

| Article                                                                                    | Price   |
|--------------------------------------------------------------------------------------------|---------|
| 843340  | € 59.95 |



Accessories  
930942 DIN rail/mounting adapter for Dali Triac dimmer



€ 1.45




DEKO-LIGHT DALI LED PWM DIMMER 12-48 V, 1/2 CHANNEL

- DT6 = occupies 2 Dali channels
- 2x 1-channel mode (WW/CW) or 1x 2 channel mode (WW-CW, CCT)
- Can be dimmed 0-100 %, overload protection, reverse polarity protection
- Flicker-free, suitable for videos (PWM 2 kHz)
- For 12 V-48 V DC (CV) LED strips/lights
- Output power: 2x 8 A = 16 A

|                |         |                     |                            |
|----------------|---------|---------------------|----------------------------|
| Housing        | Plastic | Rated Input Voltage | 12-48 V/DC                 |
| Length         | 167 mm  | Control             | DALI 1 / DT6, DALI 2 / DT6 |
| Width          | 51 mm   | Channels            | 1, 2                       |
| Height         | 23 mm   |                     |                            |
| Output Current | 16 A    |                     |                            |

| Article |                          | Price   |
|---------|--------------------------|---------|
| 843341  | <input type="checkbox"/> | € 67.95 |



DEKO-LIGHT DALI DT8 LED PWM DIMMER 12-48 V, 2 CHANNEL

- DT8 = occupies 1 Dali channel
- 1x 2-channel mode (WW-CW, CCT)
- Can be dimmed 0-100 %, overload protection, reverse polarity protection
- Flicker-free, suitable for videos (PWM 2 kHz)
- For 12 V-48 V DC (CV) LED strips/lights
- Output power: 2x 8 A = 16 A

|                |         |                     |                            |
|----------------|---------|---------------------|----------------------------|
| Housing        | Plastic | Rated Input Voltage | 12-48 V/DC                 |
| Length         | 167 mm  | Control             | DALI 1 / DT8, DALI 2 / DT8 |
| Width          | 51 mm   | Channels            | 2                          |
| Height         | 23 mm   |                     |                            |
| Output Current | 16 A    |                     |                            |

| Article |                          | Price   |
|---------|--------------------------|---------|
| 843342  | <input type="checkbox"/> | € 67.95 |






## DEKO-LIGHT DALI LED PWM DIMMER 12-48 V, 3/4 CHANNEL

- DT6 = occupies 4 Dali channels
- 1x 3-channel mode (RGB) or 1x 4-channel mode (RGBW)
- Can be dimmed 0-100 %, overload protection, reverse polarity protection
- Flicker-free, suitable for videos (PWM 2 kHz)
- For 12 V-48 V DC (CV) LED strips/lights
- Output power: 4x 4 A = 16 A

|                |         |                     |                            |
|----------------|---------|---------------------|----------------------------|
| Housing        | Plastic | Rated Input Voltage | 12-48 V/DC                 |
| Length         | 167 mm  | Control             | DALI 1 / DT6, DALI 2 / DT6 |
| Width          | 51 mm   | Channels            | 1, 2, 3, 4                 |
| Height         | 23 mm   |                     |                            |
| Output Current | 16 A    |                     |                            |

Article Price

843343 ☐ € 75.95



## DEKO-LIGHT DALI DT8 LED PWM DIMMER 12-48 V, 4 CHANNEL

- DT8 = occupies 1 Dali channel
- 1x 4-channel mode (RGBW)
- Can be dimmed 0-100 %, overload protection, reverse polarity protection
- Flicker-free, suitable for videos (PWM 2 kHz)
- For 12 V-48 V DC (CV) LED strips/lights
- Output power: 4x 4 A = 16 A

|                |         |                     |                            |
|----------------|---------|---------------------|----------------------------|
| Housing        | Plastic | Rated Input Voltage | 12-48 V/DC                 |
| Length         | 167 mm  | Control             | DALI 1 / DT8, DALI 2 / DT8 |
| Width          | 51 mm   | Channels            | 4                          |
| Height         | 23 mm   |                     |                            |
| Output Current | 16 A    |                     |                            |

Article Price

843344 ☐ € 75.95





**ILLUMINANTS**

- 860 MR16 / GU53
  - 861 G9 - GU10
  - 864 E27
  - 867 GX53
- 





page 860



page 860



page 861



page 861



page 862



page 862



page 864



page 864



page 867





LEDVANCE LED MR16

|                     |           |                     |            |
|---------------------|-----------|---------------------|------------|
| Housing             | Glass     | Ø                   | 50 mm      |
| Light Beam Angle    | 36 Degree | Rated Input Voltage | 12 V/AC/DC |
| Life Time L70 / B50 | 15000 h   | CRI (Ra)            | 80         |



| Article | Housing Color | Colour Temperature | Luminous Flux | Power | Power Consumption | Height | EEL | Price  |
|---------|---------------|--------------------|---------------|-------|-------------------|--------|-----|--------|
| 180368  | Colourless    | 3000 K             | 210 lm        | 2.0 W | 2 kWh/1000h       | 44 mm  |     | € 7.95 |
| 180748  | Colourless    | 3000 K             | 345 lm        | 3.4 W | 4 kWh/1000h       | 44 mm  |     | € 7.95 |
| 180309  | Colourless    | 4000 K             | 210 lm        | 2.1 W | 3 kWh/1000h       | 46 mm  |     | € 7.95 |
| 180318  | Colourless    | 4000 K             | 345 lm        | 3.4 W | 4 kWh/1000h       | 44 mm  |     | € 7.95 |

MR16 GU5,3

CV

IP20

1 CH

LEDVANCE LED MR16 DIMMABLE

|                     |           |                     |                                         |
|---------------------|-----------|---------------------|-----------------------------------------|
| Housing             | Glass     | Rated Input Voltage | 12 V/AC/DC                              |
| Light Beam Angle    | 36 Degree | CRI (Ra)            | 90                                      |
| Life Time L70 / B50 | 25000 h   | Control             | Dimmable via optional power supply unit |
| Height              | 44 mm     |                     |                                         |
| Ø                   | 50 mm     |                     |                                         |



| Article | Housing Color | Colour Temperature | Luminous Flux | Power | Power Consumption | EEL | Price   |
|---------|---------------|--------------------|---------------|-------|-------------------|-----|---------|
| 180746  | Colourless    | 3000 K             | 230 lm        | 2.2 W | 3 kWh/1000h       |     | € 10.95 |
| 180749  | Colourless    | 3000 K             | 345 lm        | 3.4 W | 4 kWh/1000h       |     | € 11.95 |
| 180751  | Colourless    | 3000 K             | 621 lm        | 6.1 W | 7 kWh/1000h       |     | € 21.95 |
| 180264  | Colourless    | 4000 K             | 230 lm        | 3.4 W | 4 kWh/1000h       |     | € 11.95 |
| 180750  | Colourless    | 4000 K             | 345 lm        | 3.4 W | 4 kWh/1000h       |     | € 11.95 |

MR16 GU5,3

CV

IP20


1 CH

## LEDVANCE LED P PIN G9

|                    |            |                     |              |
|--------------------|------------|---------------------|--------------|
| Housing            | Plastic    | Life Time L70 / B50 | 15000 h      |
| Colour Temperature | 2700 K     | Rated Input Voltage | 220-240 V/AC |
| Light Beam Angle   | 300 Degree | CRI (Ra)            | 80           |



| Article       | Housing Color |    | Luminous Flux | Power | Power Consumption | Height | Ø     | EEL | Price          |
|---------------|---------------|----|---------------|-------|-------------------|--------|-------|-----|----------------|
| <b>180295</b> | Colourless    | WW | 200 lm        | 1.9 W | 2 kWh/1000h       | 43 mm  | 14 mm | F   | <b>€ 5.95</b>  |
| <b>180287</b> | Colourless    | WW | 320 lm        | 2.6 W | 3 kWh/1000h       | 43 mm  | 14 mm | E   | <b>€ 7.95</b>  |
| <b>180286</b> | Colourless    | WW | 470 lm        | 4.2 W | 5 kWh/1000h       | 49 mm  | 18 mm | E   | <b>€ 10.95</b> |




NEW

## LEDVANCE LED GU10

|                    |             |                     |              |
|--------------------|-------------|---------------------|--------------|
| Housing            | Glass       | Life Time L70 / B50 | 15000 h      |
| Colour Temperature | 2700 K      | Height              | 54 mm        |
| Luminous Flux      | 350 lm      | Ø                   | 50 mm        |
| Power              | 3.7 W       | Rated Input Voltage | 220-240 V/AC |
| Light Beam Angle   | 36 Degree   | CRI (Ra)            | 80           |
| Power Consumption  | 4 kWh/1000h |                     |              |



| Article       | Housing Color |    | Price         |
|---------------|---------------|----|---------------|
| <b>180752</b> | Silver        | WW | <b>€ 5.95</b> |



### 5-year guarantee

Benefit from the maximum quality promise:  
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



PHILIPS MASTER VALUE LED GU10 DIMMABLE

|         |       |                     |                      |
|---------|-------|---------------------|----------------------|
| Housing | Glass | Rated Input Voltage | 220-240 V/AC         |
| Height  | 54 mm | Control             | Trailing-edge dimmer |
| Ø       | 50 mm | Channels            | 1                    |



| Article | Housing Color | Colour Temp. | Luminous Flux | Power | Light Beam Angle | Power Consump. | EEL | Price   |
|---------|---------------|--------------|---------------|-------|------------------|----------------|-----|---------|
| 180296  | Silver        | 2700 K       | 270 lm        | 2.8 W | 36 Degree        | 3 kWh/1000h    |     | € 7.95  |
| 180744  | Silver        | 2700 K       | 345 lm        | 4.0 W | 36 Degree        | 4 kWh/1000h    |     | € 8.95  |
| 180319  | Silver        | 2700 K       | 355 lm        | 3.7 W | 60 Degree        | 4 kWh/1000h    |     | € 9.95  |
| 180317  | Silver        | 3000 K       | 365 lm        | 3.7 W | 36 Degree        | 4 kWh/1000h    |     | € 11.95 |
| 180753  | Silver        | 3000 K       | 365 lm        | 3.7 W | 60 Degree        | 4 kWh/1000h    |     | € 9.95  |
| 180297  | Silver        | 3000 K       | 575 lm        | 5.5 W | 36 Degree        | 6 kWh/1000h    |     | € 13.95 |
| 180747  | Silver        | 4000 K       | 380 lm        | 3.7 W | 36 Degree        | 4 kWh/1000h    |     | € 11.95 |
| 180299  | Silver        | 4000 K       | 380 lm        | 3.7 W | 60 Degree        | 4 kWh/1000h    |     | € 11.95 |
| 180298  | Silver        | 4000 K       | 575 lm        | 5.5 W | 36 Degree        | 6 kWh/1000h    |     | € 13.95 |



OSRAM PARATHOM LED GU10 DIMMABLE

|                     |             |                     |                      |
|---------------------|-------------|---------------------|----------------------|
| Housing             | Glass       | Height              | 52 mm                |
| Colour Temperature  | 2700 K      | Ø                   | 50 mm                |
| Luminous Flux       | 575 lm      | Rated Input Voltage | 220-240 V/AC         |
| Power               | 6.1 W       | CRI (Ra)            | 90                   |
| Light Beam Angle    | 60 Degree   | Control             | Trailing-edge dimmer |
| Power Consumption   | 7 kWh/1000h | Channels            | 1                    |
| Life Time L70 / B50 | 25000 h     |                     |                      |



| Article | Housing Color | Price   |
|---------|---------------|---------|
| 180745  | Silver        | € 13.95 |



## DEKO-LIGHT RF-SMART LAMP GU10 RGB+CCT WITH RF ZIGBEE CONTROL

- Dimmable brightness and colour saturation
- 16 million available colours and adjustable colour temperature
- 18 pre-installed automatic programs
- Program and remote control synchronisation when operating multiple RF-smart components [repeater function]
- Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]
- Can be controlled with all controllers/apps compatible with Zigbee 3.0, such as Amazon Echo [Alexa], Google Assistant and Tuya [relevant gateway required, outdoor range up to 100 m]

|                     |             |                     |                      |
|---------------------|-------------|---------------------|----------------------|
| Housing             | Plastic     | Height              | 57 mm                |
| Colour Temperature  | 2700-6500 K | Ø                   | 50 mm                |
| Luminous Flux       | 300 lm      | Rated Input Voltage | 100-240 V/AC         |
| Power               | 4 W         | CRI (Ra)            | 80                   |
| Light Beam Angle    | 25 Degree   | Control             | RF-Smart, ZigBee 3.0 |
| Power Consumption   | 4 kWh/1000h | Channels            | 5                    |
| Life Time L70 / B50 | 50000 h     |                     |                      |

| Article | Housing Color                  | Colour Temperature                                                                                                                | Price   |
|---------|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------|
| 843532  | <input type="checkbox"/> White | <input checked="" type="checkbox"/> RGB <input checked="" type="checkbox"/> WW <input checked="" type="checkbox"/> CW 2700-6500 K | € 37.95 |



### Accessories

|        |                                                                             |  |         |
|--------|-----------------------------------------------------------------------------|--|---------|
| 843510 | RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20             |  | € 30.95 |
| 843511 | RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20             |  | € 30.95 |
| 843513 | RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT   |  | € 55.95 |
| 843514 | RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT  |  | € 87.95 |
| 843522 | RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT |  | € 59.95 |
| 843523 | RF-smart, Standard Remote, black, 3 zones, Single                           |  | € 39.95 |
| 843524 | RF-smart, Standard Remote, black, 3 zones, Single/CCT                       |  | € 39.95 |
| 843525 | RF-smart, Standard Remote, black, 3 zones, Single/CCT/RGB/RGBW/RGB+CCT      |  | € 39.95 |
| 843512 | RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT       |  | € 39.95 |
| 843527 | RF-smart, PIR motion detector, white, 120deg/7m, 3V                         |  | € 30.95 |
| 843529 | RF-smart, DMX-Gateway, 5V DC, 16 Zonen Single/CCT/RGB/W/+CCT                |  | € 47.95 |





LEDVANCE LED RETROFIT E27 A60 DIMMABLE

|                    |            |                     |                      |
|--------------------|------------|---------------------|----------------------|
| Housing            | Glass      | Power Consumption   | 6 kWh/1000h          |
| Colour Temperature | 2700 K     | Life Time L70 / B50 | 15000 h              |
| Luminous Flux      | 806 lm     | Rated Input Voltage | 220-240 V/AC         |
| Power              | 5.9 W      | CRI (Ra)            | 80                   |
| Light Beam Angle   | 300 Degree | Control             | Trailing-edge dimmer |
| Height             | 105 mm     | Channels            | 1                    |
| Ø                  | 60 mm      |                     |                      |



| Article | Housing Color | Price  |
|---------|---------------|--------|
| 180754  | Colourless    | € 6.95 |

LEDVANCE LED CLASSIC E27 A75 DIMMABLE

|                    |            |                     |                      |
|--------------------|------------|---------------------|----------------------|
| Housing            | Glass      | Power Consumption   | 8 kWh/1000h          |
| Colour Temperature | 2700 K     | Life Time L70 / B50 | 15000 h              |
| Luminous Flux      | 1055 lm    | Rated Input Voltage | 220-240 V/AC         |
| Power              | 7.5 W      | CRI (Ra)            | 80                   |
| Light Beam Angle   | 360 Degree | Control             | Trailing-edge dimmer |
| Height             | 105 mm     | Channels            | 1                    |
| Ø                  | 60 mm      |                     |                      |



| Article | Housing Color | Price   |
|---------|---------------|---------|
| 180277  | Colourless    | € 10.95 |



**Technical data sheet**  
 New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.



## DEKO-LIGHT RF-SMART LAMP E27 A60 RGB+CCT WITH RF ZIGBEE CONTROL

- Dimmable brightness and colour saturation
- 16 million available colours and adjustable colour temperature
- 18 pre-installed automatic programs
- Program and remote control synchronisation when operating multiple RF-smart components [repeater function]
- Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]
- Can be controlled with all controllers/apps compatible with Zigbee 3.0, such as Amazon Echo [Alexa], Google Assistant and Tuya [relevant gateway required, outdoor range up to 100 m]

|                  |            |                     |                      |
|------------------|------------|---------------------|----------------------|
| Housing          | Plastic    | Power Consumption   | 6 kWh/1000h          |
| Luminous Flux    | 550 lm     | Life Time L70 / B50 | 50000 h              |
| Power            | 6 W        | Rated Input Voltage | 100-240 V/AC         |
| Light Beam Angle | 220 Degree | CRI (Ra)            | 80                   |
| Height           | 100 mm     | Control             | RF-Smart, ZigBee 3.0 |
| Ø                | 57 mm      | Channels            | 5                    |

| Article       | Housing Color                  | Colour Temperature | Price          |
|---------------|--------------------------------|--------------------|----------------|
| <b>843533</b> | <input type="checkbox"/> White | 2700-6500 K        | <b>€ 37.95</b> |



### Accessories

|               |                                                                             |  |                |
|---------------|-----------------------------------------------------------------------------|--|----------------|
| <b>843510</b> | RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20             |  | <b>€ 30.95</b> |
| <b>843511</b> | RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20             |  | <b>€ 30.95</b> |
| <b>843513</b> | RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT   |  | <b>€ 55.95</b> |
| <b>843514</b> | RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT  |  | <b>€ 87.95</b> |
| <b>843522</b> | RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT |  | <b>€ 59.95</b> |
| <b>843523</b> | RF-smart, Standard Remote, black, 3 zones, Single                           |  | <b>€ 39.95</b> |
| <b>843524</b> | RF-smart, Standard Remote, black, 3 zones, Single/CCT                       |  | <b>€ 39.95</b> |
| <b>843525</b> | RF-smart, Standard Remote, black, 3 zones, Single/CCT/RGB/RGBW/RGB+CCT      |  | <b>€ 39.95</b> |
| <b>843512</b> | RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT       |  | <b>€ 39.95</b> |
| <b>843527</b> | RF-smart, PIR motion detector, white, 120deg/7m, 3V                         |  | <b>€ 30.95</b> |
| <b>843529</b> | RF-smart, DMX-Gateway, 5V DC, 16 Zonen Single/CCT/RGB/W/+CCT                |  | <b>€ 47.95</b> |



DEKO-LIGHT RF-SMART LAMP E27 MAX RGB+CCT  
WITH RF ZIGBEE CONTROL

- Dimmable brightness and colour saturation
- 16 million available colours and adjustable colour temperature
- 18 pre-installed automatic programs
- Program and remote control synchronisation when operating multiple RF-smart components [repeater function]
- Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]
- Can be controlled with all controllers/apps compatible with Zigbee 3.0, such as Amazon Echo [Alexa], Google Assistant and Tuya [relevant gateway required, outdoor range up to 100 m]

|                  |            |                     |                      |
|------------------|------------|---------------------|----------------------|
| Housing          | Plastic    | Power Consumption   | 12 kWh/1000h         |
| Luminous Flux    | 1100 lm    | Life Time L70 / B50 | 50000 h              |
| Power            | 12 W       | Rated Input Voltage | 100-240 V/AC         |
| Light Beam Angle | 220 Degree | CRI (Ra)            | 80                   |
| Height           | 147 mm     | Control             | RF-Smart, ZigBee 3.0 |
| Ø                | 70 mm      | Channels            | 5                    |

| Article                                                                                                                      | Housing Color                  | Colour Temperature                                                                                          | Price   |
|------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-------------------------------------------------------------------------------------------------------------|---------|
| 843510                                                                                                                       | <input type="checkbox"/> White | <input checked="" type="checkbox"/> RGB <input type="checkbox"/> WW <input type="checkbox"/> CW 2700-6500 K | € 51.95 |
| <div><div></div><div>E27</div><div>IP20</div><div>5 CH</div><div></div><div></div><div>A<br/>t<br/>G</div><div>F</div></div> |                                |                                                                                                             |         |

Accessories

- 843510 RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20
- 843511 RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20
- 843513 RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/WW/+CCT
- 843514 RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT
- 843522 RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT
- 843523 RF-smart, Standard Remote, black, 3 zones, Single
- 843524 RF-smart, Standard Remote, black, 3 zones, Single/CCT
- 843525 RF-smart, Standard Remote, black, 3 zones, Single/CCT/RGB/RGBW/RGB+CCT
- 843512 RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT
- 843527 RF-smart, PIR motion detector, white, 120deg/7m, 3V
- 843529 RF-smart, DMX-Gateway, 5V DC, 16 Zonen Single/CCT/RGB/W+CCT

|  |         |
|--|---------|
|  | € 30.95 |
|  | € 30.95 |
|  | € 55.95 |
|  | € 87.95 |
|  | € 59.95 |
|  | € 39.95 |
|  | € 39.95 |
|  | € 39.95 |
|  | € 39.95 |
|  | € 30.95 |
|  | € 47.95 |

ISOLED LED GX53

|                     |             |                     |              |
|---------------------|-------------|---------------------|--------------|
| Housing             | Aluminium   | Height              | 28 mm        |
| Power               | 6 W         | Ø                   | 75 mm        |
| Light Beam Angle    | 120 Degree  | Rated Input Voltage | 220-240 V/AC |
| Power Consumption   | 6 kWh/1000h | CRI (Ra)            | 80           |
| Life Time L70 / B50 | 25000 h     |                     |              |



| Article | Housing Color                  | Colour Temperature                         | Luminous Flux | Price   |
|---------|--------------------------------|--------------------------------------------|---------------|---------|
| 180196  | <input type="checkbox"/> White | <input checked="" type="checkbox"/> 3000 K | 500 lm        | € 17.95 |
| 180195  | <input type="checkbox"/> White | <input checked="" type="checkbox"/> 4000 K | 525 lm        | € 17.95 |

GX53

IP20

1 CH

A

↑

G

D





|     |                    |
|-----|--------------------|
|     | <b>ACCESSORIES</b> |
| 872 | indoor             |
| 875 | outdoor            |
| 883 | chemical products  |





□  
page 872



■  
page 873



■  
page 874



□  
page 874



■  
page 875



■ ■  
page 875



page 876



■  
page 881



■  
page 882




page 883



SAFETY SPACER

- For safe installation of downlights in ceilings with insulating material
- Creates the necessary clearance around the light to enable better air circulation
- Observe the installation requirements of the specific light.
- For ceiling installation rings from dia. 62 to 90 mm



|         |         |   |       |
|---------|---------|---|-------|
| Housing | Plastic | Ø | 62 mm |
| Height  | 80 mm   |   |       |

| Article | Housing Color                                                                           | Price  |
|---------|-----------------------------------------------------------------------------------------|--------|
| 829063  |  Black | € 3.45 |

SOCKET GU5,3

- Heat-resistant connecting cable
- Ceramic fitting



|                     |            |                          |             |
|---------------------|------------|--------------------------|-------------|
| Housing             | Ceramic    | Power                    | 35 W        |
| Ø                   | 17 mm      | Secondary Connection End | Open cables |
| Rated Input Voltage | 12 V/AC/DC | Connection Type          | Open cables |


| Article | Housing Color                  | Length | Height | Secondary Cable Length | Price  |
|---------|--------------------------------|--------|--------|------------------------|--------|
| 100200  | <input type="checkbox"/> White |        | 150 mm | 0.15 m                 | € 0.75 |
| 100250  | <input type="checkbox"/> White | 500 mm | 500 mm | 0.5 m                  | € 1.25 |



SOCKET GU10 (PROTECTION CLASS II)

|                     |              |                        |                                   |
|---------------------|--------------|------------------------|-----------------------------------|
| Housing             | Ceramic      | Power                  | 35 W                              |
| Height              | 150 mm       | Primary Cable Length   | 15 cm                             |
| Ø                   | 28 mm        | Primary Connection End | With free strand / conductor ends |
| Rated Input Voltage | 220-240 V/AC |                        |                                   |

| Article | Housing Color                  | Price  |
|---------|--------------------------------|--------|
| 100202  | <input type="checkbox"/> White | € 1.55 |




SOCKET GU10 (SAFETY CLASS I)

- With spacer and connection box
- Separate connection for protective conductors
- When using installation rings, VDE regulations require a screw connection between the spacer and installation ring



|                     |              |                        |                |
|---------------------|--------------|------------------------|----------------|
| Housing             | Ceramic      | Primary Cable Length   | 10 cm          |
| Rated Input Voltage | 220-240 V/AC | Primary Connection End | Screw terminal |
| Power               | 35 W         |                        |                |

| Article | Housing Color                  | Price  |
|---------|--------------------------------|--------|
| 100204  | <input type="checkbox"/> White | € 3.25 |

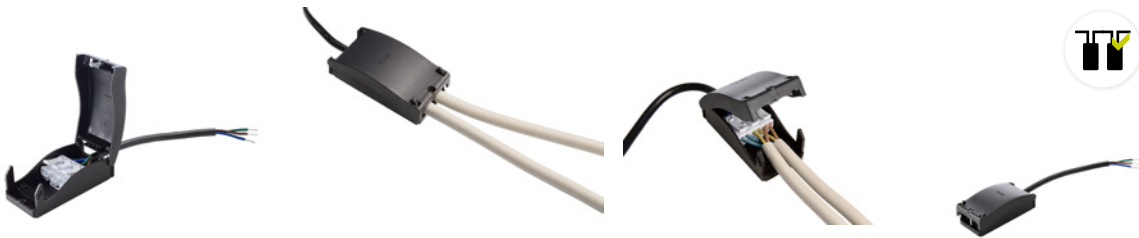

DEKO-LIGHT QUICK CONNECTION BOX 2-WAY 230 V

- Fast through-wiring of power supplies or lamps
- 3-pin quick terminal for cables from 0.5 to 1.5 mm<sup>2</sup>
- 15 cm pre-installed 3-pin cable for connecting SKI/SKII power supply units/lamps
- Quick-action closure secured with additional screw
- For inserting into ceilings with a round cut-out from 68 mm and a 25 mm ceiling cavity

|         |         |                          |                     |
|---------|---------|--------------------------|---------------------|
| Housing | Plastic | Rated Input Voltage      | 220-240 V/AC        |
| Length  | 80 mm   | Rated Current            | 16 A                |
| Width   | 40 mm   | Primary Connection End   | Connection box IP20 |
| Height  | 25 mm   | Secondary Connection End | Open cables         |

| Article | Housing Color                             | Price  |
|---------|-------------------------------------------|--------|
| 930694  | <input checked="" type="checkbox"/> Black | € 4.95 |



TRIAC-DIMMER TRAILING EDGE

- Suitable for dimming:
- **R loads (incandescent bulb) 10-350 W**
- **C loads (electrical ballasts) 10-350 W**
- **Max. five ballasts**
- **Adjustable minimum load/brightness**
- **Perfectly matched to DEKO-LIGHT power supply units**
- **Suitable for 68 mm flush-mounted/cavity wall sockets**



|                     |              |                 |                      |
|---------------------|--------------|-----------------|----------------------|
| Housing             | Plastic      | Power           | 355 W                |
| Length              | 83.5 mm      | Control         | Trailing-edge dimmer |
| Width               | 83.5 mm      | Rated Current   | 1.6 A                |
| Height              | 43.5 mm      | Connection Type | Clamp                |
| Rated Input Voltage | 220-240 V/AC |                 |                      |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 930060  | White         | € 53.95 |



OVERVOLTAGE PROTECTION WITH CONTROL DISPLAY

- **Compact protection of lights in the event of problems with the mains supply**
- **Prevents premature failure**
- **In the event of a fault, the overvoltage protection trips, protecting the light by disconnecting it from the mains supply**
- **Control LED to indicate the operating status**
- **Suitable for single-phase, non-dimmable lights**
- **With mounting bracket for installation in light fittings or junction boxes**



|                     |              |                          |                                   |
|---------------------|--------------|--------------------------|-----------------------------------|
| Housing             | Plastic      | Rated Current            | 10 A                              |
| Length              | 37 mm        | Primary Connection End   | With free strand / conductor ends |
| Width               | 30 mm        | Secondary Connection End | Open cables                       |
| Height              | 20 mm        |                          |                                   |
| Rated Input Voltage | 230-277 V/AC |                          |                                   |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 843055  | Black         | € 15.95 |





GROUND SPIKE WITH THREADED BUSHING

- Robust design
- For anchoring surface-mounted spotlights in soil

| Article | Housing Color                                                                           | Housing   | Height | Ø       | Price  |
|---------|-----------------------------------------------------------------------------------------|-----------|--------|---------|--------|
| 930426  |  Black | Aluminium | 170 mm | 33 mm   | € 7.95 |
| 930427  |  Black | Aluminium | 219 mm | 43.8 mm | € 9.95 |
| 700229  |  Black | Plastic   | 160 mm | 43 mm   | € 3.95 |
| 730349  |  Black | Plastic   | 210 mm | 45 mm   | € 5.45 |
| 700230  |  Black | Plastic   | 210 mm | 50 mm   | € 3.95 |



WALL BRACKET/DISPLAY ARM

- Robust housing
- Load capacity: max. 4.5 kg
- Ideal for illuminating advertising boards on façades
- Accessories for façade lighting
- Supplied without installation materials due to wide range of possible applications

|         |        |        |        |
|---------|--------|--------|--------|
| Housing | Metal  | Width  | 150 mm |
| Length  | 800 mm | Height | 100 mm |

| Article | Housing Color                                                                             | Price   |
|---------|-------------------------------------------------------------------------------------------|---------|
| 930659  |  Black | € 47.95 |

WEIPU DISTRIBUTOR BOX

- for wiring 12V/24V/48V DC outdoor components
- reverse polarity protected
- Robust design
- 2 socket outlets



|         |         |                     |            |
|---------|---------|---------------------|------------|
| Housing | Plastic | Height              | 38 mm      |
| Length  | 57 mm   | Rated Input Voltage | 12-48 V/DC |
| Width   | 57 mm   | Rated Current       | 8.5 A      |



| Article | Secondary Connection End | Connection Type   | Price   |
|---------|--------------------------|-------------------|---------|
| 730300  | WEIPU socket 2-pole      | WEIPU plug 2-pole | € 51.95 |
| 730301  | WEIPU socket 4-pole      | WEIPU plug 4-pole | € 54.95 |
| 940010  | WEIPU socket 5-pole      | WEIPU plug 5-pole | € 62.95 |







WEIPU HQ SOCKET / PLUG | 2-PIN

|         |         |                     |            |
|---------|---------|---------------------|------------|
| Housing | Plastic | Rated Input Voltage | 12-48 V/DC |
| Height  | 65 mm   | Rated Current       | 8.5 A      |
| Ø       | 27 mm   |                     |            |

| Article       | Connection Type     | Price   |
|---------------|---------------------|---------|
| <b>940060</b> | WEIPU plug 2-pole   | € 10.95 |
| <b>940058</b> | WEIPU socket 2-pole | € 10.95 |
| <b>940059</b> | WEIPU socket 2-pole | € 10.95 |



WEIPU HQ SOCKET / PLUG | 4-PIN

|         |         |                     |            |
|---------|---------|---------------------|------------|
| Housing | Plastic | Rated Input Voltage | 12-48 V/DC |
| Height  | 65 mm   | Rated Current       | 8.5 A      |
| Ø       | 27 mm   |                     |            |

| Article       | Connection Type     | Price   |
|---------------|---------------------|---------|
| <b>940062</b> | WEIPU plug 4-pole   | € 11.95 |
| <b>940061</b> | WEIPU socket 4-pole | € 11.95 |
| <b>940063</b> | WEIPU socket 4-pole | € 11.95 |



WEIPU HQ SOCKET / PLUG | 5-PIN

|         |         |                     |            |
|---------|---------|---------------------|------------|
| Housing | Plastic | Rated Input Voltage | 12-48 V/DC |
| Height  | 65 mm   | Rated Current       | 8.5 A      |
| Ø       | 27 mm   |                     |            |

| Article       | Connection Type     | Price   |
|---------------|---------------------|---------|
| <b>940057</b> | WEIPU plug 5-pole   | € 12.95 |
| <b>940056</b> | WEIPU socket 5-pole | € 12.95 |





WEIPU HQ FEEDER CABLE | SOCKET 2-PIN

|                     |            |                 |                     |
|---------------------|------------|-----------------|---------------------|
| Housing             | Plastic    | Rated Current   | 8.5 A               |
| Ø                   | 27 mm      | Connection Type | WEIPU socket 2-pole |
| Rated Input Voltage | 12-48 V/DC |                 |                     |



| Article | Height  | Price   |
|---------|---------|---------|
| 940037  | 1000 mm | € 17.95 |
| 940038  | 3000 mm | € 23.95 |
| 940039  | 5000 mm | € 29.95 |



WEIPU HQ FEEDER CABLE | SOCKET 4-PIN

|                     |            |                 |                     |
|---------------------|------------|-----------------|---------------------|
| Housing             | Plastic    | Rated Current   | 8.5 A               |
| Ø                   | 27 mm      | Connection Type | WEIPU socket 4-pole |
| Rated Input Voltage | 12-48 V/DC |                 |                     |



| Article | Height  | Price   |
|---------|---------|---------|
| 940033  | 1000 mm | € 21.95 |
| 940034  | 3000 mm | € 33.95 |
| 940035  | 5000 mm | € 44.95 |



WEIPU HQ FEEDER CABLE | SOCKET | 5-PIN

|                     |            |                 |                     |
|---------------------|------------|-----------------|---------------------|
| Housing             | Plastic    | Rated Current   | 8.5 A               |
| Ø                   | 27 mm      | Connection Type | WEIPU socket 5-pole |
| Rated Input Voltage | 12-48 V/DC |                 |                     |



| Article | Height  | Price   |
|---------|---------|---------|
| 940029  | 1000 mm | € 25.95 |
| 940030  | 3000 mm | € 37.95 |
| 940031  | 5000 mm | € 47.95 |





WEIPU HQ CONNECTION CABLE | 2-PIN

|                     |            |                          |                     |
|---------------------|------------|--------------------------|---------------------|
| Housing             | Plastic    | Rated Current            | 8.5 A               |
| Ø                   | 27 mm      | Secondary Connection End | WEIPU socket 2-pole |
| Rated Input Voltage | 12-48 V/DC | Connection Type          | WEIPU plug 2-pole   |



| Article | Height  | Price   |
|---------|---------|---------|
| 940049  | 1000 mm | € 27.95 |
| 940050  | 3000 mm | € 33.95 |
| 940051  | 5000 mm | € 39.95 |




WEIPU HQ CONNECTION CABLE | 4-PIN

|                     |            |                          |                     |
|---------------------|------------|--------------------------|---------------------|
| Housing             | Plastic    | Rated Current            | 8.5 A               |
| Ø                   | 27 mm      | Secondary Connection End | WEIPU socket 4-pole |
| Rated Input Voltage | 12-48 V/DC | Connection Type          | WEIPU plug 4-pole   |



| Article | Height  | Price   |
|---------|---------|---------|
| 940045  | 1000 mm | € 33.95 |
| 940046  | 3000 mm | € 45.95 |
| 940047  | 5000 mm | € 54.95 |



WEIPU HQ CONNECTION CABLE | 5-PIN

|                     |            |                          |                     |
|---------------------|------------|--------------------------|---------------------|
| Housing             | Plastic    | Rated Current            | 8.5 A               |
| Ø                   | 27 mm      | Secondary Connection End | WEIPU socket 5-pole |
| Rated Input Voltage | 12-48 V/DC | Connection Type          | WEIPU plug 5-pole   |



| Article | Height  | Price   |
|---------|---------|---------|
| 940041  | 1000 mm | € 37.95 |
| 940042  | 3000 mm | € 48.95 |
| 940043  | 5000 mm | € 57.95 |





MULTI OUTDOOR CABLE CONNECTOR | CONNECTION SLEEVE

- Watertight M25 cable glands
- For two cables measuring 4-14 mm
- For two to five wires measuring 0.5-4 mm²
- Adapter sleeves included in scope of delivery

|         |                        |                     |             |
|---------|------------------------|---------------------|-------------|
| Housing | PA 6.6 - Polyamide 6.6 | Height              | 32.56 mm    |
| Length  | 112.53 mm              | Rated Input Voltage | 12-450 V/AC |
| Width   | 29.5 mm                | Rated Current       | 24 A        |

| Article | Housing Color   | Price  |
|---------|-----------------|--------|
| 930571  | ■ Black, Yellow | € 7.95 |



MULTI OUTDOOR Y-SHAPED CABLE CONNECTOR | CONNECTION SLEEVE

- Waterproof M25 cable glands
- For three cables measuring 4-14 mm (adapter sleeves included in the scope of delivery)
- For two to three wires measuring 0.5-4 mm²

|         |                        |                     |             |
|---------|------------------------|---------------------|-------------|
| Housing | PA 6.6 - Polyamide 6.6 | Height              | 32.56 mm    |
| Length  | 139.71 mm              | Rated Input Voltage | 12-450 V/AC |
| Width   | 71.88 mm               | Rated Current       | 24 A        |

| Article | Housing Color   | Price  |
|---------|-----------------|--------|
| 930573  | ■ Black, Yellow | € 8.95 |





MULTI OUTDOOR CABLE DISTRIBUTOR TWO-WAY

- For wiring low-voltage and 230 V outdoor components
- Robust housing
- For wires measuring 0.5-2.5 mm²
- For two cables measuring 5-12 mm
- Versatile thanks to the adapter sleeves included in the scope of delivery
- Watertight M20 cable glands
- Cover: Quick-action coupling (screwless)



|         |                        |                     |             |
|---------|------------------------|---------------------|-------------|
| Housing | PA 6.6 - Polyamide 6.6 | Rated Input Voltage | 12-450 V/AC |
| Height  | 46.31 mm               | Rated Current       | 24 A        |
| Ø       | 65.33 mm               |                     |             |

| Article | Housing Color | Price  |
|---------|---------------|--------|
| 930578  | Black         | € 5.95 |



MULTI OUTDOOR CABLE DISTRIBUTOR TWO-WAY

- Watertight M20 cable glands
- For two cables measuring 5-12 mm
- Adapter sleeves included in scope of delivery
- For wires measuring 0.5-2.5 mm²
- Screwed cover (screws included in scope of delivery)



|         |                        |                     |             |
|---------|------------------------|---------------------|-------------|
| Housing | PA 6.6 - Polyamide 6.6 | Height              | 42 mm       |
| Length  | 125 mm                 | Rated Input Voltage | 12-450 V/AC |
| Width   | 70 mm                  | Rated Current       | 24 A        |

| Article | Housing Color | Price  |
|---------|---------------|--------|
| 930712  | Black         | € 7.95 |





MULTI OUTDOOR CABLE DISTRIBUTOR FOUR-WAY

- Watertight M25 cable glands
- For two to four cables measuring 4-14 mm
- Adapter sleeves and two blanking plugs included in scope of delivery
- For wires measuring 0.5-4.0 mm<sup>2</sup>
- Screwed cover (screws included in scope of delivery)



|         |                        |                     |             |
|---------|------------------------|---------------------|-------------|
| Housing | PA 6.6 - Polyamide 6.6 | Height              | 35.3 mm     |
| Length  | 112.54 mm              | Rated Input Voltage | 12-450 V/AC |
| Width   | 93.3 mm                | Rated Current       | 24 A        |

| Article | Housing Color | Price  |
|---------|---------------|--------|
| 930575  | Black         | € 9.95 |

IP68  
max.2m



MULTI OUTDOOR CABLE DISTRIBUTOR FOUR-WAY

- Watertight M25 cable glands
- For two to four cables measuring 4-14 mm
- Adapter sleeves and two blanking plugs included in scope of delivery
- For wires measuring 0.5-4.0 mm<sup>2</sup>
- Screwed cover (screws included in scope of delivery)



|         |                        |                     |             |
|---------|------------------------|---------------------|-------------|
| Housing | PA 6.6 - Polyamide 6.6 | Height              | 35.3 mm     |
| Length  | 112.54 mm              | Rated Input Voltage | 12-450 V/AC |
| Width   | 93.3 mm                | Rated Current       | 24 A        |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 930735  | Black         | € 15.95 |

IP68  
max.2m





MULTI OUTDOOR CABLE DISTRIBUTORTEN-WAY

- Watertight M25 cable glands
- For two to ten cables measuring 4-14 mm
- Adapter sleeves and eight blanking plugs included in scope of delivery
- For wires measuring 0.5-4 mm²
- Screwed cover (screws included in scope of delivery)
- For wiring low-voltage and 230 V outdoor components
- Versatile thanks to the adapter sleeves included in the scope of delivery



|         |                        |                     |             |
|---------|------------------------|---------------------|-------------|
| Housing | PA 6.6 - Polyamide 6.6 | Height              | 49.1 mm     |
| Length  | 182.95 mm              | Rated Input Voltage | 12-450 V/AC |
| Width   | 135.3 mm               | Rated Current       | 24 A        |

| Article | Housing Color | Price   |
|---------|---------------|---------|
| 930574  | Black         | € 31.95 |

IP68  
max.2m



## GEL ADHESIVE FOR BONDING END CAPS

- Cyanoacrylate instant adhesive
- 3 g tube
- Strong initial bond
- Excellent adhesion to almost all surfaces, such as metals, steel, stainless steel, zinc-plated steel, aluminium, plastics (e.g. ABS, GFRP, hard PC) and ceramic materials
- Curing time: 8-12 hours
- Observe the safety and application instructions



|        |       |        |       |
|--------|-------|--------|-------|
| Length | 60 mm | Height | 10 mm |
| Width  | 20 mm |        |       |

| Article | Price  |
|---------|--------|
| 930593  | € 4.95 |

## ASSEMBLY ADHESIVE

- Bond+Seal Power
- 310 ml cartridge
- Heavy-duty, elastic 1-component structural adhesive
- Excellent adhesion to almost all surfaces, such as metals, steel, stainless steel, galvanised steel, aluminium, plastics (e.g. ABS, GFRP, hard PVC) or ceramic materials
- UV-resistant
- Approved for use with foodstuffs according to NSF (NSF, P1 registered: 136996)
- High degree of initial strength
- Can be painted over with all commercially available paint systems (except alkyd resin paints)



|        |        |   |       |
|--------|--------|---|-------|
| Height | 230 mm | Ø | 49 mm |
|--------|--------|---|-------|

| Article | Price   |
|---------|---------|
| 930105  | € 28.95 |

## NATURAL STONE SEALANT

- 310 ml cartridge
- Suitable for bonding profile covers and for use in wet rooms
- Does not attack the surface of LEDs/strips
- Permanently elastic
- Highly resistant to weathering, UV and ageing and excellent colour fastness
- Ideal for high loads outdoors



|        |        |   |       |
|--------|--------|---|-------|
| Height | 230 mm | Ø | 49 mm |
|--------|--------|---|-------|

| Article | Price   |
|---------|---------|
| 930104  | € 31.95 |

ELECTRIC CHARACTERISTICS

CV

constant voltage

CC

constant current

SELV

safety extra-long voltage

flicker free

solar panel

USB charging socket

battery operation

LAMP

E14

base of lamp

FUNCTIONALITY

swivel-mounted +  
rotatable and swivel-mounted + rotatable

radiation direction

SURFACE

NANO coating IP XX [see product description]  
lotus effect: Water rolls off and takes all dirty surface  
particles with it.

surface paintable /  
individual design

CONTROL

movement sensor [IR / HF]

presence detector

DMX control

dimmable

1 CH

4-6 CH

number of channels

emergency power supply

SAFETY

IP protection class

walkable

passable

safety lamp control gear

components may be installed on fixtures of materials,  
the fire behavior of which is not always known.

max. surface temperature of lamp control gear

lights with limited surface temperature

protection class I

protection class II  
[protective isolation]

protection class III  
[protective low voltage]



light colours / channels



selectable light colour



human centric lighting



dim to warm



Colour rendering index RA



colour consistency SDCM



UGR



power switch



phase switch



tool-free installation



corridor function



control type



BEG eligible



suitable for VDU workstations



passable



Through-wiring possible



light can be switched separately



IP23



IP40



IP44



IP54



IP55



IP65



IP66



IP67



IP68



IP68

IP protection



seawater resistant



IK Impact resistance



1/2



2/2

mix'n match



Nightsaver



## EVERYTHING IN VIEW

Optik Eberle, retail trade, conversion

**design:**


Optik Eberle  
Marktstraße 24  
75305 Neuenbürg  
optik-eberle.de

**scope:**

consulting, lighting design, 3D visualisation, product delivery

**photo:**

Andris Balodis

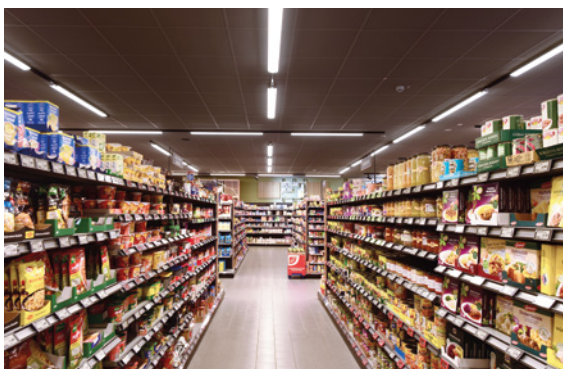

## FLEXIBLE SHOPPING EXPERIENCE

EDEKA, retail trade, refurbishment

**realisation:**

meerLICHT  
Lunser Dorfstraße 12  
27321 Thedinghausen  
meerlicht.de

**scope:**

consulting, lighting design, 3D visualisation, product delivery

**photo:**

Andris Balodis



## DRAWING WITH LIGHT

La Croix Architekten, office, new building

**design and lighting design:**

La Croix Architekten  
Reiteilstraße 8  
76297 Stutensee  
lacroix-architekten.de

**scope:**

product delivery

**photo:**

Daniel Wieser . Architekturfotografie, Hildesheim/Karlsruhe



## NEW LIGHT FOR MORE EFFICIENCY

high-bay warehouse, LED light-band system, refurbishment

**realisation:**

Elektrotechnik  
Mike Kronenwett  
Bahnhofstraße 8  
76307 Karlsbad

**extent:**

consulting inkl. Amortisationsrechnung,  
lighting design, 3D visualization, Projektlieferung

**photo:**

Roman Schinzel





## OFFICE AND BIORHYTHM

EMSR, office building, new building

### design and realisation:

EMSR-Technik GmbH  
Dieselstraße 32  
61200 Wölfersheim  
emsrtechnik.de

### scope:

consulting, lighting design, 3D visualisation, product delivery

### photo:

Roman Schinzel



## MODERN LOUNGE

Base One / Mohr Solutions, Ingenieure company building, conversion

### design and realisation:

OKTEC GmbH  
Wiesenstraße 8/1  
73054 Eisingen  
ok-tec.de

### lighting design:

lighting design Rottke  
lichtplanung-rottke.de

### scope:

consulting, product delivery

### photo:

Alexander Cevolani



## LINEAR AND TRANSPARENT

mars solutions, office- and event areas, core refurbishment

### design and realisation:

OKTEC GmbH  
Wiesenstraße 8/1  
73054 Eisingen  
ok-tec.de

### lighting design:

lighting design Rottke  
lichtplanung-rottke.de

### scope:

consulting, product delivery

### photo:

Alexander Cevolani



## MODERN THERAPY CENTRE

Physiotherapie Senger, practice rooms, refurbishment

### design and realisation:

Elektro Huml GmbH  
Egmatinger Straße 9  
85635 Siegersbrunn  
elektro-huml.de

### scope:

consulting, lighting design, 3D visualisation, product delivery

### photo:

Tanja Dörfner





## MORE LIGHT AND QUALITY OF LIFE

Wilhelmshilfe e.V., nursing home, refurbishment

### design and realisation:

OKTEC GmbH  
Wiesenstraße 8/1  
73054 Eislingen  
ok-tec.de

### lighting design:

lighting design Rottke  
lichtplanung-rottke.de

### scope:

consulting, lighting design, 3D visualisation, product delivery

### photo:

Alexander Cevolani



## MODERN LEARNING

Mühlbachschule, educational institution, refurbishment

### design:

K+H | KILIAN + PARTNER  
kh-architekten.de

### realisation:

Endlichhofer Elektrotechnik  
endlichhofer.de

### lighting design:


Ingenieurbüro Markus Reuder  
reuder.de

### scope:

product delivery

### photo:

Daniel Wieser . Architekturfotografie, Hildesheim/Karlsruhe

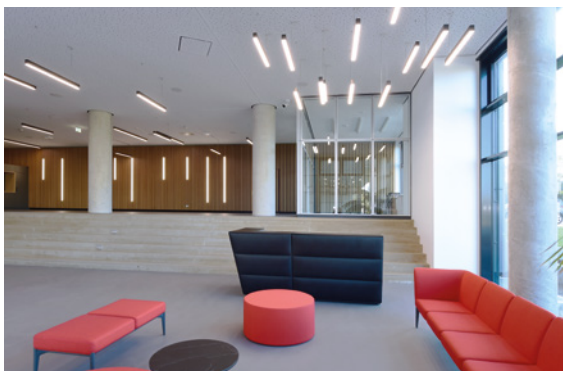

## LIGHT FOR THE HIDDEN CHAMPION

WIBU-Systems, company, new building

### design:

Architekturbüro archis  
archis.de

### project development:

IBA Immobilien  
iba-heinze.de

### project management:

mdbm  
mdbm-baumanagement.de

### general contractor:

Wolff+Müller  
wolff-mueller.de

### electrical installation:

Prinzing Elektrotechnik  
prinzing-elektro.de

### scope:

consulting, lighting design, product delivery

### photos:

Andris Balodis





## EVERY PLATE IN THE IDEAL LIGHT

Becks, restaurant, general refurbishment

**design and realisation:**

SH-Lichttechnik  
Wörthstraße 74  
72766 Reutlingen

**lighting design:**

Sven Hackius

**scope:**

consulting, product delivery

**photo:**

Andris Balodis



## LIGHT IN THE ROCK

Mawell, hotel, new building

**design:**

KommInvest GmbH & Co. KG  
komm-invest.de

**realisation:**

FARMBAU Fertigungssysteme GmbH  
farmbau.eu

**lighting design:**

Lichtdesign Gommel

**scope:**

consulting, product delivery

**photo:**

Andris Balodis



## GARDEN DREAM IN BERLIN

private building, garden landscape, new building

**design and realisation:**

Gärten von Klein GmbH & Co. KG  
Gut-Asselborn Nr. 1  
51429 Bergisch Gladbach  
gaertenvonklein.de

**lighting design:**

Günter Klein

**scope:**

consulting, product delivery

**photo:**

Grit Erlebach



## LINEARES LICHT BIS IN DEN LETZTEN WINKEL

private building, linear light, new building

**design and realisation:**

BEST – Bellemann Elektro Service Team GmbH  
Letzenbergstraße 37a  
69231 Rauenberg-Malschenberg

**lighting design:**

Michael Berger  
best-elektro.de

**scope:**

product delivery

|          |     |        |     |
|----------|-----|--------|-----|
| <b>0</b> |     |        |     |
| 000097   | 819 | 180196 | 867 |
| 000099   | 819 | 180264 | 860 |
| 000103   | 819 | 180277 | 864 |
| 000104   | 819 | 180286 | 861 |
| 000106   | 819 | 180287 | 861 |
| 000107   | 819 | 180295 | 861 |
| 000109   | 819 | 180296 | 862 |
|          |     | 180297 | 862 |
|          |     | 180298 | 862 |
|          |     | 180299 | 862 |
|          |     | 180309 | 860 |
|          |     | 180317 | 862 |
|          |     | 180318 | 860 |
|          |     | 180319 | 862 |
|          |     | 180368 | 860 |
|          |     | 180512 | 812 |
|          |     | 180513 | 812 |
|          |     | 180514 | 812 |
|          |     | 180515 | 819 |
|          |     | 180529 | 819 |
|          |     | 180730 | 33  |
|          |     | 180731 | 33  |
|          |     | 180732 | 34  |
|          |     | 180733 | 34  |
|          |     | 180734 | 35  |
|          |     | 180735 | 35  |
|          |     | 180736 | 35  |
|          |     | 180737 | 35  |
|          |     | 180741 | 35  |
|          |     | 180742 | 35  |
|          |     | 180743 | 35  |
|          |     | 180744 | 862 |
|          |     | 180745 | 862 |
|          |     | 180746 | 860 |
|          |     | 180747 | 862 |
|          |     | 180748 | 860 |
|          |     | 180749 | 860 |
|          |     | 180750 | 860 |
|          |     | 180751 | 860 |
|          |     | 180752 | 861 |
|          |     | 180753 | 862 |
|          |     | 180754 | 864 |
| <b>1</b> |     |        |     |
| 100032   | 157 |        |     |
| 100078   | 156 |        |     |
| 100079   | 156 |        |     |
| 100084   | 149 |        |     |
| 100088   | 149 |        |     |
| 100089   | 149 |        |     |
| 100111   | 526 |        |     |
| 100114   | 526 |        |     |
| 100122   | 149 |        |     |
| 100123   | 152 |        |     |
| 100124   | 153 |        |     |
| 100125   | 152 |        |     |
| 100133   | 530 |        |     |
| 100138   | 153 |        |     |
| 100139   | 152 |        |     |
| 100140   | 146 |        |     |
| 100141   | 146 |        |     |
| 100142   | 147 |        |     |
| 100143   | 146 |        |     |
| 100144   | 146 |        |     |
| 100145   | 147 |        |     |
| 100146   | 148 |        |     |
| 100147   | 148 |        |     |
| 100148   | 149 |        |     |
| 100149   | 146 |        |     |
| 100150   | 146 |        |     |
| 100151   | 148 |        |     |
| 100152   | 159 |        |     |
| 100153   | 159 |        |     |
| 100154   | 152 |        |     |
| 100156   | 159 |        |     |
| 100157   | 159 |        |     |
| 100158   | 154 |        |     |
| 100159   | 158 |        |     |
| 100160   | 158 |        |     |
| 100200   | 872 |        |     |
| 100202   | 872 |        |     |
| 100204   | 873 |        |     |
| 100250   | 872 |        |     |
| 110017   | 91  |        |     |
| 110019   | 90  |        |     |
| 110038   | 86  |        |     |
| 110039   | 86  |        |     |
| 110040   | 86  |        |     |
| 110041   | 86  |        |     |
| 110042   | 86  |        |     |
| 110043   | 86  |        |     |
| 110044   | 87  |        |     |
| 110045   | 87  |        |     |
| 110046   | 87  |        |     |
| 110047   | 87  |        |     |
| 110048   | 87  |        |     |
| 110049   | 87  |        |     |
| 110050   | 88  |        |     |
| 110051   | 88  |        |     |
| 110052   | 88  |        |     |
| 110053   | 88  |        |     |
| 110054   | 88  |        |     |
| 110055   | 88  |        |     |
| 110056   | 89  |        |     |
| 110057   | 89  |        |     |
| 110058   | 89  |        |     |
| 110059   | 89  |        |     |
| 110060   | 89  |        |     |
| 110061   | 89  |        |     |
| 122416   | 78  |        |     |
| 122417   | 79  |        |     |
| 180195   | 867 |        |     |
|          |     | 341183 | 164 |
|          |     | 341184 | 164 |
|          |     | 341194 | 162 |
|          |     | 341195 | 162 |
|          |     | 341196 | 162 |
|          |     | 341200 | 163 |
|          |     | 341202 | 163 |
|          |     | 341236 | 181 |
|          |     | 341237 | 181 |
|          |     | 341242 | 180 |
|          |     | 341243 | 180 |
|          |     | 341249 | 164 |
|          |     | 341250 | 164 |
|          |     | 341333 | 184 |
|          |     | 341334 | 184 |
|          |     | 341335 | 184 |
|          |     | 341336 | 184 |
|          |     | 341337 | 182 |
|          |     | 341338 | 182 |
|          |     | 341339 | 182 |
|          |     | 341340 | 182 |
|          |     | 341341 | 167 |
|          |     | 341342 | 167 |
|          |     | 341343 | 168 |
|          |     | 341344 | 168 |
|          |     | 341345 | 186 |
|          |     | 341346 | 186 |
|          |     | 341347 | 186 |
|          |     | 341348 | 186 |
|          |     | 341349 | 186 |
|          |     | 341350 | 186 |
|          |     | 341351 | 186 |
|          |     | 341352 | 186 |
|          |     | 342177 | 26  |
|          |     | 342178 | 26  |
|          |     | 342181 | 26  |
|          |     | 342182 | 26  |
|          |     | 342189 | 22  |
|          |     | 342190 | 22  |
|          |     | 342191 | 22  |
|          |     | 342192 | 22  |
|          |     | 342193 | 22  |
|          |     | 342194 | 22  |
|          |     | 342195 | 22  |
|          |     | 342196 | 22  |
|          |     | 342197 | 22  |
|          |     | 342198 | 22  |
|          |     | 342199 | 22  |
|          |     | 342200 | 22  |
|          |     | 342201 | 20  |
|          |     | 342202 | 20  |
|          |     | 342203 | 20  |
|          |     | 342204 | 20  |
|          |     | 342205 | 20  |
|          |     | 342206 | 20  |
|          |     | 342207 | 20  |
|          |     | 342208 | 20  |
|          |     | 342209 | 20  |
|          |     | 342210 | 20  |
|          |     | 342211 | 20  |
|          |     | 342212 | 20  |
|          |     | 342213 | 24  |
|          |     | 342214 | 24  |
|          |     | 342219 | 202 |
|          |     | 342220 | 202 |
|          |     | 342221 | 202 |
|          |     | 342228 | 212 |
|          |     | 342229 | 212 |
|          |     | 342230 | 212 |
|          |     | 342231 | 214 |
|          |     | 342232 | 214 |
|          |     | 342233 | 214 |
|          |     | 342237 | 24  |
|          |     | 342238 | 24  |
|          |     | 342241 | 24  |
|          |     | 342242 | 24  |
|          |     | 342243 | 28  |
|          |     | 342244 | 28  |
|          |     | 342245 | 28  |
|          |     | 342246 | 28  |
|          |     | 342247 | 29  |
|          |     | 342248 | 29  |
|          |     | 342251 | 200 |
|          |     | 342252 | 200 |
|          |     | 342253 | 200 |
|          |     | 342254 | 30  |
|          |     | 342255 | 30  |
|          |     | 342256 | 30  |
|          |     | 342257 | 30  |
|          |     | 342258 | 204 |
|          |     | 342259 | 204 |
|          |     | 342260 | 204 |
|          |     | 342261 | 205 |
|          |     | 342262 | 205 |
|          |     | 342263 | 205 |
|          |     | 343022 | 209 |
|          |     | 343025 | 195 |
|          |     | 343026 | 195 |
|          |     | 343030 | 206 |
|          |     | 343032 | 207 |
|          |     | 343037 | 190 |
|          |     | 343038 | 190 |
|          |     | 343039 | 192 |
|          |     | 343040 | 192 |
|          |     | 346015 | 194 |
|          |     | 346016 | 194 |
|          |     | 346026 | 196 |
|          |     | 346027 | 196 |
|          |     | 346028 | 196 |
|          |     | 346063 | 213 |
|          |     | 346064 | 213 |
|          |     | 346065 | 213 |
|          |     | 346066 | 215 |
|          |     | 346067 | 215 |
|          |     | 346068 | 215 |
|          |     | 346086 | 191 |
|          |     | 346087 | 191 |
|          |     | 346088 | 192 |
|          |     | 346089 | 192 |
|          |     | 348022 | 78  |
|          |     | 348023 | 78  |
|          |     | 348024 | 79  |
|          |     | 348025 | 79  |
|          |     | 348071 | 485 |
|          |     | 348072 | 485 |
|          |     | 348107 | 56  |
|          |     | 348122 | 57  |
|          |     | 348123 | 58  |
|          |     | 348124 | 54  |
|          |     | 348125 | 55  |
|          |     | 348127 | 59  |
|          |     | 348153 | 60  |
|          |     | 348154 | 60  |
|          |     | 348155 | 60  |
|          |     | 348156 | 60  |
|          |     | 348157 | 60  |
|          |     | 348158 | 60  |
|          |     | 348159 | 60  |
|          |     | 348160 | 60  |
|          |     | 348161 | 62  |
|          |     | 348162 | 62  |
|          |     | 348163 | 62  |
|          |     | 348164 | 62  |
|          |     | 348165 | 62  |
|          |     | 348166 | 62  |
|          |     | 348167 | 62  |
|          |     | 348168 | 62  |
|          |     | 348175 | 55  |
|          |     | 348176 | 59  |
|          |     | 348177 | 58  |
|          |     | 348178 | 57  |
|          |     | 348179 | 54  |
|          |     | 348180 | 44  |
|          |     | 348181 | 44  |
|          |     | 348182 | 44  |
|          |     | 348183 | 44  |
|          |     | 348186 | 42  |
|          |     | 348187 | 42  |
|          |     | 348188 | 42  |
|          |     | 348189 | 42  |
|          |     | 348190 | 42  |
|          |     | 348191 | 42  |
|          |     | 348192 | 42  |
|          |     | 348193 | 42  |
|          |     | 348194 | 42  |
|          |     | 348195 | 42  |
|          |     | 348196 | 42  |
|          |     | 348197 | 42  |
|          |     | 348198 | 40  |
|          |     | 348199 | 40  |
|          |     | 348200 | 40  |
|          |     | 348201 | 40  |
|          |     | 348202 | 40  |
|          |     | 348203 | 40  |
|          |     | 348204 | 40  |
|          |     | 348205 | 40  |
|          |     | 348206 | 40  |
|          |     | 348207 | 40  |
|          |     | 348208 | 40  |
|          |     | 348209 | 40  |
|          |     | 348210 | 56  |
|          |     | 348213 | 64  |
|          |     | 348214 | 64  |
|          |     | 348215 | 64  |
|          |     | 348216 | 64  |
|          |     | 348223 | 65  |
|          |     | 348224 | 65  |
|          |     | 348225 | 65  |
|          |     | 348226 | 65  |
|          |     | 348233 | 57  |



|             |     |             |          |             |          |             |     |
|-------------|-----|-------------|----------|-------------|----------|-------------|-----|
| 707148..... | 369 | 707245..... | 398      | 710045..... | 313      | 720001..... | 270 |
| 707149..... | 369 | 707246..... | 384      | 710047..... | 313      | 720002..... | 270 |
| 707150..... | 369 | 707247..... | 384      | 710048..... | 324, 356 | 720003..... | 270 |
| 707151..... | 369 | 707248..... | 384      | 710050..... | 324, 356 | 720004..... | 270 |
| 707152..... | 369 | 707249..... | 290      | 710051..... | 327, 359 | 720005..... | 270 |
| 707153..... | 369 | 707250..... | 290      | 710053..... | 327, 359 | 720006..... | 274 |
| 707154..... | 369 | 707251..... | 381      | 710054..... | 331, 361 | 720007..... | 274 |
| 707155..... | 287 | 707252..... | 381      | 710056..... | 331, 361 | 720008..... | 274 |
| 707156..... | 287 | 707253..... | 289      | 710057..... | 322, 354 | 720009..... | 274 |
| 707161..... | 408 | 707254..... | 289      | 710059..... | 322, 354 | 720010..... | 275 |
| 707162..... | 408 | 707255..... | 381      | 710060..... | 331, 361 | 720011..... | 275 |
| 707163..... | 295 | 707256..... | 381      | 710062..... | 331, 361 | 720012..... | 275 |
| 707164..... | 295 | 707257..... | 289      | 710063..... | 321, 353 | 720013..... | 275 |
| 707165..... | 296 | 707258..... | 289      | 710065..... | 321, 353 | 720014..... | 276 |
| 707166..... | 296 | 707264..... | 365      | 710066..... | 320, 352 | 720015..... | 276 |
| 707167..... | 296 | 707265..... | 365      | 710068..... | 320, 352 | 720016..... | 276 |
| 707168..... | 296 | 707266..... | 365      | 710077..... | 320, 352 | 720017..... | 276 |
| 707175..... | 297 | 707267..... | 365      | 710078..... | 323, 355 | 720018..... | 277 |
| 707176..... | 297 | 707268..... | 364      | 710079..... | 320, 352 | 720019..... | 277 |
| 707177..... | 297 | 707269..... | 364      | 710082..... | 326, 358 | 720020..... | 278 |
| 707178..... | 297 | 707270..... | 364      | 710083..... | 326, 358 | 720021..... | 278 |
| 707183..... | 406 | 707271..... | 364      | 710084..... | 323, 355 | 720022..... | 278 |
| 707184..... | 406 | 707274..... | 248      | 710086..... | 323, 355 | 720023..... | 278 |
| 707187..... | 292 | 707277..... | 248      | 710087..... | 323, 355 | 720024..... | 279 |
| 707188..... | 292 | 707280..... | 249      | 710094..... | 324, 356 | 720025..... | 279 |
| 707189..... | 378 | 707283..... | 249      | 710096..... | 324, 356 | 720026..... | 277 |
| 707190..... | 378 | 707284..... | 366      | 710097..... | 328      | 720027..... | 277 |
| 707191..... | 378 | 707285..... | 366      | 710099..... | 328      | 720028..... | 279 |
| 707192..... | 378 | 707286..... | 366      | 710103..... | 320, 352 | 720029..... | 279 |
| 707193..... | 379 | 707287..... | 366      | 710104..... | 322, 354 | 720030..... | 280 |
| 707194..... | 379 | 707292..... | 366      | 710106..... | 322, 354 | 720031..... | 280 |
| 707195..... | 376 | 707293..... | 366      | 710107..... | 345      | 720032..... | 282 |
| 707196..... | 376 | 707294..... | 366      | 710108..... | 321, 353 | 720033..... | 282 |
| 707197..... | 376 | 707295..... | 366      | 710109..... | 321, 353 | 720034..... | 283 |
| 707198..... | 376 | 707296..... | 367      | 710110..... | 325, 357 | 720035..... | 283 |
| 707199..... | 377 | 707297..... | 367      | 710112..... | 325, 357 | 720036..... | 281 |
| 707200..... | 377 | 707298..... | 367      | 710113..... | 312, 343 | 720037..... | 281 |
| 707201..... | 294 | 707299..... | 367      | 710114..... | 312, 343 | 720038..... | 280 |
| 707202..... | 294 | 707304..... | 367      | 710115..... | 312, 343 | 720039..... | 280 |
| 707203..... | 409 | 707305..... | 367      | 710116..... | 312, 343 | 720040..... | 282 |
| 707204..... | 409 | 707306..... | 367      | 710117..... | 325, 357 | 720041..... | 282 |
| 707205..... | 378 | 707307..... | 367      | 710118..... | 325, 357 | 720042..... | 273 |
| 707206..... | 378 | 707328..... | 375      | 710500..... | 340      | 720043..... | 273 |
| 707207..... | 378 | 707329..... | 375      | 710501..... | 340      | 720044..... | 273 |
| 707208..... | 378 | 707330..... | 375      | 710502..... | 340      | 720045..... | 273 |
| 707209..... | 379 | 707331..... | 375      | 710503..... | 340      | 720046..... | 283 |
| 707210..... | 379 | 707332..... | 375      | 710504..... | 340      | 720047..... | 283 |
| 707211..... | 298 | 707333..... | 375      | 710505..... | 340      | 730255..... | 534 |
| 707212..... | 298 | 707334..... | 375      | 710506..... | 344      | 730262..... | 537 |
| 707213..... | 407 | 707335..... | 375      | 710507..... | 344      | 730266..... | 529 |
| 707214..... | 407 | 710000..... | 310      | 710508..... | 344      | 730267..... | 529 |
| 707215..... | 299 | 710002..... | 310      | 710509..... | 344      | 730276..... | 532 |
| 707216..... | 299 | 710003..... | 310      | 710510..... | 344      | 730289..... | 535 |
| 707217..... | 401 | 710005..... | 310      | 710511..... | 344      | 730292..... | 537 |
| 707218..... | 401 | 710006..... | 310      | 710512..... | 341      | 730296..... | 531 |
| 707219..... | 372 | 710008..... | 310      | 710513..... | 341      | 730300..... | 875 |
| 707220..... | 372 | 710009..... | 314      | 710514..... | 346      | 730301..... | 875 |
| 707221..... | 372 | 710011..... | 314      | 710515..... | 346      | 730330..... | 474 |
| 707222..... | 372 | 710012..... | 314      | 710516..... | 346      | 730336..... | 526 |
| 707223..... | 373 | 710014..... | 314      | 710517..... | 346      | 730349..... | 875 |
| 707224..... | 373 | 710015..... | 316      | 710520..... | 347      | 730408..... | 484 |
| 707226..... | 244 | 710017..... | 316      | 710521..... | 347      | 730432..... | 537 |
| 707227..... | 244 | 710018..... | 316, 348 | 710523..... | 347      | 730434..... | 537 |
| 707228..... | 244 | 710020..... | 316, 348 | 710524..... | 347      | 730454..... | 533 |
| 707229..... | 247 | 710024..... | 330, 360 | 710525..... | 348      | 730459..... | 525 |
| 707230..... | 247 | 710026..... | 330, 360 | 710526..... | 348      | 730474..... | 524 |
| 707231..... | 247 | 710027..... | 318      | 710527..... | 349      | 730475..... | 524 |
| 707232..... | 403 | 710029..... | 318      | 710528..... | 349      | 730478..... | 524 |
| 707233..... | 403 | 710030..... | 318      | 710530..... | 350      | 730479..... | 524 |
| 707234..... | 399 | 710032..... | 318      | 710531..... | 350      | 730483..... | 229 |
| 707235..... | 399 | 710033..... | 319      | 710532..... | 350      | 730484..... | 230 |
| 707238..... | 399 | 710035..... | 319      | 710533..... | 350      | 730485..... | 231 |
| 707239..... | 399 | 710036..... | 317      | 710535..... | 351      | 730486..... | 229 |
| 707240..... | 402 | 710038..... | 317      | 710536..... | 351      | 730487..... | 230 |
| 707241..... | 402 | 710039..... | 315      | 710538..... | 320, 352 | 730488..... | 231 |
| 707242..... | 402 | 710041..... | 315      | 710539..... | 360      | 730489..... | 229 |
| 707243..... | 402 | 710042..... | 315      | 710540..... | 360      | 730490..... | 230 |
| 707244..... | 398 | 710044..... | 315      | 720000..... | 270      | 730491..... | 231 |

|        |     |        |     |          |     |        |     |
|--------|-----|--------|-----|----------|-----|--------|-----|
| 730492 | 428 | 731183 | 456 | 733004   | 436 | 840388 | 785 |
| 730493 | 428 | 731184 | 456 | 733040   | 432 | 840389 | 785 |
| 730494 | 428 | 731185 | 456 | 733041   | 432 | 840390 | 785 |
| 730495 | 424 | 731186 | 456 | 733042   | 432 | 840391 | 785 |
| 730496 | 424 | 731187 | 457 | 733043   | 434 | 840392 | 787 |
| 730497 | 424 | 731188 | 457 | 733044   | 434 | 840393 | 780 |
| 730498 | 424 | 731189 | 457 | 733045   | 434 | 840394 | 780 |
| 730499 | 422 | 731190 | 457 | 733054   | 498 | 840395 | 780 |
| 730500 | 422 | 731191 | 457 | 733055   | 498 | 840396 | 781 |
| 730501 | 422 | 731192 | 457 | 733064   | 502 | 840397 | 781 |
| 730502 | 422 | 731193 | 449 | 733065   | 502 | 840398 | 781 |
| 730503 | 422 | 731194 | 449 | 733066   | 500 | 840399 | 778 |
| 730504 | 422 | 731195 | 449 | 733067   | 500 | 840400 | 779 |
| 730505 | 422 | 731196 | 448 | 733068   | 438 | 840401 | 780 |
| 730506 | 422 | 731197 | 448 | 733069   | 438 | 840402 | 780 |
| 730509 | 229 | 731198 | 448 | 733070   | 504 | 840403 | 780 |
| 730510 | 229 | 731199 | 455 | 733071   | 504 | 840404 | 781 |
| 730511 | 229 | 731200 | 455 | 733072   | 430 | 840405 | 781 |
| 730519 | 427 | 731201 | 455 | 733073   | 430 | 840406 | 781 |
| 730520 | 427 | 731202 | 454 | 763025   | 488 | 840407 | 778 |
| 730521 | 427 | 731203 | 454 | 763026   | 490 | 840408 | 779 |
| 731015 | 464 | 731204 | 454 |          |     | 840409 | 729 |
| 731019 | 464 | 731205 | 452 | <b>8</b> |     | 840410 | 729 |
| 731020 | 464 | 731206 | 452 | 829063   | 872 | 840411 | 729 |
| 731024 | 464 | 731207 | 452 | 836011   | 494 | 840412 | 729 |
| 731025 | 464 | 731208 | 453 | 836014   | 494 | 840414 | 730 |
| 731026 | 464 | 731209 | 453 | 836930   | 494 | 840416 | 730 |
| 731029 | 465 | 731210 | 453 | 836931   | 494 | 840417 | 769 |
| 731030 | 465 | 731211 | 444 | 840124   | 762 | 840418 | 769 |
| 731031 | 458 | 731212 | 444 | 840147   | 756 | 840419 | 769 |
| 731060 | 474 | 731213 | 444 | 840158   | 748 | 840420 | 732 |
| 731099 | 471 | 731214 | 445 | 840159   | 748 | 840421 | 732 |
| 731100 | 471 | 731215 | 445 | 840164   | 745 | 840422 | 732 |
| 731126 | 478 | 731216 | 445 | 840165   | 745 | 840423 | 732 |
| 731127 | 468 | 731217 | 446 | 840166   | 745 | 840424 | 732 |
| 731129 | 472 | 731218 | 446 | 840167   | 745 | 840425 | 732 |
| 731130 | 462 | 731219 | 446 | 840175   | 749 | 840426 | 732 |
| 731131 | 462 | 731220 | 447 | 840178   | 756 | 840427 | 732 |
| 731133 | 459 | 731221 | 447 | 840179   | 756 | 840428 | 732 |
| 731134 | 472 | 731222 | 447 | 840180   | 756 | 840429 | 732 |
| 731135 | 472 | 731223 | 466 | 840186   | 753 | 840430 | 734 |
| 731136 | 472 | 731224 | 466 | 840187   | 753 | 840431 | 734 |
| 731138 | 476 | 731225 | 467 | 840192   | 762 | 840432 | 734 |
| 731139 | 477 | 731226 | 467 | 840193   | 762 | 840433 | 734 |
| 731140 | 476 | 731227 | 474 | 840194   | 762 | 840434 | 772 |
| 731141 | 477 | 731228 | 462 | 840210   | 749 | 840435 | 773 |
| 731144 | 459 | 731229 | 462 | 840236   | 759 | 840436 | 772 |
| 731151 | 461 | 731230 | 462 | 840239   | 757 | 840437 | 773 |
| 731153 | 460 | 731231 | 462 | 840254   | 754 | 840438 | 772 |
| 731154 | 460 | 731232 | 462 | 840256   | 755 | 840439 | 773 |
| 731155 | 460 | 731233 | 462 | 840267   | 749 | 840440 | 780 |
| 731156 | 460 | 732049 | 528 | 840276   | 752 | 840441 | 781 |
| 731157 | 461 | 732050 | 528 | 840289   | 767 | 840442 | 780 |
| 731158 | 480 | 732071 | 520 | 840291   | 747 | 840443 | 781 |
| 731159 | 480 | 732072 | 520 | 840293   | 787 | 840444 | 780 |
| 731160 | 232 | 732079 | 521 | 840294   | 787 | 840445 | 781 |
| 731161 | 232 | 732080 | 521 | 840295   | 787 | 840446 | 778 |
| 731162 | 232 | 732094 | 513 | 840308   | 765 | 840447 | 779 |
| 731163 | 234 | 732095 | 513 | 840309   | 765 | 840448 | 774 |
| 731164 | 234 | 732096 | 541 | 840317   | 783 | 840449 | 775 |
| 731165 | 234 | 732097 | 541 | 840318   | 782 | 840450 | 774 |
| 731166 | 235 | 732098 | 541 | 840319   | 783 | 840451 | 775 |
| 731167 | 235 | 732102 | 541 | 840320   | 782 | 840452 | 774 |
| 731168 | 235 | 732108 | 514 | 840331   | 763 | 840453 | 775 |
| 731169 | 450 | 732109 | 515 | 840332   | 763 | 840454 | 776 |
| 731170 | 450 | 732110 | 516 | 840333   | 764 | 840455 | 777 |
| 731171 | 450 | 732127 | 514 | 840334   | 764 | 840456 | 776 |
| 731172 | 450 | 732128 | 515 | 840337   | 782 | 840457 | 777 |
| 731173 | 450 | 732129 | 516 | 840338   | 783 | 840458 | 776 |
| 731174 | 450 | 732143 | 528 | 840339   | 782 | 840459 | 777 |
| 731175 | 451 | 732156 | 222 | 840340   | 783 | 840460 | 776 |
| 731176 | 451 | 732157 | 225 | 840349   | 751 | 840461 | 777 |
| 731177 | 451 | 732158 | 222 | 840350   | 750 | 840462 | 776 |
| 731178 | 451 | 732159 | 225 | 840353   | 758 | 840463 | 777 |
| 731179 | 451 | 732160 | 512 | 840373   | 760 | 840464 | 776 |
| 731180 | 451 | 732161 | 512 | 840378   | 761 | 840465 | 777 |
| 731181 | 456 | 732162 | 219 | 840386   | 785 | 840466 | 742 |
| 731182 | 456 | 732163 | 220 | 840387   | 785 | 840467 | 742 |



|             |     |             |     |                                 |     |             |         |
|-------------|-----|-------------|-----|---------------------------------|-----|-------------|---------|
| 840468..... | 742 | 862162..... | 800 | 862277.....                     | 803 | 930418..... | 489     |
| 840469..... | 742 | 862163..... | 800 | 862278.....                     | 803 | 930419..... | 489     |
| 840470..... | 743 | 862164..... | 800 | 862280.....                     | 802 | 930420..... | 489     |
| 840471..... | 743 | 862165..... | 800 | 862281.....                     | 802 | 930421..... | 489     |
| 840472..... | 743 | 862166..... | 800 | 862282.....                     | 802 | 930422..... | 489     |
| 840473..... | 743 | 862167..... | 800 | 862283.....                     | 802 | 930423..... | 489     |
| 840474..... | 736 | 862168..... | 800 | 862285.....                     | 814 | 930424..... | 489     |
| 840475..... | 736 | 862172..... | 799 | 862299.....                     | 807 | 930426..... | 875     |
| 840476..... | 736 | 862173..... | 799 | 862300.....                     | 807 | 930427..... | 875     |
| 840477..... | 737 | 862180..... | 329 | 862301.....                     | 807 | 930461..... | 490     |
| 840478..... | 737 | 862181..... | 329 | 872014.....                     | 813 | 930468..... | 490     |
| 840479..... | 737 | 862182..... | 329 | 872045.....                     | 802 | 930469..... | 490     |
| 840480..... | 738 | 862183..... | 329 | 872046.....                     | 802 | 930470..... | 490     |
| 840481..... | 739 | 862184..... | 329 | 872082.....                     | 800 | 930471..... | 490     |
| 840482..... | 740 | 862185..... | 329 | 872083.....                     | 800 | 930472..... | 490     |
| 840483..... | 741 | 862190..... | 817 | 872084.....                     | 800 | 930473..... | 490     |
| 843008..... | 850 | 862191..... | 817 | 872085.....                     | 800 | 930474..... | 490     |
| 843011..... | 850 | 862192..... | 817 | 872086.....                     | 800 | 930475..... | 490     |
| 843037..... | 851 | 862193..... | 817 | 872087.....                     | 800 | 930476..... | 490     |
| 843049..... | 851 | 862194..... | 817 | 872088.....                     | 800 | 930477..... | 490     |
| 843050..... | 851 | 862196..... | 812 | 872089.....                     | 800 | 930478..... | 490     |
| 843055..... | 874 | 862197..... | 812 | 872091.....                     | 800 | 930512..... | 756     |
| 843273..... | 852 | 862198..... | 812 | 872093.....                     | 800 | 930517..... | 759     |
| 843279..... | 852 | 862199..... | 812 | 872094.....                     | 800 | 930571..... | 879     |
| 843340..... | 853 | 862201..... | 812 | 872105.....                     | 801 | 930573..... | 879     |
| 843341..... | 854 | 862202..... | 814 | 872106.....                     | 801 | 930574..... | 882     |
| 843342..... | 854 | 862203..... | 814 | 872107.....                     | 801 | 930575..... | 881     |
| 843343..... | 855 | 862204..... | 814 | 872108.....                     | 801 | 930578..... | 880     |
| 843344..... | 855 | 862205..... | 814 | 872109.....                     | 807 | 930593..... | 883     |
| 843500..... | 827 | 862207..... | 814 | 872110.....                     | 807 | 930659..... | 875     |
| 843501..... | 829 | 862208..... | 814 | 872111.....                     | 807 | 930694..... | 873     |
| 843502..... | 830 | 862209..... | 814 | 872112.....                     | 807 | 930712..... | 880     |
| 843503..... | 832 | 862210..... | 814 | 872113.....                     | 807 | 930735..... | 881     |
| 843504..... | 833 | 862211..... | 814 | 872114.....                     | 807 | 930908..... | 32      |
| 843505..... | 834 | 862220..... | 803 | 872115.....                     | 807 | 930909..... | 32      |
| 843506..... | 835 | 862221..... | 803 | 872125.....                     | 801 | 930913..... | 36      |
| 843507..... | 847 | 862222..... | 803 | 872126.....                     | 805 | 930914..... | 36      |
| 843508..... | 836 | 862223..... | 812 | 872127.....                     | 798 | 930920..... | 257     |
| 843509..... | 836 | 862224..... | 812 | 872128.....                     | 798 | 930922..... | 257     |
| 843510..... | 837 | 862225..... | 812 | 872129.....                     | 811 | 930946..... | 257     |
| 843511..... | 837 | 862226..... | 812 | 872130.....                     | 811 | 930947..... | 257     |
| 843512..... | 841 | 862227..... | 812 | 872131.....                     | 811 | 930954..... | 259     |
| 843513..... | 844 | 862228..... | 812 | 872132.....                     | 813 | 930955..... | 259     |
| 843514..... | 846 | 862229..... | 798 | 872134.....                     | 813 | 930956..... | 260     |
| 843518..... | 540 | 862230..... | 798 | 872135.....                     | 804 | 930957..... | 260     |
| 843519..... | 540 | 862231..... | 799 | 872136.....                     | 804 | 930958..... | 261     |
| 843520..... | 540 | 862232..... | 799 | 872137.....                     | 804 | 930959..... | 261     |
| 843521..... | 508 | 862233..... | 799 | 872138.....                     | 804 | 930965..... | 32      |
| 843522..... | 845 | 862234..... | 799 | 872142.....                     | 804 | 930966..... | 32      |
| 843523..... | 838 | 862235..... | 813 | 872143.....                     | 804 | 930967..... | 95, 137 |
| 843524..... | 839 | 862236..... | 813 | 872145.....                     | 800 | 930968..... | 95, 137 |
| 843525..... | 840 | 862237..... | 813 | 872146.....                     | 806 | 930969..... | 95, 137 |
| 843527..... | 848 | 862238..... | 811 | 872147.....                     | 806 | 930970..... | 95, 137 |
| 843529..... | 849 | 862239..... | 811 | 872148.....                     | 806 | 930971..... | 95, 137 |
| 843530..... | 392 | 862240..... | 803 | 872628.....                     | 812 | 930972..... | 95, 137 |
| 843531..... | 392 | 862241..... | 803 | 872629.....                     | 799 | 930973..... | 95, 137 |
| 843532..... | 863 | 862242..... | 803 | 872630.....                     | 799 | 930974..... | 95, 137 |
| 843533..... | 865 | 862253..... | 805 |                                 |     | 930975..... | 95, 137 |
| 843534..... | 866 | 862254..... | 805 | <b>9</b>                        |     | 930976..... | 95, 137 |
| 843535..... | 843 | 862255..... | 805 | 930060.....                     | 874 | 931007..... | 175     |
| 843537..... | 826 | 862256..... | 805 | 930104.....                     | 883 | 931009..... | 175     |
| 843538..... | 828 | 862257..... | 814 | 930105.....                     | 883 | 931010..... | 177     |
| 843539..... | 508 | 862258..... | 814 | 930301...77, 187, 193, 291, 385 |     | 931012..... | 177     |
| 843540..... | 511 | 862259..... | 814 | 930302...77, 187, 193, 291, 385 |     | 931013..... | 175     |
| 843542..... | 831 | 862262..... | 805 | 930303...77, 187, 193, 291, 385 |     | 931015..... | 175     |
| 862048..... | 812 | 862263..... | 805 | 930345.....                     | 787 | 931016..... | 177     |
| 862093..... | 799 | 862264..... | 814 | 930346.....                     | 787 | 931018..... | 177     |
| 862094..... | 799 | 862265..... | 799 | 930347.....                     | 787 | 931019..... | 175     |
| 862121..... | 799 | 862266..... | 815 | 930348.....                     | 787 | 931021..... | 175     |
| 862122..... | 799 | 862268..... | 802 | 930349.....                     | 787 | 931022..... | 177     |
| 862123..... | 799 | 862269..... | 802 | 930350.....                     | 787 | 931024..... | 177     |
| 862124..... | 799 | 862270..... | 799 | 930366...77, 187, 193, 291, 385 |     | 931025..... | 175     |
| 862125..... | 799 | 862271..... | 799 | 930406.....                     | 787 | 931027..... | 175     |
| 862126..... | 799 | 862272..... | 799 | 930413.....                     | 489 | 931028..... | 177     |
| 862127..... | 800 | 862273..... | 805 | 930414.....                     | 489 | 931030..... | 177     |
| 862130..... | 812 | 862274..... | 803 | 930415.....                     | 489 | 931031..... | 175     |
| 862136..... | 814 | 862275..... | 805 | 930416.....                     | 489 | 931033..... | 175     |
| 862157..... | 812 | 862276..... | 805 | 930417.....                     | 489 | 931034..... | 177     |

|        |              |        |     |        |     |        |     |
|--------|--------------|--------|-----|--------|-----|--------|-----|
| 931036 | 177          | 950234 | 555 | 970028 | 632 | 970808 | 595 |
| 931037 | 175          | 950235 | 555 | 970041 | 636 | 970809 | 595 |
| 931039 | 175          | 950236 | 555 | 970043 | 636 | 970820 | 598 |
| 931040 | 177          | 950237 | 555 | 970045 | 636 | 970821 | 598 |
| 931042 | 177          | 950238 | 555 | 970048 | 636 | 970822 | 598 |
| 931043 | 95, 137      | 950239 | 555 | 970061 | 640 | 970823 | 598 |
| 931044 | 95, 137      | 950240 | 555 | 970063 | 640 | 970824 | 598 |
| 931045 | 95, 137      | 950241 | 555 | 970065 | 640 | 970825 | 598 |
| 931046 | 95, 137      | 950242 | 555 | 970068 | 640 | 970826 | 598 |
| 931047 | 95, 137      | 950243 | 555 | 970081 | 624 | 970827 | 598 |
| 931048 | 95, 137      | 950244 | 555 | 970085 | 624 | 970828 | 598 |
| 931049 | 95, 137      | 950245 | 555 | 970101 | 630 | 970829 | 603 |
| 931050 | 95, 137      | 950246 | 555 | 970103 | 630 | 970830 | 603 |
| 931051 | 95, 137      | 950247 | 555 | 970105 | 630 | 970831 | 603 |
| 931052 | 95, 137      | 950248 | 555 | 970121 | 634 | 970832 | 603 |
| 931053 | 77, 291, 385 | 950249 | 555 | 970123 | 634 | 970833 | 599 |
| 931054 | 77, 291, 385 | 950250 | 555 | 970125 | 634 | 970834 | 599 |
| 931055 | 77, 291, 385 | 950251 | 555 | 970128 | 634 | 970835 | 599 |
| 931056 | 77, 291, 385 | 950252 | 556 | 970141 | 638 | 970836 | 599 |
| 931057 | 77, 291, 385 | 950253 | 556 | 970143 | 638 | 970837 | 599 |
| 931058 | 77, 291, 385 | 950254 | 556 | 970145 | 638 | 970838 | 599 |
| 931059 | 187, 193     | 950255 | 556 | 970148 | 638 | 970839 | 599 |
| 931060 | 187, 193     | 950256 | 556 | 970161 | 642 | 970840 | 599 |
| 931061 | 187, 193     | 950257 | 556 | 970163 | 642 | 970841 | 599 |
| 931062 | 187, 193     | 950258 | 556 | 970165 | 642 | 970842 | 608 |
| 931063 | 187, 193     | 950259 | 556 | 970168 | 642 | 970843 | 608 |
| 931064 | 187, 193     | 950260 | 556 | 970181 | 626 | 970844 | 608 |
| 931088 | 258          | 950261 | 556 | 970183 | 626 | 970845 | 608 |
| 931089 | 258          | 950262 | 556 | 970185 | 626 | 970846 | 608 |
| 931090 | 260          | 950263 | 556 | 970280 | 660 | 970847 | 608 |
| 931091 | 260          | 950264 | 556 | 970281 | 660 | 970848 | 608 |
| 931168 | 250          | 950265 | 556 | 970284 | 660 | 970849 | 608 |
| 931169 | 251          | 950266 | 556 | 970285 | 660 | 970850 | 608 |
| 940010 | 875          | 950267 | 556 | 970301 | 672 | 970851 | 610 |
| 940029 | 877          | 950268 | 556 | 970303 | 672 | 970852 | 610 |
| 940030 | 877          | 950269 | 556 | 970305 | 672 | 970853 | 610 |
| 940031 | 877          | 950270 | 557 | 970401 | 674 | 970854 | 610 |
| 940033 | 877          | 950271 | 557 | 970403 | 674 | 970855 | 610 |
| 940034 | 877          | 950272 | 557 | 970404 | 674 | 970856 | 610 |
| 940035 | 877          | 950273 | 557 | 970460 | 668 | 970857 | 610 |
| 940037 | 877          | 950274 | 557 | 970470 | 670 | 970858 | 610 |
| 940038 | 877          | 950275 | 557 | 970502 | 664 | 970859 | 610 |
| 940039 | 877          | 950276 | 557 | 970503 | 664 | 970860 | 609 |
| 940041 | 878          | 950277 | 557 | 970522 | 666 | 970861 | 609 |
| 940042 | 878          | 950278 | 557 | 970523 | 666 | 970862 | 609 |
| 940043 | 878          | 950279 | 557 | 970550 | 678 | 970863 | 609 |
| 940045 | 878          | 950280 | 557 | 970551 | 678 | 970864 | 609 |
| 940046 | 878          | 950281 | 557 | 970560 | 680 | 970865 | 609 |
| 940047 | 878          | 950282 | 557 | 970561 | 680 | 970866 | 609 |
| 940049 | 878          | 950283 | 557 | 970570 | 682 | 970867 | 609 |
| 940050 | 878          | 950284 | 557 | 970571 | 682 | 970868 | 609 |
| 940051 | 878          | 950285 | 557 | 970572 | 582 | 970869 | 602 |
| 940056 | 876          | 950286 | 557 | 970573 | 582 | 970870 | 602 |
| 940057 | 876          | 950287 | 557 | 970574 | 582 | 970871 | 602 |
| 940058 | 876          | 950918 | 558 | 970575 | 582 | 970872 | 602 |
| 940059 | 876          | 950919 | 558 | 970576 | 582 | 975001 | 644 |
| 940060 | 876          | 950920 | 558 | 970577 | 582 | 975003 | 644 |
| 940061 | 876          | 950921 | 558 | 970578 | 583 | 975005 | 644 |
| 940062 | 876          | 950922 | 558 | 970579 | 583 | 975021 | 648 |
| 940063 | 876          | 950923 | 558 | 970580 | 583 | 975023 | 648 |
| 950216 | 554          | 950924 | 558 | 970581 | 583 | 975025 | 648 |
| 950217 | 554          | 950925 | 558 | 970582 | 583 | 975041 | 652 |
| 950218 | 554          | 950926 | 558 | 970583 | 583 | 975045 | 652 |
| 950219 | 554          | 950927 | 558 | 970584 | 584 | 975049 | 652 |
| 950220 | 554          | 950928 | 558 | 970585 | 584 | 975101 | 646 |
| 950221 | 554          | 950929 | 558 | 970586 | 584 | 975103 | 646 |
| 950222 | 554          | 950930 | 558 | 970587 | 584 | 975105 | 646 |
| 950223 | 554          | 950931 | 558 | 970588 | 584 | 975121 | 650 |
| 950224 | 554          | 950932 | 558 | 970589 | 584 | 975123 | 650 |
| 950225 | 554          | 950933 | 558 | 970741 | 714 | 975125 | 650 |
| 950226 | 554          | 950934 | 558 | 970800 | 594 | 975141 | 654 |
| 950227 | 554          | 950935 | 558 | 970801 | 594 | 975143 | 654 |
| 950228 | 554          | 970001 | 628 | 970802 | 594 | 975145 | 654 |
| 950229 | 554          | 970003 | 628 | 970803 | 594 | 975161 | 656 |
| 950230 | 554          | 970005 | 628 | 970804 | 595 | 975163 | 656 |
| 950231 | 554          | 970021 | 632 | 970805 | 595 | 975165 | 656 |
| 950232 | 554          | 970023 | 632 | 970806 | 595 | 975361 | 706 |
| 950233 | 554          | 970025 | 632 | 970807 | 595 | 975365 | 706 |

|             |     |
|-------------|-----|
| 975371..... | 708 |
| 975375..... | 708 |
| 975381..... | 710 |
| 975385..... | 710 |
| 975411..... | 676 |
| 975412..... | 676 |
| 975471..... | 688 |
| 975475..... | 688 |
| 975483..... | 690 |
| 975485..... | 690 |
| 975491..... | 686 |
| 975495..... | 686 |
| 975501..... | 694 |
| 975511..... | 698 |
| 975516..... | 700 |
| 975521..... | 702 |
| 975525..... | 696 |
| 975530..... | 692 |
| 975741..... | 716 |
| 975781..... | 718 |
| 988170..... | 605 |
| 988171..... | 605 |
| 988172..... | 605 |
| 988173..... | 605 |

# KS Licht – Your lighting wholesaler in Essen

Contact, customer service and information for customers

**LIGHT Impressions 2026 | 2027**

## Directly linked to our product range, advice and project services:

In the KS Multi Brand Business online shop, you will find the latest products, new releases and special offers, as well as information to support you with advice, quotations and project management:

- Online stock availability check
- Catalogues, browsable catalogues and product links
- Technical data, tender specifications, light distribution curves and LDT files
- Easily find and order spare parts
- View your individual terms and conditions, delivery and payment terms
- Relevant product recommendations, variants and alternative products
- Direct contact with our sales team

## Customer Information

All prices are net, plus statutory VAT. The retail prices quoted are recommended retail prices. Upon publication of this catalogue, previous price lists cease to be valid.

Illustrations, colours, shapes, designs and technical specifications are for illustrative purposes only and are not binding. Subject to changes and errors.

Goods are generally dispatched ex works, carriage forward.

For orders with a net value of less than €70.00, a minimum order surcharge of €8.00 will be applied.

## Ordering & Delivery

When placing orders, please always specify the item number, colour and quantity. This reduces the need for follow-up enquiries and speeds up processing. Express and direct deliveries are available on request.

Custom-made items, components assembled to the customer's specifications and lamps are excluded from exchange.

Our General Terms and Conditions apply and are available at [www.ks-germany.com/de/agb](http://www.ks-germany.com/de/agb).

## Kontakt

### KS Licht- und Elektrotechnik GmbH

Manderscheidtstraße 8 c  
45141 Essen  
Germany

### Verkauf & Service

Tel.: +49 (0)201-89924-0  
[verkauf@ks-germany.com](mailto:verkauf@ks-germany.com)

### Online

[ks-licht.nl](http://ks-licht.nl)  
[www.ks-germany.com](http://www.ks-germany.com)

## Pflichtangaben

KS Licht- und Elektrotechnik GmbH · Sitz der Gesellschaft: Essen · Geschäftsführer: Kai Becker  
Registergericht: Amtsgericht Essen · Handelsregister: HRB 12736 · Steuer-Nr.: 111/5708/2689 ·  
USt-IdNr.: DE190673411



## **KS Licht- und Elektrotechnik GmbH**

Manderscheidtstraße 8 C  
45141 Essen  
Germany

Tel.: +49 (0)201-89924-0  
E-Mail: [verkauf@ks-germany.com](mailto:verkauf@ks-germany.com)

Onlineshop: [ks-licht.nl](http://ks-licht.nl)  
Internet: [www.ks-germany.com](http://www.ks-germany.com)

